

EXPERIMENT: 32

```
#include <stdio.h>
```

```
#include <string.h>
```

```
int main()
```

$$\{$$

```
char data[100], stuffed[200];
```

```
int i, j = 0, count = 0;
```

```
printf("BIT STUFFING\n");
```

```
printf("-----\n");
```

```
printf("Enter the data: ");
```

```
scanf("%s", data);
```

```
/* Add starting flag */
```

```
stuffed[j++] = '0';
```

```
stuffed[j++] = '1';
```

```
stuffed[j++] = '1';
```

```
stuffed[j++] = '1';
```

```
stuffed[j++] = '1';
```

```
stuffed[j++] = '1';
```


```
stuffed[j++] = '1';
```

```
stuffed[j++] = '0';
```

```
/* Bit stuffing */
```

[illegible]

```
printf("\nOriginal Data : %s\n", data);  
printf("Stuffed Data : %s\n", stuffed);  
  
return 0;  
}
```

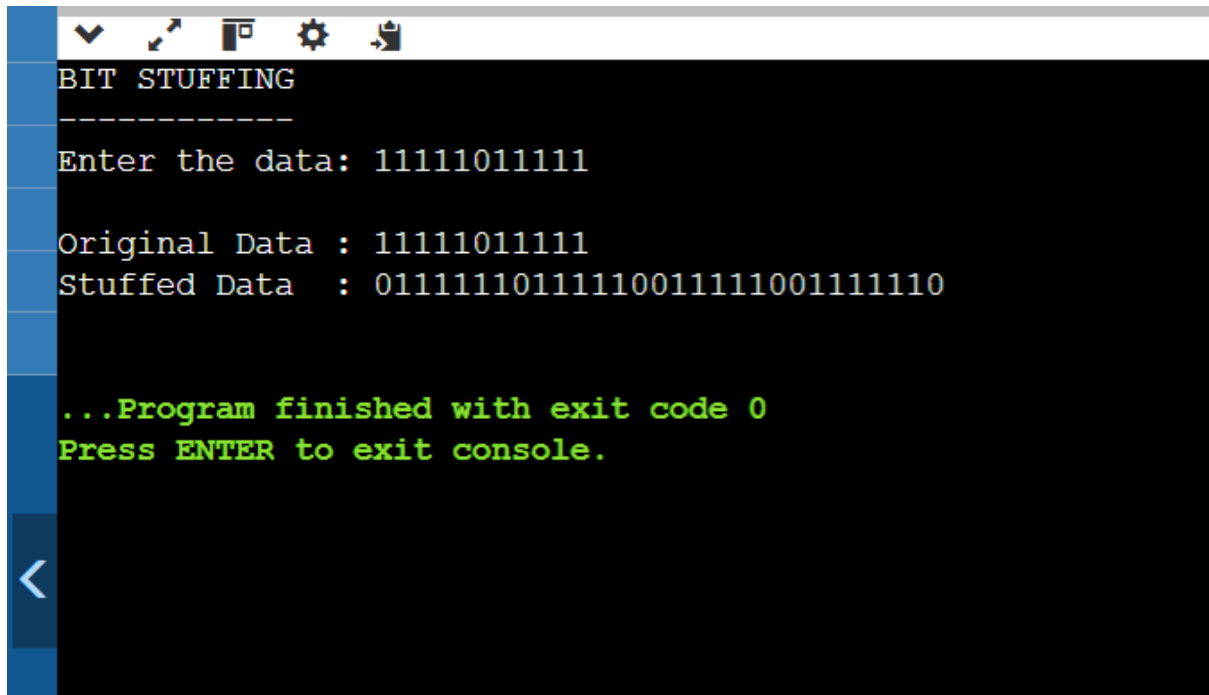

The screenshot shows a Windows command prompt window with a title bar containing standard icons. The window title is "BIT STUFFING". The command prompt has a black background with white text. The user has entered the data "11111011111". The program outputs the original data and the stuffed data. The stuffed data is "01111110111110011111001111110". The program finishes with exit code 0, and the user is prompted to press ENTER to exit the console.

```
BIT STUFFING  
-----  
Enter the data: 11111011111  
  
Original Data : 11111011111  
Stuffed Data  : 01111110111110011111001111110  
  
...Program finished with exit code 0  
Press ENTER to exit console.
```