Experiment-1

Aim: To Study and Execute commands on Unix

a) File Commands: ls, pwd, cd, mkdir, rmdir, touch, cat, head, tail, cp, mv, rm, chmod, grep, cmp, paste, echo, date, man, clear.

b) Process Commands: top, ps, Kill, nice, renice.

c) Network Commands: ping, netstat, nslookup, ifconfig, telnet, traceroute.

a) File Commands:

Command: mkdir
Description: mkdir is used to create new directory
Syntax: mkdir dir_name

Command: cd
Description: cd is used to change directory
Syntax: cd dir_name

Command: pwd
Description: pwd is used to know present working directory
Syntax: pwd

Command: ls
Description: ls is used to print all the files in current directory
Syntax: ls

Command: clear
Description: clear is used to clear the teminal screen
Syntax: clear

Command: head
Description: head is used to print the first 10 lines of the file
Syntax: head file_name

Command: tail
Description: tail is used to print the last 10 lines of the file
Syntax: last file_name


Command: date
Description: date is used to print timestamp.
Syntax: date

Command: echo
Description: echo is used to print message given by user
Syntax: echo “message”

Command: rm
Description: rm is used to delete a file
Syntax: rm file_name

Command: mv
Description: mv is used to rename or move file
Syntax: mv file_name new_dest

Output of above commands:

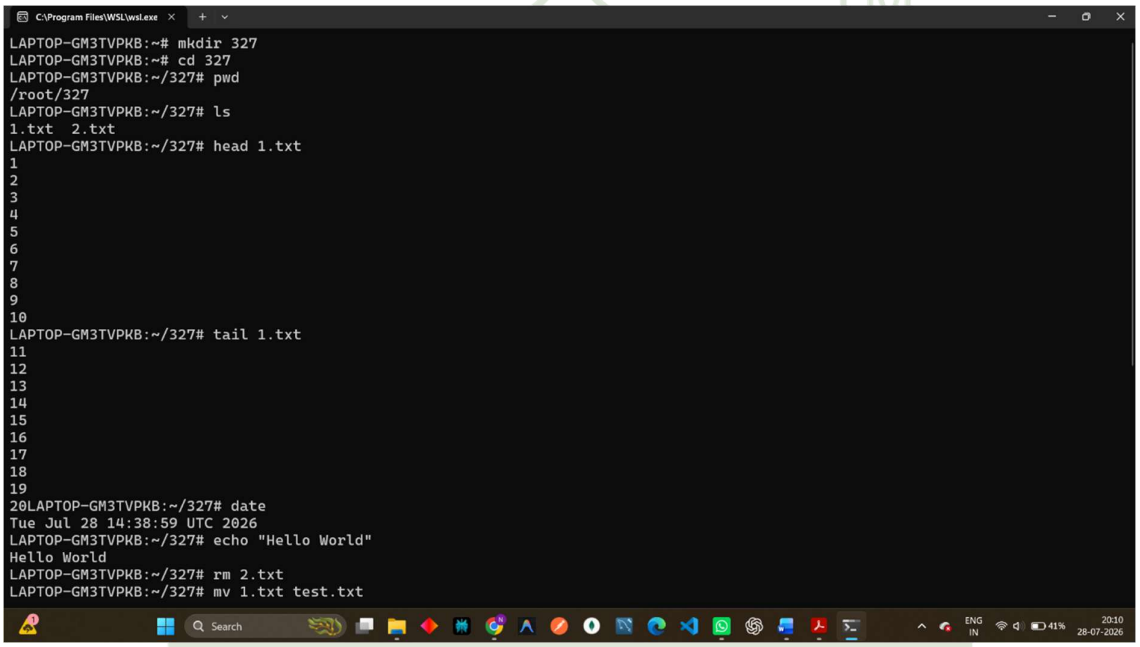

Command: cat
Description: cat is used to print the content of file
Syntax: cat file_name

Command: man
Description: man is used to print the manual
Syntax: man

Command: cp
Description: cp is used to copy the file
Syntax: cp [options] <source> <destination>

Command: cmp
Description: cmp is used to compare the files
Syntax: cmp file1 file2

INSTITUTE OF TECHNOLOGY
స్వయం తేజస్విన్ భవ
1979


Command: paste
Description: paste is used to paste the copy the file
Syntax: paste file1 file2

Command: grep
Description: grep is used to search the word in the file
Syntax: grep “word” filename

Command: touch
Description: touch is used to create the new file
Syntax: touch filename

Command: chmod
Description: chmod is used to change the permissions
Syntax: chmod [options] file

Command: rmdir
Description: rmdir is used to delete the folder
Syntax: rmdir dirname

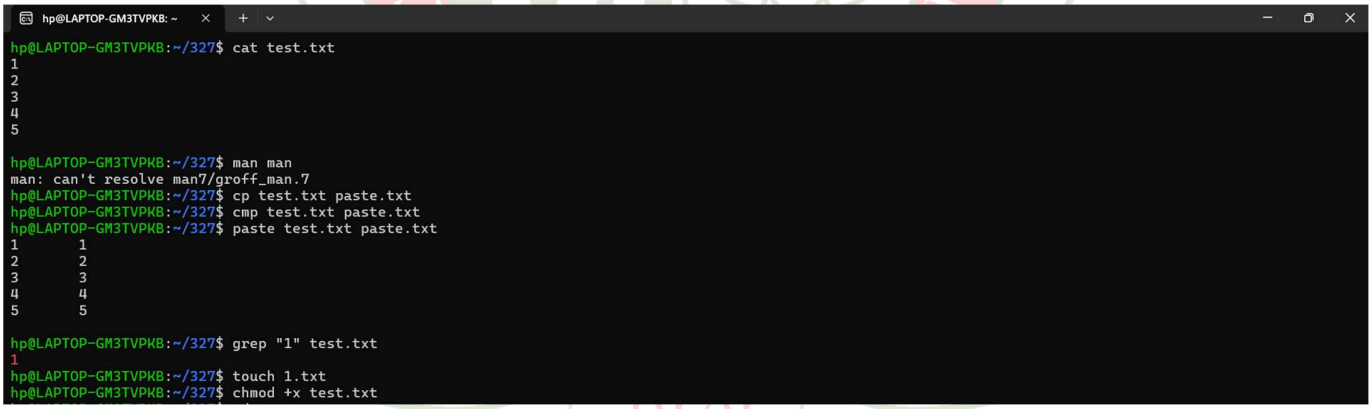


b) Process commands

Command: top

Description: top is used to print the table of processes running


Syntax: top

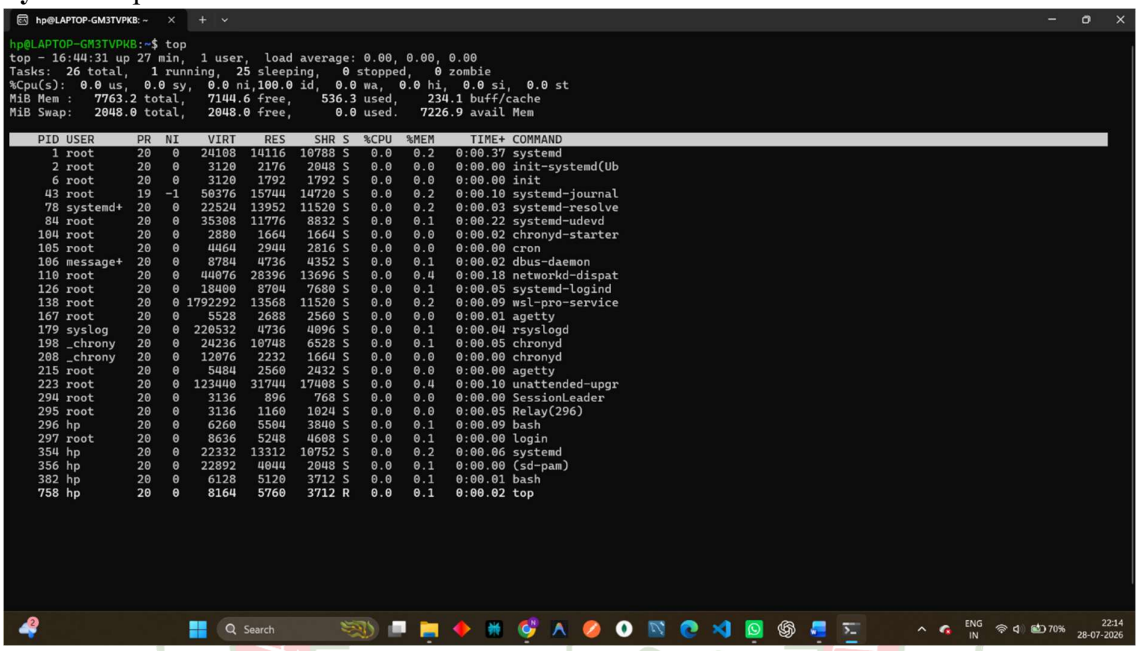

Command: ps

Description: ps is used to print the list of currently running processes

Syntax: ps

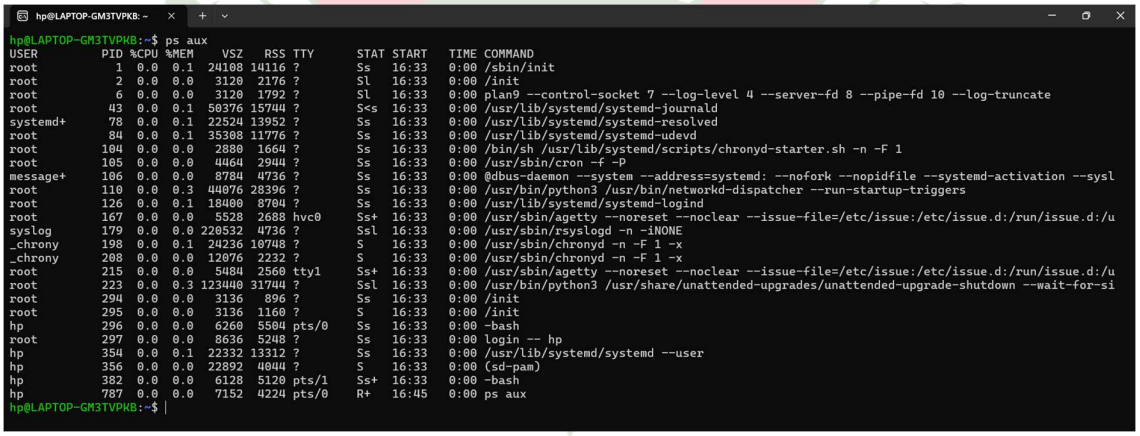

Command: kill

Description: kil is used to kill the running process

Syntax: kill [signal] PID

Command: nice

Description: nice is used to give the priority to a process

Syntax: nice -n [value] command


Command: renice
Description: renice is used to re-prioritize the processes
Syntax: renice [value] -p PID



c) Network Commands:

Command: ping
Description: ping is used to measure the ping of a ip address
Syntax: ping ip_address


Command: netstat
Description: netstat is used to display active network connections, listening ports, interface statistics
Syntax: netstat [options]

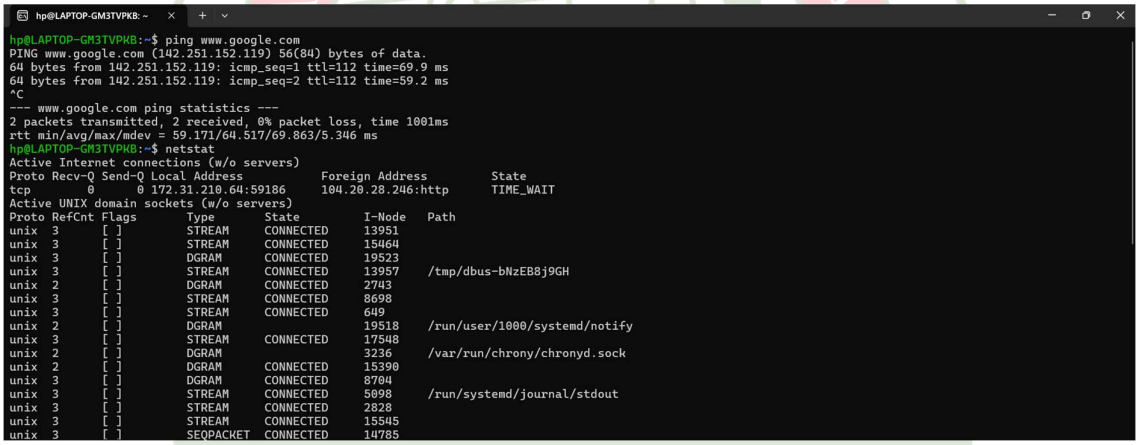

Command: nslookup
Description: nslookup is used to find ip addresses
Syntax: nslookup [-options] [domain] [dns_server]

Command: ifconfig
Description: ifconfig is used to get network parameters
Syntax: ifconfig


Command: telnet
Description: The telnet command is a classic network utility used to establish a text-based connection to another computer or server over a network.
Syntax: telnet [hostname or IP address] [port]

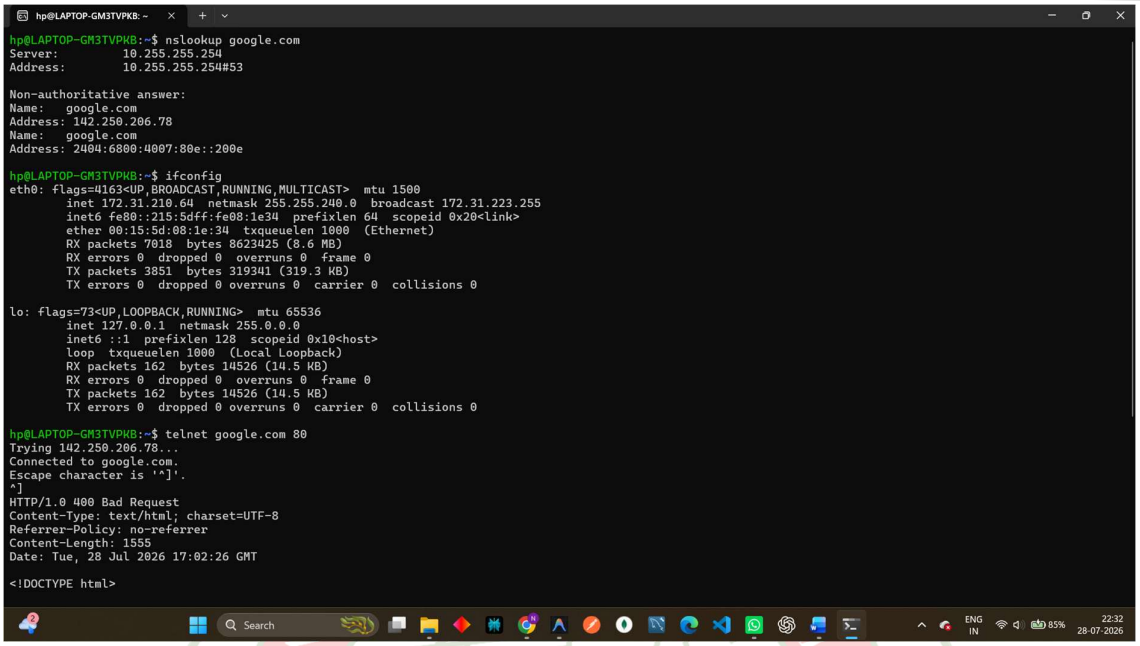

Command: traceroute

Description: traceroute is used to track real time path that data packets take

Syntax: traceroute <target>

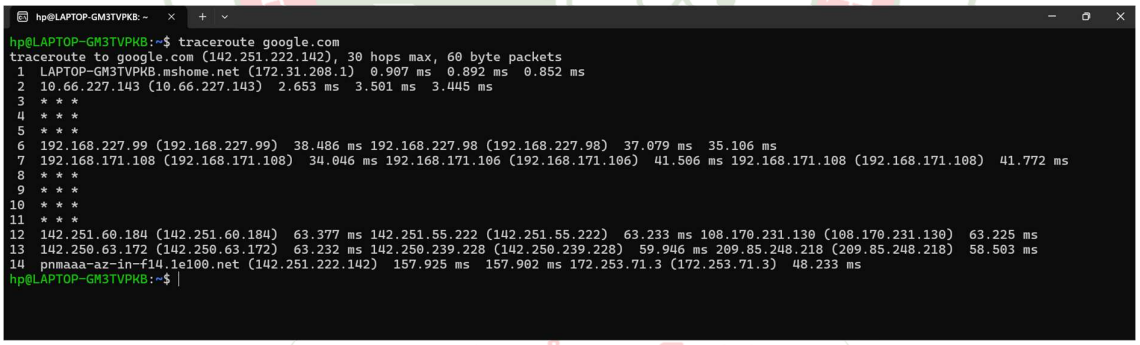

స్వయం తేజస్విన్ భవ
1979