

Functional Design Document

Retail Management

eThekweni Municipality

Oracle Revenue Management System (C2M)

This template is used for technical documentation on Oracle consulting projects. See section Use of This Document for style guidance.

April 2024, Version 1.0
Copyright © 2026, Oracle and/or its affiliates
Confidential – Oracle Internal Use Only

1 Contents

1	Contents	ii
2	Introduction	1
2.1	Document Purpose	1
2.2	Scope	1
2.3	Related Work / Dependencies	1
3	Assumptions & Open Items	2
3.1	Assumptions	2
3.2	Open Items	2
4	High Level Approach	3
4.1	Background	3
4.2	To Be Solution	3
4.2.1	Solution Overview	3
4.2.2	Business Process Flow Diagram (whenever applicable)	5
4.2.3	Business Process Description (whenever applicable)	5
4.3	Major Build Components	5
5	Build Component Design	9
5.1	Business Object	9
5.1.1	CM_RetailManagement	9
5.1.2	CM-RetailAccountPriceMgmt	13
	CM-RetailAccountPriceMgmt	13
5.1.3	CM-MaintainItemPriceList	15
5.1.4	CM-OrderRetailManagement	18
5.1.5	CM-MaintainOrderInvoice	21
5.1.6	CM-MaintainDeliveryNote	23
5.2	BO Case Lifecycle	25
5.2.1	Maintain Orders	25
5.2.2	Maintain Invoice	29
5.2.3	Maintain Delivery Note	31
5.3	Zone	33
5.3.1	CM-RTLMGMACT	33
5.3.2	CMRTPRRICEMG	33
5.4	Portal	33
5.4.1	CMACTRTM	33
5.4.2	CMORDMGM	34
5.5	Menu	36
5.6	Script	37

5.6.1	CMActRetMain	37
5.6.2	CM-ZoneAlwVI	Error! Bookmark not defined.
5.6.3	CMActRtlPrcM	39
5.6.4	CM-ZoneBrcVI	39
5.6.5	CMOrdMgmMtAt	40
5.6.6	CM_RMMOVALID	41
5.6.7	CM_RMBBRTORD	42
5.6.8	CM_RMPROFINV	42
5.6.9	CM_RMMROVALD	42
5.6.10	CM_RMMROMAIL	43
5.6.11	CM_RMMRVALID	43
5.6.12	CM_RMOINCALC	44
5.6.13	CM_OrdMgmMt	44
5.6.14	CM_PrintOrdr	45
5.6.15	CM_PrnItmLst	45
5.7	Algorithm Type	45
5.8	Algorithms	48
5.9	UI MAP	50
5.9.1	CM-RetialAccountPriceMgmtDisp	50
5.9.2	CM-RetialOrderMgmtActions	54
5.9.3	CM-RetailManagementDisplay	58
6	Solution Specific Configuration	62
6.1	Message	62
6.1.1	Message	62
6.2	Administrative Activities	62
6.2.1	Characteristics Type	62
6.2.2	Lookup	65
7	Data Requirements	66
8	Security Requirements	67
8.1	Users and Security	67
9	Performance Considerations	68
10	Testing Requirements	69
10.1	Test Scenarios	69
11	Appendix: Document Control	70
12	Appendix: Definitions, Acronyms, and Abbreviations	72

2 Introduction

2.1 Document Purpose

The purpose of the Functional Specification is to outline how the system or product can be configured, extended, modified, localized, and integrated to address specific business requirements.

This document is to address the eThekweni Municipality's business requirement regarding Community Residential Units .

2.2 Scope

In-scope: This includes but not limited to the following significant areas of interest for this component:

- Architecture design considerations for component
- Component behavior designs
- Component data designs necessary for component
- User interface designs required for component

Out-of-scope: The following design areas of interest are not considered in-scope for this project:

- Application setup considerations for component
- Software detailed designs for component
- Changes to logical database design in order to support component design

2.3 Related Work / Dependencies

#	Work product / Artifact	Description/Reference link	Document date and version	Artifact dependency (Y/N)
1	Foundation Design	ethekweni_DSW_026_Foundation_Design	current	Y

3 Assumptions & Open Items

3.1 Assumptions

This Functional Specification assumes the following:

1. Only Authorized users will be able to add, modify the Orders, Maintain PriceList, retailers Details

3.2 Open Items

#	Issue/action item	Resolution	completion date
001	Security access	This should be considered when discussion and design of User, access roles will be designed.	
002	Print Functions,Reports and Emails	Depends on BI, Integration Design	

4 High Level Approach

4.1 Background

In eThekwini, The Hostels are getting converted in to CRUs. Each management area will have more than one trading area. Existing Data from GIS will be used to create the CRUs. The CRU will further have Blocks, Family Units, and Rooms. These will be maintained as Child Premise to the CRU with different Premise types.

Further the Application for renting the Family Units/Blocks/Beds will be handled in the in C2M using Campaign via Order creation. And once the Application approved Service Agreement will be activated.

Business requirement is to maintain these mentioned Informal trade components in the C2M:

1. Create and Maintain CRUs.
2. Create and Maintain CRU Blocks.
3. Create and Maintain CRU Family Units.
4. Create and Maintain Beds.
5. Maintaining the Customer Application.

Note to Developer: the following technical detail in document is only for reference purpose and might not contain exact details. This needs to be taken care during development phase.

4.2 To Be Solution

4.2.1 Solution Overview

The entities CRUs, Blocks, Home units and rooms will be defined as premises within Oracle C2M. For these, dedicated Business Objects will be created using the Premise Maintenance Object and respective Premise type will be created. All relevant attributes will be stored within the premise's data area or as premise characteristics. These premises will serve as the foundational units for managing CRUs.

Access to CRU Premise Management Portal, Creation of Order using the relevant Campaign will be handled exclusively by authorized users through dedicated application service.

Furthermore, dedicated portals will be developed for Maintaining Block, Home Units, Rooms and beds - These portals will be accessible only to authorized business users, providing them with a secure and user-friendly interface to maintain and manage CRUs Sites efficiently. Portals will help the user to query the existing details and allow them to add /update the details for respective entity.

4.2.1.1 Campaign and SP Details overview

A new campaign has been introduced to register enrolment requests from customers for **beds, rooms, and family units**. For each incoming request, an **Order** will be created under this campaign.

Registration Form Requirements

All **required and optional questions** necessary for completing the registration form are **predefined at the campaign level**. These questions must be populated for every Order created.

Package Eligibility Validation

Package eligibility rules have been configured to validate whether a customer qualifies for the requested service based on the **form details** captured in the Order.

- If **all eligibility rules pass**, the Order will be created successfully.
- A **new Service Agreement (SA)** will then be created and linked to the existing **Bed Service Point (SP)**.

Premise Handling

No new premise will be created as part of this process. An **existing premise** will always be used for creating the Order.

Person and Account Handling

- If a **Person** and/or **Account** is provided in the request, the **existing records** will be used.
- If not provided, the process will automatically **create a new Person and Account**.

The system will maintain **one Service Point (SP) for each bed** allocated within a Family Unit or Room.

- If the Service Point already exists for the corresponding premise, it will be reused.
- If the Service Point does not exist, it will be **created during Order completion**, along with the creation of the associated **Service Agreement (SA)**.

The entities CRUs, Blocks, Home units and rooms will be defined as premises within Oracle C2M. For these, dedicated Business Objects will be created using the Premise Maintenance Object and respective Premise type will be created. All relevant attributes will be stored within the premise's data area or as premise characteristics. These premises will serve as the foundational units for managing CRUs.

Access to CRU Premise Management Portal, Creation of Order using the relevant Campaign will be handled exclusively by authorized users through dedicated application service.

Furthermore, dedicated portals will be developed for Maintaining Block, Home Units, Rooms and beds - These portals will be accessible only to authorized business users, providing them with a secure and user-friendly interface to maintain and manage CRUs Sites efficiently. Portals will help the user to query the existing details and allow them to add /update the details for respective entity.

4.2.2 Business Process Flow Diagram (whenever applicable)

n/a

4.2.3 Business Process Description (whenever applicable)

n/a

4.3 Major Build Components

Component type	Component Name	Description
UI Maps	CM-PremCharTypeInfoMaint	To Maintain Characteristic type maintenance.
	CM-PremCharMaint	Input Map to capture characteristic type
	CM-PremCharDisp	Display map to display characteristic Type captured data
Zone	CM-CRUBLDT	Zone to retrieve the CRU BLOCK details using Block Address ID
	CM-CRUBLDT1	Zone to retrieve the CRU BLOCK details using CRU Premise ID
	CM-CRUFUDT	CRU Family Unit should be searched by using the Family Unit- name/address
	CM-CRUFUDT1	CRU Family Unit should be searched by using the CRU block premise ID
	CM-CRURMDT	CRU Family Unit should be searched by using the room unit name/address
	CM-CRURMDT1	CRU Room should be searched by using House unit premise ID/ CRU block premise ID
	CM-CRUBDDT	CRU bed SP should be searched using the room unit/Family unit premise
	CM-CRUBDDT1	CRU BED should be searched by using the bed number

	CM-CRUBLUQ	Zone will be utilized to search the CRU block using the query zone/SQL added to it and provide option to edit details using a button/hyper link.
	CM-CRUFUQ	Zone will utilize to search the CRU home unit using query zone/SQL added to it provide option to edit selected premise details using a button/hyper link.
	CM-CRURUQ	Zone will utilize to search the CRU room unit using the Query zone/SQL added to it and provide option to edit the selected premise details using a button/hyper link.
	CM-CRUBDQ	Zone will utilize to search the CRU room unit using the Query zone/SQL added to it and provide option to edit the selected premise details using a button/hyper link.
Portal	CM_CRUBLK	Block portal to add display block details.
	CM_CRUFU	Family unit portal it displays family unit details.
	CM_CRURU	Rooms unit portal it displays rooms unit details.
	CM-CRUBD	Beds unit portal it displays CRU Beds details
Business object	CM-CRUBlockBO	CRU block unit is Block business object
	CM_CRUFamilyUnitBO	CRU family unit business object
	CM_CRURoomBO	CRU Room BO
	CM_CRUBedSPBO	CRU bed SP Business Object
Script	CM-CRUBUMain	This BPA script is used to rendered block BO and attached to the block Navigation option
	CM-CRUBOProc	This Script should be used to invoke this script to process BO Object
	CM-CRUFUMain	This script is used to render CRU family unit details for add/edit and it is attached to the block navigation.
	CM-CRUFUProc	This script should be used to invoke this script to process BO object.

	CM-CRURUMain	This script is used to render CRU Room Unit details for add/edit and it is attached to the block navigation option.
	CM-CRURUProc	This script should be used to invoke this script to process BO object
	CM-CRUBDMain	This script is used to render Bed SP details for add/edit and it is attached to the block navigation option.
	CM-CRUBDProc	This script should be used to invoke this script to process BO object
	CM-CRUSTVal	This script is attached to the relevant business object and executed during creation or update.
Algorithm Type	CM-SNDWL	This algorithm type is used to send welcome letter
	CM-SIGNTD	This algorithm type is used to create to do to initiate signing process
	CM-ISSKEYTD	This algorithm type is used to create to do to issue the keys.
	CM-UPDPMST	This algorithm type is used to update allocation status on premise
	CM-CHCKPMST	This algorithm type is used to check premise status.
	CM-CRTSASP	This algorithm type is used to create SA and SP .
Algorithm	CM-SNDWL	This algorithm type is used to send welcome letter
	CM-SIGNTD	This algorithm type is used to create to do to initiate signing process
	CM-ISSKEYTD	This algorithm type is used to create to do to issue the keys.
	CM-UPDPMST	This algorithm type is used to update allocation status on premise
	CM-CHCKPMST	This algorithm type is used to check premise status.
	CM-CRTSASP	This algorithm type is used to create SA and SP .

5 Build Component Design

This section provides detailed information about all the new and existing Software Components which are getting updated as part of this Functional Specification

5.1 Business Object

5.1.1 CM_RetailManagement

This BO will be used to hold the Retailer data. This includes searchable characteristics for the retailer type, retailer name, retailer code, department, retailer status. These characteristics needs to be protected and accessible only by DSW users. This BO also holds the branch code/name, delivery address, "GRN required?" policy for invoice authorization, and status.

Property	Value
Business Object	CM_RetailManagement
Description	Retail Management Menu
Maintenance Object	ACCOUNT
Application Service	F1-DFLT5
Instance Control	Allow new instances
Schema	<pre><schema xmlns:uiHint="http://oracle.com/ouafUIHints"> <accountId fkRef="ACCT" mapField="ACCT_ID" dataType="string"/> <departmentName label="Department Name" mapField="CHAR_VAL"> <row mapChild="CI_ACCT_CHAR"> <CHAR_TYPE_CD is="CM-DPTNM"/> <EFFDT is="%effectiveDate"/> </row> </departmentName> <retailerFlag label="Retailer Flag" mapField="CHAR_VAL"> <row mapChild="CI_ACCT_CHAR"> <CHAR_TYPE_CD is="CM_RTLFG"/> <EFFDT is="%effectiveDate"/> </row> </retailerFlag> <retailerCode label="Retailer Code" mapField="ADHOC_CHAR_VAL"> <row mapChild="CI_ACCT_CHAR"> <CHAR_TYPE_CD is="CM_RTLCD"/> <EFFDT is="%effectiveDate"/> </row> </retailerCode> <retailerName label="Retailer Name" mapField="ADHOC_CHAR_VAL"> <row mapChild="CI_ACCT_CHAR"> <CHAR_TYPE_CD is="CM-RTMRN"/> <EFFDT is="%effectiveDate"/> </row> </retailerName> <retailerType label="Retailer Type" mapField="CHAR_VAL"></pre>

Property	Value	
	<pre><row mapChild="CI_ACCT_CHAR"> <CHAR_TYPE_CD is="CM_RTLTY"/> <EFFDT is="%effectiveDate"/> </row> </retailerType> <retailerStatus label="Retailer Status" mapField="CHAR_VAL"> <row mapChild="CI_ACCT_CHAR"> <CHAR_TYPE_CD is="CM_RTLST"/> <EFFDT is="%effectiveDate"/> </row> </retailerStatus> <retailerBranch type="group" mapXML="ACCT_DATA_AREA"> <retailerBranchList type="list"> <branchCode label="Branch Code" isPrimeKey="true" dataType="string"/> <branchName label="Branch Name" isPrimeKey="true" fkRef="ACCT" dataType="string"/> <deliveryAddress label="Delivery Address" fkRef="PREM" dataType="string"/> <extReference label="External Refercene ID requiered" dataType="lookup" lookup="F1_SE_TRUEFALSE_FLG"/> <status label="Status" dataType="lookup" lookup="ACT_INACT_FLG"/> </retailerBranchList> </retailerBranch> <uiHint:startSection label="Logs" sectionColumn="float" visibleOn="displayMap"/> <cmlogs type="group" mapXML="ACCT_DATA_AREA"> <createdBy label="created By" dataType="string"/> <createdDateTime label="created Date time" dataType="string"/> <updatedBy label="Updated User" default="%CurrentUser" dataType="string"/> <updatedDateTime label="Updated Date Time" default="%ProcessDateTime" dataType="string"/> </cmlogs> <uiHint:endSection/> </schema></pre>	
Options	Display Map Service Script	
	Portal Navigation Option	

Field Name	Description
Main	
Account Id	Primary Key
Department Name	Mandatory. Characteristic Type CM-DPTNM
Retailer Flag	Mandatory. Characteristic Type CM_RTLFG

Field Name	Description
Retailer Code	Mandatory Characteristic Type CM_RTLCD
Retailer Name	Mandatory Characteristic Type CM-RTMRN
Retailer Type	Characteristic Type CM_RTLY
Retailer Status	Characteristic Type CM_RTST
Retailer Branch List	
Branch Code	Unique internal identifier for the branch. Mandatory and maps to ACCT_DATA_AREA element branchCode
Branch Name	Full name of the branch (e.g., SPAR – DISTRIBUTION CENTRE). Mandatory and this will be an existing account id in the system and maps to ACCT_DATA_AREA element branchName with FK reference to account.
Delivery Address	The physical branch delivery address (C2M Premise Id) maps to ACCT_DATA_AREA element deliveryAddress with FK reference to premise.
External Reference Required?	A Yes/No value to indicate whether the authorization of order requires the external reference or not. Default to 'No' if value does not present on migrated account. Maps to ACCT_DATA_AREA element extReferenceFlag with Lookup Value – YES/NO
Status	Current branch status (active/inactive). Maps to ACCT_DATA_AREA element status with Lookup Value – Active/Inactive

5.1.1.1 Retail Management Input Map

Input MAP should be rendered to maintain Retail and branch Details. These Details will be added/updated by authorized users; hence New Application service needs to be created which will be attached to this.

In (C2M) system, each Retailer account, branch account will be represented as a distinct business object, associated with the Account maintenance object.

A new menu should be created to attach this Map and used to update Retailer/branch details which will be stored as in C2M Account entity.

Mock Input UI

Account ID *9495717263 Villa, Maria, Residential, \$365.79

Department Name

Retailer FlagNo

Retailer Code

Retailer Name

Retailer TypeMajor Chain

Retailer StatusActive

	Branch Code	Branch Name	Delivery Address	External Refercenc ID required	Status
+ -	BRANCH1	4204432996 Pancho Villa Taqueria, Commercial, \$0.00	5082678669 100 Main Street, Portland, OR, 97229	False	Active

Save

Cancel

Mock Display UI

Account ID

Department Name

Retailer Flag

Retailer Code

Retailer Name

Retailer Type

Retailer Status

Record Actions ⓘ

Edit

Branch Code	Branch Name	Delivery Address	External Refercenc ID required	Status
-------------	-------------	------------------	--------------------------------	--------

Logs

created By

created Date time

Updated User

Updated Date Time

Account Retail Management

Bookmark

Refresh

Main

Retail Management Account

Account ID Villa, Maria, Residential, \$365.79

Department Name

Retailer Flag

Retailer Code

Retailer Name

Retailer TypeIndependent

Retailer Status

Record Actions ⓘ

Edit

Branch Code	Branch Name	Delivery Address	External Refercenc ID required	Status
BRANCH1	Beck, Mark, Residential, \$0.00			Active
BRVC 2	AKHILA, SAICHOWDARY, Residential, \$-10.00			Inactive

created By

created Date time

Updated User

Updated Date Time

The Edit should open the Input UI with editable data for updating the Retailer data and branch details.

5.1.2 CM-RetailAccountPriceMgmt

Property	Value
Business Object	CM-RetailAccountPriceMgmt
Description	Retailer/Branch-specific price overlay (discount)
Maintenance Object	ACCOUNT
Application Service	F1-DFLT5
Instance Control	Allow new instances
Schema	<pre> <schema xmlns:uiHint="http://oracle.com/ouafUIHints"> <accountId mapField="ACCT_ID" dataType="string"/> <retailerBranchPriceList label="Retailer Price List" type="group" mapXML="ACCT_DATA_AREA"> <bagList label="Retailer Price deatils" type="list"> <productCode label="product code" isPrimeKey="true" dataType="string"/> <bagType label="Bag Type" dataType="lookup" isPrimeKey="true" lookup="CM_BAG_TYPE_FLG"/> <effectiveDate mdField="EFFDT" dataType="date" isPrimeKey="true"/> <endDate label="effective To" dataType="date" isPrimeKey="true"/> <revisionNumber label="Revision Number" type="group"> <vatData label="VAT Details" type="list"> <revNum label="Revision Number" isPrimeKey="true" dataType="string"/> <priceExclVAT label="Price Excl. VAT" dataType="string"/> <vatAmount label="VAT" dataType="string"/> <priceInclVAT label="Price Incl. VAT" dataType="string"/> <discountPercent label="Discount %" dataType="string"/> <costAmount label="Cost" dataType="string"/> <markUpAmount label="Mark Up" dataType="string"/> <markUpPercent label="Mark Up %" dataType="string"/> <stockLevel label="Stock Level" dataType="string"/> </vatData> </revisionNumber> </bagList> </retailerBranchPriceList> </schema> </pre>

Field Name	Description
Main	
Department Name	Mandatory. It is a lookup or characteristic. It is maps to the element Department Name in the ACCT_DATA_AREA.
Revision Number	It identifies the version of the item price list. It maps to the element Revision Number in the ACCT_DATA_AREA.

Effective From	Mandatory. The date which retailer price defines then it becomes effective. It maps to Effective From in the ACCT_DATA_AREA.
Effective To	Mandatory. this date should be later than the Effective Date From. It maps to Effective To in the ACCT_DATA_AREA.
<u>Sale Price Excl. VAT</u>	The price of the product, excluding VAT. It maps to Sale Price Excluding VAT in the ACCT_DATA_AREA.
VAT	The value added tax applicable for the product. It maps to VAT in the ACCT_DATA_AREA.
<u>Sale Price Incl. VAT</u>	The price of the product, including VAT. It maps to Sale Price Including VAT in the ACCT_DATA_AREA.
Discount %	Mandatory. Here percentage can be equal or greater than zero. It maps to Discount Percent in the ACCT_DATA_AREA.
<u>Discounted Sale Amount</u>	The discount price obtained by applying discount percentage is EXCI VAT value. It maps to the element Discounted Sale Amount in the ACCT_DATA_AREA.
Mark Up	Here difference between the discounted price Excl. VAT vale and discounted price values. It maps to element Mark Up in the ACCT_DATA_AREA.
Mark Up %	Here percentage is equal to Mark Up divided by the <u>Cost Price</u> and multiplied by 100. It maps to the element Mark Up Percent in the ACCT_DATA_AREA.
Stock Level	Mandatory. Value must be numerical. It maps to the element Stock Level in the ACCT_DATA_AREA.

5.1.2.1 Retail Account Price Management Input Map

Input MAP should be rendered to maintain Item Price List of a specific customer/branch on top of the Item price. In this its custom interface hosts negotiated terms, like discount percentage, derived cost/ markup. And this design isolates branch-specific terms, preserving the integrity of the base item price list.

This portal is a Fact-based object and can be launch via the Retail Management Menu and the BO will contain the below elements.

UI Mock Input

ccount ID 9495717263

Retailer Price List

Retailer Price details

Bag Type	Effective Date	effective To	VAT Details			
+ Black Plastic	02-24-2026	02-28-2026	+ product code	Revision Number	Price Excl. VAT	VAT
			cd01	11	100	10

Save

Cancel

Mock Display UI

Retailers Price details

Account ID 9495717263

Record Actions

Edit

Retailer Price List

Retailer Price details

Bag Type	Effective Date	effective To	VAT Details									
Black Plastic	02-24-2026	02-28-2026	product code	Revision Number	Price Excl. VAT	VAT	Price Incl. VAT	Discount %	Cost	Mark Up	Mark Up %	Stock Level
			cd01	11	100	10	110	5	105	5	5	100

5.1.3 CM-MaintainItemPriceList

Maintain Item Price is an Extendable lookup BO used to Maintain the Effective dated and Revision Based Price details for the Items(Bags)

Property	Value
Business Object	CM-MaintainItemPriceList
Description	Maintain Item Price List
Maintenance Object	F1-EXT LKUP
Application Service	F1-DFLT5
Instance Control	Allow new instances
Schema	<schema name="schema"> <lookupValue label="Product Code" required="true" isPrimeKey="true" mapField="F1_EXT_LOOKUP_VALUE"/> <bo suppress="true" isPrimeKey="true" fkRef="F1-BUSOB" mapField="BUS_OBJ_CD"/> <description required="true" mapField="DESCR"/>

Property	Value
	<pre> <overrideDescription suppress="blank" mapField="DESCR_OVRD"/> <longDescription suppress="blank" mapField="DESCRLONG"/> <lookupUsage required="true" dataType="lookup" default="F1AC" mapField="F1_EXT_LOOKUP_USAGE_FLG" lookup="F1_EXT_LOOKUP_USAGE_FLG"/> <owner suppress="true" dataType="lookup" mapField="OWNER_FLG" lookup="OWNER_FLG"/> <version suppress="true" dataType="number" mapField="VERSION"/> <itemPriceList label="Item Details" type="group" mapXML="BO_DATA_AREA"> <bagList label="bagList" type="list"> <bagType label="Bag Type" dataType="lookup" isPrimeKey="true" lookup="CM_BAG_TYPE_FLG"/> <revisionNumber label="Revision Number" type="group"> <vatData label="VAT Details" type="list"> <revNum label="Revision Number"/> <effectiveDate mdField="EFFDT" dataType="date" isPrimeKey="true"/> > <endDate label="effective To" dataType="date" isPrimeKey="true"/> <costPrice label="Cost Price"/> <salePriceExclVAT label="Sale Price Excluding VAT"/> <vatCode label="VAT Code"/> <vatPercentage label="VAT Percentage"/> <salePriceInclVAT label="Sale Price Including VAT"/> </vatData> </revisionNumber> </bagList> </itemPriceList> </schema> </pre>

Field Name	Description
Main	
Product Code	Mandatory. It is a Extendable lookup. It maps to the element Product Code in the Lookup Value
Bag Type	Mandatory. It is delivered to DC and It maps to the element Bag Type in the BO_DATA_AREA.
Revision number	It identifies the version of the item price list. It maps to the element Revision Number in the BO_DATA_AREA.

Field Name	Description
Cost price	Mandatory. Values must be greater than zero. It maps to the element Cost Price in the BO_DATA_AREA.
Sales Price Excluding VAT	Mandatory. Here the excluding value will be added tax (VAT) amount and must be greater than zero. It maps to the element Sale Price Excluding VAT in the BO_DATA_AREA.
VAT Code	Mandatory. Added value tax applicable for the product must/should be selected. It maps to the element VAT Code in the BO_DATA_AREA.
VAT Percentage	Here the percentage of added value tax is defined for selected VAT Code. It maps to the element VAT Percentage in the BO_DATA_AREA.
Sale Price Including VAT	Including VAT the price item will be sold. It maps to the element Sale Price Including VAT in the BO_DATA_AREA.
Effective From	Mandatory. The date which retailer price defines then it becomes effective. It maps to Effective From in the BO_DATA_AREA.
Effective To	Mandatory . this date should be later than the Effective Date From. It maps to Effective To in the BO_DATA_AREA.
Status	Current item price status (active/inactive).). Maps to BO_DATA_AREA element status with Lookup Value – Active/Inactive

Whenever adding data or Updating data Validations needs to done on the product Effective Dates to avoid Overlapping and End date should not be prior to the From Date.

5.1.3.1 Maintain Item Price List Input Map

Input MAP should be rendered to maintain Item Price List of a specific customer/branch on top of the Item price. In this its custom interface hosts negotiated terms, like discount percentage, derived cost/ markup. And this design isolates branch-specific terms, preserving the integrity of the base item price list.

This portal is a Fact-based object and can be launch via the Retail Management Menu and the BO will contain the below elements

UI Mock Input

Main

Product Code

CP002

Description

CP 02

Override Description

Detailed Description

Status

Active

ITEM

Item Details

bagList

Bag Type		VAT Details						
			Revision Number	Effective Date	effective To	Cost Price	Sale Price Excluding VAT	VAT Code
+	Black Plastic	+	10	02-26-2026	03-10-2026	10	100	001

Save

Cancel

Mock Display UI

Extendable Lookup Value

Main

Product Code

PROD001

Description

Product One

Status

Active

ITEM

Item Details

bagList

Bag Type	VAT Details				
	Revision Number	Effective Date	effective To	Cost Price	Sale Price
Blue Garden	1	02-01-2026	02-26-2026	100	90

Record Actions

Edit

Delete

Duplicate

Record Information

5.1.4 CM-OrderRetailManagement

This BO will be used to hold the Order data for Retail Management. This includes searchable characteristics for the order number, department, retailer code, branch code, and order status. These characteristics need to be protected and accessible only by DSW users. This BO also holds the retailer order number, customer account number, product variant details, order line items with product codes and quantities, delivery note reference, GRN reference, invoice authorization status, and order totals including subtotal excluding VAT, total discount, total VAT, and total amount including VAT.

Property	Value
Business Object	CM-OrderRetailManagement
Description	Order Retail Management
Maintenance Object	Fact
Application Service	TBD
Instance Control	Allow new instances
Schema	<pre> <schema xmlns:uiHint="http://oracle.com/ouafUIHints"> <factId suppress="input" mapField="FACT_ID" uiHint:visibleOn="displayMap" dataType="string"/> <branchCode label="Branch Code" isPrimeKey="true" fkRef="ACCT" mapField="CHAR_VAL"> <row mapChild="F1_FACT_CHAR"> <CHAR_TYPE_CD is="C1-ACCT"/> </row> </branchCode> <businessObject default="CM-OrderRetailMangement" mapField="BUS_OBJ_CD" uiHint:visibleOn="displayMap" dataType="string"/> <uiHint:startSection mdField="F1_RECORD_ACTIONS_LBL" sectionColumn="right" visibleOn="displayMap"/> <uiHint:includeMap map="CM-RetailOrderMgmtActions"/> <uiHint:endSection/> <rmMaintainOrder type="group" mapXML="FACT_DATA_AREA"> <maintainOrder label="Maintain Order" type="group"> <orderDate label="Order Date" dataType="date"/> <retailerOrderNumber label="Retailer Order Number" dataType="string"/> <caseId label="Case ID" fkRef="CASE" uiHint:visibleOn="displayMap" dataType="string"/> </maintainOrder> <productVariantDetails label="Product Variant Details" type="group"> <variant_1 label="Vairant-1" isPrimeKey="true" dataType="string"/> <variant_2 label="Vairant-2" dataType="string"/> <variant_3 label="Vairant-3" dataType="string"/> </productVariantDetails> <orderDetails label="Order Details" type="list"> <productCode label="Product Code" dataType="lookupBO" isPrimeKey="true" lookupBO="CM-MaintainItemPriceList"/> <variant_1 label="Vairant-1" dataType="string"/> <variant_2 label="Vairant-2" dataType="string"/> <variant_3 label="Vairant-3" dataType="string"/> <quantityOrdered label="Quantity Ordered" isPrimeKey="true" dataType="string"/> <priceExclVat label="Price Excl. VAT" dataType="string"/> <discountAmount label="Discount Amount" dataType="string"/> <vat label="VAT" dataType="string"/> <priceInclVat label="Price Incl. VAT" dataType="string"/> <totalLineAmount label="Total Line Amount" dataType="string"/> <requiredDate label="Required Date" dataType="date"/> <stockLevel label="Stock Level" dataType="string"/> </pre>

Property	Value
	<pre> <lineStatus label="Line Status" dataType="string"/> <remark label="Remark" dataType="string"/> </orderDetails> <subTotal label="Sub Total" type="group"> <totalOrderQuantity label="Total Order Quantity" isPrimeKey="true" dataType="string"/> <totalDiscount label="Total Discount" dataType="string"/> <totalVat label="Total VAT" dataType="string"/> <totalOrderAmountExclVat label="Total Order Amount Excl. VAT" dataType="string"/> <totalOrderAmountInclVat label="Total Order Amount Incl. VAT" dataType="string"/> </subTotal> </rmMaintainOrder> </schema> </pre>
Options	Display Map Service Script
	Portal Navigation Option

Display UI:

The life cycle status Buttons needs to be rendered based on the Current BO status along with the Custom action Buttons such as calculate, Print and Print Itemlist

The screenshot shows the Oracle Utilities Customer To Meter application. The main header includes navigation icons, a search bar, and user information (Demo 29.0.11 / Z3A). The page title is "Order Management - Fact". Below the title, there's a "Main" section with order details: Order ID: 217410732040, Status: CREATE, Status Date/Time: 03-01-2026 17:04:24, Branch Code: Utility Company, Commercial, \$0.00, and Business Object: CM-OrderRetailMangement. A "Record Actions" section contains buttons for Calculate, Submit, Print, and Print Item List. Below this is the "Maintain Order" section with fields for Order Date (03-04-2026), Retailer Order Number, and Case ID. The "Product Variant Details" section lists Variant-1, Variant-2, and Variant-3. On the right, a sidebar contains a "Work List" section with a "Clear" button, a "Customer Contact" section with a "Type" dropdown and a "Comment" text area, an "Alerts" section with an "Alerts" button, and a "C2M Demo Scenarios" section with a "Load Demo Scenario" button and a list of scenarios including "Add One Time Payment UI" and "Adjustment Approval: Martha".

The **Calculate Button** Should Invoke the Editable UI of the Fact Entity and Clicking on save should calculate the Total Line Item Amount on each line item level and calculate Total Order Quantity, Total Discount, Total VAT, Total Order Amount Excl. VAT, Total Order Amount Incl. VAT on the Order Level and update the Value to the Fact entity.

The Print and Print item list should call the BI Publisher by passing the Fact ID to render the Printable report.

5.1.5 CM-MaintainOrderInvoice

This BO will be used to hold the Maintain Invoice data for retail management. This includes searchable characteristics for the invoice number, account id, branch reference, order reference and invoice status. These characteristics need to be protected and accessible only by DSW users. This BO also holds the delivery note reference, GRN external reference, invoice line items with product codes, quantities delivered and pricing, invoice totals including subtotal excluding VAT, total discount, total VAT, total amount including VAT, currency, authorization status, and notes.

Property	Value
Business Object	CM-MaintainOrderInvoice
Description	Order Invoice Management
Maintenance Object	Fact
Application Service	TBD
Instance Control	Allow new instances
Schema	<pre> <schema> <factId mapField="FACT_ID" dataType="string"/> <businessObject default="CM-MaintainOrderInvoice" mapField="BUS_OBJ_CD" dataType="string"/> <maintainOrderInvoice type="group" mapXML="FACT_DATA_AREA"> <orderInvoice label="Order Invoice" type="group"> <department label="Department" dataType="string"/> <invoiceNumber label="Invoice Number" dataType="string"/> <invoiceDate label="invoice Date" dataType="date" isPrimeKey="true"/> <status label="Status" isPrimeKey="true" dataType="string"/> <orderNumber label="Order Number" isPrimeKey="true" dataType="string"/> <orderDate label="Order Date" dataType="date" isPrimeKey="true"/> <accountId label="Account ID" isPrimeKey="true" dataType="string"/> <retailerCode label="Retailer Code" isPrimeKey="true" dataType="string"/> <branchCode label="Branch Code" isPrimeKey="true" fkRef="ACCT" dataType="string"/> <deliveryAddress label="Delivery Address" dataType="string"/> <notes label="Notes" isPrimeKey="true" dataType="string"/> </orderInvoice> <productVariantDetails label="Product Variant Details" type="list"> <variant_1 label="Variant-1" isPrimeKey="true" dataType="string"/> <variant_2 label="Variant-2" dataType="string"/> <variant_3 label="Variant-3" dataType="string"/> </pre>

Property	Value
	<pre> </productVariantDetails> <invoiceDetails label="Invoice Details" type="group"> <lineNo label="Line No" isPrimeKey="true" dataType="string"/> <productCode label="Product Code" isPrimeKey="true" dataType="string"/> <variant_1 label="Variant-1" dataType="string"/> <variant_2 label="Variant-2" dataType="string"/> <variant_3 label="Variant-3" dataType="string"/> <quantityOrdered label="Quantity Ordered" isPrimeKey="true" dataType="string"/> <priceExclVat label="Price Excl. VAT" dataType="string"/> <discountAmount label="Discount Amount" dataType="string"/> <vat label="VAT" dataType="string"/> <priceInclVat label="Price Incl. VAT" dataType="string"/> <totalLineAmount label="Total Line Amount" dataType="string"/> <requiredDate label="Required Data" dataType="date"/> <stockLevel label="Stock Level" dataType="string"/> <lineTotal label="Line Total" dataType="string"/> <remark label="Remark" dataType="string"/> </invoiceDetails> <subTotal label="Sub Total" type="list"> <totalInvoiceQuantity label="Total Invoice Quantity" isPrimeKey="true" dataType="string"/> <totalDiscount label="Total Discount" dataType="string"/> <totalVat label="Total VAT" dataType="string"/> <totalInvoiceAmountExclVat label="Total Invoice Amount Excl. VAT" dataType="string"/> <totalInvoiceAmountInclVat label="Total Invoice Amount Incl. VAT" dataType="string"/> </subTotal> </maintainOrderInvoice> </schema> </pre>
Options	Display Map Service Script
	Portal Navigation Option

Fact Id	
Business Object	
Order Invoice	
Department	
Invoice Number	
Invoice Date	
Status	
Order Number	
Order Date	
Account ID	
Retailer Code	
Branch Code	
Delivery Address	
Notes	

Product Variant Details			
	Variant-1	Variant-2	Variant-3
+ X			

Product Variant Details			
	Variant-1	Variant-2	Variant-3
+ X			

Invoice Details							
	Line No	Product Code	Variant-1	Variant-2	Variant-3	Quantity Ordered	Price E
+ X							

Sub Total	
Total Invoice Quantity	
Total Discount	
Total VAT	
Total Invoice Amount Excl. VAT	
Total Invoice Amount Incl. VAT	

5.1.6 CM-MaintainDeliveryNote

This BO will be used to hold the Delivery Note data for retail management. This includes searchable characteristics for the delivery note number, order reference, route reference, and delivery status. These characteristics need to be protected and accessible only by DSW users. This BO also holds the vehicle registration, delivery person details, required delivery date, actual delivery date, GRN external reference, proof of delivery capture status, delivery line items with planned and delivered quantities, receiver name, and optional return reference linkbacks.

Property	Value
Business Object	CM-MaintainDeliveryNote

Property	Value	
Description	Maintain Delivery Note	
Maintenance Object	Fact	
Application Service	TBD	
Instance Control	Allow new instances	
Schema	<pre> <schema> <factId mapField="FACT_ID" dataType="string"/> <businessObject default="CM-MaintainDeliveryNote" mapField="BUS_OBJ_CD" dataType="string"/> <maintainDeliveryNote type="group" mapXML="FACT_DATA_AREA"> <deliveryNote label="delivery Note" type="group"> <deliveryNoteNBR label="Delivery Note Number" dataType="string"/> <orderReference label="Order reference" dataType="string"/> <reqdeliveryDate label="Requested Delivery Date" dataType="date" isPrimeKey="true"/> <deliveryDate label="Delivery Date" dataType="date" isPrimeKey="true"/> <vehicleRegistration label="Vehicle Registration" isPrimeKey="true" dataType="string"/> <deliveryPerson label="Delivery Person" isPrimeKey="true" dataType="string"/> <deliveryContact label="Delivery Contact" isPrimeKey="true" dataType="string"/> <goodsReceivedNoteNBR label="Goods Received Note NBR" isPrimeKey="true" dataType="string"/> <routeReference label="Route Reference" isPrimeKey="true" dataType="string"/> <deliveryStatus label="Delivery Status" dataType="string"/> <attachments label="Attachments" isPrimeKey="true" dataType="string"/> </deliveryNote> <deliveryDetails label="Delivery Details" type="list"> <sequenceNumber label="Sequence Number" isPrimeKey="true" dataType="string"/> <productCode label="Product Code" isPrimeKey="true" dataType="string"/> <quantityPlanned label="Quantity Planned" isPrimeKey="true" dataType="string"/> <quantityDelivered label="Quantity Delivered" dataType="string"/> <receiverName label="Receiver Name" dataType="string"/> <proofOfDeliveryCaptured label="Proof of Delivery Captured" dataType="string"/> </deliveryDetails> </maintainDeliveryNote> </schema> </pre>	
Options	Display Map Service Script	
	Portal Navigation Option	

Fact Id

*

Business Object

*

delivery Note

Delivery Note Number

Order reference

Requested Delivery Date

Delivery Date

Vehicle Registration

Delivery Person

Delivery Contact

Goods Received Note NBR

Route Reference

Delivery Status

Attachments

Delivery Details

Save

Cancel

5.2 BO Lifecycle

5.2.1 Maintain Orders

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
CREATE	Create	10	Initial	No	Display	SUBMITTED
Required Characteristics						
Comment						

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
SUBMITTED	Submitted	20	Interim	No	Display	- HOLD - ORDERED
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
Exit processing	10					

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
HOLD	Hold	30	Interim	No	Display	ORDERED
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
Exit processing	10					


Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
ORDERED	Ordered	40	Interim	No	Display	• SHORTCLS • HOLD • CANCELLED
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
	20					
Exit processing	10					

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
SHORTCLS	On Hold	50	Interim	No	Display	• CLOSE
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
Exit processing	10					

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
--------	-------------	----------	------------------	------------------	-------	-------------

CANCELLED	Captured	60	Interim	No	Display	• CLOSE
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
Exit processing	10					

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
CLOSED	Closed	70	Final	No		
Required Characteristics						
Comment						

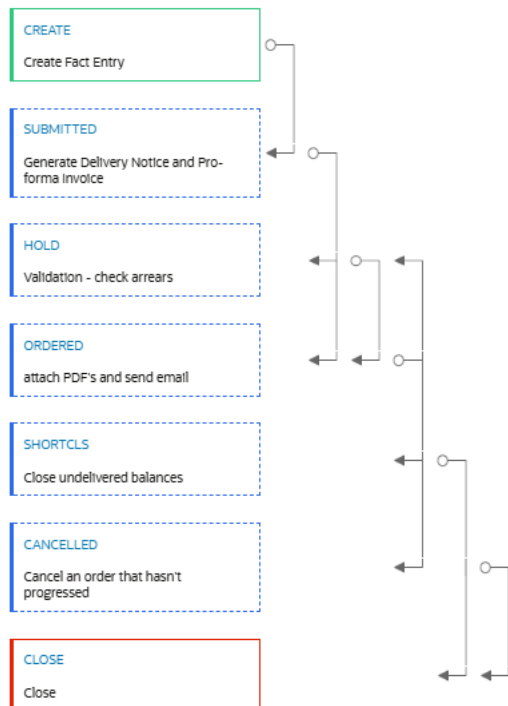

5.2.2 Maintain Invoice

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
FRESH	Fresh	10	Initial	No	Display	L1-APPRV
Required Characteristics						
Comment						

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
L1-APPRV	L1-Approval	20	Interim	No	Display	FINAL
Required Characteristics						
Comment						

System Event	Seq.	Algorithm
Enter Processing	10	
	20	
Exit processing	10	

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
FINAL	Approved	30	Interim	No	Display	REJECTED
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
Exit processing	10					

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
REJECTED	Rejected	40	Final	No	Display	
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				

Enter Processing	10	
Exit processing	10	

5.2.3 Maintain Delivery Note

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
DRAFT	Draft	10	Initial	No	Display	• ISSUED
Required Characteristics						
Comment						

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
ISSUED	Issued	20	Interim	No	Display	• COMPLETED
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
	20					
Exit processing	10					

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
COMPLETED	Completed	30	Interim	No	Display	• CANCELLED
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
Exit processing	10					

Status	Description	Sequence	Status Condition	Transitory State	Alert	Next status
CANCELLED	Cancelled	40	Final	No	Display	
Required Characteristics						
Comment						
System Event	Seq.	Algorithm				
Enter Processing	10					
Exit processing	10					

5.3 Zone

5.3.1 CM-RTLMGMACT

Property	Value
Zone	CM-RTLMGMACT
Zone Type	Explicit Object Map
Description	Retail Management Account
Application Service	CILCACCP
Ui Map	map='CM_RetailManagementDisplay'
Zone Visibility Service Script	ss='CM-ZoneAlwVI' output=shouldShowZone
display Object	bo='CM_RetailManagement'
XML Parameter 1	Name=ACCT_ID targetPath=accountId

5.3.2 CMRTPRRICEMG

Property	Value
Zone	CMRTPRRICEMG
Zone Type	Explicit Object Map
Description	Retail Price Details
Application Service	Account
Ui Map	map='CM-RetialAccountPriceMgmtDisp'
Zone Visibility Service Script	ss='CM-ZoneBrcVI' output=shouldShowZone
display Object	bo='CM-RetialAccountPriceMgmt'
XML Parameter 1	name=ACCT_ID targetPath=accountId

5.4 Portal

Create Account Retail Management to Main Retail and Retailers Price details.
Include the Zone field in the portal to allow users to search, add, or update Blocks based on Zone.

5.4.1 CMACTRTM

Property	Value
Portal	CMACTRTM
Description	Account Retail Management

Property	Value
Type	Standalone Portal
Application Service	
Zone 1	C1-ACMGMQRY
Zone 2	CM-RTLMGMACT
Zone 3	CMRTPRRICEMG

Note: C1-ACMGMQRY can be Duplicated/customized to CM zone to adjust the Input filter, broadcast and output displays for the Account Retail management.

5.4.2 CMORDMGM

Create Order Management Portal for Adding the Fact based Order Management Entity in the Portal action option(Add order) and for Searching the Order Fact entry using the Branch Account ID, Creation Date, Completion Date,Fact Status which needs to Navigate the Fact Entity (Bo - CM-OrderRetailManagement).

Order management Portal:

The screenshot displays the Oracle Utilities Customer To Meter Order Management Portal. The main section is titled 'Order Management' and includes a 'Main' tab. Below this, the 'Fact Search' section is visible, featuring a 'Search By' dropdown set to 'Main'. The 'Business Object' is set to 'Order Retail Management', and the 'Status' is set to 'Create Fact Entry'. There are input fields for 'Create Date/Time' and 'Last Update Date/Time', each with a calendar icon. A 'Fact Id' field is also present. A 'Search' button is located at the bottom of the search section. On the right side, there are several panels: 'Customer Contact' with a 'Type' dropdown and a 'Comment' text area; 'Alerts' with a 'Lookup' button; and 'C2M Demo Scenarios' with a 'Load Demo Scenario' button and a link to 'Add One Time Payment UI'. The top navigation bar includes 'Advanced Search', 'Control Central Search', 'Account Information', and 'ES'.

Add order Button Click should invoke the Order management UI for creating the Fact Entry.

Branch Code: Utility Company, Commercial, \$0.00 2652143458

Maintain Order

Order Date:

Retailer Order Number:

Product Variant Details

Vairant-1:

Vairant-2:

Vairant-3:

Order Details

	Product Code	Vairant-1	Vairant-2	Vairant-3	Quantity Ordered	Price Excl. VAT	Discount Amount	VAT	Price Incl. VAT
+	Product One				10	200	10	10	210

Sub Total

After choosing the Product code the Price Details such as Price Excl Vat, Vat Amount, Inclusive Vat amount should be auto populated from the Extendable lookup (CM-MaintainItemPriceList) or if the Branch account has Special Retail Price (CM-RetailAccountPriceMgmt).

Search Options output:

Order Management Add Order Bookmark

Main

Search By:

Business Object:

Status:

Create Date/Time: -

Last Update Date/Time: -

Fact Id:

Filters: Business Object Order Retail Management

	Create Date/Time	Record Information	Last Update Date/Time	Business Object	User	Fact Id
1	03-01-2026 17:14:27		03-01-2026 17:14:27	Order Retail Management	System, English	582807831228
2	03-01-2026 17:12:23		03-01-2026 17:12:23	Order Retail Management	System, English	699476939908
3	03-01-2026 17:12:14		03-01-2026 17:12:14	Order Retail Management	System, English	208467007676
4	03-01-2026 17:04:24		03-01-2026 17:04:24	Order Retail Management	System, English	217410752846
5	03-01-2026 16:35:42		03-01-2026 16:35:42	Order Retail Management	System, English	317962978814

Clicking on Fact Id should take the Relevant Fact Ids's BO navigation Portal. Similarly order can be searched using the Account Id(Branch) its created

Order Management

Add Order
Bookmark
Refresh

Main

Fact Search

Search By
Search by Account

Account ID
2652143458

Search

Link Editor

Filters: Account ID 2652143458

	Last Update Date/Time	Business Object	User	Fact Id
1	03-01-2026 17:04:24	Order Retail Management	System, English	217410752846

5.4.3 CMINVMGM

Create Invoice Management Portal for Searching the Order Fact entry using the Branch Account ID,Order Id, Creation Date, Completion Date,Fact Status which needs to Navigate the Fact Entity (CM-MaintainOrderInvoice).

5.5 Menu

Upon generating the Portal, the system will automatically create the required navigation options and associated keys.

These keys must be used to add the following submenus into the main menu to facilitate access to the maintenance modules:

1. Retail Management

Selecting any of the above menu option system should invoke the respective maintenance portal. When a user clicks on any of this option, a **Query Portal** should be displayed to view existing entries.

Upon selecting **ADD**, an **Input Map** should be presented to allow the user to add or update details. These menu items and associated functionalities must be **restricted to authorized users only**.

Mock UI:

Account Should be searched with the Retailer Code or branch Code Characteristics type and on Broad cast/search of the account ID Maintain Retailers and Retailers price list zone should be displayed.

Account Retail Management
Bookmark
Refresh

Main

Account Search ⓘ

Search By
Default

Person ID

Include Hierarchy
☐

Customer Class

Account Management Group

Bill Cycle

Search

Maintain Retailer

Retailer Price List Management

Account Retail Management
Bookmark
Refresh

Main

Account Search ⓘ

Search By
Account Characteristic

Person ID
2154079703
David,John

Include Hierarchy
☒

Characteristic Type
External Account Number

Characteristic Value

Search

Hide Filters

Filters: Person ID 2154079703, Include Hierarchy Y

	Account	Mailing Address	Account Management Group	Bill Cycle	Person ID	Account
☐	David,John, Residential, \$0.00	1320 SW, Park Avenue, Portland, OR, 97421		Monthly bill cycle - day 2	2154079703	450065

5.6 Script

5.6.1 CMActRetMain

This BPA will be used to Maintain the Retails management Account and validations for Changing the Branch Status and Updating/Removing the Branch char.

The chars (**CMBRCHCD – Branch Code**), (**CMRTATID – Retailer account ID**) will be added/updated/removed on the accounts during the updates. It is assumed that one branch will linked to one Retailer at a time.

Property	Value
Script	CMActRetMain
Description	Retail Management Account
Script Type	BPA script
Application Service	F1-DFLT5
Script as text	<pre> move "\$accountId" to \$boPrimeKey; //move "\$accountId" to "map_schema/boGroup/accountId"; move 'map_schema/accountId' to \$boPrimeKeyXpath; if("\$action='UPD'") move "\$acctId" to "CM_RetailManagement/accountId"; invokeBO 'CM_RetailManagement' using "CM_RetailManagement" for read; end-if; generateBOEditMap 'CM_RetailManagement' using "CM_RetailManagement"; //move "map_schema/accountId" to "CM_RetailManagement/accountId"; //invokeBO 'CM_RetailManagement' using "CM_RetailManagement" for read; invokeBO 'CM_RetailManagement' using "CM_RetailManagement" for update; //For each of the Branches updated/removed the chars (CMBRCHCD – Branch Code), (CMRTATID – Retailer account ID) will be added/updated/removed </pre>

5.6.3 CMAcRtlPrcM

Property	Value
Script	CMAcRtlPrcM
Description	Account Retail Price Management
Script Type	BPA script
Algorithm Entity	
Application Service	F1-DFLT5
Script as text	

5.6.4 CM-ZoneBrcVl

Property	Value
Script	CM-ZoneBrcVl
Description	Zone Visibility - True if the account is Branch and active
Script Type	Service script
Algorithm Entity	
Application Service	F1-DFLT5
Script as text	<pre>1: label "This script will determine whether to display the Retailer Price Management Zone or not"; 10: edit data // Initialize values //Return true if Account is a Branch account(CMBRCHCD - Branch Code) and the account is active for the Retailer Mapped (CMRTATID - Retailer account ID) has this account ID as Active in the account Data area move 'true' to "parm/shouldShowZone"; end-edit;</pre>

5.6.5 CMOrdMgmMtAt

Property	Value
Script	CMOrdMgmMtAt
Description	order magt action service script
Script Type	Service script
Algorithm Entity	
Application Service	C1SITASK
Script as text	<pre>10: edit data if ("parm/factId = \$BLANK") terminate; end-if; end-edit; 20: edit data move 'F1-FACT' to "F1-DetermineBo/input/mo"; move "parm/factId" to "F1-DetermineBo/input/pkValue1"; invokeBS 'F1-DetermineBo' using "F1-DetermineBo"; move "F1-DetermineBo/output/bo" to "parm/bo"; end-edit; 30: edit data invokeBO "F1-DetermineBo/output/bo" using "parm" for read; end-edit; 40: edit data if ("parm/boStatus != \$BLANK") move "parm/factId" to "F1- RetrieveNextStates/input/pkValue1"; move "F1-DetermineBo/output/bo" to "F1- RetrieveNextStates/input/bo"; move "F1-DetermineBo/output/boStatus" to "F1- RetrieveNextStates/input/boStatus"; invokeBS 'F1-RetrieveNextStates' using "F1- RetrieveNextStates";</pre>

Property	Value
	<pre> for (\$state in "F1-RetrieveNextStates/output/states") move "\$state/default" to "parm/output/+states/default"; move "\$state/boStatus" to "parm/output/states[last()]/boStatus"; move "\$state/boTransitory" to "parm/output/states[last()]/boTransitory"; move "\$state/boNextStatusLabel" to "parm/output/states[last()]/boNextStatusLabel"; move "\$state/access" to "parm/output/states[last()]/access"; move "\$state/boTransitionCondition" to "parm/output/states[last()]/boTransitionCondition"; end-for; end-if; end-edit; </pre>

5.6.6 CM_RMMOVALID

Property	Value
Script	CM_RMMOVALID
Description	Arrear Validation/Check
Script Type	Plug-in script
Algorithm Entity	Package – Criteria Field
Application Service	<<>>
Script as text	- Retrieve Account ID - Check the arrears

Property	Value
	- If arrears exist proceed to status HOLD - If arrears do not exist proceed to ORDERED

5.6.7 CM_RMBBRTORD

Property	Value
Script	CM_RMBBRTORD
Description	Blue Bag – Retail Order Case
Script Type	Plug-in script
Algorithm Entity	Package – Criteria Field
Application Service	<<>>
Script as text	Create the given case type with the valid inputs

5.6.8 CM_RMPROFINV

Property	Value
Script	CM_RMPROFINV
Description	Pro-forma Invoice
Script Type	Plug-in script
Algorithm Entity	Package – Criteria Field
Application Service	<<>>
Script as text	Create Pro-forma Invoice

5.6.9 CM_RMMROVALD

Property	Value
Script	CM_RMMROVALD

Property	Value
Description	Validate Attachments
Script Type	Plug-in script
Algorithm Entity	Package – Criteria Field
Application Service	<<>>
Script as text	Admin validates intake (PO/portal ref, Delivery Notice, Proforma).

5.6.10 CM_RMMROMAIL

Property	Value
Script	CM_RMMROMAIL
Description	Depot Email
Script Type	Plug-in script
Algorithm Entity	Package – Criteria Field
Application Service	<<>>
Script as text	Depot Email to notify depot/region

5.6.11 CM_RMMRVALID

Property	Value
Script	CM_RMMRVALID
Description	Validate return attachments
Script Type	Plug-in script
Algorithm Entity	Package – Criteria Field
Application Service	<<>>
Script as text	Validate links to Delivery Note/Invoice; check quantities

5.6.12 CM_RMOINCALC

Property	Value
Script	CM_RMOINCALC
Description	Calculate Sub Total
Script Type	Plug-in script
Algorithm Entity	Package – Criteria Field
Application Service	<<>>
Script as text	Validate links to Delivery Note/Invoice; check quantities

5.6.13 CM_OrdMgmMt

Calculates the order amounts including product prices, discount amounts, VAT, and total invoice amounts (excl. and incl. VAT) for all line items in the order before submission. Invokes the BO 'CM-OrderRetailMangement' using the CALCULATE action.

Property	Value
Script	CM_OrdMgmMt
Description	Order Management fact Maintain
Script Type	BPA script
Application Service	F1-DFLT5
Script as text	If action ='ADD' generateBOEditMap 'CM-OrderRetailMangement' using "CM-OrderRetailMangement"; invokeBO 'CM-OrderRetailMangement' using "CM-OrderRetailMangement" for add; if action ='CALCULATE' update the Price Details based on the Product code mapping with extendable lookup/Branch Specific Price Details

5.6.14 CM_PrintOrdr

Property	Value
Script	CM-PrintOrdr
Description	Print Order
Script Type	BPA script
Application Service	F1-DFLTS
Script as text	Invoke BI Publisher for Order Print

5.6.15 CM_PrnItmLst

Property	Value
Script	CM-PrnItmLst
Description	Print Item List
Script Type	BPA script
Application Service	F1-DFLTS
Script as text	Invoke BI Publisher for Item Print Details

5.7 Algorithm Type

CM_RMMOVALID

Field Name	Field Value
Algorithm type	CM_RMMOVALID
Description	check arrears and decide which status to proceed.
Detailed Description	The purpose of this algorithm is that it takes 2 status inputs and checks the arrears and decides what to do. If arrears exist - status 1 (HOLD) If arrears doesn't exist - status 2 (ORDERED)
Algorithm Entity	Business Object Status – Enter

Program Type	Plug-in Script
Script	CM_RMMOVALID
ALGORITHM PARAMETER	REQUIRED
Status-1	HOLD
Status-2	ORDERED

CM_RMBBRTORD

Field Name	Field Value
Algorithm type	CM_RMMOVALID
Description	Blue Bags Case
Detailed Description	Blue Bags - Retail Order Case
Algorithm Entity	Business Object Status – Enter
Program Type	Plug-in Script
Script	CM_RMBBRTORD
ALGORITHM PARAMETER	REQUIRED
Blue Bags Case type code	CM-RMBBCSP

CM_RMPROFINV

Field Name	Field Value
Algorithm type	CM_RMPROFINV
Description	Pro-forma Invoice
Detailed Description	Create Pro-forma Invoice and send pro-forma PDF email.
Algorithm Entity	Business Object Status – Enter
Program Type	Plug-in Script
Script	CM_RMPROFINV

ALGORITHM PARAMETER	REQUIRED
FACT BO	CM-MaintainOrderInvoice

CM_RMMROVALD

Field Name	Field Value
Algorithm type	CM_RMMROVALD
Description	Validate Attachments
Detailed Description	Admin validates intake (PO/portal ref, Delivery Notice, Pro-forma).
Algorithm Entity	Business Object Status – Enter
Program Type	Plug-in Script
Script	CM_RMMROVALD

ALGORITHM PARAMETER	REQUIRED
---------------------	----------

CM_RMDPOMAIL

Field Name	Field Value
Algorithm type	CM_RMDPOMAIL
Description	Depot Email
Detailed Description	Depot mail
Algorithm Entity	Business Object Status – Enter
Program Type	Plug-in Script
Script	CM_RMDPOMAIL

ALGORITHM PARAMETER	REQUIRED
---------------------	----------

CM_RMMRVALID

Field Name	Field Value
Algorithm type	CM_RMMRVALID
Description	Validate return attachments
Detailed Description	Validate links to Delivery Note/Invoice; check quantities
Algorithm Entity	Business Object Status – Enter
Program Type	Plug-in Script
Script	CM_RMMRVALID
ALGORITHM PARAMETER	REQUIRED

5.8 Algorithms

CM_RMMOVALID

Field	Value
Algorithm	CM_RMMOVALID
Description	check arrears and decide which status to proceed.
Algorithm Type	CM_RMMOVALID
Algorithm Parameters	
Fact BO	CM-OrderRetailMangement

CM_RMBBRTORD

Field	Value
Algorithm	CM_RMMOVALID
Description	Blue Bags Case
Algorithm Type	CM_RMMOVALID
Soft Parameters	

Blue Bags Case type code	CM-RMBBCSP
---------------------------------	------------

CM_RMPROFINV

Field	Value
Algorithm	CM_RMPROFINV
Description	Create Pro-forma Invoice and send pro-forma PDF email.
Algorithm Type	CM_RMPROFINV
Algorithm Parameters	
Fact BO	CM-MaintainOrderInvoice

CM_RMMROVALD

Field	Value
Algorithm	CM_RMMROVALD
Description	Admin validates intake (PO/portal ref, Delivery Notice, Pro-forma).
Algorithm Type	CM_RMMROVALD
Soft Parameters	
Document Intake	PO/Portal ref
	Delivery Notice
	Pro-forma

CM_RMMROMAIL

Field	Value
Algorithm	CM_RMMROMAIL
Description	Depot mail to notify depot/region
Algorithm Type	CM_RMDPOMAIL

CM_RMMRVALID

Field	Value
Algorithm	CM_RMMRVALID
Description	Validate links to Delivery Note/Invoice; check quantities
Algorithm Type	CM_RMMRVALID
Soft Parameters	
Document Intake	Delivery Note
	Invoice

CM_RMMRDMAIL

Field	Value
Algorithm	CM_RMMRDMAIL
Description	Depot email with return note PDF
Algorithm Type	CM_RMDPOMAIL

5.9 UI MAP

5.9.1 CM-RetialAccountPriceMgmtDisp

CM-RetailManagementDisplay – the UI map will be used to display the Retail Account Detail and its branch details and Edit button will be available which will invoke the BO to display the details for Edit.

Property	Value
UI Map	CM-RetailAccountPriceMgmtDisp
UI Map Type	XHTML Document
Description	Retail Price Management Display
HTML Editor	<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd"> <html class="scrollRepaintFix"> <head>

Property	Value
	<pre> <link rel="stylesheet" type="text/css" href="cisDisabled.css" /> <script> function processButtonClick(action) { var root = xmlData.documentElement; var bo = OraDomElementHelper.getText(root.selectSingleNode('bo')); var values= {action: action, bo: bo}; oraRunScriptWithValues('CMActRtlPrcM', values); } </script> </head> <body class="oraZoneMap"> <input id="EDIT" oraMdLabel="EDIT_LBL" class="oraButton" type="button" style="float:left;" onClick="processButtonClick('UPD');" /> <div> <label oraLabel="accountId" for="accountId" /> </div> <div class="oraGridDiv" id="retailerBranch_retailerBranchList"> <table cellpadding="2" oraMdLabel="GENERIC_SUMMARY" oraList="retailerBranch/retailerBranchList" onResize="if (this.clientWidth > this.parentNode.clientWidth) { this.parentNode.className += ' oraGridDivScroll'};"> <thead> <tr> <th class="oraGridColumnHeader" oraLabel="branchCode" nowrap="nowrap" scope="col" /> </pre>

Property	Value
	<pre> <th class="oraGridColumnHeader" nowrap="nowrap" oraLabel="bagList" /> </tr> </thead> <tbody> <tr> <td class="oraNormal oraDisplayCell" scope="row" oraField="branchCode" /> <td class="oraDisplayCell oraEmbeddedTable" nowrap="nowrap"> <table cellpadding="2" oraMdLabel="GENERIC_SUMMARY" oraList="bagList" onResize="if (this.clientWidth > this.parentNode.clientWidth) { this.parentNode.className += ' oraGridDivScroll';}"> <thead> <tr> <th class="oraGridColumnHeader" oraLabel="bagType" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="effectiveDate" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="endDate" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" nowrap="nowrap" oraLabel="revisionNumber/vatData" /> </tr> </thead> <tbody> <tr> <td class="oraNormal oraDisplayCell" scope="row" oraField="bagType" /> <td class="oraNormal oraDisplayCell" scope="row" oraField="effectiveDate" /> <td class="oraNormal oraDisplayCell" scope="row" oraField="endDate" /> </pre>

Property	Value
	<pre> <td class="oraDisplayCell oraEmbeddedTable" nowrap="nowrap"> <table cellpadding="2" oraMdLabel="GENERIC_SUMMARY" oraList="revisionNumber/vatData" onResize="if (this.clientWidth > this.parentNode.clientWidth) { this.parentNode.className += ' oraGridDivScroll';}"> <thead> <tr> <th class="oraGridColumnHeader" oraLabel="productCode" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="revNum" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="costPrice" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="vatPer" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="costIncVat" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="discountPrice" nowrap="nowrap" scope="col" /> </tr> </thead> <tbody> <tr> <td class="oraNormal oraDisplayCell" scope="row" oraField="productCode" /> <td class="oraNormal oraDisplayCell" oraField="revNum" /> <td class="oraNormal oraDisplayCell" oraField="costPrice" /> <td class="oraNormal oraDisplayCell" oraField="vatPer" /> <td class="oraNormal oraDisplayCell" oraField="costIncVat" /> </pre>

Property	Value
	<pre> <td class="oraNormal oraDisplayCell" oraField="discountPrice" /> </tr> </tbody> </table> </td> </tr> </tbody> </table> </td> </tr> </tbody> </table> </div> </body> <xml style="display:none;"> <root> <accountId>3243395299</accountId> </root> </xml> </html> </pre>

5.9.2 CM-RetialOrderMgmtActions

CM-RetailOrderMgmtActions – the UI map will be used to display the action buttons for the Order Retail Management fact. Calculate, Submit and Cancel buttons will be available which will invoke the BPA scripts **CM-OrdMgmMt**, **CM-PrintOrdr** and **CM-PrrlItmLst** respectively to perform the corresponding actions on the BO **CM-OrderRetailMangement**.

Property	Value
UI Map	CM-RetailOrderMgmtActions

Property	Value
UI Map Type	XHTML Document
Description	Retail Management Task Actions
HTML Editor	<pre> <script type="text/javascript"> /* <![CDATA[*/ function getAction() { id('pkVal1').value = id('factId').value; oraInvokeSS('CMOrdMgmMtAt','nextStates'); } function processButtonClick (actionValue,index) { var path = 'nextStates/output/states[' + index +']/boStatus'; var actions = {action: actionValue}; oraRunScriptWithValues('CM_OrdMgmMt', actions, 'factId', 'bo', path); } function processCalculate() { //Open the Input map of the fact BO and calculate the amounts and update the BO. var actions = {action: 'CALCULATE'}; oraRunScriptWithValues('CM_OrdMgmMt', actions, 'factId', 'bo', path); } /*]]> */ </script> <div> </pre> </td></tr> </table> </div> <div data-bbox="82 921 246 947" data-label="Page-Footer"> <p>55 Functional Design Document Retail Management</p> </div> <div data-bbox="104 951 419 963" data-label="Page-Footer"> <p>Copyright © 2026, Oracle and/or its affiliates / Confidential – Oracle Internal</p> </div> <div data-bbox="814 930 918 946" data-label="Page-Footer"> <p>ORACLE</p> </div> <div data-bbox="771 959 948 973" data-label="Page-Footer"> <p>Confidential – Oracle Internal</p> </div>]]></pre>

Property	Value
	<pre> <input id="CALCULATE" oraMdLabel="CALCULATE_LBL" class="oraButton" type="button" style="float:left;" onClick="processCalculate();" /> </div> <div> <input id="PRINT ORDER" oraMdLabel="PRINT_LBL" class="oraButton" type="button" style="float:left;" /> </div> <div> <input id="PRINT_ITEM_LIST" oraMdLabel="PRINT_LBL" class="oraButton" type="button" style="float:left;" /> </div> <div id="actionSection"> <div oraAfterLoad="getAction();"> <input id="TRANSITION_1" oraMdLabel="TRANSITION_1_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',1);"/> <input id="TRANSITION_2" oraMdLabel="TRANSITION_2_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',2);"/> <input id="TRANSITION_3" oraMdLabel="TRANSITION_3_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',3);"/> <input id="TRANSITION_4" oraMdLabel="TRANSITION_4_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',4);"/> <input id="TRANSITION_5" oraMdLabel="TRANSITION_5_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',5);"/> <input id="TRANSITION_6" oraMdLabel="TRANSITION_6_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',6);"/> <input id="TRANSITION_7" oraMdLabel="TRANSITION_7_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',7);"/> </pre>

Property	Value
	<pre><input id="TRANSITION_8" oraMdLabel="TRANSITION_8_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',8);"/> <input id="TRANSITION_9" oraMdLabel="TRANSITION_9_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',9);"/> <input id="TRANSITION_10" oraMdLabel="TRANSITION_10_LBL" class="oraButton" type="button" style="float:left; display:none" onClick="processButtonClick('TRANSITION',10);" oraLoad="oraInitializeTransitionActions();"/> </div> </div> <div style="display:none"> <input type="text" id="serviceTaskIdentifier" oraField="serviceTaskId"></input> <tr> <td style="display:none"> <table id="nextStateList" oraList="nextStates/output/states" width="100%"> <tr> <td id="boStatusCode" oraField="boStatus" style="display:none"></td> <td> <input type="text" id="pkVal1" oraField="nextStates/serviceTaskId"/> </td> </tr> </table> </td> </tr> </div></pre>

5.9.3 CM-RetailManagementDisplay

Property	Value
UI Map	CM_RetailManagementDisplay
UI Map Type	Complete XHTML Document
Description	Retail Management Display
HTML Editor	<pre><!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Strict//EN" "http://www.w3.org/TR/xhtml1/DTD/xhtml1-strict.dtd"> <html> <head> <link rel="stylesheet" type="text/css" href="cisDisabled.css" /> <script> function processButtonClick(action) { var root = xmlData.documentElement; var bo = OraDomElementHelper.getText(root.selectSingleNode('bo')); var values= {action: action, bo: bo}; oraRunScriptWithValues('CMActRetMain', values); } </script> </head> <body class="oraZoneMap"> <div> <label oraLabel="accountId" for="accountId" /> </div> <div> <label oraLabel="departmentName" for="departmentName" /></pre>

Property	Value
	<pre> </div> <div> <label oraLabel="retailerFlag" for="retailerFlag" /> </div> <div> <label oraLabel="retailerCode" for="retailerCode" /> </div> <div> <label oraLabel="retailerName" for="retailerName" /> </div> <div> <label oraLabel="retailerType" for="retailerType" /> </div> <div> <label oraLabel="retailerStatus" for="retailerStatus" /> </div> <div class="oraGridDiv" id="retailerBranch_retailerBranchList"> <table cellspacing="2" oraMdLabel="GENERIC_SUMMARY" oraList="retailerBranch/retailerBranchList" onResize="if (this.clientWidth > this.parentNode.clientWidth) { this.parentNode.className += ' oraGridDivScroll';}"> <thead> </pre>

Property	Value
	<pre> <tr> <th class="oraGridColumnHeader" oraLabel="branchCode" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="branchName" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="deliveryAddress" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="extReference" nowrap="nowrap" scope="col" /> <th class="oraGridColumnHeader" oraLabel="status" nowrap="nowrap" scope="col" /> </tr> </thead> <tbody> <tr> <td class="oraNormal oraDisplayCell" scope="row" oraField="branchCode" /> <td class="oraNormal oraDisplayCell" oraField="branchName" /> <td class="oraNormal oraDisplayCell" oraField="deliveryAddress" /> <td class="oraNormal oraDisplayCell" oraField="extReference" /> <td class="oraNormal oraDisplayCell" oraField="status" /> </td> </tbody> </table> </div> <div> <label oraLabel="cmlogs/createdBy" for="cmlogs_createdBy" /> </div> </pre>

Property	Value
	<pre> <div> <label oraLabel="cmlogs/createdDateTime" for="cmlogs_createdDateTime" /> </div> <div> <label oraLabel="cmlogs/updatedBy" for="cmlogs_updatedBy" /> </div> <div> <label oraLabel="cmlogs/updatedDateTime" for="cmlogs_updatedDateTime" /> </div> <input id="EDIT" oraMdLabel="EDIT_LBL" class="oraButton" type="button" style="float:left;" onClick="processButtonClick('UPD');" /> </body> <xml style="display:none;" /> </html> </pre>

6 Solution Specific Configuration

This section provides the configurations needed to support the solution.

6.1 Message

6.1.1 Message

##	Msg Category	Msg Number	Msg Text
1			
2			
3			

6.2 Administrative Activities

6.2.1 Characteristics Type

6.2.1.1 CM-DEPTN

Field	Value	
Characteristic Type	CM-DEPTN	
Description	Department Number	
Type of Char Value	Predefined Value	
Algorithm		
Characteristic Entities		
Characteristic Entity	Case	
Characteristic Values		
ACCOUNT	Account	

6.2.1.2 CM-RTLFG

Field	Value	
Characteristic Type	CM-RTLFG	
Description	Retailer Flag	
Type of Char Value	Predefined Value	
Algorithm		

Characteristic Entities	
Characteristic Entity	Case
Characterstic Value	
YES	Yes
NO	No

6.2.1.3 CM_RTMRN

Field	Value	
Characteristic Type	CM-RTMRN	
Description	Retailer Name	
Type of Char Value		
Algorithm		
Characteristic Entities		
Characteristic Entity	Case	
Characteristic Value		
ACCOUNT	Account	

6.2.1.4 CM_RTLCD

Field	Value	
Characteristic Type	CM_RTLCD	
Description	Retailer Code	
Type of Char Value	Adhoc Value	
Algorithm		
Characteristic Entities		
Characteristic Entity	Case	
Characteristic Value		
ACCOUNT	Account	

6.2.1.5 CM_RTLY

Field	Value	
Characteristic Type	CM_RTLY	

Description	Retailer Type	
Type of Char Value	Predefined Value	
Algorithm		
Characteristic Entities		
Characteristic Entity	Case	
Characteristic Value		
ACCOUNT	Account	

6.2.1.6 CM-RTLST

Field	Value	
Characteristic Type	CM-RTLST	
Description	Retailer Status	
Type of Char Value	Predefined Value	
Algorithm		
Characteristic Entities		
Characteristic Entity	Case	
Characteristic Value		
ACTIVE	Active	
INACTIVE	Inactive	

6.2.1.7 CMBRCHCD

Field	Value	
Characteristic Type	CMBRCHCD	
Description	Retail Management-Branch Code	
Type of Char Value	Adhoc Value	
Algorithm		
Characteristic Entities		
Characteristic Entity	Case	

6.2.1.8 CMRTATID

Field	Value	
-------	-------	--

Characteristic Type	CMRTATID	
Description	Retail Management- Retailer Account ID	
Type of Char Value	Foreign Key Value	
Algorithm		
Characteristic Entities		
Characteristic Entity	Case	

6.2.2 Lookup

6.2.2.1 CM_BAG_TYPE_FLG - Bag Type Retail Management

FIELD VALUE	DESCRIPTION
10	Bin Liner
12	Blue Garden
20	Plastic Bag
25	Red Bags

7 Data Requirements

The following are the known data requirements from the eThekwini’s business team and from the business needs provided:

id	data requirement	expected data location

8 Security Requirements

8.1 Users and Security

The following application security rules have been identified during the gathering of the eThekwini business needs:

Note : User groups and Security will be more discussed with migration/Business team and updated further .

- Users with signing authority should only be able to approve or cancel the respective To Do, rest all users should only view the To Do details.
- Users with key issue authority should only be able to approve or cancel the respective To Do, rest all users should only view the To Do details.

Id	Security Exception	Response
----	--------------------	----------

9 Performance Considerations

<<Prepare the Performance Considerations by defining the design considerations necessary to achieve the data retrieval and storage requirements for performance. One example is 1 minute response time for a certain batch processing etc.>>

10 Testing Requirements

10.1 Test Scenarios

These are sample test scenarios for testing .

Id	test scenario	preparation	expected result
001	Create new CRU Block	Add CRU block as premise	A new premise with type CRU Block should be created with CRU as Parent premise
002	Create new House Unit	Add new CRU House Unit	A new premise with type CRU House Unit should be created, with parent as CRU Block
003	Create New Room Unit	Create CRU Home unit	New Home Unit should be created with premise type parent as CRU Block or House Unit.
004	Effective from Date Should not be backdated	Try to input Backdated entry	Effective date should be mandatory and should select only current or future date
005	Effective till Date should be non-blank and greater than from date	Try to put backdated entry	System should not accept.
006	Create CRU lease Campaign	Add a Campaign will all Data required.	System should show eligible packages and create SA/SP for the Lease of CRU.

11 Appendix: Document Control

This appendix shows how this document has been edited, reviewed, and approved. This information is in the Appendix to improve the overall readability of the document.

Change Record

Version	Date	Author	Summary of Changes
v0.1	19-02-2025	Divakar	Initial draft version;

Reviewers

Date	Reviewer	Role / Responsibility

Approvals

Date	Approved by	Role / Responsibility

Document Reference

This document may be related to other documents and project work products that are listed in the following table.

Document Name	Description and Location
Project schedule	Project Plan with weekly updates <<Provide link>>
Data Acquisition and Migration Requirements	Requirements for acquiring data from the legacy system, updating (cleaning) the data, and transforming. These reflect business requirements and are not a mapping. <<Provide link>>
Council Workshop notes	External-eThekweni RMS-Oracle C2M - Documents - Notes - All Documents
...	

12 Appendix: Definitions, Acronyms, and Abbreviations

[<update this table from the current Document Library version of the table to get latest updates.>](#)

Term	Explanation
API	Application Programming Interface
Change Requests	Requests by project team which change or add to previously agreed upon scope or functional requirements. Change Requests are approved via the project change request management process.
CIS	Customer Information System (Legacy)
CSR	Customer Service Representative
CSS	Cascading Style Sheet
CX	Customer Experience
DB	Database
ERD	Entity Relationship Diagram
IT	Information Technology
IWS	Inbound Web Services
OAuth	Open Authorization
OOTB	Out of the Box
PMO	Project Management Office
POC	Proof of Concept
Process Playback	Process Playback sessions are interactive demonstrations during which the configured solution is “played back” to the key stakeholders to confirm that the solution meets the client’s business needs. It is owned and led by the Business Process Owner and supported by the Solution Architect who will step through selected use cases that are agreed at the beginning of the Refine phase.
QA	Quality Assurance
RACI	<u>R</u> esponsible, <u>A</u> ccountable, <u>C</u> onsulted, and <u>I</u> nformed are used to clarify responsibilities by forming matrices to identify specific roles and responsibilities within testing
RAID log	<u>R</u> isks, <u>A</u> ctions, <u>I</u> ssues, <u>D</u> ecisions project logs
REST	Representational State Transfer
SIT	Systems Integration Testing
SLA	Service Level Agreement

Term	Explanation
SOA	Service Oriented Architecture
SOAP	Simple Object Access Protocol
SOW	Statement of Work
Standard Validation Script	A Standard Validation Script is the specific set of sequential steps, required data and expected results based on Oracle Standard Use Cases (Oracle Modern Best Practice) used to validate Oracle solution
UAT	User Acceptance Testing
UI	User Interface
URL	Uniform Resource Locator
VPN	Virtual Private Network
WO	Work Order
WSDL	Web Service Definition Language