


/home/osboxes/bambu
/PandA-bambu/src/global
_variables.cpp

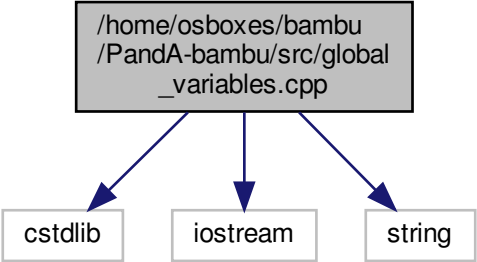

```
graph TD; A["/home/osboxes/bambu  
/PandA-bambu/src/global  
_variables.cpp"] --> B[cstdlib]; A --> C[iostream]; A --> D[string];
```

The diagram illustrates the dependencies of a C++ source file. At the top, a grey rectangular box contains the file path: `/home/osboxes/bambu`, `/PandA-bambu/src/global`, and `_variables.cpp`. Three blue arrows originate from the bottom of this box and point to three separate white rectangular boxes below. The leftmost box is labeled `cstdlib`, the middle box is labeled `iostream`, and the rightmost box is labeled `string`. This indicates that the source file depends on these three standard C++ libraries.

`cstdlib`

`iostream`

`string`