

BIHAR TOUR & TRAVEL

By

SUJATA SUMAN (ROLL NO:- 13CS05)

POOJA PATEL (ROLL NO:- 13CS28)

NITISH KUMAR (ROLL NO:- 13CS31)

AAMIR AZAM (ROLL NO:- 13CS27)

Under the guidance

Of

NEERAJ KUMAR(H.O.D OF C.S.E)

Submitted to

**The Department Of Computer Science & Engineering
Bachelor of Technology (B.Tech)**



CERTIFICATE OF APPROVAL

The following thesis entitled “BIHAR TOUR & TRAVEL ”, is here by approved as a creditable study of research topics and has been presented in satisfactory manner to warrant its acceptance as prerequisite to the degree for which it has been submitted. It understood that by this approval undersigned do not necessarily endorse any conclusion drawn or opinion expressed there in but approve the thesis for the purpose for which it is submitted.

.....
INTERNAL EXAMINER

.....
EXTERNAL EXAMINER

.....
HEAD OF DEPARTMENT



ACKNOWLEDGMENT

“Teacher can change lives with just the right mix of chalk and challenges.”

At this moment of submission of the Major Project, we express our gratitude and affection which we have in the core of heart for respected **Mr. Neeraj Kumar** (H.O.D of department of Computer Science & Engineering (CSE) for his perfect guidance for providing proper environment. Through his art of teaching, he has created a joy in creating expression and knowledge.

We are grateful to my project guidance Mr. Neeraj Kumar for giving his valuable time and constructive guidance. A true patience as grounded in wisdom & compassion, without his guidance and encouragement this idea can't be converted into reality.



CONTENT

SI. No.	Topic	Page no.
1	Introduction	06
2	Objectives	07
3	Software & Hardware requirements	08
4	Existing System	09
5	Proposed System	10
6	Introduction to HTML	11
7	Introduction to CSS & BOOTSTRAP	12
10	Introduction to JSP	13
11	Introduction to SERVLET	14
12	Introduction to JAVASCRIPT	15
13	Introduction to MySQL	16
14	Introduction to XAMPP CONTROL PANEL	17
15	System Analysis	19
16	Screenshots	19 – 41

17	Entity Relationship Diagram	42 – 43
18	Data Flow Diagram	44 – 47
19	Coding Of CSS	48 – 76
20	Coding Of JavaScript	76 – 83
21	Coding Of JSP & HTML	84 – 178
22	Coding Of SERVLET	178 - 238
23	Security Mechanism	239
25	Testing	240
26	Limitation	241
27	Implementation and Evaluation	242
28	Future Scope	243
29	Bibliography	244



INTRODUCTION

This project we are discussing “ **BIHAR TOUR & TRAVEL (Knect Tourism)**”. Through this website admin can access the whole information that is getting through the site.

This website provide the most sophisticated steps through You can travel all Over Bihar in the Most cheape way. It has **two** important modules :-

- Admin Management .
- Client Management .

Admin management where, an admin control all the activies going through the website, He will add Packages, See Client information related to website and also select best pic of the Week/Month.

Client module where client register himself, book our Package and also acid his Trip-related Pic.

On Home Page, We have given a query and feedback section where can ask Our query and add Our feedback.



OBJECTIVES

- ✓ This Project aims to Enhance “BIHAR TOUR & TRAVEL”, Keeping in Mind the safety and comfort of traveller.
- ✓ This Project insures a proper management System as there is a Admin Panel Who know about every information getting through the site.
- ✓ The Admin can add/delete/view both the client segment and manage accordingly.
- ✓ This Project has the most secure and advanced client panel where client after entering their details buy our Packages.
- ✓ For Client, They can book their package according to their ease, Many option has given for this purpose like using cab, bus and Hotel facilities.
- ✓ Some easiest steps are design for travellers through they book their package.
- ✓ The beauty of project is the Interactive Environment, provided where a Client and Admin can easily interact with each other.
- ✓ Query and Feedback sections we heartly accept any suggestion and Solve any related query.



SOFTWARE & HARDWARE TOOLS REQUIREMENT

➤ **Hardware configuration**

- Processor:- Intel(R) Core(TM) i3-4010U CPU
- RAM:- 4 GB DDR or SDRAM
- HARD DISK:- 250GB or higher

➤ **Software configuration**

- Operating System:- windows 7
- Front-end:- Html, Jsp, Servlet, CSS, Bootstrap,
JavaScript (For sliding and dropdown menu)
- Back-end:- MYSQL, Servlet, Xampp Control Panel



EXISTING SYSTEM

Existing system has manual process which is a big limitation. In this existing system we found some limitations which are as follow:-

- Since each and every work is maintained manually in the register which is time consuming.
- Employee and product management is so difficult.
- Data movement by paper or floppy is quite unreliable.
- In manual job, we found inefficient method of keeping the record.
- This way of keeping records make the report limited and found less security also.
- It is difficult to retrieve the correct information regarding any work.



PROPOSED SYSTEM

- It provide an interactive environment, Where an admin, and traveller can easily exchange their relevant information.
- Admin can view user profile, area relevant packages and solve client query.
- Client can easily book trip related package according to their ease like by choosing Bus,Cab or Hotels facility.
- According to future requirement, the system has been made flexible
- It provide high level of security as pages used are servlets, Jsp etc.
- Many other logical safety measures like special userId session procedure has been applied to remove any ill functioning and evil-work.



INTRODUCTION TO HTML

- HTML stands for Hyper Text Markup Language
- HTML describes the structure of Web pages using markup
- HTML elements are the building blocks of HTML pages
- HTML elements are represented by tags
- HTML tags label pieces of content such as "heading", "paragraph", "table", and so on
- Browsers do not display the HTML tags, but use them to render the content of the page.

HTML is a **markup language**. The word *markup* was used by editors who *marked up* manuscripts (usually with a blue pencil) when giving instructions for revisions. "Markup" now means something slightly different: a language with specific syntax that instructs a Web browser how to display a page. Once again, HTML separates "content" (words, images, audio, video, and so on) from "presentation" (instructions for displaying each type of content). HTML uses a pre-defined set of elements to define content types. Elements contain one or more "tags" that contain or express content. Tags are enclosed by angle brackets, and the closing tag begins with a forward slash.

Tim Berners-Lee, then a contractor at CERN (the European Organization for Nuclear Research), devised a way in the late 1980s for scientists to share documents over the Internet. Before that, Internet communication had been limited to plain text, using technologies such as email, FTP (File Transfer Protocol), and Usenet-based discussion boards. HTML used a content model stored on a central server but transferable to a local workstation and viewable in a browser, simplifying access to content and making "rich" content possible (such as sophisticated text formatting and images). HTML is derived from SGML, which is a complex syntax for marking up or binding of content (text or graphics) in documents; as of HTML5, HTML no longer attempts to adhere to SGML syntax.



INTRODUCTION TO CSS & BOOTSTRAP

Cascading Style Sheets, fondly referred to as CSS, is a simple design language intended to simplify the process of making web pages presentable.

CSS handles the look and feel part of a web page. Using CSS, you can control the color of the text, the style of fonts, the spacing between paragraphs, how columns are sized and laid out, what background images or colors are used, layout designs, and variations in display for different devices and screen sizes as well as a variety of other effects.

CSS is easy to learn and understand but it provides powerful control over the presentation of an HTML document. Most commonly, CSS is combined with the markup languages HTML or XHTML.

Bootstrap is a powerful front-end framework for faster and easier web development. It includes HTML and CSS based design templates for common user interface components like Typography, Forms, Buttons, Tables, Navigations, Dropdowns, Alerts, Modals, Tabs, Accordion, Carousel and many other as well as optional JavaScript extensions.

Bootstrap also gives you ability to create responsive layout with much less efforts.



INTRODUCTION TO JSP

JSP technology is used to create dynamic web applications. JSP pages are easier to maintain than a Servlet. JSP pages are opposite of Servlets as a servlet adds HTML code inside Java code, while JSP adds Java code inside HTML using JSP tags. Everything a Servlet can do, a JSP page can also do it.

JSP enables us to write HTML pages containing tags, inside which we can include powerful Java programs. Using JSP, one can easily separate Presentation and Business logic as a web designer can design and update JSP pages creating the presentation layer and java developer can write server side complex computational code without concerning the web design. And both the layers can easily interact over HTTP requests.



INTRODUCTION TO SERVLET

Servlets provide a component-based, platform-independent method for building Web-based applications, without the performance limitations of CGI programs. Servlets have access to the entire family of Java APIs, including the JDBC API to access enterprise databases.

Servlet technology is used to create web application (resides at server side and generates dynamic web page).

Servlet technology is robust and scalable because of java language. Before Servlet, CGI (Common Gateway Interface) scripting language was popular as a server-side programming language. But there were many disadvantages of this technology. We have discussed these disadvantages below.

There are many interfaces and classes in the servlet API such as Servlet, GenericServlet, HttpServlet, ServletRequest, ServletResponse etc.



INTRODUCTION TO JAVASCRIPT

JavaScript is most commonly used as a client side scripting language. This means that JavaScript code is written into an HTML page. When a user requests an HTML page with JavaScript in it, the script is sent to the browser and it's up to the browser to do something with it.

The fact that the script is in the HTML page means that your scripts can be seen and copied by whoever views your page. Nonetheless, to my mind this openness is a great advantage, because the flip side is that you can view, study and use any JavaScript you encounter on the WWW.

JavaScript can be used in other contexts than a Web browser. Netscape created server-side JavaScript as a CGI-language that can do roughly the same as Perl or ASP. There is no reason why JavaScript couldn't be used to write real, complex programs. However, this site exclusively deals with the use of JavaScript in web browsers.

If you don't have any programming experience at all it's best to start with some gentle JavaScript examples that teach you the basics. It might be a good idea to buy Negrino & Smith, "JavaScript for the World Wide Web", 4th edition, Peachpit Press, 2001. It contains some very useful examples and though it doesn't treat advanced programming tricks, it will certainly help you get started. Of course this site also offers plenty of help.

I can also recommend Jeremy Keith, DOM Scripting: Web Design with JavaScript and the Document Object Model, 1st edition, Friends of Ed, 2005. This, too, is a book that doesn't delve too deeply into technology, but gives non-programmers such as graphic designers/CSS wizards an excellent overview of the most common uses of JavaScript - as well as the most common problems.



INTRODUCTION TO MYSQL

MySQL is an open-source relational database management system (RDBMS). Its name is a combination of “My”, the name of co-founders Michael Widenius’ daughter, and “SQL”, the abbreviation for Structured Query Language. The MySQL development project has made its source code available under the terms of the GNU General Public Licence, as well as under a variety of proprietary agreements. MySQL was owned and sponsored by a Oracle Corporation. For proprietary use, several paid editions are available, and offer additional functionality. MySQL is a fast, easy to use. RDBMS being used for many small and big business. MySQL support large databases up to 50 million rows or more tables.



INTRODUCTION TO XAMPP CONTROL PANEL

XAMPP stands for Cross-Platform (X), Apache (A), MySQL (M), PHP (P) and Perl (P). It is a simple, lightweight Apache distribution that makes it extremely easy for developers to create a local web server for testing purposes. Everything you need to set up a web server – server application (Apache), database (MySQL), and scripting language (PHP) – is included in a simple extractable file. XAMPP is also cross-platform, which means it works equally well on Linux, Mac and Windows. Since most actual web server deployments use the same components as XAMPP, it makes transitioning from a local test server to a live server is extremely easy as well. Web development using XAMPP is especially beginner friendly, as this popular **PHP and MySQL for beginners course** will teach you.



SYSTEM ANALYSIS

Analysis is a detailed study of the various operations performed by system and their relationships within and outside of the system. During analysis, data are collected on the available files, decision and transaction handled by the present system.

IDENTIFICATION OF THE NEED:-

1. No conflict and ambiguity should be created as admin manages the information.
2. Client with simple steps enter their property detail and should get appropriate profit.
3. Notification send to client in case there is a buyer for their property.
4. Easy to update and modify.
5. Data hold to long time using secure database connectivity.

PRELIMINARY INVESTIGATION:- Things are expected to get even more critical since the company's growing numbers of clients and related requirements have been projected to demand a massive number of employees in the coming future. It is better to implement the latest of it rather than to go through the pain of updating the system over and over again.

FEASIBILITY STUDY:- Depending on the results of initial investigation, the survey is expended to a more detailed feasibility study. Feasibility study is a test of proposed system according to its work ability, impact on the organisation, ability to meet user needs. The objective of feasibility study is not to solve the problem but to acquire a sense of its scope. During the study, the definition is crystallized and aspects of the problem to be included in the system are determined.

Consequently, costs and benefits are described with greater with accuracy at this stage.




In this stage is done in three steps:-

- **Economic feasibility:-** In this study, we analysis whether the cost invested on this project is beneficial or not.
- **Operational feasibility:-** In this study, we analysis whether the problems can be solved in user's environment or not.
- **Technical feasibility:-** In this study, we checked whether the proposed system is supported by hardware/software of existing system.

SCREENSHOTS:-



News Feed Packages Gallery Competition Registration /LOGIN Contact

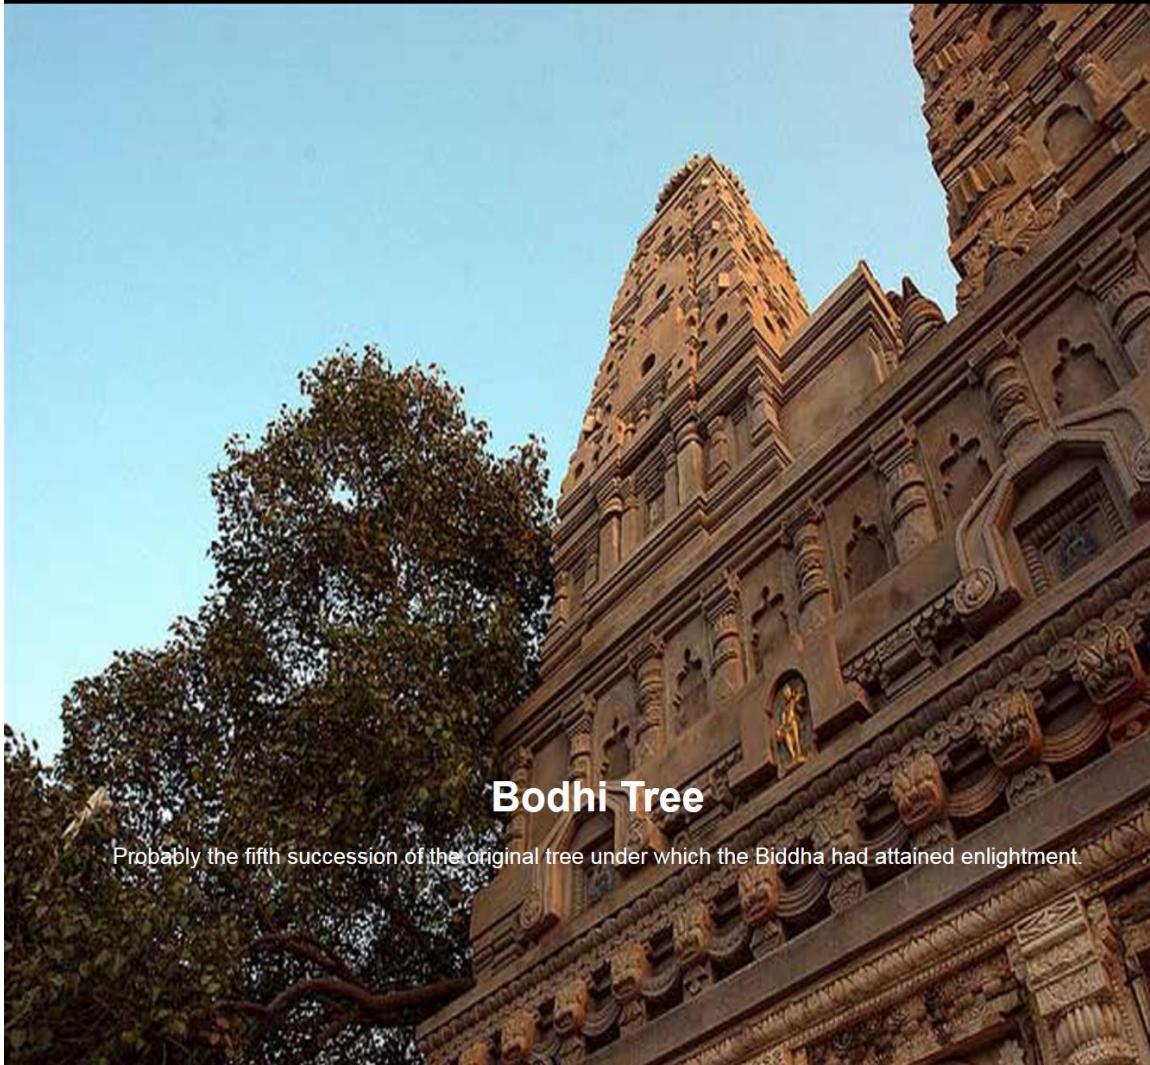

Bodhi Tree

Probably the fifth succession of the original tree under which the Buddha had attained enlightenment.

[About Us](#)



About Us

KNect Tourism

Bihar in Eastern India is one of the oldest inhabited places in the world with a history going back 3000 Year. Inspire of being, Land of Budha and many seers Bihar has remained an understand tourists destination in India. Through this Site "Intourism you Can Easily travel to Bihar and explore rich tradition and culture of the state. A Number of Tourist destination of Bihar, Listed here along with Many attractive Package including fooding and lodging. We not only maintain your comfort and luxury but also take care of our security along whole journey. Discreet/Registered tourist can also share their experience, Photos and moments and the best one will be selected as our "Pic of The Week". So "wherever you go, go with all your heart".

Our Features

Hotels

Customer Book Hotels as cheapest Price with Efficient Facility.

Cab

Customer Cab as cheapest Price with Own Choice as shareable or Private.

Tourist Guidance

We Provide as much better Guide with known many language.

Offline Payments

This is the best facility we only provide offline payment facility. tourist only booked their own tourist site or whatever tourists want.

News Feed

Tourist share own tour pics and seen other sharable tour pics.


Competition

Customer win many attractive prizes with their share Tour Pic.

Our Services



Package



Gallery



News Feed




Competition


Our Services



Package



Gallery



News Feed



Competition

Subscribe Now

For Keep Updating This Site.

Enter your Email

Subscribe Now!



Facebook
1K 2K



WhatsApp
8271237935



Twitter
follower: 500 People

All Copyrights Rights are Reserved by
KNect 2017




News Feed Packages Gallery Competition Registration /LOGIN Contact

News Feed





Packages




Rajgir

Price: 2500 /-

[See Detail](#)

News Feed Packages Gallery Competition Registration /LOGIN Contact

Destination Tour: Rajgir

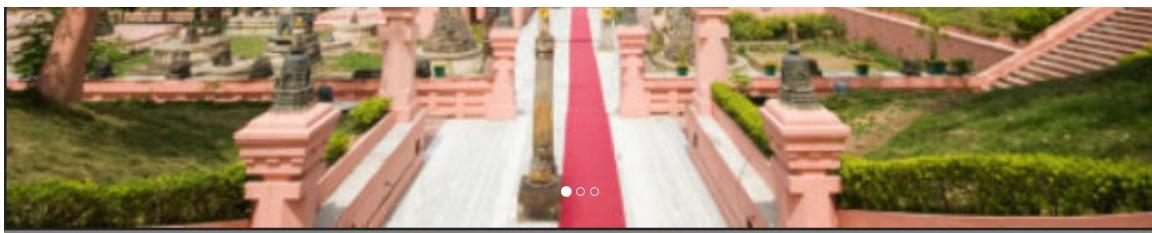

Destination
Tour:

About: Lorem Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum has been the industry's standard dummy text ever since the 1500s, when an unknown printer took a galley of type and scrambled it to make a type specimen book. It has survived not only five centuries, but also the leap into electronic typesetting, remaining essentially unchanged.

Day Of Tour: 3

Date Of Journey: 12/07/2015


No. Of Available Person: 93(Hurry Up!!)

Tour Price: 1700/-

Car Rent: 2500

Bus Rent: 1500

Book Now

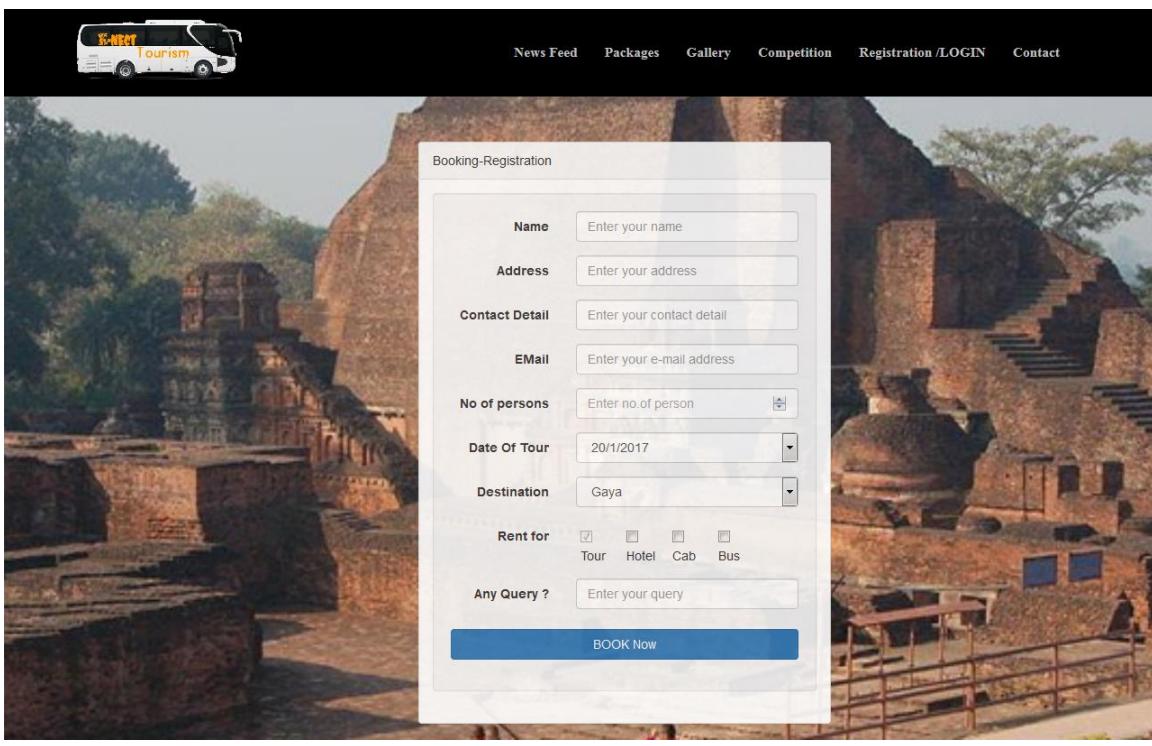

News Feed **Packages** **Gallery** **Competition** **Registration /LOGIN** **Contact**

Booking-Registration

Name	<input type="text" value="Enter your name"/>
Address	<input type="text" value="Enter your address"/>
Contact Detail	<input type="text" value="Enter your contact detail"/>
EMail	<input type="text" value="Enter your e-mail address"/>
No of persons	<input type="text" value="Enter no. of person"/> <input type="button" value="Calender"/>
Date Of Tour	<input type="text" value="20/01/2017"/>
Destination	<input type="text" value="Gaya"/>
Rent for	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> Tour Hotel Cab Bus
Any Query ?	<input type="text" value="Enter your query"/>
BOOK Now	



News Feed Packages Gallery Competition Registration /LOGIN Contact


Gallery








hello

Registration /LOGIN Contact

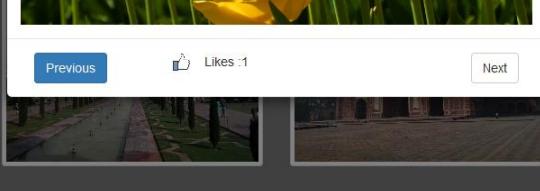

Previous Likes : 1 Next

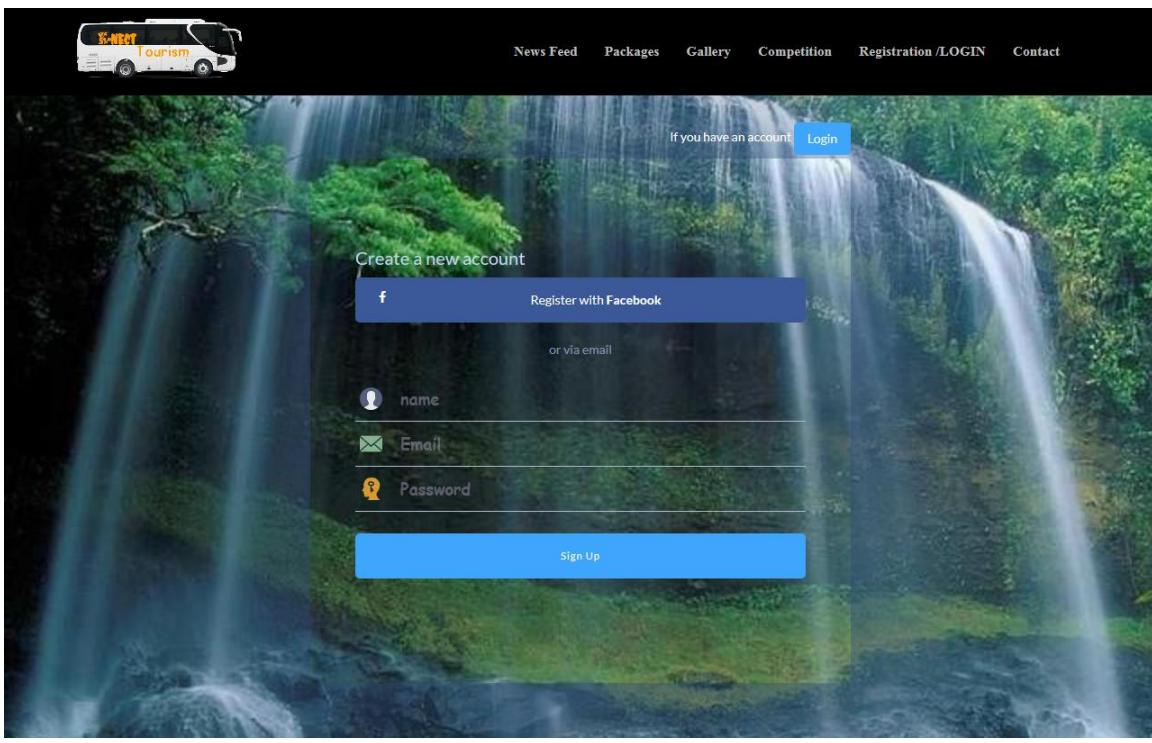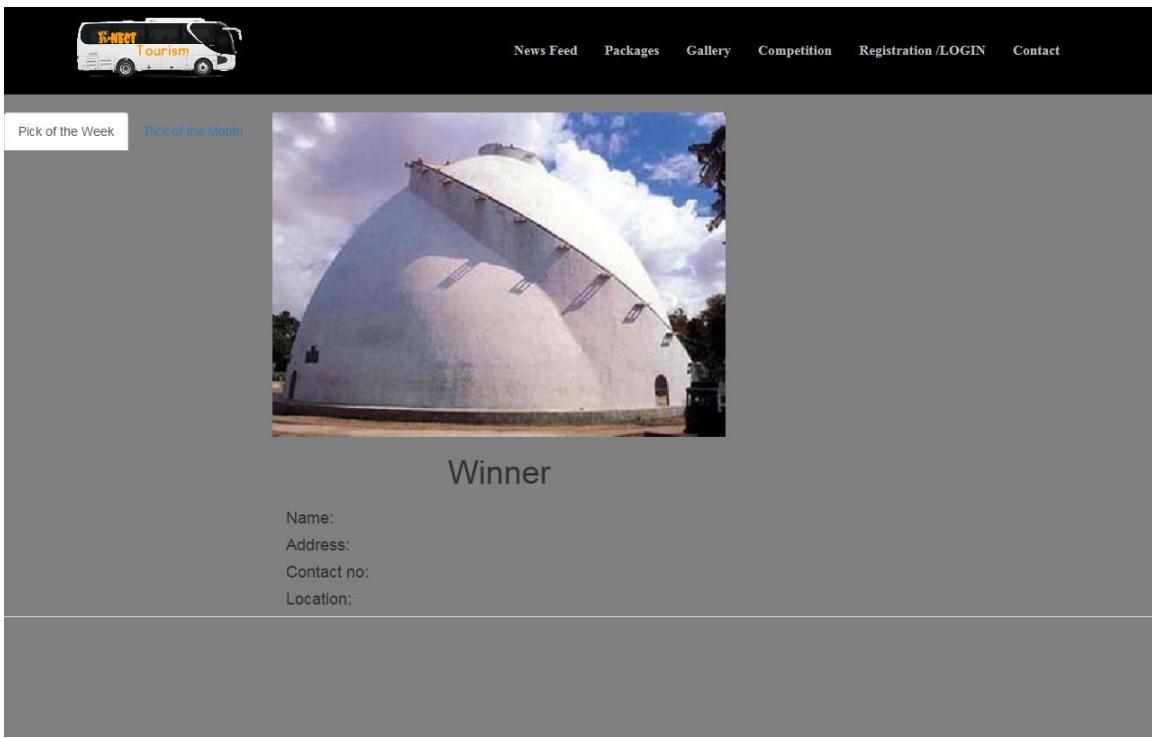

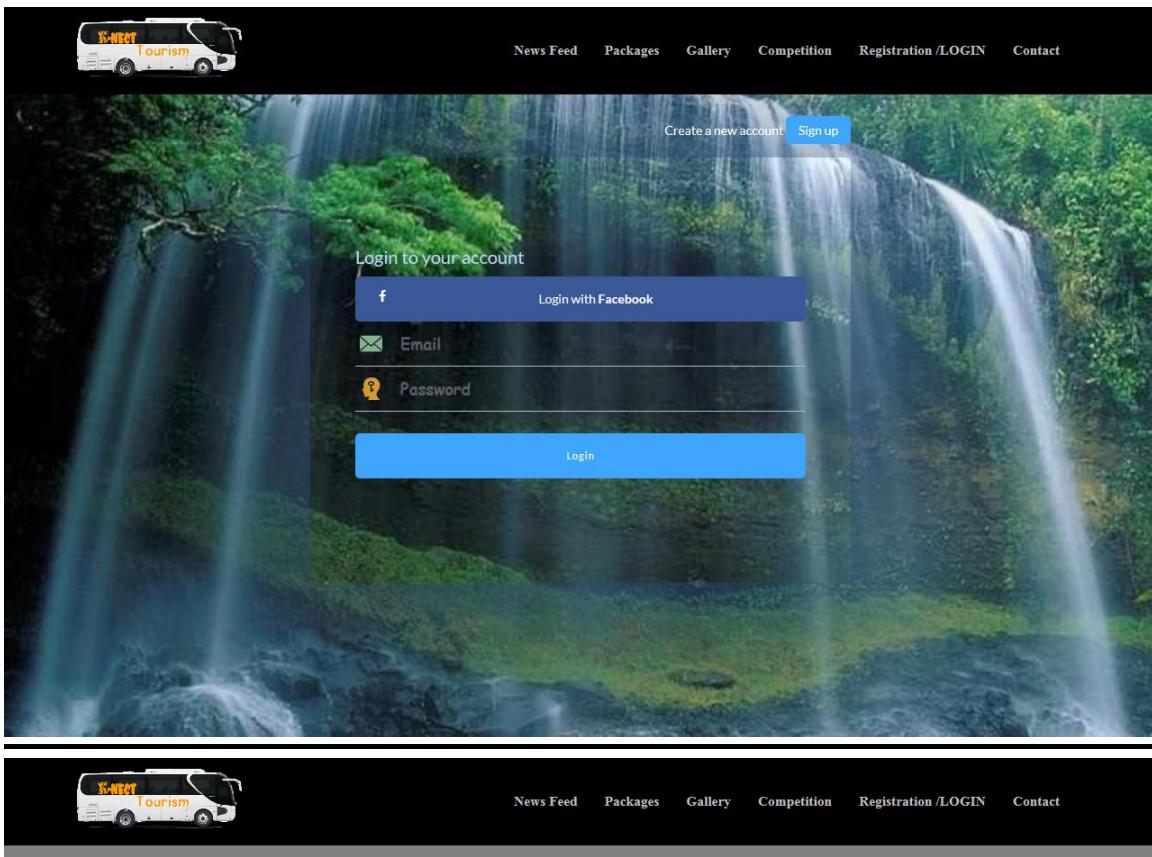

Contact us Feel free to contact us

Name <input type="text" value="Enter name"/>	Message <input type="text" value="Message"/>
Email Address <input type="text" value="Enter email"/>	
Subject <input type="text" value="Choose One:"/>	

Send Message

Our office

KNect Tourism
5th Flare , Supoo Bhawan
Basant Bihar, New Delhi
P: (+91) 8271237935

Email:
knect_tourism@gmail.com

Welcome to Knect Tourism
A Unit of Bihar Travel Agency

Home Tour Package Ur Photo Profile Logout

Hello, aamir azam

Notification

You haven't Any Notificattion yet.

Welcome to Knect Tourism
A Unit of Bihar Travel Agency

Home Tour Package Ur Photo Profile Logout

Profile

User Name: aamir azam

Address:

Gender:

E-mail: aamir@gmail.com


Photo:

Change Password Edit Profile

The screenshot shows a user interface for managing a profile. At the top, there is a modal window titled "Change Password" with fields for "Old Password", "New Password", and "Confirm Password". Below the modal, the main content area is titled "Profile". It displays the following information:

- User Name:** aamir azam
- Address:** (empty field)
- Gender:** (empty field)
- E-mail:** aamir@gmail.com
- Photo:** (Placeholder icon)



At the bottom of the profile section are two buttons: "Change Password" (green) and "Edit Profile" (blue).

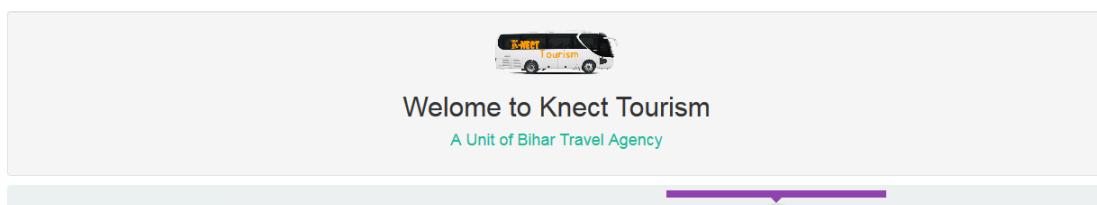

This screenshot shows the "Profile" section of the Knect Tourism website. It contains the following information:

- User Name:** aamir azam
- Address:** (empty field)
- Gender:** (empty field)
- E-mail:** aamir@gmail.com
- Photo:** (Placeholder text: "Browse... No file selected.")

At the bottom of the profile section are two buttons: "Cancel" (green) and "Save" (blue).

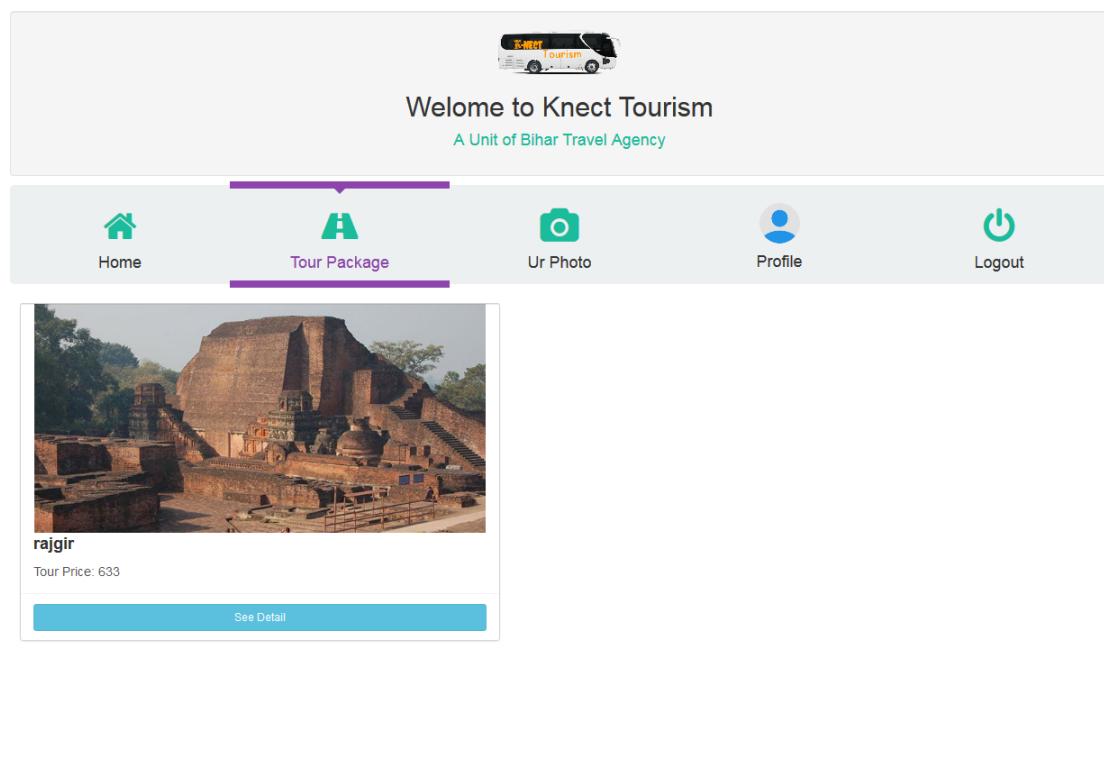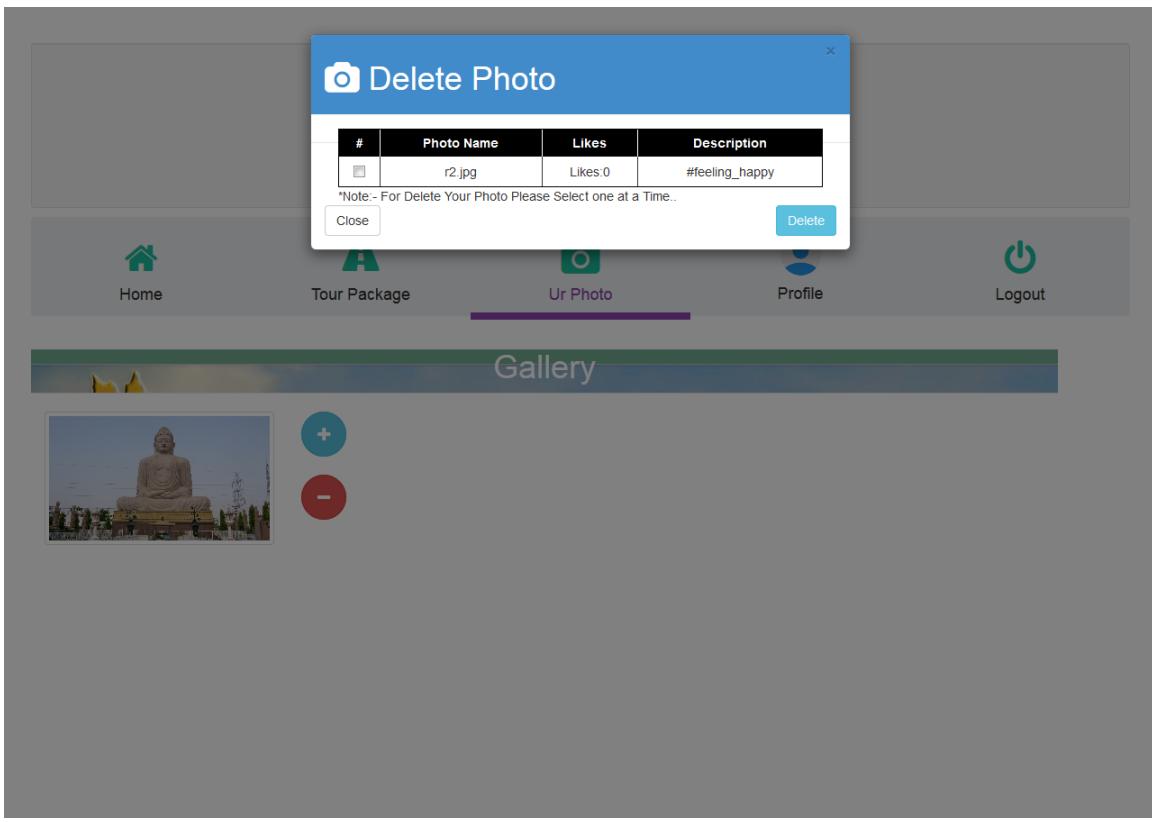

Welcome to Knect Tourism
A Unit of Bihar Travel Agency

Home Tour Package Ur Photo Profile Logout

Hello, aamir azam

Notification

You haven't Any Notificatton yet.

Hello, Sujata Suman

Notification

You haven't Any Notification yet.

- Clients
- Competition
- Packages
- Client Query

The screenshot shows a web application interface for 'X-NEET Tourism'. At the top, there's a navigation bar with a logo of a white bus labeled 'X-NEET Tourism' on the left and user profile icons on the right. A dropdown menu on the left lists 'Clients', 'Competition', 'Packages', and 'Client Query'. The main content area displays a greeting 'Hello, Sujata Suman' and a section titled 'Notification' with a message 'You haven't Any Notification yet.'

The screenshot shows a user profile page for 'Sujata Suman'. The top navigation bar and sidebar are identical to the previous screenshot. The main content area features a large black header with the word 'Profile' in white. Below it, the user's information is listed: 'User Name: Sujata Suman', 'Address: haveli pe, Patna-12', 'Gender: female', and 'E-mail: sweetsuman1411@gmail.com'. There is also a placeholder 'Photo:' with a small thumbnail image of two penguins. At the bottom of the profile section are two buttons: 'Change Password' (green) and 'Edit Profile' (blue).

All Client orders

#	Name	E-mail	Contact-No	Trip Date	Transaction Id	Client Address	Amount	Persons	Trip location	Rent For	Query
<input type="checkbox"/>	gbvxc	vc xc	4566666	CXVCX	CXZV	vbx	66	2	CXVX	Tour,Hotel,Cab	VXCV

*Note:- For Delete Client Order Please Select one at a Time..

[Delete](#)

All Client Profile

#	Name	E-mail	Gender	Password	Address
<input type="checkbox"/>	name	gmail@gmail.com		123	
<input type="checkbox"/>	name	asdf@dfs.d	jsak	123	sadkjh
<input type="checkbox"/>	nvvj	xzcv@h.h		123	
<input type="checkbox"/>	sujata	sujatasuman1411@gmail.com		suman	
<input type="checkbox"/>	Pooja	nicepooja@gmail.com	Female	1234	Bhabua
<input type="checkbox"/>	manish	manish2512@gmai.com		raj	
<input type="checkbox"/>	raj	rajkamal@gmail.com		raj	
<input type="checkbox"/>	nitish	asdf@a.com		asdf	
<input type="checkbox"/>	aamir azam	aamir@gmail.com		123	

*Note:- For Delete Client profile Please Select one at a Time..


[Delete](#)

The screenshot shows a travel agency's website interface. At the top, there is a navigation bar with a logo of a white bus labeled "K-NEXT Tourism". On the right side of the header are icons for a house, a user profile, and a dropdown menu. The main content area has a dark header with the text "Added PACKAGES" in white. Below this is a large image of ancient brick ruins, identified as "rajgir". To the right of the image is a blue button labeled "Add Package". On the left side of the main content area is a sidebar with a dark background and white text, listing categories: "Clients", "Competition", "Packages", and "Client Query".

This screenshot shows the same travel agency website interface, but the main content area now displays "Query Ask BY Client". It features a dark header with the text "Query Ask BY Client" in white, surrounded by decorative orange sparkles. Below the header is a table with the following columns: #, Name, E-mail, Subject, Message, and Date. A single row of data is shown:

#	Name	E-mail	Subject	Message	Date
<input type="checkbox"/>	nitish	dfkh@jkfg.ds	jksgfnvk	gnfk	20/7/2013

Below the table, a note says "Note:- For Delete Query Please Select one at a Time..". On the far right, there is a blue "Delete" button.

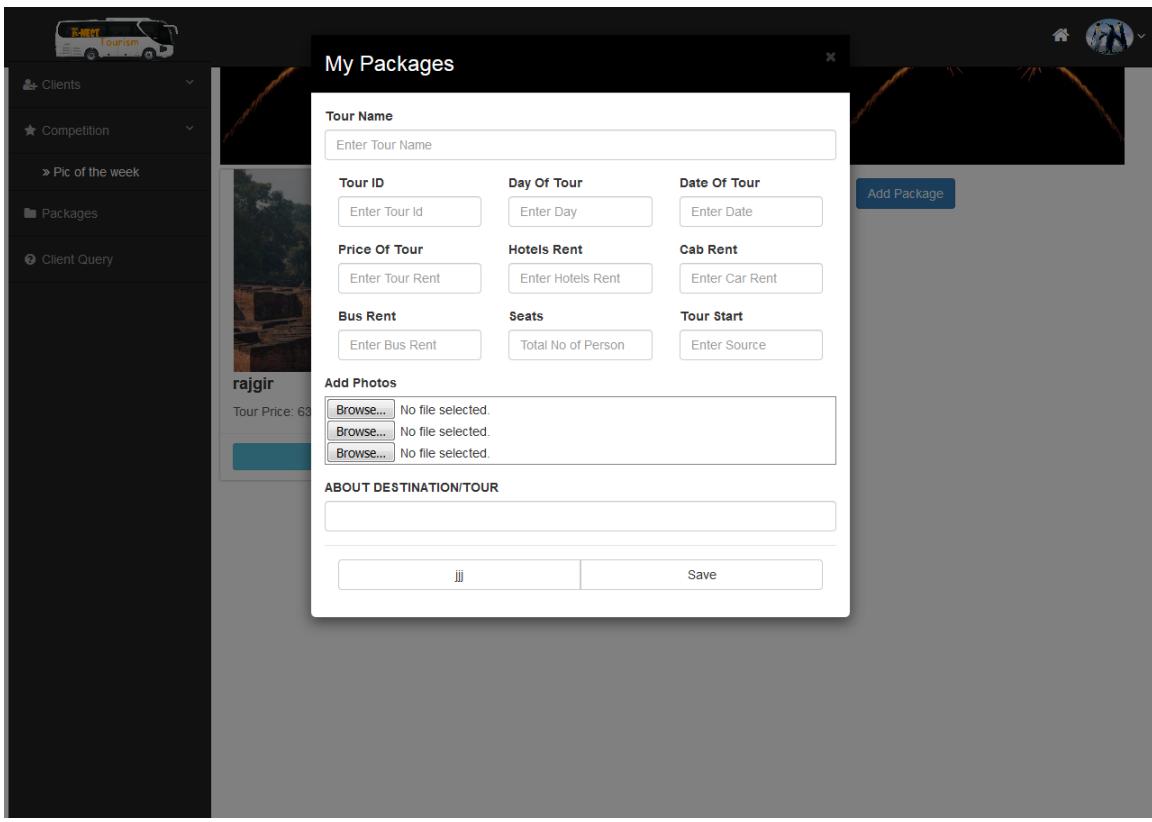

DATABASE TABLE SCREENSHOT

Table	Action	Rows	Type	Collation	Size	Overhead
addp	Browse Structure Search Insert Empty Drop	1	InnoDB	latin1_swedish_ci	16 Kib	-
book	Browse Structure Search Insert Empty Drop	1	InnoDB	latin1_swedish_ci	16 Kib	-
gallery	Browse Structure Search Insert Empty Drop	9	InnoDB	latin1_swedish_ci	16 Kib	-
potw	Browse Structure Search Insert Empty Drop	3	InnoDB	latin1_swedish_ci	16 Kib	-
query	Browse Structure Search Insert Empty Drop	1	InnoDB	latin1_swedish_ci	16 Kib	-
registration	Browse Structure Search Insert Empty Drop	10	InnoDB	latin1_swedish_ci	16 Kib	-
subscribe	Browse Structure Search Insert Empty Drop	2	InnoDB	latin1_swedish_ci	16 Kib	-
7 tables	Sum	29	InnoDB	latin1_swedish_ci	112 Kib	0 B

phpMyAdmin

Server: 127.0.0.1 » Database: tourism » Table: addp

#	Name	Type	Collation	Attributes	Null	Default	Extra	Action
1	S_no	int(7)	latin1_swedish_ci		No	AUTO_INCREMENT		Change Drop Primary Unique Index More
2	tourname	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
3	tourid	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
4	day	int(8)			No	None		Change Drop Primary Unique Index More
5	date	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
6	tprice	int(8)			No	None		Change Drop Primary Unique Index More
7	hrent	int(8)			No	None		Change Drop Primary Unique Index More
8	crent	int(8)			No	None		Change Drop Primary Unique Index More
9	brent	int(8)			No	None		Change Drop Primary Unique Index More
10	seat	int(8)			No	None		Change Drop Primary Unique Index More
11	source	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
12	p1	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
13	p2	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
14	p3	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
15	about	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More

[Check All](#) [With selected:](#) [Browse](#) [Change](#) [Drop](#) [Primary](#) [Unique](#) [Index](#)

[Print view](#) [Relation view](#) [Propose table structure](#) [Track table](#) [Move columns](#)

[Add](#) [column\(s\)](#) [At End of Table](#) [At Beginning of Table](#) [After S_no](#) [Go](#)

phpMyAdmin

Server: 127.0.0.1 » Database: tourism » Table: addp

Showing rows 0 - 0 (1 total, Query took 0.0010 seconds.)

```
SELECT * FROM `addp`
```

Number of rows: 25 Filter rows: Search this table

+ Options [Edit](#) [Copy](#) [Delete](#) 1 rajgir rajg 3 20/7/16 633 11 45 656 63 rajgir rajgir.jpg user.png us

[Check All](#) [With selected:](#) [Change](#) [Delete](#) [Export](#)

Number of rows: 25 Filter rows: Search this table

[Query results operations](#)

[Print view](#) [Print view \(with full texts\)](#) [Export](#) [Display chart](#) [Create view](#)

[Bookmark this SQL query](#)

phpMyAdmin

Server: 127.0.0.1 » Database: tourism » Table: addp

Showing rows 0 - 0 (1 total, Query took 0.0010 seconds.)

```
SELECT * FROM `addp`
```

Number of rows: 25 Filter rows: Search this table

+ Options [Edit](#) [Copy](#) [Delete](#) 1 rajgir rajg 3 20/7/16 633 11 45 656 63 rajgir rajgir.jpg user.png user.png 0

[Check All](#) [With selected:](#) [Change](#) [Delete](#) [Export](#)

Number of rows: 25 Filter rows: Search this table

[Query results operations](#)

[Print view](#) [Print view \(with full texts\)](#) [Export](#) [Display chart](#) [Create view](#)

[Bookmark this SQL query](#)

phpMyAdmin

Server: 127.0.0.1 > Database: tourism > Table: book

Browse Structure SQL Search Insert Export Import Privileges Operations Tracking Triggers

Showing rows 0 - 0 (1 total, Query took 0.0000 seconds.)

```
SELECT * FROM `book`
```

Number of rows: 25 Filter rows: Search this table

+ Options ↗ T ↘ Edit Copy Delete 1 gbvxc vbx 4566666 vc xc 2 cxwvx cxvx 5 5 5 0 vxvc cxzv

Check All With selected: Change Delete Export

Number of rows: 25 Filter rows: Search this table

Query results operations

Print view Print view (with full texts) Export Display chart Create view

Bookmark this SQL query

phpMyAdmin

Server: 127.0.0.1 > Database: tourism > Table: book

Browse Structure SQL Search Insert Export Import Privileges Operations More

#	Name	Type	Collation	Attributes	Null	Default	Extra	Action
1	S_no	int(7)			No	None	AUTO_INCREMENT	Change Drop Primary Unique More
2	Name	text	latin1_swedish_ci		No	None		Change Drop Primary Unique More
3	Address	text	latin1_swedish_ci		No	None		Change Drop Primary Unique More
4	Mobile	bigint(11)			No	None		Change Drop Primary Unique More
5	Email	text	latin1_swedish_ci		No	None		Change Drop Primary Unique More
6	Persons	int(11)			No	None		Change Drop Primary Unique More
7	date	text	latin1_swedish_ci		No	None		Change Drop Primary Unique More
8	Destination	text	latin1_swedish_ci		No	None		Change Drop Primary Unique More
9	Tourrent	int(7)			No	None		Change Drop Primary Unique More
10	Hotelrent	int(11)			No	None		Change Drop Primary Unique More
11	Cabrent	int(11)			No	None		Change Drop Primary Unique More
12	Busrent	int(11)			No	None		Change Drop Primary Unique More
13	query	text	latin1_swedish_ci		No	None		Change Drop Primary Unique More
14	TransactionID	text	latin1_swedish_ci		No	None		Change Drop Primary Unique More
15	Amount	int(11)			No	None		Change Drop Primary Unique More

Check All With selected: Browse Change Drop Primary Unique Index

Print view Relation view Propose table structure Track table Move columns

Add 1 column(s) At End of Table At Beginning of Table After S_no Go

phpMyAdmin

Server: 127.0.0.1 > Database: tourism > Table: gallery

Browse Structure SQL Search Insert Export Import Privileges Operations More

Showing rows 0 - 8 (9 total, Query took 0.0010 seconds.)

```
SELECT * FROM `gallery`
```

Number of rows: 25 Filter rows: Search this table

Sort by key: None

+ Options ↗ T ↘ S_no Photoid Photo likes Email Description

	1	null+null	Penguins.jpg	0	Penguins.jpg	#init
	2	null+null	Tulips.jpg	0	Tulips.jpg	#init
	5	Tulips.jpg+asdf@dfs.d11	Tulips.jpg	1	asdf@dfs.d	hello
	9	Penguins.jpg+asdf@dfs.d17	Penguins.jpg	0	asdf@dfs.d	#init
	10	Desert.jpg+asdf@dfs.d26	Desert.jpg	0	asdf@dfs.d	#init
	11	Photo0087.jpg+nicepooja@gmail.com28	Photo0087.jpg	0	nicepooja@gmail.com	
	12	Photo0123.jpg+nicepooja@gmail.com39	Photo0123.jpg	0	nicepooja@gmail.com	#jama masjid
	13	Photo0471.jpg+nicepooja@gmail.com51	Photo0471.jpg	0	nicepooja@gmail.com	
	14	r2.jpg	r2.jpg	0	aamir@gmail.com	#feeling_happy

phpMyAdmin

Server: 127.0.0.1 > Database: tourism > Table: gallery

#	Name	Type	Collation	Attributes	Null	Default	Extra	Action
1	S_no	int(7)	latin1_swedish_ci		No	AUTO_INCREMENT		Change Drop Primary Unique Index More
2	Photoid	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
3	Photo	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
4	likes	bigint(11)			No	None		Change Drop Primary Unique Index More
5	Email	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
6	Description	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More

Check All With selected: [Browse](#) [Change](#) [Drop](#) [Primary](#) [Unique](#) [Index](#)

[Print view](#) [Relation view](#) [Propose table structure](#) [Track table](#) [Move columns](#)

[Add](#) 1 column(s) At End of Table At Beginning of Table After S_no [Go](#)

+ Indexes

Information

Space usage	Row statistics
Data 16 KiB	Format Compact
Index 0 B	Collation latin1_swedish_ci
Total 16 KiB	Next autoindex 15
	Creation Jun 04, 2017 at 03:13 AM

phpMyAdmin

Server: 127.0.0.1 > Database: tourism > Table: potw

#	Name	Type	Collation	Attributes	Null	Default	Extra	Action
1	S_no	int(7)	latin1_swedish_ci		No	AUTO_INCREMENT		Change Drop Primary Unique Index More
2	Photoid	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
3	Likes	int(7)			No	None		Change Drop Primary Unique Index More
4	Name	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
5	Email	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
6	Address	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More
7	date	text	latin1_swedish_ci		No	None		Change Drop Primary Unique Index More

Check All With selected: [Browse](#) [Change](#) [Drop](#) [Primary](#) [Unique](#) [Index](#)

[Print view](#) [Relation view](#) [Propose table structure](#) [Track table](#) [Move columns](#)

[Add](#) 1 column(s) At End of Table At Beginning of Table After S_no [Go](#)

+ Indexes

Information

Space usage	Row statistics
Data 16 KiB	Format Compact
Index 0 B	Collation latin1_swedish_ci
Total 16 KiB	Next autoindex 2
	Creation Jun 06, 2017 at 08:17 AM

phpMyAdmin

Server: 127.0.0.1 » Database: tourism » Table: query

#	Name	Type	Collation	Attributes	Null	Default	Extra	Action
1	S_no	int(7)	latin1_swedish_ci	No	None	AUTO_INCREMENT		Change Drop Primary Unique Index More
2	Name	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
3	Email	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
4	Subject	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
5	Message	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
6	Date	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More

+ Add [1] column(s) At End of Table At Beginning of Table After S_no

+ Indexes

Information

Space usage	Row statistics
Data 16 KiB	Format Compact
Index 0 B	Collation latin1_swedish_ci
Total 16 KiB	Next autoindex 4
Creation Jun 06, 2017 at 09:17 AM	

phpMyAdmin

Server: 127.0.0.1 » Database: tourism » Table: registration

#	Name	Type	Collation	Attributes	Null	Default	Extra	Action
1	SI_no	int(4)	latin1_swedish_ci	No	None	AUTO_INCREMENT		Change Drop Primary Unique Index More
2	name	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
3	Email	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
4	password	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
5	Address	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
6	gender	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
7	photo	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
8	log	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More

+ Add [1] column(s) At End of Table At Beginning of Table After SI_no

+ Indexes

Information

Space usage	Row statistics
Data 16 KiB	Format Compact
Index 0 B	Collation latin1_swedish_ci
Total 16 KiB	Next autoindex 11

phpMyAdmin

Server: 127.0.0.1 » Database: tourism » Table: subscribe

#	Name	Type	Collation	Attributes	Null	Default	Extra	Action
1	S_no	int(7)	latin1_swedish_ci	No	None	AUTO_INCREMENT		Change Drop Primary Unique Index More
2	email	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More
3	date	text	latin1_swedish_ci	No	None			Change Drop Primary Unique Index More

+ Add [1] column(s) At End of Table At Beginning of Table After S_no


+ Indexes

Information


Space usage	Row statistics
Data 16 KiB	Format Compact
Index 0 B	Collation latin1_swedish_ci
Total 16 KiB	Next autoindex 3
Creation Jun 05, 2017 at 09:00 PM	

ENTITY RELATIONSHIP DIAGRAM

- ERD of Client management System

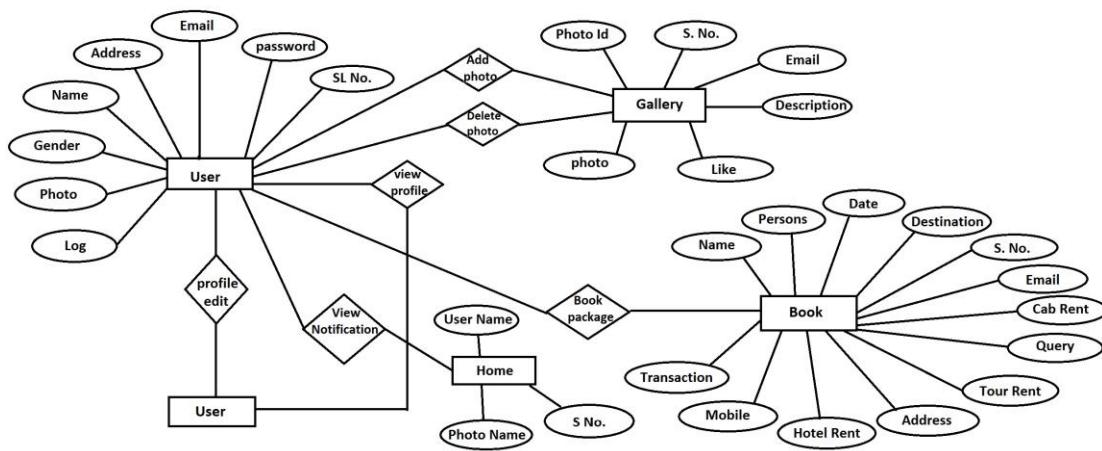

• ERD of ADMIN management System

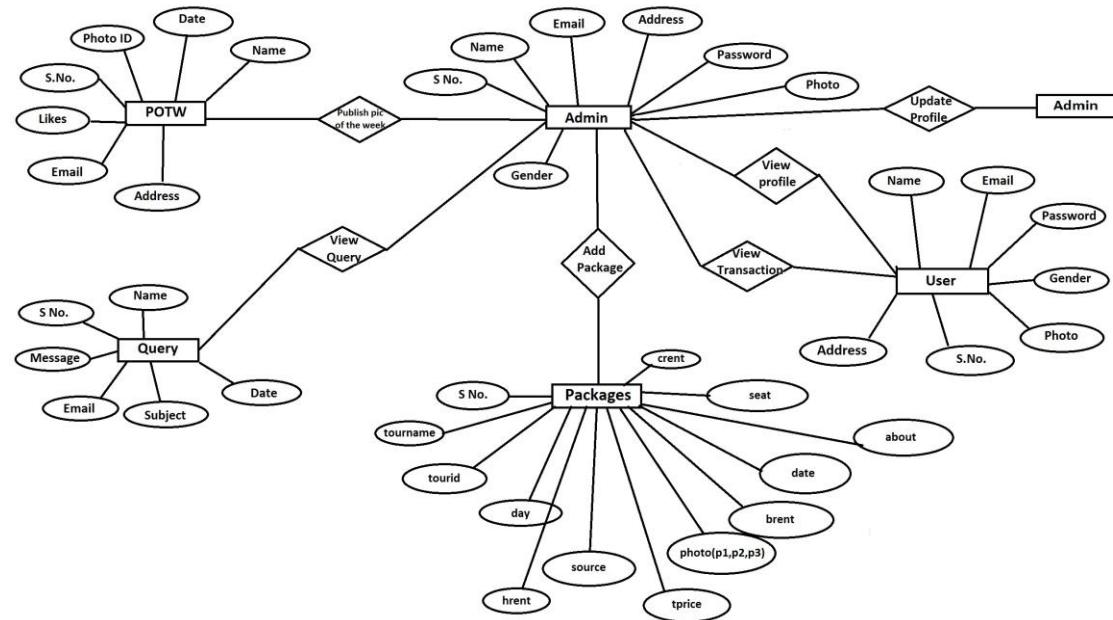

Data Flow Diagram (dfd)

- 0 Level DFD (Context Diagram)

- 1st Level DFD

- 2nd Level DFD (for Client DashBoard)

- 2nd Level DFD (for Admin DashBoard)

Coding Of CSS

```
*****  
***** admin.css *****  
*****  
  
. @import url('https://maxcdn.bootstrapcdn.com/font-awesome/4.3.0/css/font-awesome.min.css');  
@media(min-width:768px) {  
    body {  
        margin-top: 50px;  
    }  
    #p8{  
        margin-left:25%;  
    }  
  
    /*html, body, #wrapper, #page-wrapper {height: 100%; overflow: hidden;}*/  
}  
  
#r7 :hover{  
    background-color: #aaaaaa;  
  
}  
#wrapper {  
    padding-left: 0;  
}  
  
#page-wrapper {  
    width: 100%;  
    padding: 0;  
    background-color: #fff; margin-top: 20px;  
  
}  
  
@media(max-width:768px) {  
    #page-wrapper { margin-top: 120px; padding:0px 5px; }  
}  
  
@media(min-width:768px) {  
    #wrapper {  
        padding-left: 225px;  
    }  
}
```

```
#page-wrapper {
    padding: 50px 10px;
}

/*
 * Top Navigation *
 */

.top-nav {
    padding: 0 15px;
}

.top-nav>li {
    display: inline-block;
    float: left;
}

.top-nav>li>a {
    padding-top: 20px;
    padding-bottom: 20px;
    line-height: 20px;
    color: #fff;
}

.top-nav>li>a:hover,
.top-nav>li>a:focus,
.top-nav>.open>a,
.top-nav>.open>a:hover,
.top-nav>.open>a:focus {
    color: #fff;
    background-color: #1a242f;
}

.top-nav>.open>.dropdown-menu {
    float: left;
    position: absolute;
    margin-top: 0;
    /*border: 1px solid rgba(0,0,0,.15);*/
    border-top-left-radius: 0;
    border-top-right-radius: 0;
    background-color: #fff;
    -webkit-box-shadow: 0 6px 12px rgba(0,0,0,.175);
    box-shadow: 0 6px 12px rgba(0,0,0,.175);
}

.top-nav>.open>.dropdown-menu>li>a {
```

```
white-space: normal;
}

/* Side Navigation */

@media(min-width:768px) {
    .side-nav {
        position: fixed;
        top: 60px;
        left: 5px;
        width: 225px;
        margin-left: -225px;
        border: none;
        border-radius: 0;
        border-top: 1px rgba(0,0,0,.5) solid;
        overflow-y: auto;
        background-color: #222;
        /*background-color: #5A6B7D;*/
        bottom: 0;
        overflow-x: hidden;
        padding-bottom: 40px;
    }

    .side-nav>li>a {
        width: 225px;
        border-bottom: 1px rgba(0,0,0,.3) solid;
    }

    .side-nav li a:hover,
    .side-nav li a:focus {
        outline: none;
        background-color: #1a242f !important;
    }

    .side-nav>li>ul {
        padding: 0;
        border-bottom: 1px rgba(0,0,0,.3) solid;
    }

    .side-nav>li>ul>li>a {
        display: block;
        padding: 10px 15px 10px 38px;
    }
}
```

```

text-decoration: none;
/*color: #999;*/
color: #fff;
}

.side-nav>li>ul>li>a:hover {
  color: #fff;
}

.navbar .nav > li > a > .label {
  -webkit-border-radius: 50%;
  -moz-border-radius: 50%;
  border-radius: 50%;
  position: absolute;
  top: 14px;
  right: 6px;
  font-size: 10px;
  font-weight: normal;
  min-width: 15px;
  min-height: 15px;
  line-height: 1.0em;
  text-align: center;
  padding: 2px;
}

.navbar .nav > li > a:hover > .label {
  top: 10px;
}

.navbar-brand {
  padding: 5px 15px;
}

/* ****      bootstrap.min.css  CDN  are also included  ***** */

***** client.css *****

body {
  background: #16a085;
  font-family: 'Roboto', sans-serif;
  padding-top: 40px;
}

.dashboard {
  padding: 0 30px;
}

```

```
}

.dashboard-tabs {
    background-color: #ecf0f1;
    padding: 0;
    border: 0 solid #ecf0f1;
    border-radius: 5px;
}

.dashboard-tabs:after {
    content: "";
    display: block;
    clear: both;
}

.dashboard-tabs > li {
    list-style: none;
    display: inline-block;
    width: 20%;
    float: left;
    padding: 0;
}

.dashboard-tabs > li:first-of-type {
    border-top-left-radius: 5px;
    border-bottom-left-radius: 5px;
}

.dashboard-tabs > li:last-of-type {
    border-top-right-radius: 5px;
    border-bottom-right-radius: 5px;
}

.dashboard-tabs > li > a {
    vertical-align: middle;
    text-align: center;
    background-color: #ecf0f1;
    width: 100%;

    text-decoration: none;
    color: #333;

    border: 0 solid #8e44ad;
    border-radius: 0;
    padding: 10px 0 4px 0;
}

.dashboard-tabs > li.active > a {
    color: #8e44ad;

    border-width: 8px 0;
    padding: 0;
    margin: -4px 0;
}
```

```
.dashboard-tabs > li:first-of-type > a {  
    border-top-left-radius: 5px;  
    border-bottom-left-radius: 5px;  
}  
  
.dashboard-tabs > li:last-of-type > a {  
    border-top-right-radius: 5px;  
    border-bottom-right-radius: 5px;  
}  
  
.dashboard-tabs > li.active > a:before {  
    content: ":";  
    position: relative;  
    border-style: solid;  
    border-width: 6px 6px 0;  
    border-color: #8E44AD transparent;  
    display: block;  
    width: 0;  
    z-index: 1;  
    margin-left: -6px;  
    top: 0;  
    left: 50%;  
}  
  
.dashboard-tabs > li > a .fa {  
    color: #1abc9c;  
    padding-top: 16px;  
    font-size: 40px;  
}  
  
.dashboard .tab-content {  
    margin: 40px 0;  
}  
  
.dashboard .jumbotron {  
    margin-top: 0px;  
    background: #8e44ad;  
    color: #fff;  
    border-radius: 5px 5px 0 0;  
}  
  
.dashboard .jumbotron small {  
    color: #fff;  
}  
  
.dashboard .jumbotron-sm {  
    padding-top: 24px;  
    padding-bottom: 24px;  
}  
  
.help-pane {  
    background: #ecf0f1;  
    border-radius: 5px;  
}
```

```
.profile-pane {  
    width: 100%;  
    display: table;  
    border-spacing: 10px;  
}  
  
.profile-pane .header {  
    background: #8e44ad;  
    color: #fff;  
    padding: 5px 15px;  
    border-radius: 10px 10px 0 0;  
}  
  
.profile-pane .content {  
    background: #ecf0f1;  
    border-radius: 0 0 10px 10px;  
    padding: 5px 15px;  
}  
  
.profile-pane h4.col {  
    text-align: center;  
    margin-bottom: 40px;  
}  
  
.profile-pane button.col {  
    text-align: center;  
    padding: 0;  
}  
  
.profile-pane .title {  
    margin-top: 0;  
    padding: 10px;  
    border-bottom: 1px solid #aaa;  
}  
  
#supportedCauses {  
    padding: 0;  
}  
  
.cause-info {  
    margin-bottom: 5px;  
    padding: 5px;  
    background: #fff;  
    border-radius: 5px;  
    display: inline-block;  
}  
  
.cause-info a:hover {  
    cursor: pointer;  
}  
  
.cause-info > div:nth-of-type(3) {  
    width: 16.66666666%;
```

```
float: left;
}

.cause-info > div:nth-of-type(3) > * {
  padding: 0 15px;
  float: right;
}

.cause-info > div:nth-of-type(3) a > .glyphicon {
  transition: transform .5s;
}

.cause-info:not(.expanded) > div:nth-of-type(1) {
  width: 83.33333333%;
  float: left;
  display: inline-block;
}

.cause-info:not(.expanded) > div:nth-of-type(1) > img {
  width: 20%;
  float: left;
}

.cause-info:not(.expanded) > div:nth-of-type(1) > div {
  width: 40%;
  float: left;
  padding: 0 15px;
}

.cause-info:not(.expanded) > div:nth-of-type(1) > div:nth-of-type(2):before {
  content: "";
  display: inline-block;
  height: 100%;
  vertical-align: middle;
}

.cause-info:not(.expanded) > div:nth-of-type(2) {
  display: none;
}

.cause-info.expanded > div:nth-of-type(1) {
  width: 25%;
  float: left;
}

.cause-info.expanded > div:nth-of-type(1) > img {
  width: 66.6666667%;
}

.cause-info.expanded > div:nth-of-type(2) {
  width: 58.33333333%;
  float: left;
}

.cause-info.expanded > div:nth-of-type(3) a > .glyphicon {
  transform: rotate(180deg);
```

```

}

.profile-pane article {
  background: #fff;
  border-radius: 5px;
  padding: 5px;
  margin-bottom: 40px;
}

.search-bar {
  position: relative;
  display: table;
  border-collapse: collapse;
}

.search-bar > input {
  display: block;
  width: 100%;
  height: 34px;
  padding: 6px 12px;
  font-size: 14px;
  line-height: 1.42857143;
  color: #555;
  background-color: #fff;
  background-image: none;
  border: 1px solid #ccc;
  border-radius: 4px 0 0 4px;
  -webkit-box-shadow: inset 0 1px 1px rgba(0,0,0,.075);
  box-shadow: inset 0 1px 1px rgba(0,0,0,.075);
  -webkit-transition: border-color ease-in-out .15s,-webkit-box-shadow ease-in-out .15s;
  -o-transition: border-color ease-in-out .15s,box-shadow ease-in-out .15s;
  transition: border-color ease-in-out .15s,box-shadow ease-in-out .15s;
}

.search-select {
  border-radius: 4px;
  border-color: #ccc;
  height: 34px;
  font-size: 14px;
  color: #555;
  background: #fff;
  padding-right: 0;
}

.receipt-infos {
  border: 1px solid #000;
  padding: 0;
  margin-top: 20px;
  margin-bottom: 20px;
  border-radius: 5px;
  background: #fff;
}

.receipt-infos > div:last-of-type {
  border-bottom: none;
}

```

```

.receipt-infos > div {
    display: inline-block;
    border-bottom: 1px solid #000;
}

.receipt-infos > div > * {
    float: left;
}

.receipt-infos > div > img {
    width: 18%;
    margin: 1%;
}

.receipt-infos > div > div {
    width: 80%;
    padding: 0 15px;
}

/***** myc.css *****/
.jasgrid{padding:0;}
.box-item {
    float: left;
    opacity: 1;
    overflow: hidden;
    position: relative;
}

.box-item img {
    width: 100%;
}
.box-item a,span{color:#FFF;}

.box-item .box-post span.meta {
    font-family: sans-serif;
    font-size: 12px;
    color: #fff;
    margin-top: 15px;
    display: block;
}

.box-item .box-post span.meta span {
    margin-right: 15px;
}

.box-item .box-post {
    position: absolute;
    left: 0;
    bottom: 0;
}

```

```
width: 100%;  
background: linear-gradient(to top, rgba(0, 0, 0, 0.6) 0%, rgba(0, 0, 0, 0) 100%);  
padding: 30px;  
-webkit-box-sizing: border-box;  
-moz-box-sizing: border-box;  
box-sizing: border-box;  
}  
.box-item .box-post h1 .post-title {  
    font-size: 10pt;  
}  
  
#like:visited{  
    color: red;  
}  
  
html {  
    font-family: Lato, 'Helvetica Neue', Arial, Helvetica, sans-serif;  
    font-size: 14px;  
}  
  
h5 {  
    font-size: 1.28571429em;  
    font-weight: 700;  
    line-height: 1.2857em;  
    margin: 0;  
}  
  
.card {  
    font-size: 1em;  
    overflow: hidden;  
    padding: 0;  
    border: none;  
    border-radius: .28571429rem;  
    box-shadow: 0 1px 3px 0 #d4d4d5, 0 0 0 1px #d4d4d5;  
}  
  
.card-block {  
    font-size: 1em;  
    position: relative;  
    margin: 0;  
    padding: 1em;  
    border: none;  
    border-top: 1px solid rgba(34, 36, 38, .1);  
    box-shadow: none;  
}  
  
.card-img-top {  
    display: block;  
    width: 100%;  
    height: auto;  
}  
  
.card-title {  
    font-size: 1.28571429em;  
    font-weight: 700;
```

```
line-height: 1.2857em;
}

.card-text {
  clear: both;
  margin-top: .5em;
  color: rgba(0, 0, 0, .68);
}

.card-footer {
  font-size: 1em;
  position: static;
  top: 0;
  left: 0;
  max-width: 100%;
  padding: .75em 1em;
  color: rgba(0, 0, 0, .4);
  border-top: 1px solid rgba(0, 0, 0, .05) !important;
  background: #fff;
}

.card-inverse .btn {
  border: 1px solid rgba(0, 0, 0, .05);
}

.profile {
  position: absolute;
  top: -12px;
  display: inline-block;
  overflow: hidden;
  box-sizing: border-box;
  width: 25px;
  height: 25px;
  margin: 0;
  border: 1px solid #fff;
  border-radius: 50%;
}

.profile-avatar {
  display: block;
  width: 100%;
  height: auto;
  border-radius: 50%;
}

.profile-inline {
  position: relative;
  top: 0;
  display: inline-block;
}

.profile-inline ~ .card-title {
  display: inline-block;
  margin-left: 4px;
  vertical-align: top;
}
```

```

.text-bold {
    font-weight: 700;
}

.meta {
    font-size: 1em;
    color: rgba(0, 0, 0, .4);
}

.meta a {
    text-decoration: none;
    color: rgba(0, 0, 0, .4);
}

.meta a:hover {
    color: rgba(0, 0, 0, .87);
}
/***** mycs.css *****
***** mycs.css *****
***** mycs.css ****/
.jasgrid{padding:0;}
.box-item {
    float: left;
    opacity: 1;
    overflow: hidden;
    position: relative;
}

.box-item img {
    width: 100%;
}
.box-item a,span{color:#FFF; }

.box-item .box-post span.meta {
    font-family: sans-serif;
    font-size: 12px;
    color: #fff;
    margin-top: 15px;
    display: block;
}

.box-item .box-post span.meta span {
    margin-right: 15px;
}

.box-item .box-post {
    position: absolute;
}

```

```
left: 0;
bottom: 0;
width: 100%;
background: linear-gradient(to top, rgba(0, 0, 0, 0.6) 0%, rgba(0, 0, 0, 0) 100%);
padding: 30px;
-webkit-box-sizing: border-box;
-moz-box-sizing: border-box;
box-sizing: border-box;
}
.box-item .box-post h1 .post-title {
    font-size: 10pt;
}

#like:visited{
    color: red;
}
```

```
***** */
```

```
.btn-circle {
    width: 30px;
    height: 30px;
    text-align: center;
    padding: 6px 0;
    font-size: 12px;
    line-height: 1.428571429;
    border-radius: 15px;
}
.btn-circle.btn-lg {
    width: 50px;
    height: 50px;
    padding: 10px 16px;
    font-size: 18px;
    line-height: 1.33;
    border-radius: 25px;
}
.btn-circle.btn-xl {
    width: 70px;
    height: 70px;
    padding: 10px 16px;
    font-size: 24px;
    line-height: 1.33;
    border-radius: 35px;
}
```

```

*****
***** mycss.css *****
*****



body{
    background-color: rgb(192,192,192);
}

/* ***** navbar *****/
#p1 button span {
    background-color:rgb(254,153,1);
}

#p1 button {
    background-color:white;
}

.q1{
    background-color: black;
    height:12%;
}
#p1 img{

    padding:1%;
    height: 16%;
    width: 18%;
}
#p1 img:hover{
    -webkit-transition: 2s;
    padding:1%;
    height: 17%;
    width: 19%;

    cursor: pointer;
}
.q1 .q2 ul {
    text-align: center;
    margin: 2%;
}
.q1 .q2 ul li a{
    font-size: 110%;
    color: rgb(192,192,192);
    font-family: Roboto Condensed;
    font-weight:bold;

}
.q1 .q2 ul li a:hover , .q1 .q2 ul li a:focus{
    transition: 1s;
    background-color: transparent;
    color:forestgreen;
}

```

```
font-size:112%;  
}  
  
#bx-pager a img {  
    padding: 1px;  
  
}  
@media(max-width:992px) and (min-width:768px)  
{  
.q1 .q2 ul li a{  
    font-size: 85%;  
    color: darkslategray;  
    font-family: Roboto Condensed;  
}  
  
}  
  
@media(min-width:800px)  
{  
    #p6  
    {  
        font-size:150%;  
    }  
}  
  
@media(max-width:799px)  
{  
    #p6  
    {  
        font-size:120%;  
    }  
}  
@media(max-width:768px) and (min-width:415px)  
{  
    #w7  
    {  
        padding-left: 30%;  
    }  
}  
  
@media(max-width:620px)  
{  
    #p1 img{  
        padding:2%;  
        height: 40px;  
        width: 80px;  
    }  
    #p1 img:hover{  
        padding:2%;  
        height: 40px;  
        width: 80px;  
    }  
}
```

```

        -webkit-transition: 2s;
        padding: 1%;
        height: 50px;
        width: 90px;

        cursor: pointer;
    }

}

/*
*****
***** */

```

.site-slider ul li {
 float: left;
 margin: 0;
}
.site-slider ul li img{
 width:100%;
}

@media (max-width: 767px) {
 #h{
 padding-right: 50px;
 }
 #plan .plan {
 padding-right: 0;
 margin: 54px auto 54px auto;
 width: 360px;
 }
}
.slider-caption {
 position: absolute;
 z-index: 988;
 bottom: 200px;
 color: #ffffff;
 display: inline-block;
 right: 0;
 left: 0;
 text-align: center;
 padding: 0 20px 20px 20px;
}
.slider-caption h2 {
 font-size: 48px;
}

```
font-weight: 600;
display: inline-block;
margin-bottom: 24px;
}
.slider-caption p {
    font-size: 26px;
}

@media (max-width: 1200px) {

    .slider-caption {
        bottom: 90px;
    }

    .bx-controls-direction {
        bottom: 30px;
    }
}

@media (max-width: 980px) {
    .slider-caption {
        bottom: 60px;
    }
    .slider-caption h2 {
        font-size: 32px;
    }
    .slider-caption p {
        font-size: 18px;
    }
    .bx-controls-direction {
        right: 30px;
    }
    .bx-controls-direction {
        bottom: -40px;
    }
    .heading {
        font-size: 62px;
    }
    .custom-navbar .navbar-brand {
        border: none;
        font-size: 18px;
    }
}

@media (max-width: 768px) {

    .slider-caption {
        bottom: 30px;
    }
    .slider-caption h2 {
        font-size: 18px;
    }
    .slider-caption p {
        font-size: 12px;
        line-height: 14px;
    }
}
```

```
        }
    }

    @media (min-width: 500px) {
        #o7{
            font-size: 125%;

        }
        #o8{
            font-size: 120%;

        }
    }

    @media (max-width: 500px) {
        #o7{
            font-size: 100%;
            height:46px;

        }
        #o8{
            font-size: 95%;

        }
    }

    @media (max-width: 400px) {
        #o7{
            font-size:70%;

        }
        #o8{
            font-size: 60%;

        }
        div div center{
            font-size: 10px;
        }
        div div center h4{
            font-size: 13px;
        }
    }
}
```

```
*****  
***** mycss2.css *****  
*****  
  
html {  
    font-family: Lato, 'Helvetica Neue', Arial, Helvetica, sans-serif;  
    font-size: 14px;  
}  
  
h5 {  
    font-size: 1.28571429em;  
    font-weight: 700;  
    line-height: 1.2857em;  
    margin: 0;  
}  
  
.card {  
    font-size: 1em;  
    overflow: hidden;  
    padding: 0px;  
    border: none;  
    border-radius: .28571429rem;  
    box-shadow: 0 1px 3px 0 #d4d4d5, 0 0 0 1px #d4d4d5;  
}  
  
.card-block {  
    font-size: 1em;  
    position: relative;  
    margin: 0;  
    padding: 1em;  
    border: none;  
    border-top: 1px solid rgba(34, 36, 38, .1);  
    box-shadow: none;  
}  
  
.card-img-top {  
    display: block;  
    width: 100%;  
    height: auto;  
}  
  
.card-title {  
    font-size: 1.28571429em;  
    font-weight: 700;  
    line-height: 1.2857em;  
}
```

```
.card-text {  
  clear: both;  
  margin-top: .5em;  
  color: rgba(0, 0, 0, .68);  
}  
  
.card-footer {  
  font-size: 1em;  
  position: static;  
  top: 0;  
  left: 0;  
  max-width: 100%;  
  padding: .75em 1em;  
  color: rgba(0, 0, 0, .4);  
  border-top: 1px solid rgba(0, 0, 0, .05) !important;  
  background: #fff;  
}  
  
.card-inverse .btn {  
  border: 1px solid rgba(0, 0, 0, .05);  
}  
  
.profile {  
  position: absolute;  
  top: -12px;  
  display: inline-block;  
  overflow: hidden;  
  box-sizing: border-box;  
  width: 25px;  
  height: 25px;  
  margin: 0;  
  border: 1px solid #fff;  
  border-radius: 50%;  
}  
  
.profile-avatar {  
  display: block;  
  width: 100%;  
  height: auto;  
  border-radius: 50%;  
}  
  
.profile-inline {  
  position: relative;  
  top: 0;  
  display: inline-block;  
}  
  
.profile-inline ~ .card-title {  
  display: inline-block;  
  margin-left: 4px;  
  vertical-align: top;  
}  
  
.text-bold {
```

```

        font-weight: 700;
    }

.meta {
    font-size: 1em;
    color: rgba(0, 0, 0, .4);
}

.meta a {
    text-decoration: none;
    color: rgba(0, 0, 0, .4);
}

.meta a:hover {
    color: rgba(0, 0, 0, .87);
}

/*
***** mycss3.css *****
***** */

.jk-slider{
    width:100%;
}
/*      Hero Headers      */
/***** */

.hero {
    position: absolute;
    top: 50%;
    left: 50%;
    z-index: 3;
    color: #fff;
    text-align: center;
    text-transform: uppercase;
    text-shadow: 1px 1px 0 rgba(0,0,0,.75);
    -webkit-transform: translate3d(-50%,-50%,0);
    -moz-transform: translate3d(-50%,-50%,0);
    -ms-transform: translate3d(-50%,-50%,0);
    -o-transform: translate3d(-50%,-50%,0);
    transform: translate3d(-50%,-50%,0);
}
.hero h1 {
    font-size: 6em;
    font-weight: bold;
    margin: 0;
    padding: 0;
}

.fade-carousel .carousel-inner .item .hero {
    opacity: 0;
    -webkit-transition: 2s all ease-in-out .1s;
    -moz-transition: 2s all ease-in-out .1s;

```

```

        -ms-transition: 2s all ease-in-out .1s;
        -o-transition: 2s all ease-in-out .1s;
        transition: 2s all ease-in-out .1s;
    }
.fade-carousel .carousel-inner .item.active .hero {
    opacity: 1;
    -webkit-transition: 2s all ease-in-out .1s;
    -moz-transition: 2s all ease-in-out .1s;
    -ms-transition: 2s all ease-in-out .1s;
    -o-transition: 2s all ease-in-out .1s;
    transition: 2s all ease-in-out .1s;
}
/*****************************************/
/*      Overlay      */
/*****************************************/
.overlay {
    position: absolute;
    width: 100%;
    height: 100%;
    z-index: 2;
    background-color: #080d15;
    opacity: 0;
}
/*****************************************/
***** p.css *****
/*****************************************/

```

#myCarousel .carousel-caption {
 left:0;
 right:0;
 bottom:0;
 text-align:left;
 padding:10px;
 background:rgba(0,0,0,0.6);
 text-shadow:none;
}

#myCarousel .list-group {
 position:absolute;
 top:0;
 right:0;
}
#myCarousel .list-group-item {
 border-radius:0px;
 cursor:pointer;
}
#myCarousel .list-group .active {
 background-color:#eee;
}

@media (min-width: 992px) {
 #myCarousel {padding-right:33.3333%;}

```

        #myCarousel .carousel-controls {display:none;}
    }
    @media (max-width: 991px) {
        .carousel-caption p,
        #myCarousel .list-group {display:none;}
    }

}

/*****modal *****/
.modal-header {
    padding-bottom: 5px;
}

.modal-footer {
    padding: 0;
}

.modal-footer .btn-group button {
    height:40px;
    border-top-left-radius : 0;
    border-top-right-radius : 0;
    border: none;
    border-right: 1px solid #ddd;
}

.modal-footer .btn-group:last-child > button {
    border-right: 0;
}

/***** style.css *****/
***** /



* {
    box-sizing: border-box;
    margin: 0px;
}

body {
    background-image: url(..image/bg.jpg);
    background-size: cover;
    background-repeat: no-repeat;
    font-family: 'Lato', sans-serif;
}

```

```

h1 {
  color: #C7D6F1;
  font-size: 1.2rem;
}

.content {
  display: -ms-flexbox;
  display: -webkit-box;
  display: flex;
  -ms-flex-align: center;
  -webkit-box-align: center;
  align-items: center;
  -webkit-box-orient: vertical;
  -webkit-box-direction: normal;
  -ms-flex-direction: column;
  flex-direction: column;
}

.wrapper {
  position: relative;
  width: 600px;
  margin: 50px auto;
  background-color: transparent;
  border-radius: 5px;
  cursor: pointer;
  -webkit-box-shadow: 4px 3px 167px 31px rgba(46,74,117,0.68);
  -moz-box-shadow: 4px 3px 167px 31px rgba(46,74,117,0.68);
  box-shadow: 4px 3px 167px 31px rgba(46,74,117,0.68);
}

.wrapper:hover{

}

/* responsiver */

.registered {
  position: relative;
  width: 400px;
  height: 200px;
  background: #FFF;
  display: none;
  margin: 100px auto;
  text-align: center;
  -webkit-box-shadow: 4px 3px 67px 31px rgba(46,74,117,0.68);
  -moz-box-shadow: 4px 3px 67px 31px rgba(46,74,117,0.68);
  box-shadow: 4px 3px 67px 31px rgba(46,74,117,0.68);

  cursor: pointer;
}

.registered button {
  width: 100px;
  background: #3FA6FD;
  border: none;
}

```

```
border-radius: 5px;
padding: 7px 15px;
position: absolute;
bottom: 18px;
right: 18px;
color: #FFF;
}
.registered h1 {
  font-size: 1rem;
}

.login--content {
  display: none;
}

.register--content, .login--content {
  width: 500px;
  margin: 100px auto;
}

.floating-label {
  position: absolute;
  pointer-events: none;
  left: 0px;
  top: 20px;
  font-size: 11px;
  color: #B3BBCE;
  -webkit-transition: 0.2s ease all;
  transition: 0.2s ease all;
}

.email, .password, .name {
  position: relative;
  margin: 0px 0;
}
input[type='text'] , input[type='password']{
  background-image: url(..image/user.svg);
  background-repeat: no-repeat;
  background-size: 25px;
  background-position: 5px center;

}

input[type='email']{
  background-image: url(..image/close-envelope.svg);
  background-repeat: no-repeat;
  background-size: 25px;
  background-position: 5px center;
}
input[type='password']{
  background-image: url(..image/key-logic.svg);
  background-repeat: no-repeat;
  background-size: 25px;
  background-position: 5px center;
```

```
}

.inputText {
    font-size: 12px;
    width: 100%;
    height: 50px;
    border: none;
    border-bottom: 1px solid #B3BBCE;
    outline: none;
    color: #9390A1;
    background-color: transparent;
    font-weight: 900;
    font-size: 18px;
    font-family: cursive;
    padding-left: 10%;
}

input:focus ~ .floating-label,
input:not(:focus):valid ~ .floating-label {
    top: 2px;
    bottom: 10px;
    left: 0px;
    font-size: 11px;
    opacity: 1;
    color: #3FA6FD;
}

img{
    width: 70px;
    height: 70px;
}

.social {
    width: 100%;
    background: #3B5999;
    height: 50px;
    line-height: 50px;
    text-align: center;
    border-radius: 5px;
}

.social a {
    text-decoration: none;
    color: #FFF;
}

.social span i {
    color: #fff;
    float: left;
    line-height: 45px;
    margin-left: 26px;
}

.via-email {
    text-align: center;
    padding: 20px 0;
    color: #8291AC;
}

input[type="submit"] {
```

```
width: 100%;  
position: relative;  
height: 50px;  
background-color: #3FA6FD;  
color: #fff;  
border-radius: 5px;  
-webkit-border-radius: 5px;  
margin: 24px 0 16px;  
border: none;  
outline: none;  
cursor: pointer;  
font-size: 1.1rem;  
letter-spacing: .1rem;  
font-weight: 100;  
}  
  
.login--button {  
position: absolute;  
top: -40px;  
right: 0;  
}  
  
.login--button a {  
background: #3FA6FD;  
padding: 7px 14px;  
color: #FFF;  
text-decoration: none;  
border-radius: 5px;  
}  
  
.login {  
display: none;  
}  
  
 @media screen and (max-width: 580px) {  
  
.wrapper{  
position: relative;  
}  
  
.l2{  
width: 90%;  
}  
  
}  
  
 @media screen and (max-width: 750px) {  
.wrapper {  
width: 90%;  
}  
}
```

```

        }
        @media screen and (max-width: 480px) {
            .wrapper {
                width: 90%;
            }
        }
        @media screen and (max-width: 280px) {
            .wrapper {
                width: 80%;
            }
        }
    }
}

```

Coding of Javascript (for slider and dropdown menu):-

```

/*
***** custom.js *****
****

/* jQuery Preloader
-----
$(window).load(function(){
    $('.preloader').fadeOut(1000); // set duration in brackets
});

$(document).ready(function() {

    /* Hide mobile menu after clicking on a link
    -----
    $('.navbar-collapse a').click(function(){
        $(".navbar-collapse").collapse('hide');
    });

    /* jQuery to collapse the navbar on scroll
    -----
    $(window).scroll(function() {
        if ($.navbar.offset().top > 50) {
            $(".navbar-fixed-top").addClass("top-nav-collapse");
        } else {
            $(".navbar-fixed-top").removeClass("top-nav-collapse");
        }
    });

})

```

```

/* BxSlider
-----
(function (window, $) {
'use strict';

// Cache document for fast access.
var document = window.document;

function mainSlider() {
$('.bxslider').bxSlider({
    auto: true,
    pagerCustom: '#bx-pager',
    mode: 'fade',
    nextText: '',
    prevText: ''
});
}

mainSlider();

var $links = $(".bx-wrapper .bx-controls-direction a, #bx-pager a");
$links.click(function(){
    $(".slider-caption").removeClass('animated fadeInLeft');
    $(".slider-caption").addClass('animated fadeInLeft');
});

$(".bx-controls").addClass('container');
$(".bx-next").addClass('fa fa-angle-right');
$(".bx-prev").addClass('fa fa-angle-left');

})(window, jQuery);

/* Owl Carousel
-----
$(document).ready(function() {
$("#owl-work").owlCarousel({
    autoPlay: 3000,
    items : 3,
    itemsDesktop : [1199,3],
    itemsDesktopSmall : [979,3],
});
});

/* Parallax section
-----
function initParallax() {
$('#work').parallax("100%", 0.3);
$('#about').parallax("100%", 0.2);
$('#team').parallax("100%", 0.3);
$('#portfolio').parallax("100%", 0.1);
$('#plan').parallax("100%", 0.3);
$('#contact').parallax("100%", 0.2);
}

```

```

initParallax();

/* Nivo lightbox
-----
$(#portfolio .col-md-4 a').nivoLightbox({
    effect: 'fadeScale',
});

/* wow
-----
new WOW({ mobile: false }).init();

});

/***** bootstrap.min.js CDN are include *****/
***** jquery-2.1.1.min.js  CDN are include*****/
***** client.css  *****/


$(function() {
    var toggleFunction;
    $('.toggle-handle').click(toggleFunction = function() {
        var area = $('#' + $(this).attr('data-area'));
        if(area.hasClass('expanded')) {
            area.removeClass('expanded');
        } else {
            area.addClass('expanded');
        }
        $(this).blur();
        return false;
    });

    $('#supportedCauses').append(
        $(document.createElement('div')).attr('id', 'pane4').addClass('cause-info').append(
            $(document.createElement('div')).append(
                $(document.createElement('img')).attr('src',
                'http://lorempixel.com/420/420/people'),
            $(document.createElement('div')).append(

```

```

$(document.createElement('h4')).text('[Name]'),
$(document.createElement('h4')).text('[Cause]')
),
$(document.createElement('div')).append(
    $(document.createElement('h4')).text('[X] Votes')
)
),
$(document.createElement('div')).append(
    $(document.createElement('h4')).text('About:'),
    $(document.createElement('div')).append(
        $(document.createElement('p')).text(
            'Nam ex ullum assum apeirian, facilisi splendide quo ex. Sea et nonumy
accusata, in utinam vocent facilis vix. \
            Cu vix eripuit temporibus mediocritatem, denique theophrastus ne mel, et
graecis maiorum mediocritatem per. \
            Magna tacimates sed eu, sit no graeco latine referrentur. Id sed assum
quaerendum, apeirian erroribus ut his. Ex mei mazim minimum.'
        ),
        $(document.createElement('h5')).html('More at <a>[Website]</a>')
    ),
    $(document.createElement('button')).addClass('btn btn-primary pull-
right').text('Give')
),
$(document.createElement('div')).append(
    $(document.createElement('h2')).append(
        $(document.createElement('a')).append(
            $(document.createElement('span')).addClass('glyphicon glyphicon-
chevron-down')
        ).attr('href', '#pane4').attr('data-area', 'pane4').click(toggleFunction)
    )
)
);
});

*******/

***** forsl.css *****
***** */

$(document).ready(function(){

loadGallery(true, 'a.thumbnail');

//This function disables buttons when needed
function disableButtons(counter_max, counter_current){
    $('#show-previous-image, #show-next-image').show();
    if(counter_max == counter_current){
        $('#show-next-image').hide();
    } else if (counter_current == 1){

```

```

        $('#show-previous-image').hide();
    }
}

/**
 *
 * @param setIDs      Sets IDs when DOM is loaded. If using a PHP
counter, set to false.
 * @param setClickAttr Sets the attribute for the click handler.
 */

function loadGallery(setIDs, setClickAttr){
    var current_image,
        selector,
        counter = 0;

    $('#show-next-image, #show-previous-image').click(function(){
        if($(this).attr('id') == 'show-previous-image'){
            current_image--;
        } else {
            current_image++;
        }

        selector = $('[data-image-id=' + current_image + "']");
        updateGallery(selector);
    });
}

function updateGallery(selector) {
    var $sel = selector;
    current_image = $sel.data('image-id');
    $('#image-gallery-caption').text($sel.data('caption'));
    $('#image-gallery-title').text($sel.data('title'));
    $('#image-gallery-image').attr('src', $sel.data('image'));
    disableButtons(counter, $sel.data('image-id'));
}

if(setIDs == true){
    $('[data-image-id]').each(function(){
        counter++;
        $(this).attr('data-image-id', counter);
    });
}

```

```

}
$(setClickAttr).on('click',function(){
    updateGallery($(this));
});
}

***** index.js *****/
$(".register-button").click(function(e) {
    e.preventDefault();
    $(".registered").slideDown(600);
    $(".wrapper").slideUp(600);
});

$(".reset").click(function(e) {
    e.preventDefault();
    $(".registered").slideUp(600);
    $(".wrapper").slideDown(600);
});

$(".btn").click(function(e) {
    e.preventDefault();
    $(".login--content").slideDown(600);
    $(".register--content").slideUp(600);
});

$(".btn-reg").click(function(e) {
    e.preventDefault();
    $(".login--content").slideUp(600);
    $(".register--content").slideDown(600);
});

***** modal.js *****/
$(document).ready(function(){

loadGallery(true, 'a.thumbnail');

//This function disables buttons when needed

```

```

function disableButtons(counter_max, counter_current){
    $('#show-previous-image, #show-next-image').show();
    if(counter_max == counter_current){
        $('#show-next-image').hide();
    } else if (counter_current == 1){
        $('#show-previous-image').hide();
    }
}

/**
 *
 * @param setIDs      Sets IDs when DOM is loaded. If using a PHP counter, set to
false.
 * @param setClickAttr Sets the attribute for the click handler.
 */

function loadGallery(setIDs, setClickAttr){
    var current_image,
        selector,
        counter = 0;

    $('#show-next-image, #show-previous-image').click(function(){
        if($(this).attr('id') == 'show-previous-image'){
            current_image--;
        } else {
            current_image++;
        }

        selector = $('[data-image-id=' + current_image + ']');
        updateGallery(selector);
    });
}

function updateGallery(selector) {
    var $sel = selector;
    current_image = $sel.data('image-id');
    $('#image-gallery-caption').text($sel.data('caption'));
    $('#image-gallery-title').text($sel.data('title'));
    $('#image-gallery-image').attr('src', $sel.data('image'));
    disableButtons(counter, $sel.data('image-id'));
}

if(setIDs == true){
    $('[data-image-id]').each(function(){
        counter++;
        $(this).attr('data-image-id',counter);
    });
}
$(setClickAttr).on('click',function(){
    updateGallery($(this));
});
}

```

```

});
```

```

/********************* package.js *****/
$(document).ready(function(){

    var clickEvent = false;
    $('#myCarousel').carousel({
        interval: 4000
    }).on('click', '.list-group li', function() {
        clickEvent = true;
        $('.list-group li').removeClass('active');
        $(this).addClass('active');
    }).on('slid.bs.carousel', function(e) {
        if(!clickEvent) {
            var count = $('.list-group').children().length -1;
            var current = $('.list-group li.active');

            current.removeClass('active').next().addClass('active');
            var id = parseInt(current.data('slide-to'));
            if(count == id) {
                $('.list-group li').first().addClass('active');
            }
        }
        clickEvent = false;
    });
})

$(window).load(function() {
    var boxheight = $('#myCarousel .carousel-inner').innerHeight();
    var itemlength = $('#myCarousel .item').length;
    var triggerheight = Math.round(boxheight/itemlength+1);
    $('#myCarousel .list-group-item').outerHeight(triggerheight);
});

/********************* jquery.js & jquery-2.1.1.min.js CDN are included *****/

```

Coding Of JSP & Html Pages:-

```
*****  
***** index.html(front page) *****  
*****  
  
<!DOCTYPE html>  
<html lang="en">  
<head>  
<title>HOME | KNET TOURISM</title>  
    <link rel="stylesheet" href="css/bootstrap.min.css">  
    <link rel="stylesheet" href="css/mycss.css">  
  
    <meta name="viewport" content="width=device-width, initial-scale=1">  
</head>  
<body>  
  
    <!-- Navigation section  
===== -->  
<section class="navbar navbar-fixed-top q1" role="navigation"  
style="position:relative;">  
    <div class="container q3" >  
  
        <div id="p1">  
            <button class="navbar-toggle collapsed" data-  
toggle="collapse" data-target=".navbar-collapse">  
  
                <span class="icon icon-bar"></span>  
                <span class="icon icon-bar"></span>  
                <span class="icon icon-bar"></span>  
            </button>  
            <a href="index.html"> </a>  
        </div>  
        <div class="collapse navbar-collapse q2" >  
            <ul class="nav navbar-nav navbar-right">  
  
                <li><a href="newsfeed.jsp" >News Feed</a></li>  
                <li><a href="Package.jsp">Packages</a></li>  
                <li><a href="gallery.jsp">Gallery</a></li>  
                    <li ><a href="competition.jsp"> Competition </a> <!--  
<ul class="collapse navbar-collapse" >
```

```

<li ><a href="#">Week of the Pic</a></li>
<li data-toggle="collapse" ><a href="#">Month of the
Pic</a></li></ul> --></li>
<li><a href="ClientD.jsp">Registration /LOGIN</a></li>
<li><a href="contact.jsp">Contact</a></li>
</ul>
</div>

</div>
</section>

```

```

<!----- slider ----->

<div id="home">
    <div class="site-slider" style="margin:-20px; margin-left:-40px;margin-
right:0px;">
        <ul class="bxslider" >
            <li>
                
                <div class="container">
                    <div class="row">
                        <div class="col-md-12">
                            <div class="slider-caption" id="h">
                                <h2>Buddha's Enlightenment</h2>
                                <p class="color-white">Sacred Buddhist pilgrimage
center.</p>
                            </div>
                        </div>
                    </div>
                </div>
            </li>
            <li>
                
                <div class="container caption-wrapper">
                    <div class="slider-caption" id="h" >
                        <h2>Bodhi Tree</h2>
                        <p class="color-white">Probably the fifth succession of the
original tree under which the Buddha had attained enlightenment.</p>
                    </div>
                </div>
            </li>
            <li>
                

```

```

<div class="container">
    <div class="row">
        <div class="col-md-12">
            <div class="slider-caption" id="h">
                <h2>Nalanda University</h2>
                <p class="color-white"><font color=red>N</font>alanda
, founded in the 5th century AD, is famous as the ancient seat of
learning.</p>
            </div>
        </div>
    </div>
</div>
</li>
<li>
    
    <div class="container">
        <div class="row">
            <div class="col-md-12">
                <div class="slider-caption" id="h">
                    <h2>muchalinda-lake</h2>
                    <p class="color-white">Mucalinda, Muchalinda or Mucilinda
is the name of a <font color=blue> naga, a snake</font>-like being . who
protected the Gautama Bodda from the elements after his <font COLOR:BLUE>
enlightment</font></p>
                </div>
            </div>
        </div>
    </div>
</li>
<!-- <li>
    
    <div class="container">
        <div class="row">
            <div class="col-md-12">
                <div class="slider-caption">
                    <h2>Golghar</h2>
                    <p class="color-white">The winding stairway around this
monument offers a brilliant panoramic view of the city and the Ganga flowing
by.</p>
                </div>
            </div>
        </div>
    </div>
</li> -->
</ul> <!-- /.bxslider -->

```

```

<!-- <div class="bx-thumbnail-wrapper" style="margin-left:10%; position: absolute;">
    <div class="container">
        <div class="row">
            <div class="col-md-12" >
                <div id="bx-pager">
                    <a data-slide-index="0" href=""></a>
                    <a data-slide-index="1" href=""></a>
                    <a data-slide-index="2" href=""></a>
                    <a data-slide-index="3" href=""></a>
                </div>
            </div>
        </div>
    </div> -->
</div> <!-- /.site-slider -->
</div>

```

```

<!------- -->

<div>
<div class="container" style="text-align:center; padding-top:30px;">

    <h2 style="font-weight:600; border-bottom:1px solid grey; padding-bottom:10px;">About Us</h2>
    <hr align="center" height="2px" style="border-top:2px solid grey; color:grey; margin-top:20px;" width="50px">
    <h3 style="font-weight:400; color:rgb(131,131,131);> KNect Tourism</h3>
    <p style="font-family:Times New Roman; color:rgb(138,138,138); text-align: justify; " id="p6" >

```

Bihar in Eastern India is one of the oldest inhabited places in the world with a history going back 3000 Year. Inspire of being, Land of Budha and many surveeras Bihar has remained an understand tourists destination in India. Through this Site <q></q>Intourism you Can Easily travel to Bihar and explore rich tradition and culture of the state. A Number of Tourist destination of Bihar, Listed here along with Many attractive Package including fooding and lodging. We not only maintain your comfort and luxury but also take care of our security along whole journey.

Disered/Registered tourist can also share their experience,Photos and moments and the best one will be selected as our <q>Pic of The Week</q>. So <q>wherever you go, go with all your heart</q>.

```
</p>
<hr align="center" height="3px" style=" border-top:2px solid grey; margin-bottom:22px;" width="50px;">
</div>
</div>

<div>
<div class="container" style="text-align:center; padding-top:30px;">
    <h2 style="font-weight:600; padding-bottom:10px;">Our Features</h2>
    <hr align="center" height="2px" style=" border-top:1px solid grey; width:50%; color:grey; margin-top:20px;">
    <div class="row" align="center">
        <div class="col-md-4 col-sm-6 col-xs-12" style="padding:10px; ">
            <div style="float:left; padding-top:13px;" id="w7">
                
            </div>
            <div >
                <h2 style="color:black; text-align:left; padding-left:2px;">
Hotels</h2><br>
                <p style="color:rgb(131,131,131); text-align:justify; font-size:110%; font-style:Times New Roman;"> Customer Book Hotels Hotels as cheapest Price with Efficient Facility. </p>
            </div>
        </div>
    </div>

    <div class="col-md-4 col-sm-6 col-xs-12" style="padding:10px;">
        <div style="float:left; padding-top:13px;" id="w7">
            
        </div>
        <div >
            <h2 style="color:black; text-align:left; padding-left:2px;">Cab</h2><br>
            <p style="color:rgb(131,131,131); font-size:110%; text-align:justify; font-style:Times New Roman;"> Customer Cab as cheapest Price with Own Choice as shareable or Private. </p>
        </div>
    </div>
</div>
```

```

<div style="float:left; padding-top:13px;" id="w7">
    
</div>
<div>
    <h2 style="color:black; text-align:left; padding-left:2px;">Tourist
Guidance</h2><br>
    <p style="color:rgb(131,131,131); font-size:110%; text-align:justify;
font-style:Times New Roman;"> We Provide as much better Guide with known
many language. </p>

</div>

</div>
<div class="col-md-4 col-sm-6 col-xs-12 " style="padding:10px;">
    <div style="float:left; padding-top:13px; " id="w7">
        
    </div>
    <div>
        <h2 style="color:black; text-align:left; padding-left:2px;">Offline
Payments</h2><br>
        <p style="color:rgb(131,131,131); font-size:110%; text-align:justify;
font-style:Times New Roman;">This is the best facility.we only provide offline
payment facility.tourist only booked their own tourist site or whatever tourists
want. </p>

    </div>

    </div>
    <div class="col-md-4 col-sm-6 col-xs-12" style="padding:10px;">
        <div style="float:left; padding-top:13px;" id="w7">
            
        </div>
        <div>
            <h2 style="color:black; text-align:left; padding-left:2px;">News
Feed</h2><br>
            <p style="color:rgb(131,131,131); font-size:110%; text-align:justify;
font-style:Times New Roman;"> Tourist share own tour pics and seen other
shareable tour pics . </p>

        </div>

        </div>
    </div>

    <div class="col-md-4 col-sm-6 col-xs-12" style="padding:10px;">
        <div style="float:left; padding-top:13px;" id="w7">
            
        </div>

```

```

<div>
    <h2 style="color:black; text-align:left; padding-left:2px;">Competition</h2><br>
        <p style="color:rgb(131,131,131); font-size:110%; text-align:justify; font-style:Times New Roman;"> Customer win many attractive prizes with their share Tour Pic.</p>

    </div>

</div>

</div>
</div>

<!--          LINKS FEATURES      ---->

<div >
<div class="container" style="text-align:center;">
    <h2 style="font-weight:600; padding-bottom:10px;">Our Services</h2>
    <hr align="center" height="2px" style=" border-top:1px solid grey; color:grey; margin-top:20px; width:50%;">
        <div class="row" style="padding:10px;">
            <div class="col-md-3 col-sm-6 col-xs-12" style="margin-bottom:10px;">
                <br>
                    <a href="Package.jsp"> <input type="button" value="Package" style="color:White; font-weight:600; width:100%; height:40px; background-color:green; font-family:Times New Roman;">
                        </a>

                </div>
                <div class="col-md-3 col-sm-6 col-xs-12" style="margin-bottom:10px;">
                    <br>
                    <a href="gallery.jsp"> <input type="button" value="Gallery" style="color:White; font-weight:600; width:100%; height:40px; background-color:green; font-family:Times New Roman;">
                        </a>

                </div>
            </div>
        </div>
    </div>
</div>

```

```
<div class="col-md-3 col-sm-6 col-xs-12" style="margin-bottom:10px;">
    <br>
        <a href="newsfeed.jsp"> <input type="button" value="News Feed" style="color:White; font-weight:600; width:100%; height:40px; background-color:green; font-family:Times New Roman;">
            </a>

    </div>
    <div class="col-md-3 col-sm-6 col-xs-12" style="margin-bottom:10px;">
        <br>
        <a href="competition.jsp"> <input type="button" value="Competition" style="color:White; font-weight:600; width:100%; height:40px; background-color:green; font-family:Times New Roman;">
            </a>

    </div>

</div>

</div>

</div>

<div style="margin-bottom:10px;">
    <div class="container" style="text-align:center;">
        <h2 style="font-weight:600; padding-bottom:10px;">Subscribe Now</h2>
        <hr align="center" height="2px" style=" border-top:1px solid grey; color:grey; margin-top:20px; width:50%;">
        <h4> For Keep Updating This Site.</h4>
        <form action="subscribe" method="post" >
            <div class="col-md-3 col-sm-1 col-xs-1" ></div>
```

```

<div class="col-md-4 col-sm-6
col-xs-6" style="padding-right:0px;">

    <!-- <span class="input-
group-addon"><i class="glyphicon glyphicon-envelope" aria-
hidden="true"></i></span> -->
        <input id="o8"
type="email" class="form-control input-lg" name="email" id="email"
style="border-bottom-left-radius:30%; border-top-left-radius:30%; font-
weight:600; border-bottom-right-radius:0%; border-top-right-radius:0%;"
placeholder="Enter your Email"/>

    </div>

    <button id="o7" class="btn col-md-2 col-sm-4 col-xs-4 btn-success
btn-lg" style="padding-left:0px; border-bottom-right-radius:35%; border-top-left-
radius:0%;border-bottom-left-radius:0%; border-top-right-radius:35%;font-
weight:600; ">Subscribe Now!</button>
</form>

</div>
</div>

<!------- dhfbf --->

<div id="footer" class="well" style="background-color:black;color:white;">
<div class="container">
<div class="row">

    <div class="col-md-4 col-xs-4">
        <center>
            
            <br>
            <h4 class="footertext">Facebook</h4>
            <p class="footertext">
&nbsp; 2K <br>
        </center>
    </div>

```

```

</div>
<div class="col-md-4 col-xs-4">
<center>

<br>
<h4 class="footertext">Whatsapp</h4>
<p class="footertext">8271237935<br>
</center>
</div>
<div class="col-md-4 col-xs-4">
<center>

<br>
<h4 class="footertext">Twitter</h4>
<p class="footertext">follower: 500 People <br>
</center>
</div>
</div>
<div class="row">
<p><center><a style="text-decoration:none; ">All Copyrights Rights are
Reserved by</a> <p class="footertext"><a href="#" style="text-decoration:none;
color:white;">KNect 2017</a></p></center></p>
</div>
</div>
</div>

<script src="js/jquery.js"></script>
<script src="js/bootstrap.min.js"></script>
<script src="js/js/custom.js"></script>
<script src="js/js/plugins.js"></script>

</body>
</html>

***** login.html *****
*****
```

```

<!DOCTYPE html>
<html lang="en">
<head>
<!-- <meta charset="UTF-8" -->
<title>Register Form</title>
<link href="https://fonts.googleapis.com/css?family=Courgette"
rel="stylesheet">
<link href="https://fonts.googleapis.com/css?family=Lato:400,700"
rel="stylesheet">
<link rel="stylesheet"
href="https://cdnjs.cloudflare.com/ajax/libs/normalize/5.0.0/normalize.min.css">

<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/mycss.css">

<meta name="viewport" content="width=device-width, initial-scale=1">

<link rel='stylesheet prefetch' href='https://maxcdn.bootstrapcdn.com/font-
awesome/4.7.0/css/font-awesome.min.css'>

<link rel="stylesheet" href="css/style.css">

</head>

<body>
    <!-- Navigation section
=====
-->
<section class="navbar navbar-fixed-top q1" role="navigation"
style="position: relative;">
    <div class="container q3" >

        <div id="p1">
            <button class="navbar-toggle collapsed" data-
toggle="collapse" data-target=".navbar-collapse">

                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
            </button>
            <a href="index.html"> </a>
        </div>
        <div class="collapse navbar-collapse q2" >

```

```

<ul class="nav navbar-nav navbar-right">

    <li><a href="newsfeed.jsp" >News Feed</a></li>
    <li><a href="Package.jsp">Packages</a></li>
    <li><a href="gallery.jsp">Gallery</a></li>
    <li ><a href="competition.jsp"> Competition </a> <!--<ul
class="collapse navbar-collapse" >
        <li ><a href="#" >Week of the Pic</a></li>
        <li data-toggle="collapse" ><a href="#" >Month of the
Pic</a></li></ul> --></li>
        <li><a href="login.html" >Registration /LOGIN</a></li>

        <li><a href="contact.jsp" >Contact</a></li>
        </ul>
    </div>

</div>
</section>

```

```

<div class="content">

    <div class="wrapper">

        <div class="register--content l2">

            <div class="login--button" style="padding-bottom: 10px;">
                <span style="color:white;">If you have an account</span>
                <a class="btn" data-popup-open="register-popup"
href="#">Login</a>
            </div>

            <h1 style="font-size: 20px;">Create a new account</h1>
            <div class="social" id="l1">
                <a href=""><span class="facebook-icon"><i class="fa fa-
facebook"></i></span>Register with <strong>Facebook</strong></a>
            </div>

            <div class="via-email">
                <span>or via email</span>
            </div>

```

```

        <form action="store" method="post">
        <input type="text" class="inputText" placeholder="name" name="name"
required/>

        <input type="email" class="inputText" placeholder="Email" name="Email"
required/>

        <input type="password" class="inputText" placeholder="Password"
name="password" required/>

            <input type="submit" id="11" value="Sign Up" name="register">
        </form>
    </div>

<div class="login--content l2">

    <div class="login--button">
        <span style="color:white;">Create a new account</span>
        <a class="btn-reg" data-popup-open="register-popup"
href="#">Sign up</a>
    </div>
    <h1 style="font-size: 20px;">Login to your account</h1>
    <div class="social" id="11">
        <a href="#"><span class="facebook-icon"><i class="fa fa-
facebook"></i></span>Login with <strong>Facebook</strong></a>
    </div>

    <form action="match" method="post">
        <div class="email">

            <input type="email" class="inputText" placeholder="Email" name="email"
required />
        </div>

        <div class="password">
            <input type="password" class="inputText" placeholder="Password"
name="password" required />
        </div>

```

```

<input type="submit" value="Login">
</form>
</div>

</div>

<script src="js/jquery.js"></script>
<script src="js/bootstrap.min.js"></script>

<script src="js/jquery-2.1.1.min.js"></script>

<script src="js/index.js"></script>

</body>
</html>
*****
***** AProfile.jsp *****
*****/




<%--
 Document : AProfile
 Created on : 1 Jun, 2017, 10:08:25 PM
 Author   : Nitish Aryan
--%>

<%
 if(session.getAttribute("mail")==null )
 {
    response.sendRedirect("login.html");
 }

```

```

%>

<%@page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
    <head>
        <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
        <title>Admin Profile</title>
    </head>
    <body>
        <%@include file="Header Admin.jsp" %>

        <div id="page-wrapper">
            <div class="hek" style=" font-size: 40px; ">
                <table align="center" class="tb">
                    <th colspan="2" style="text-align: center; font-family: Alexuss Heavy; padding: 10px; background: black; color: white;"><u>Profile</u></th>

                    <tr>
                        <td><b>User Name:</b> </td><td>
                            <%=session.getAttribute("name") %></td>
                        </tr>
                        <tr>
                            <td><b>Address:</b> </td><td>
                                <%=session.getAttribute("address") %></td>
                            </tr>
                            <tr>
                                <td><b>Gender:</b> </td><td> <%=session.getAttribute("ling") %></td>
                            </tr>
                            <tr>
                                <td><b>E-mail:</b> </td><td> <%=session.getAttribute("mail") %></td>
                            </tr>
                            <tr>
                                <td><% String pc="image/" + session.getAttribute("pic"); %>
                                    <b>Photo:</b> </td><td style="text-align: center;"> <img src=<%=pc %> height="80px" weight="70px" style="border-right: 50%; border: 1px solid #0e1a35;"></td>
                            </tr>
                        </table>
                    </div>
                </div>
            </body>
        </html>
    
```

```

</tr>
<tr >
    <td colspan="2" style="text-align: center;"><a href="#" data-
toggle="modal" data-target="#primary" ><button class="btn btn-success"
id="sb">Change Password</button></a> <a href="AprofileE.jsp"><button
class="btn btn-info" id="sb" >Edit Profile</button></a> </td>
    </tr>

</table>
</div>

<!-- /.container-fluid -->
</div>

<div class="modal fade" id="primary" tabindex="-1" role="dialog" aria-
labelledby="myModalLabel" aria-hidden="true">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header modal-header-primary" style="background-
color: #31b0d5;">
                <button type="button" class="close" data-dismiss="modal" aria-
hidden="true">x</button>
                <h1><i class="fa fa-cog"></i> Change Password</h1>
            </div>
            <form action="upass" method="post" accept-charset="utf-8">
                <div class="modal-body">

                    <div class="modal-body" style="padding: 5px;">
                        <div class="row">
                            <div class=" col-md-12 col-sm-12 col-xs-12" style="padding-
bottom: 10px;">
                                <input class="form-control" name="opass"
placeholder="Old Password" type="password" required autofocus />
                            </div>
                            <div class="col-md-12 col-sm-12 col-xs-12" style="padding-
bottom: 10px;">
                                <input class="form-control" name="npass"
placeholder="New Password" type="password" required />
                            </div>
                            <div class="col-md-12 col-sm-12 col-xs-12" style="padding-
bottom: 10px;">

```

```

        <input class="form-control" name="cpassword"
placeholder="Confirm Password" type="password" required />
    </div>

    </div>
</div>

</div>
<div class="modal-footer">
    <button type="button" class="btn btn-default pull-left" data-
dismiss="modal">Close</button>
    <button type="submit" class="btn btn-danger pull-right">
Save</button>
</div></form>
</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div>

</body>
</html>

```

```

*****
***** AddPackage.jsp *****
*****/

```

```

<%--
 Document : Aorder
 Created on : 1 Jun, 2017, 11:24:42 PM
 Author   : Nitish Aryan
--%>

```

```

<%@page import="java.sql.ResultSet"%>
<%@page import="java.sql.Statement"%>
<%@page import="control.ConnectDB"%>
<%@page import="java.sql.Connection"%>
<%
if(session.getAttribute("mail")==null )
{
    response.sendRedirect("login.html");
}

```

```
%>

<% @page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
  <head>
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
    <link rel="stylesheet" href="css/admin.css">

    <link rel="stylesheet" href="css/myc.css">

    <title>AddPackages | Admin</title>
    <style>
      .card-view{
        padding-right: 12px;
        padding-bottom: 12px;
      }
      #d5:hover{
        box-shadow: 2px 2px 2px ;
      }

    </style>
    <style>
      @media(min-width:768px){
        #page-wrapper{
          margin-left:230px;
        }
        body{
          width:80%;
        }
      }
      @media(max-width:767px){
        #page-wrapper{
          margin-top:20px;
        }
      }
      #page-wrapper .inbox-head h1{
        margin-top: 50px;
        padding: 10px;
      }
    </style>
  </head>
  <body>
    <div class="card-view" style="background-color: #fff; border: 1px solid #ccc; padding: 10px; margin-bottom: 20px;">
      <h2>Add Packages</h2>
      <form>
        <div>
          <label>Package Name</label>
          <input type="text" value="My Package" style="width: 100%; height: 30px; border: 1px solid #ccc; padding: 5px; margin-bottom: 10px; font-size: 14px; font-weight: bold; border-radius: 5px;" />
        </div>
        <div>
          <label>Category</label>
          <select style="width: 100%; height: 30px; border: 1px solid #ccc; padding: 5px; margin-bottom: 10px; font-size: 14px; font-weight: bold; border-radius: 5px;">
            <option>Select Category</option>
            <option>Category A</option>
            <option>Category B</option>
            <option>Category C</option>
            <option>Category D</option>
            <option>Category E</option>
            <option>Category F</option>
            <option>Category G</option>
            <option>Category H</option>
            <option>Category I</option>
            <option>Category J</option>
            <option>Category K</option>
            <option>Category L</option>
            <option>Category M</option>
            <option>Category N</option>
            <option>Category O</option>
            <option>Category P</option>
            <option>Category Q</option>
            <option>Category R</option>
            <option>Category S</option>
            <option>Category T</option>
            <option>Category U</option>
            <option>Category V</option>
            <option>Category W</option>
            <option>Category X</option>
            <option>Category Y</option>
            <option>Category Z</option>
          </select>
        </div>
        <div>
          <label>Description</label>
          <input type="text" value="A detailed description of the package." style="width: 100%; height: 100px; border: 1px solid #ccc; padding: 5px; margin-bottom: 10px; font-size: 14px; font-weight: bold; border-radius: 5px;" />
        </div>
        <div>
          <label>Status</label>
          <select style="width: 100%; height: 30px; border: 1px solid #ccc; padding: 5px; margin-bottom: 10px; font-size: 14px; font-weight: bold; border-radius: 5px;">
            <option>Active</option>
            <option>Inactive</option>
            <option>Pending Approval</option>
            <option>Deleted</option>
            <option>Archived</option>
          </select>
        </div>
        <div>
          <label>File Attachment</label>
          <input type="file" style="width: 100%; height: 30px; border: 1px solid #ccc; padding: 5px; margin-bottom: 10px; font-size: 14px; font-weight: bold; border-radius: 5px;" />
        </div>
        <div style="text-align: right; margin-top: 20px;>
          <button type="button" style="border: 1px solid #ccc; padding: 5px 10px; border-radius: 5px; background-color: #fff; color: #007bff; font-size: 14px; font-weight: bold;">SaveCancel
```

```
}

@media(max-width:420px){
table th , tr{
    font-size: 65%;
}
}

#a1{
    width:100%;text-align: left;padding: 5px; margin-right:2px; white-space: normal;
}
button{
    padding: 5px;
}

table th{
    color: white;
    background-color: black;
}
table th , tr{
    text-align:center;
    word-break: break-all;
}
table th , tr td{
    padding:5px;
}

table tr:hover{
    cursor: pointer;
    background-color: mintcream;
}

</style>
</head>
```

```

<body >

    <%@include file="Header Admin.jsp" %>

    <div id="page-wrapper" style="padding-top:5px; margin-top:20px; " >
        <div class="inbox-head" style="background: url(image/6.jpg) ; padding: 40px; margin-bottom: 5px; ">
            <h1 style="color:windowframe; text-align: center;">Added PACKAGES</h1>

        </div>

    <div >

        <div class="row">

            <%
                Connection con;
                con=ConnectDB.connect();
                Statement st=con.createStatement();
                String phl;
                ResultSet rs,rs1;
                rs=st.executeQuery("select * from addp ");

                Boolean b;
                b=rs.next();
                String s;
                do
                {

            <%>

            <div class="col-sm-5 col-xs-12 col-md-5 col-lg-6 " >
                <div class="card-view"><% s="image/" +rs.getString("p1"); %>
                <div class="card card-inverse card-info" id="d5" style="background-color: white;">
                    
                    <div class="card-block">

```

```

<h4 class="card-title"><%=rs.getString("tourname")%></h4>
<div class="card-text">
    Tour Price: <%=rs.getString("tprice")%>
</div>
</div>
<div class="card-footer">
    <button class="btn btn-info btn-sm" style="width:100%;">See
Detail</button>
</div>
</div>
</div>
</div>

<% }while(rs.next()); %>

<div class="col-xs-6" style="padding:10px;">

<button data-toggle="modal" data-target="#squarespaceModal" class="btn
btn-primary center-block">Add Package</button>
</div>
</div>

<!-- line modal -->
<div class="modal fade" id="squarespaceModal" tabindex="-1" role="dialog"
aria-labelledby="modalLabel" aria-hidden="true">
<div class="modal-dialog">
    <div class="modal-content">
        <div class="modal-header" style="background-color:black;">
            <button type="button" class="close" data-
dismiss="modal"><span aria-hidden="true" style="color:white;">x</span><span
class="sr-only">Close</span></button>
            <h3 class="modal-title" id="lineModalLabel"
style="color:white;">My Packages</h3>
        </div>

```

```

<div class="modal-body">

    <!-- content goes here -->
    <form action="addp" method="post"
enctype="multipart/form-data">
        <div class="form-group">
            <label for="exampleInputEmail1" >Tour Name</label>
            <input type="text" class="form-control" required="" name="name"
placeholder="Enter Tour Name">
        </div>
        <div class="form-group col-md-4">
            <label for="exampleInputEmail1" >Tour ID</label>
            <input type="text" class="form-control" required="" name="idk"
placeholder="Enter Tour Id">
        </div>
        <div class="form-group col-md-4">
            <label for="exampleInputPassword1">Day Of Tour</label>
            <input type="Text" class="form-control" required="" name="dayy"
placeholder="Enter Day">
        </div>

        <div class="form-group col-md-4 ">
            <label for="exampleInputPassword1">Date Of Tour</label>
            <input type="Text" class="form-control" required="" name="date"
placeholder="Enter Date">
        </div>
        <div class="form-group col-md-4">
            <label for="exampleInputPassword1">Price Of Tour </label>
            <input type="Text" class="form-control" required="" name="trent"
placeholder="Enter Tour Rent">
        </div>
        <div class="form-group col-md-4">
            <label for="exampleInputPassword1">Hotels Rent</label>
            <input type="Text" class="form-control" required="" name="hrent"
placeholder="Enter Hotels Rent">
        </div>
        <div class="form-group col-md-4">
            <label for="exampleInputPassword1">Cab Rent</label>
            <input type="Text" class="form-control" required="" name="crent"
placeholder="Enter Car Rent">
        </div>
        <div class="form-group col-md-4">
            <label for="exampleInputPassword1">Bus Rent</label>
            <input type="Text" class="form-control" required="" name="brent"
placeholder="Enter Bus Rent">
        </div>
        <div class="form-group col-md-4">

```

```

<label for="exampleInputPassword1">Seats</label>
<input type="Text" class="form-control" required="" name="seat"
placeholder="Total No of Person">
</div>
<div class="form-group col-md-4">
<label for="exampleInputPassword1">Tour Start</label>
<input type="Text" class="form-control" required="" name="source"
placeholder="Enter Source ">
</div>

<div class="form-group">
<label for="exampleInputFile">Add Photos</label>
<div style="border:1px solid rgb(131,131,131); padding:1px;">
<input type="file" name="p1" required="" id="exampleInputFile">
<input type="file" name="p2" required="" id="exampleInputFile">
<input type="file" name="p3" required="" id="exampleInputFile"></div>
</div>

<div class="form-group">
<label for="exampleInputPassword1">ABOUT
DESTINATION/TOUR</label>
<input type="Text" name="about" class="form-control" required="" id="exampleInputPassword1" >
</div>

<!-- <div class="checkbox">
<label>
<input type="checkbox"> Check me out
</label>
</div>
<button type="submit" class="btn btn-default">Submit</button> -->
<div class="modal-footer">
<div class="btn-group btn-group-justified" role="group" aria-
label="group button">
<div class="btn-group" role="group">
<button type="button" class="btn btn-default"
data-dismiss="modal" role="button">jjj</button>
</div>
<div class="btn-group" role="group">
<button type="submit" id="saveImage"
class="btn btn-default btn-hover-green" data-action="save"
role="button">Save</button>
</div>
</div>

```

```
</div>
</form>

</div>
</div>
</div>

</div>

<div class="modal fade" id="image-gallery" tabindex="-1" role="dialog"
aria-labelledby="myModalLabel" aria-hidden="true">
<div class="modal-dialog">
<div class="modal-content">
<div class="modal-header">
    <button type="button" class="close" data-dismiss="modal"><span aria-
hidden="true">×</span><span class="sr-only">Close</span></button>
    <h4 class="modal-title" id="image-gallery-title"></h4>
</div>
<div class="modal-body">
    <img id="image-gallery-image" class="img-responsive" src="">
</div>
<div class="modal-footer">

    <div class="col-md-2">
        <button type="button" class="btn btn-primary" id="show-previous-
image">Previous</button>
    </div>

    <div class="col-md-8 text-justify" id="image-gallery-caption">
        This text will be overwritten by jQuery
    </div>

    <div class="col-md-2">
        <button type="button" id="show-next-image" class="btn btn-
default">Next</button>
    </div>
</div>
</div>
</div>
```

```

</div>

<script src="js/jquery.js"></script>
<!-- <script src="js/bootstrap.min.js"></script> -->
<script src="js/package.js"></script>

</body>
</html>

/*
***** Ahome.jsp *****/
*/

<%--
 Document : Ahome
 Created on : 1 Jun, 2017, 11:24:42 PM
 Author   : Nitish Aryan
--%>

<%
 if(session.getAttribute("mail")==null )
 {
    response.sendRedirect("login.html");
 }

%>

<% @page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>

```

```

<head>
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
    <link rel="stylesheet" href="css/admin.css">
    <title>Admin Home</title>
    <style>
        @media(min-width:768px){
            #page-wrapper{
                margin-left:230px;
            }
            body{
                width:80%;
            }
        }

        #a1{
            width:100%;text-align: left;padding: 5px; margin-right:2px; white-space: normal;
        }
        button{
            padding: 5px;
        }
    </style>
</head>
<body >

<%@include file="Header Admin.jsp" %>

<div id="page-wrapper" >

    <h1>Hello, <%= session.getAttribute("name") %></h1>

    <div class="mail-box">
        <div class="inbox-head">
            <h3>Notification</h3>

        </div>
        <table class="table table-inbox table-hover">
            <tbody>

                <!--      <tr>

```

```

<td class="view-message center-block">
    <b> No Notification.. <b>
    </td>
</tr> -->

<tr>
    <td class="view-message ">
        <!-- <form action="#" method="post"> <button
class="btn " id="a1" type="submit" id="qw" title="Click For View
Notification.." name="message" value="kjnvdskjnvdskn dsfcndsk sdkcnds">
<span class="glyphicon glyphicon-envelope" aria-hidden="true"></span> <b>
rahul </b> has Intrested in your <b>rajgir </b> Site and You Got A Message..
<span style="float: right; padding-right: 5%; "> 22/5/2017
</span></button></form>
-->
        <h3 style="background:#0d172e; color:white; text-
align:center;padding:10px;">You haven't Any Notification yet. </h3>
    </td>
</tr>

</tbody>
</table>

</div>

</div>

```

```

</body>
</html>

/*****
***** Aorder.jsp *****
****/




<%--
 Document : Aorder
 Created on : 1 Jun, 2017, 11:24:42 PM
 Author   : Nitish Aryan
--%>

<%
 if(session.getAttribute("mail")==null )
 {
    response.sendRedirect("login.html");
 }

%>

<%@page import="java.sql.ResultSet"%>
<%@page import="java.sql.Statement"%>
<%@page import="control.ConnectDB"%>
<%@page import="java.sql.Connection"%>
<%@page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
<link rel="stylesheet" href="css/admin.css">
<title>All client Ordwer | Admin</title>
<style>
 @media(min-width:768px){
 #page-wrapper{
 margin-left:230px;}
 body{
 width:80%;}
 }

 @media(max-width:420px){
```

```





```

```

<div class="col-md-12 col-xs-12">
    <form action="Adelete" method="get">
    <table border="3" class="table-responsive">

        <th>#</th><th> Name</th><th>E-mail</th><th>Contact-
No</th><th>Trip Date</th><th colspan="2">Transaction Id</th><th
colspan="3">Client Address</th><th>Amount</th><th>Persons</th><th
colspan="2">Trip location</th><th colspan="2">Rent For</th><th
colspan="2">Query</th>

        <%
            Connection connl;
            connl=ConnectDB.connect();
            Statement sttl=connl.createStatement();
            String y=(String) session.getAttribute("mail");
            ResultSet rssl=sttl.executeQuery("select * from book ");
            Boolean stttl=rssl.next();
            String f=null; int i1,i2,i3;
            do{

                f=rssl.getString("TransactionID");

            %>

        <tr title="for more detail click !">
            <td><input type="checkbox" name="check"
value="<%="f%">"></td>
            <td><%=rssl.getString("Name")%> </td>
            <td> <%=rssl.getString("Email")%> </td>
            <td><%=rssl.getLong("Mobile")%> </td>
            <td><%=rssl.getString("date")%> </td>
            <td colspan="2"> <%=f%> </td>
            <td colspan="3"><%=rssl.getString("Address")%> </td>
            <td><%=rssl.getInt("Amount")%> </td>
            <td><%=rssl.getInt("Persons")%> </td>
            <td colspan="2"><%=rssl.getString("Destination")%> </td>
            <% i1=rssl.getInt("Hotelrent"); i2=rssl.getInt("Cabrent");
i3=rssl.getInt("Busrent"); f="Tour"; if(i1!=0){ f=f + ",Hotel"; }
if(i2!=0){


```

```

f=f+",Cab";
}
if(i3!=0)
{
    f=f+",Bus";
}
%>
<td colspan="2"><%=f%></td>
<td colspan="2"><%=rssl.getString("query")%> </td>

</tr>

<% }while(rssl.next()); rssl.close(); %>

</table>
<input class="btn btn-info" type="submit"
style="float:right; margin-top:10px; margin-right:30px;" value="Delete">

</form>

 *Note:- For Delete Client Order Please Select one at a Time..
</div>

</div>

</body>
</html>

***** Aprofile.jsp *****/

```

<%--
 Document : AProfile

Created on : 1 Jun, 2017, 10:08:25 PM

Author : Nitish Aryan

--%>

```
<%
if(session.getAttribute("mail")==null )
{
    response.sendRedirect("login.html");
}
```

%>

```
<% @page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
    <head>
        <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
        <title>Admin Profile</title>
    </head>
    <body>

        <% @include file="Header Admin.jsp" %>
```

```
<div id="page-wrapper">
    <div class="hek" style=" font-size: 40px; ">
        <form action="editpro" method="post" enctype="multipart/form-data">
            <table align="center" class="tb">
                <th colspan="2" style="text-align: center; font-family: Alexuss Heavy; padding: 10px; background: black;color:white;"><u>Profile</u></th>

                <tr>
                    <td><b>User Name:</b> </td><td> <input placeholder="<% =session.getAttribute("name") %>" name="name" type="text"></td>
                </tr>
                <tr>
                    <td><b>Address:</b> </td><td><input placeholder="<% =session.getAttribute("address") %>" name="address" type="text"></td>
```

```

</tr>
<tr>
    <td><b>Gender: </b></td><td> <input
placeholder=<%=session.getAttribute("ling") %>" type="text"
name="ling"></td>
</tr>

<tr>
    <td><b>E-mail: </b></td><td><%=session.getAttribute("mail")%
%></td>
</tr>

<tr>
    <td><b>Photo: </b></td><td style="text-align: center;"> <input
type="file" name="image"></td>
</tr>
<tr>
    <td colspan="2" style="text-align: center;"><button class="btn btn-
success" name="use" value="cancel" id="sb">Cancel</button> <button
class="btn btn-info" name="use" value="save" id="sb" >Save</button></td>
</tr>

</table>
</form>
</div>

<!-- /.container-fluid -->
</div>

</body>
</html>
*****
***** ClientD.jsp *****
*****/
```

```

<% @page import="java.sql.ResultSet"%>
<% @page import="java.sql.Statement"%>
<% @page import="control.ConnectDB"%>
```

```

<%@page import="java.sql.Connection"%>
<!DOCTYPE html>
<%
    if(session.getAttribute("mail") == null )
    {
        response.sendRedirect("login.html");
    }
    String check = session.getAttribute("admin") + "";
    if(check.equals("admin")){
        response.sendRedirect("Ahome.jsp");
    }
%>

<html lang="en">
<head>
<title>Client | Kect Tourism</title>

<link rel="stylesheet" href="css/client.css">
<link rel="stylesheet" href="css/myc.css">
<link rel="stylesheet" href="css/bootstrap.min.css">
<meta name="viewport" content="width=device-width, initial-scale=1">

<link rel="stylesheet" href="css/mycs.css">

<style>
    .card-view{
        padding: 12px;
    }
    #d5:hover{
        box-shadow: 2px 2px 2px ;
    }
</style>

<style>
    @media(max-width:420px){
        table th , tr{
            font-size: 65%;
        }
    }
</style>

```

```

# a1 {
    width: 100%; text-align: left; padding: 5px; margin-right: 2px; white-
space: normal;
}
button {
    padding: 5px;
}

table th{
    color: white;
    background-color: black;
}
table th , tr{
    text-align:center;
    word-break: break-all;
}
table th , tr td{
    padding:5px;
}

}

table tr:hover{
    cursor: pointer;
    background-color: mintcream;
}

}

</style>

<link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.6.3/css/font-
awesome.min.css" rel="stylesheet" integrity="sha384-
T8Gy5hrqNKT+hzMclPo118YTQO6cYprQmhrYwLiQ/3axmI1hQomh7Ud2hPOy
8SP1" crossorigin="anonymous">
<style>
table{
    border: 1px solid black;
}

```

```

table tr td{
    padding-left: 5px;
}
@media(max-width:1200px)and(min-width:990px){
    .page-header{ margin-top:84px;
    height:10px;}
}

@media(max-width:650px){
#q2 {
    font-size:150%;

}
#f4{
    font-size: 100%;

}
#q3 {
    display: none;

}
}

#settings div table th , tr td{
    font-size:15px;

}

}

.modal-header-primary {
    color:#fff;
padding:9px 15px;
border-bottom:1px solid #eee;
background-color: #428bca;
-webkit-border-top-left-radius: 5px;
-webkit-border-top-right-radius: 5px;
-moz-border-radius-topleft: 5px;
-moz-border-radius-topright: 5px;
border-top-left-radius: 5px;
border-top-right-radius: 5px;
}

```

```

</style>

</head>
<body>

<div class="dashboard">
    <div class="well" style="text-align: center; margin-bottom:10px;">
        <a href="index.html"></a>
        <h2 id="f4">Welome to Knect Tourism</h2>
        <h4 style="color:#1abc9c;" id="f4">A Unit of Bihar Travel Agency</h4>
    </div>
    <div class="row">
        <div class="col-md-12 " >
            <ul class="dashboard-tabs" >
                <li class="active">
                    <a href="#profile" class="btn" aria-controls="profile" role="tab" data-toggle="tab">
                        <span class="fa fa-home" id="q2" ></span>
                        <h4 id="q3">Home</h4>
                    </a>
                </li>
                <li>

```

```

<a href="#statistics" class="btn" aria-controls="statistics" role="tab"
data-toggle="tab">
    <span id="q2" class="fa fa-road"></span>
    <h4 id="q3">Tour Package</h4>
</a>
</li>
<li>
    <a href="#donate" class="btn" aria-controls="donate" role="tab"
data-toggle="tab">
        <span id="q2" class="fa fa-camera"></span>
        <h4 id="q3">Ur Photo</h4>
    </a>
</li>
<% String pic="image/" + session.getAttribute("pic") ; %>
<li style="padding-top: 10px;">
    <a href="#settings" class="btn" aria-controls="settings" role="tab"
data-toggle="tab">
        <!--<span id="q2" class="fa fa-user"></span> --> <img
src=<%=pic%> class="img-circle" height="45" width="45">
        <h4 id="q3">Profile</h4>
    </a>
</li>
<li>
    <a href="logout" class="btn" aria-controls="help" role="tab" >
        <span id="q2" class="fa fa-power-off"></span>
        <h4 id="q3">Logout</h4>
    </a>
</li>
</ul>
</div>
<div class="tab-content container">
    <div role="tabpanel" class="tab-pane profile-pane active " id="profile">
        <div>
            <div class="col-md-12 col-sm-12 col-xs-12 l5">

                <h1>Hello, <%= session.getAttribute("name") %></h1>
                <div class="header">
                    <h4>Notification</h4>
                </div>
                <div class="content" >

                    <table class="table table-inbox table-hover" >
                    <tbody>

```

```

<tr>
    <td class="view-message ">
        <!-- <form action="#" method="post"> <button
        class="btn " style="text-align: left; white-space: normal; width: 100%; "
        type="submit" id="qw" title="Click For View Notification.." name="message"
        value="kjnvdskjnvdskn dsfcndsk sdkcnds"> <span class="glyphicon glyphicon-
        envelope" aria-hidden="true"></span> <b> rahul </b> has Intrested in your
        <b>rajgir </b> Site and You Got A Message.. <span style="float: right; padding-
        right: 5% ; "> 22/5/2017 </span></button></form>

        --><h3 style="background:#0d172e; color:white; text-
        align:center;padding:10px;">You haven't Any Notificattion yet. </h3>
    </td>
</tr>

</tbody>

</table>

</div>
</div>
</div>
</div>

<div role="tabpanel" class="tab-pane" id="statistics">

<!--
<div class="col-md-12 col-xs-12">

<table border="3" style="width:100% " >

    <th>#</th><th> Tour Name</th><th>Registration Id</th>
    <th>Date Of Tour</th><th>NO. of Person</th><th>Total Rent (Ind Curr)</th>

```

```

<tr title="for more detail click !">
    <td><input type="checkbox" name="check" value="hello
"></td>
    <td> yo </td>
    <td>ID ID </td>
    <td >20/7/2013</td>
    <td >8</td>
    <td >9000 </td>

</tr>

</table>

<input class="btn btn-info" type="submit"
style="float:right;margin-top:10px;margin-right:30px;" value="Cancel">
    *Note:- For Cancel Your Order Please Select one at a Time..
</div>
-->

<div class="row">

<%
    Connection con2;
    con2=ConnectDB.connect();
    Statement st3=con2.createStatement();
    String ph6;
    ResultSet rs6,rs16;
    rs6=st3.executeQuery("select * from addp ");

    Boolean b;
    b=rs6.next();
    String s6;
    do
    {

```

```

%>

<div class="col-sm-5 col-xs-12 col-md-5 col-lg-6 " >
    <div class="card-view"><% s6="image/" +rs6.getString("p1"); %>
        <div class="card card-inverse card-info" id="d5" style="background-
color: white;">
            
            <div class="card-block">
                <h4 class="card-title"><% =rs6.getString("tourname")%></h4>
                <div class="card-text">
                    Tour Price: <% =rs6.getString("tprice")%>
                </div>
            </div>
            <div class="card-footer">
                <button class="btn btn-info btn-sm" style="width:100%;">See
Detail</button>
            </div>
        </div>
    </div>
<% }while(rs6.next()); %>

</div>

```

```


×

# Your Order



| # | Tour Name | Registration Id | Date Of Tour | NO. of Person | Total Rent (Ind Curr) |
|---|-----------|-----------------|--------------|---------------|-----------------------|
|   |           |                 |              |               |                       |


<%
Connection connl;
connl=ConnectDB.connect();
Statement sttl=connl.createStatement();
String y=(String) session.getAttribute("mail");
ResultSet rssl=sttl.executeQuery("select * from book Where Email='"+ y +"' ");
Boolean stttl=rssl.next();
String w1=null,w2=null,w3=null;
int w5=0 ,w4=0;
if(stttl==false)
{
    %>


### You haven't Booked Any Order yet.


<%
}
/* else{

    do{
        w1=rssl.getString("Destination");
        w2=rssl.getString("TransactionID");
        w3=rssl.getString("date");
        w5=rssl.getInt("Persons");
        w4=rssl.getInt("Amount");
    }
}


```

```

%>

<tr title="for more detail click !">
    <td><input type="checkbox" name="check"
value=<w2%>></td>
    <td><=w1%> </td>
    <td><2%></td>
    <td ><=w3%></td>
    <td ><=w5%></td>
    <td ><=w4%></td>

</tr>

</table>

<% /*}while(rssl.next()); }*/ %>

        *Note:- For Cancel Your Order Please Select one at a Time..
</div>

</div>
<div class="modal-footer">
    <button type="button" class="btn btn-default pull-left" data-
dismiss="modal">Close</button>
    <button class="btn btn-info pull-right " type="submit">
Cancel</button>
</div>
</form>
</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div>

```

```

</div>
<div role="tabpanel" class="tab-pane" id="donate">

    <div class="row">

        <div class="col-md-12 " style="margin-top:-18px; padding-top: 5px;">
            <h1 class="page-header" style="text-align: center; color: white; background:url(image/gallery.jpg);">Gallery</h1>

    <%
        Connection con;
        con=ConnectDB.connect();
        Statement st=con.createStatement();
        String s=(String) session.getAttribute("mail") ,t,phl,k,k1;
        ResultSet rs=st.executeQuery("select * from gallery Where Email='"+s+"'");
        Boolean s1=rs.next();
        if(s1==false)
            { %>
                <h3 style="background:#0d172e; color:white; text-align:center;padding:10px;">You haven't Add Any Photo yet. </h3><%
            }
        else{

            do
            {

                t=rs.getString("Photo");
                phl="image/gallery/"+t;
                k="Likes:"+rs.getLong("likes");
                k1=rs.getString("Description");
            %>

                <div class="col-lg-3 col-md-4 col-sm-6 col-xs-12 thumb">
                    <a class="thumbnail" href="#" data-image-id="" data-toggle="modal" data-title="<%>=k1%" data-caption="<%>=k%" data-image="<%>=phl%" data-target="#image-gallery">
                        
                    </a>
                </div>
            
```

```

<% }while(rs.next());} rs.close(); %>

    <div class="modal fade" id="delete" tabindex="-1" role="dialog"
aria-labelledby="myModalLabel" aria-hidden="true">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header modal-header-primary">
                <button type="button" class="close" data-dismiss="modal" aria-
hidden="true">×</button>
                <h1><i class="fa fa-camera"></i> Delete Photo</h1>
            </div>
            <form action="delete" method="get" enctype="multipart/form-data" >
                <div class="modal-body">

                    <div class="col-md-12 col-xs-12">

                        <table border="3" style="width:100%" >

                            <th>#</th><th> Photo Name</th><th>Likes</th
colspan="3"><th>Description</th>

                            <%
                                Connection con1;
                                con1=ConnectDB.connect();
                                Statement st1=con1.createStatement();
                                ResultSet rs1=st1.executeQuery("select * from gallery Where
Email='"++s+"'");
                                Boolean s11=rs1.next();
                                if(s11==false)
                                    {%
                                        <h3 style="background:#0d172e; color:white; text-
align:center;padding:10px;">You haven't Add Any Photo yet. </h3><%
                                    }
                                else{

                                    do
                                    {

                                        t=rs1.getString("Photo");
                                        phl="image/gallery/"+t;
                                        k="Likes:"+rs1.getLong("likes");
                                        k1=rs1.getString("Description");
                                    %>

```

```

<tr title="for more detail click !">
    <td><input type="checkbox" name="check"
value=<%=rs1.getString("PhotoId")%>"></td>
    <td> <%=t%> </td>
    <td> <%=k%></td>
    <td colspan="3"><%=k1%></td>

</tr>

<% }while(rs1.next());%> rs1.close(); %>

</table>

```

*Note:- For Delete Your Photo Please Select one at a Time..
</div>

```

</div>
<div class="modal-footer">
    <button type="button" class="btn btn-default pull-left" data-
dismiss="modal">Close</button>
    <button class="btn btn-info pull-right " type="submit">
Delete</button>
</div>
</form>
</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->

```

```

</div>

<div class="col-lg-3 col-md-4 col-sm-6 col-xs-12 thumb">
    <a href="#" data-target="#addp" data-toggle="modal">
        <button type="button" class="btn btn-info btn-circle btn-lg"><i
class="fa fa-plus"></i></button> </a> <br><br>
    <a href="#" data-target="#delete" data-toggle="modal">
        <button type="button" class="btn btn-danger btn-circle btn-lg"><i
class="fa fa-minus"></i></button> </a>
    </div>
</div>

<div class="modal fade" id="addp" tabindex="-1" role="dialog" aria-
labelledby="myModalLabel" aria-hidden="true">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header modal-header-primary">
                <button type="button" class="close" data-dismiss="modal" aria-
hidden="true">×</button>
                <h1><i class="fa fa-camera"></i> Add Photo</h1>
            </div>
            <form action="AGallery" method="post" enctype="multipart/form-data"
>
                <div class="modal-body">
                    <h4 style="margin-left: 15px;"> Description:</h4> <input
type="textArea" name="des" placeholder="Enter description"
Style="width:95%;margin: 10px;">
                    <input type="file" required="" name="image" >
                </div>
                <div class="modal-footer">

```

```

        <button type="button" class="btn btn-default pull-left" data-
dismiss="modal">Close</button>
        <button class="btn btn-info pull-right " type="submit"
>Save</button>
    </div>
    </form>
</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div>

<div class="modal fade" id="image-gallery" tabindex="-1" role="dialog" aria-
labelledby="myModalLabel" aria-hidden="true">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header">
                <button type="button" class="close" data-dismiss="modal"><span aria-
hidden="true">×</span><span class="sr-only">Close</span></button>
                <h4 class="modal-title" id="image-gallery-title"></h4>
            </div>
            <div class="modal-body">
                <img id="image-gallery-image" class="img-responsive" src="">
            </div>
            <div class="modal-footer">

                <div class="col-md-2">
                    <button type="button" class="btn btn-primary" id="show-previous-
image">Previous</button>
                </div>

                <div class="col-md-8 text-justify" id="image-gallery-caption">
                    This text will be overwritten by jQuery
                </div>

                <div class="col-md-2">
                    <button type="button" id="show-next-image" class="btn btn-
default">Next</button>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

</div>

</div>

<div role="tabpanel" class="tab-pane" id="settings">

    <div class="hek" style=" font-size: 40px; ">
        <table align="center" class="tb">
            <th colspan="2" style="text-align: center; font-family: Alexuss Heavy; padding: 10px; background: black;color:white;"><u>Profile</u></th>

            <tr>
                <td><b>User Name:</b> </td><td>
<%=session.getAttribute("name") %></td>
            </tr>
            <tr>
                <td><b>Address:</b> </td><td>
<%=session.getAttribute("address") %></td>
            </tr>
            <tr>
                <td><b>Gender:</b> </td><td> <%=session.getAttribute("ling") %></td>
            </tr>

            <tr>
                <td><b>E-mail:</b> </td><td> <%=session.getAttribute("mail") %></td>
            </tr>

            <tr>
                <td><b>Photo:</b> </td><td style="text-align: center;"> <img src=<%=pic%> height="80px" weight="70px" style="border-right: 50%; border:1px solid #0e1a35;"></td>
            </tr>
            <tr >

```

```

        <td colspan="2" style="text-align: center;"><a href="#" data-
        toggle="modal" data-target="#primary" ><button class="btn btn-success"
        id="sb">Change Password</button></a> <a href="editpr.jsp#settings"><button
        class="btn btn-info" id="sb" >Edit Profile</button></a> </td>
        </tr>

    </table>
    </div>

</div>

<!-- Modal --&gt;
&lt;div class="modal fade" id="primary" tabindex="-1" role="dialog" aria-
labelledby="myModalLabel" aria-hidden="true"&gt;
    &lt;div class="modal-dialog"&gt;
        &lt;div class="modal-content"&gt;
            &lt;div class="modal-header modal-header-primary"&gt;
                &lt;button type="button" class="close" data-dismiss="modal" aria-
hidden="true"&gt;x&lt;/button&gt;
                &lt;h1&gt;&lt;i class="fa fa-cog"&gt;&lt;/i&gt; Change Password&lt;/h1&gt;
            &lt;/div&gt;
            &lt;form action="upass" method="post" accept-charset="utf-8"&gt;
                &lt;div class="modal-body"&gt;

                    &lt;div class="modal-body" style="padding: 5px;"&gt;
                        &lt;div class="row"&gt;
                            &lt;div class=" col-md-12 col-sm-12 col-xs-12" style="padding-
bottom: 10px;"&gt;
                                &lt;input class="form-control" name="opass"
                                placeholder="Old Password" type="password" required autofocus /&gt;
                            &lt;/div&gt;
                            &lt;div class="col-md-12 col-sm-12 col-xs-12" style="padding-
bottom: 10px;"&gt;
                                &lt;input class="form-control" name="npass"
                                placeholder="New Password" type="password" required /&gt;
                            &lt;/div&gt;
                            &lt;div class="col-md-12 col-sm-12 col-xs-12" style="padding-
bottom: 10px;"&gt;
                                &lt;input class="form-control" name="cpass"
                                placeholder="Confirm Password" type="password" required /&gt;
                            &lt;/div&gt;
                &lt;/div&gt;
            &lt;/form&gt;
        &lt;/div&gt;
    &lt;/div&gt;
&lt;/div&gt;
</pre>

```

```

</div>

</div>

</div>
<div class="modal-footer">
    <button type="button" class="btn btn-default pull-left" data-
dismiss="modal">Close</button>
    <button type="submit" class="btn btn-danger pull-right" 
>Save</button>
</div></form>
</div><!-- /.modal-content -->
</div><!-- /.modal-dialog -->
</div>

<!-- <div role="tabpanel" class="tab-pane help-pane" id="help">
    <!-- End Help -- >
    </div> -->
</div>
</div>
</div>

<script src="js/jquery.min.js"></script>
<script src="js/client.js"></script>
<script src="js/modal.js"></script>
<script src="js/bootstrap.min.js"></script>

<script src="js/jquery-2.1.1.min.js"></script>

</body>
</html>

*****
***** Header Admin.jsp *****
***** /*****



<%--



Document : Header Admin

```

Created on : 1 Jun, 2017, 9:59:15 PM

Author : Nitish Aryan

--%>

```
<%@page contentType="text/html" pageEncoding="UTF-8"%>

<head>
    <link rel="stylesheet" href="css/admin.css">
    <link rel="stylesheet" href="css/bootstrap.min.css">
    <link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.6.3/css/font-awesome.min.css" rel="stylesheet" integrity="sha384-T8Gy5hrqNKT+hzMclPo118YTQO6cYprQmhrYwLiQ/3axmI1hQomh7Ud2hPOy8SP1" crossorigin="anonymous">
    <meta name="viewport" content="width=device-width, initial-scale=1">
</head>

<div id="throbber" style="display:none; min-height:120px;"></div>
<div id="noty-holder"></div>
<div id="wrapper">
    <!-- Navigation -->
    <nav class="navbar navbar-inverse navbar-fixed-top" role="navigation" style="padding:10px;">
        <!-- Brand and toggle get grouped for better mobile display -->
        <div class="navbar-header" >
            <button type="button" class="navbar-toggle" data-toggle="collapse" data-target=".navbar-ex1-collapse" style="float:right;">
                <span class="sr-only">Toggle navigation</span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
                <span class="icon-bar"></span>
            </button>
            <a class="navbar-brand" href="index.html" style="height:0px ; padding:1px;" id="p8">
                
            </a>
        </div>
```

```

<!-- Top Menu Items -->
<ul class="nav navbar-right top-nav" style="float:right;" id="r7">
    <li><a href="Ahome.jsp" data-placement="bottom" data-
    toggle="tooltip" href="#" style="font-size:20px;" data-original-
    title="Stats"><i class="fa fa-home"></i>
        </a>
    </li>      <% String pic="image/" +
    session.getAttribute("pic") ; %>
    <li class="dropdown">
        <a href="#" class="dropdown-toggle" style="padding:3px;" 
    data-toggle="dropdown">  <b class="fa fa-angle-
    down"></b></a>
        <ul class="dropdown-menu">
            <li><a href="AProfile.jsp"><i class="fa fa-fw fa-
    user"></i> Profile</a></li>
            <!-- <li><a href="#"><i class="fa fa-fw fa-cog"></i>
    Change Password</a></li> -->
            <li class="divider"></li>
            <li><a href="logout"><i class="fa fa-fw fa-power-
    off"></i> Logout</a></li>
        </ul>
    </li>
</ul>
<!-- Sidebar Menu Items - These collapse to the responsive
navigation menu on small screens -->
<div class="collapse navbar-collapse navbar-ex1-collapse">
    <ul class="nav navbar-nav side-nav">
        <li>
            <a href="#" data-toggle="collapse" data-
            target="#submenu-1"><i class="fa fa-fw fa-user-plus"></i> Clients <i
            class="fa fa-fw fa-angle-down pull-right"></i></a>
            <ul id="submenu-1" class="collapse">
                <li><a href="Aorder.jsp"><i class="fa fa-angle-double-
            right"></i> Orders</a></li>
                <li><a href="ListProfile.jsp"><i class="fa fa-angle-
            double-right"></i> Profile</a></li>
            </ul>
        </li>
        <li>

```

```

    <a href="#" data-toggle="collapse" data-
target="#submenu-2"><i class="fa fa-fw fa-star"></i> Competition <i
class="fa fa-fw fa-angle-down pull-right"></i></a>
        <ul id="submenu-2" class="collapse">
            <li><a href="POTW.jsp"><i class="fa fa-angle-double-
right"></i> Pic of the week</a></li>
                <!-- <li><a href="POTM.jsp"><i class="fa fa-angle-
double-right"></i> Pic of the Month</a></li> -->

            </ul>
        </li>
        <li>
            <a href="AddPackage.jsp"><i class="fa fa-fw fa-
folder"></i> Packages</a>
        </li>

        <li>
            <a href="Query.jsp"><i class="fa fa-fw fa fa-question-
circle"></i> Client Query</a>
        </li>
    </ul>
</div>
<!-- /.navbar-collapse -->
</nav>
```

```

<!-- /#page-wrapper -->
</div><!-- /#wrapper -->
<script src="js/jquery.min.js"></script>
<script src="js/admin.js"></script>
```

```
<script src="js/bootstrap.min.js"></script>
```

```
*****
***** ListProfile.jsp *****
*****
```

```
<%--
```

Document : Aorder
 Created on : 1 Jun, 2017, 11:24:42 PM
 Author : Nitish Aryan
 --%>

```

<%
  if(session.getAttribute("mail")==null )
  {
    response.sendRedirect("login.html");
  }
%>

<% @page import="java.sql.ResultSet"%>
<% @page import="java.sql.Statement"%>
<% @page import="control.ConnectDB"%>
<% @page import="java.sql.Connection"%>
<% @page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
  <head>
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
    <link rel="stylesheet" href="css/admin.css">
    <title>All client Profile | Admin</title>
    <style>
      @media(min-width:768px){
        #page-wrapper{
          margin-left:230px;}
        body{
          width:80%;}
      }
      @media(max-width:420px){
        table th , tr{
          font-size: 65%;}
      }
    </style>
  </head>
  <body>
    <div id="page-wrapper">
      <div id="content">
        <div id="header">
          <h1>All client Profile | Admin</h1>
        </div>
        <div id="main">
          <table border="1">
            <thead>
              <tr>
                <th>Client ID</th>
                <th>Client Name</th>
                <th>Address</th>
                <th>Phone No</th>
                <th>Email ID</th>
                <th>Status</th>
                <th>Actions</th>
              </tr>
            </thead>
            <tbody>
              <tr>
                <td>1</td>
                <td>John Doe</td>
                <td>123 Main St, Anytown USA</td>
                <td>(555) 123-4567</td>
                <td>jdoe@example.com</td>
                <td>Active</td>
                <td><a href="#">Edit</a> <a href="#">Delete</a></td>
              </tr>
              <tr>
                <td>2</td>
                <td>Jane Smith</td>
                <td>456 Elm St, Anytown USA</td>
                <td>(555) 987-6543</td>
                <td>jsmith@example.com</td>
                <td>Inactive</td>
                <td><a href="#">Edit</a> <a href="#">Delete</a></td>
              </tr>
              <tr>
                <td>3</td>
                <td>Bob Johnson</td>
                <td>789 Oak St, Anytown USA</td>
                <td>(555) 555-1234</td>
                <td>bjohnson@example.com</td>
                <td>Active</td>
                <td><a href="#">Edit</a> <a href="#">Delete</a></td>
              </tr>
            </tbody>
          </table>
        </div>
      </div>
    </div>
  </body>
</html>

```

```

        }
    button{
        padding: 5px;
    }

    table th{
        color: white;
        background-color: black;
    }
    table th , tr{
        text-align:center;
        word-break: break-all;
    }
    table th , tr td{
        padding:5px;
    }

}

table tr:hover{
    cursor: pointer;
    background-color: mintcream;
}

</style>
</head>
<body >

<%@include file="Header Admin.jsp" %>

<div id="page-wrapper" >
    <div class="inbox-head">
        <h3>All Client Profile</h3>

        </div>

        <div class="col-md-12 col-xs-12">
            <form action="Adelete" method="post">
            <table border="3" style="width:100%;" class="table-responsive">

                <th>#</th><th> Name</th><th>E-
            mail</th><th>Gender</th><th>Password</th><th colspan="3">Address</th>

```

```

<%
    Connection connl;
    connl=ConnectDB.connect();
    Statement sttl=connl.createStatement();
    String y;
    ResultSet rssl=sttl.executeQuery("select * from registration
where log='client' ");
    Boolean sttl=rssl.next();

    do{

        y=rssl.getString("Email");

        %>

        <tr title="for more detail click !">
            <td><input type="checkbox" name="check"
value=<%=y%>"></td>
            <td><%=rssl.getString("name")%> </td>
            <td> <%=y%></td>
            <td><%=rssl.getString("gender")%></td>
            <td><%=rssl.getString("password")%></td>

            <td colspan="3"><%=rssl.getString("Address")%> </td>
        </tr>

        <% }while(rssl.next()); rssl.close(); %>

    </table>
    <input class="btn btn-info" type="submit"
style="float:right;margin-top:10px;margin-right:30px;" value="Delete">

    </form>

    *Note:- For Delete Client profile Please Select one at a Time..
</div>

</div>

```

```

</body>
</html>

/***** POTW.jsp *****/
<%-- Document : Aorder
Created on : 1 Jun, 2017, 11:24:42 PM
Author : Nitish Aryan
--%>
<%
    if(session.getAttribute("mail")==null )
    {
        response.sendRedirect("login.html");
    }
%>
<% @page import="java.sql.ResultSet"%>
<% @page import="java.sql.Statement"%>
<% @page import="control.ConnectDB"%>
<% @page import="java.sql.Connection"%>
<% @page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
    <head>
        <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
        <link rel="stylesheet" href="css/admin.css">
        <title>PIC OF THE WEEK | Admin</title>
        <style>
            @media(min-width:768px){
                #page-wrapper{
                    margin-left:230px;}
                body{

```

```

        width:80%;
    }

}

@media(max-width:420px){
table th , tr{
    font-size: 65%;
}
}

#a1{
    width:100%;text-align: left;padding: 5px; margin-right:2px; white-
space: normal;
}
button{
    padding: 5px;
}

table th{
    color: white;
    background-color: black;
}
table th , tr{
    text-align:center;
    word-break: break-all;
}
table th , tr td{
    padding:5px;
}

table tr:hover{
    cursor: pointer;
    background-color: mintcream;
}

</style>
</head>
<body >

<% @include file="Header Admin.jsp" %>

```

```


142


```

```
<td colspan="3"><%=rssl.getString("Address")%></td>
</tr>

</table>
<% }while(rssl.next()); %>
<input class="btn btn-info" type="submit"
style="float:right;margin-top:10px;margin-right:30px;" value="Delete">
</form>

*Note:- For Delete Your Site Please Select one at a Time..
</div>

</div>

<script src="js/forsl.js"></script>

</body>
</html>
```

```
*****
***** Package.jsp *****
*****
```

```
*****
```

```
<%--  
 Document : Package  
 Created on : 3 Jun, 2017, 1:32:58 PM  
 Author   : Nitish Aryan  
--%>
```

```
<% @page contentType="text/html" pageEncoding="UTF-8"%>  
<!DOCTYPE html>  
<html>  
  <head>  
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">  
    <title>All Package</title>  
    <link rel="stylesheet" href="css/bootstrap.min.css">  
    <link rel="stylesheet" href="css/mycss.css">  
    <link rel="stylesheet" href="css/myc.css">  
    <meta name="viewport" content="width=device-width, initial-scale=1">  
  
  <style>  
    .card-view{  
      padding: 12px;  
    }  
    #d5:hover{  
      box-shadow: 2px 2px 2px ;  
    }  
  </style>  
  
<body style="background-color: grey;">  
  
  <!-- Navigation section  
===== -->  
  <section class="navbar navbar-fixed-top q1" role="navigation"  
  style="position:relative;">  
    <div class="container q3" >  
  
      <div id="p1">  
        <button class="navbar-toggle collapsed" data-  
        toggle="collapse" data-target=".navbar-collapse">  
  
          <span class="icon icon-bar"></span>  
          <span class="icon icon-bar"></span>  
          <span class="icon icon-bar"></span>
```

```

        </button>
        <a href="index.html"> </a>
        </div>
        <div class="collapse navbar-collapse q2" >
            <ul class="nav navbar-nav navbar-right">

                <li><a href="newsfeed.jsp" >News Feed</a></li>
                <li><a href="Package.jsp">Packages</a></li>
                <li><a href="gallery.jsp">Gallery</a></li>
                <li ><a href="competition.jsp"> Competition </a> <!--<ul
class="collapse navbar-collapse" >
                    <li ><a href="#" >Week of the Pic</a></li>
                    <li data-toggle="collapse" ><a href="#" >Month of the
Pic</a></li></ul> --></li>
                    <li><a href="ClientD.jsp" >Registration /LOGIN</a></li>
                    <li><a href="contact.jsp" >Contact</a></li>
                </ul>
            </div>

        </div>
    </section>

    <h3 style="background-color: white; color:black; font-family: Times New
Roman; height: 35px; text-align: center;">Packages</h3>

    <div class="col-sm-6 col-xs-12 col-md-6 col-lg-4 mt-4 " >
        <div class="card-view">
            <div class="card card-inverse card-info " id="d5" style="background-
color: white;">
                
                <div class="card-block">
                    <h4 class="card-title">Rajgir</h4>
                    <div class="card-text">
                        Price: 2500 /-.
                    </div>
                </div>
                <div class="card-footer">
                    <a href="packaged.jsp"> <button class="btn btn-info btn-sm"
style="width:100%;">See Detail</button> </a>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

<script src="js/jquery.js"></script>
<script src="js/bootstrap.min.js"></script>

</body>
</html>

/*
***** Query.jsp *****
***** */

<%--
 Document : Aorder
 Created on : 1 Jun, 2017, 11:24:42 PM
 Author   : Nitish Aryan
--%>

<%
 if(session.getAttribute("mail")==null )
 {
    response.sendRedirect("login.html");
 }

%>

<% @page import="java.sql.ResultSet"%>
<% @page import="java.sql.Statement"%>
<% @page import="control.ConnectDB"%>
<% @page import="java.sql.Connection"%>
<% @page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
  <head>

```

```

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
<link rel="stylesheet" href="css/admin.css">
<title>Client Query | Admin</title>
<style>
    @media(min-width:768px){
        #page-wrapper{
            margin-left:230px;
        }
        body{
            width:80%;
        }
    }

    @media(max-width:420px){
        table th , tr{
            font-size: 65%;
        }
    }

#a1{
    width:100%;text-align: left;padding: 5px; margin-right:2px; white-space: normal;
}
button{
    padding: 5px;
}

table th{
    color: white;
    background-color: black;
}
table th , tr{
    text-align:center;
    word-break: break-all;
}
table th , tr td{
    padding:5px;
}

table tr:hover{
    cursor: pointer;
    background-color: mintcream;
}

</style>

```

```

</style>
</head>
<body >

<% @include file="Header Admin.jsp" %>

<div id="page-wrapper" >
    <div class="inbox-head" style="background: url(image/6.jpg) ; padding: 40px; margin-bottom: 5px; ">
        <h1 style="color:windowframe; text-align: center;">Query Ask  
BY Client</h1>

    </div>

    <div class="col-md-12 col-xs-12">
        <form action="deletec" method="post">
            <table border="3" class="table-responsive" style="width: 100%;">

                <th>#</th><th> Name</th><th>E-mail</th><th>Subject</th><th colspan="3">Message</th><th>Date</th>

                <%
                    Connection connl;
                    connl=ConnectDB.connect();
                    Statement sttl=connl.createStatement();
                    String y;
                    ResultSet rssl=sttl.executeQuery("select * from query ");
                    Boolean sttl=rssl.next();
                    String d;
                    do{
                        d=rssl.getString("Date");
                %>

                <tr title="for more detail click !">

```

```

<td><input type="checkbox" name="check"
value=<%=d%>></td>
<td><%=rssl.getString("Name")%></td>
<td><%=rssl.getString("Email")%></td>
<td><%=rssl.getString("Subject")%></td>

<td colspan="3"><%=rssl.getString("Message")%></td>
<td><%=d%></td>

</tr>

<% }while(rssl.next()); %>

</table>
<input class="btn btn-info" type="submit"
style="float:right;margin-top:10px;margin-right:30px;" value="Delete">

</form>

*Note:- For Delete Query Please Select one at a Time..
</div>

</div>

<div class="modal fade" id="image-gallery" tabindex="-1" role="dialog"
aria-labelledby="myModalLabel" aria-hidden="true">
<div class="modal-dialog">
<div class="modal-content">
<div class="modal-header">
<button type="button" class="close" data-dismiss="modal"><span aria-
hidden="true">&times;</span><span class="sr-only">Close</span></button>
<h4 class="modal-title" id="image-gallery-title"></h4>
</div>
<div class="modal-body">
<img id="image-gallery-image" class="img-responsive" src="">
</div>
<div class="modal-footer">

<div class="col-md-2">
<button type="button" class="btn btn-primary" id="show-previous-
image">Previous</button>

```

```
</div>

<div class="col-md-8 text-justify" id="image-gallery-caption">
    This text will be overwritten by jQuery
</div>

<div class="col-md-2">
    <button type="button" id="show-next-image" class="btn btn-
default">Next</button>
    </div>
    </div>
    </div>
    </div>
</div>
```

```
<script src="js/forsl.js"></script>
```

```
</body>
</html>
```

```
*****
***** book.jsp *****
*****
```

```
<!DOCTYPE html>

<%
if(session.getAttribute("mail")==null )
{
    response.sendRedirect("login.html");
}
```

```

%>
<html>
  <head>
    <title>Booking Form</title>
    <link rel="stylesheet" href="css/bootstrap.min.css">
    <link rel="stylesheet" href="css/mycss.css">
    <!-- <link rel="stylesheet"
      href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.min.css"
      integrity="sha384-BVYiiSIFeK1dGmJRAkycuHAHRg32OmUcww7on3RYdg4Va+PmSTsz/K68vb
      dEjh4u" crossorigin="anonymous">
  -->
    <meta name="viewport" content="width=device-width, initial-scale=1">

    <style>
      body {
        background: url('image/rajgir.jpg') no-repeat center center fixed;
        -webkit-background-size: cover;
        -moz-background-size: cover;
        -o-background-size: cover;
        background-size: cover;
      }

      .panel-default {
        opacity: 0.9;
        margin-top: 30px;
      }
      .form-group.last { margin-bottom: 0px; } t { margin-bottom: 0px; }
    </style>


  </head>
  <body>

    <!-- Navigation section
===== -->
    <section class="navbar navbar-fixed-top q1" role="navigation"
      style="position: relative;">
      <div class="container q3" >

        <div id="p1">
          <button class="navbar-toggle collapsed" data-
            toggle="collapse" data-target=".navbar-collapse">

```

```


<span class="icon icon-bar"></span>
    <span class="icon icon-bar"></span>
<span class="icon icon-bar"></span>
</button>
<a href="index.html"> </a>
</div>
<div class="collapse navbar-collapse q2" >
<ul class="nav navbar-nav navbar-right">

<li><a href="newsfeed.jsp" >News Feed</a></li>
<li><a href="Package.jsp">Packages</a></li>
<li><a href="gallery.jsp">Gallery</a></li>
<li ><a href="competition.jsp"> Competition </a> <!--<ul
class="collapse navbar-collapse" >
<li ><a href="#" >Week of the Pic</a></li>
<li data-toggle="collapse" ><a href="#" >Month of the
Pic</a></li></ul> --></li>
<li><a href="login.html" >Registration /LOGIN</a></li>
<li><a href="contact.jsp" >Contact</a></li>
</ul>
</div>

</div>
</section>

<div class="container">
<div class="row">
<div class="col-md-5 col-md-offset-4">
<div class="panel panel-default">
<div class="panel-heading">
<span class="glyphicon glyphicon-login"></span>Booking-
Registration</div>
<div class="panel-body">
<form action="booking" method="post" class="form-horizontal
well">

<fieldset>
<div class="form-group">
```

```

        <label class="col-md-4 control-label"
for="textinput">Name</label>
        <div class="col-md-8">
            <input id="textinput" name="name" placeholder="Enter your
name" class="form-control input-md" type="text">
        </div>
    </div>

        <div class="form-group">
            <label class="col-md-4 control-label"
for="textinput">Address</label>
            <div class="col-md-8">
                <input id="textinput" name="address" placeholder="Enter
your address" class="form-control input-md" type="text">
            </div>
        </div>

        <div class="form-group">
            <label class="col-md-4 control-label" for="textinput">Contact
Detail</label>
            <div class="col-md-8">
                <input id="textinput" name="mobile" placeholder="Enter
your contact detail" class="form-control input-md" type="text">
            </div>
        </div>

        <div class="form-group">
            <label class="col-md-4 control-label"
for="textinput">EMail</label>
            <div class="col-md-8">
                <input id="textinput" name="email" placeholder="Enter
your e-mail address" class="form-control input-md" type="email">
            </div>
        </div>

        <div class="form-group">
            <label class="col-md-4 control-label" for="textinput">No of
persons</label>
            <div class="col-md-8">
                <input id="textinput" name="person" placeholder="Enter
no.of person" class="form-control input-md" type="number">
            </div>
        </div>

        <div class="form-group">

```

```

<label class="col-md-4 control-label" for="textinput">Date Of
Tour</label>
<div class="col-md-8">
    <select id="selectbasic" name="date" class="form-control
input-medium">
        <option>20/1/2017</option>

        </select>
    </div>
</div>

<div class="form-group">
    <label class="col-md-4 control-label"
for="textinput">Destination</label>
    <div class="col-md-8">
        <select id="selectbasic" name="destination" class="form-
control input-medium">
            <option>Gaya</option>
            <option>Pawapuri</option>
            <option>Rajgir</option>
        </select>
    </div>
</div>

<div class="form-group">
    <label class="col-md-4 control-label" for="radios">Rent
for</label>
    <div class="col-md-8 row">
        <label class="radio-inline col-md-2" for="radios-0">
            <input name="trent" id="radios-0" value="tour"
checked="checked" disabled="" type="checkbox">
                Tour
            </label>
        <label class="radio-inline col-md-2" for="radios-1">
            <input name="hrent" id="radios-1" value="hotel"
type="checkbox">
                Hotel
            </label>
        <label class="radio-inline col-md-2" for="radios-1">
            <input name="crent" id="radios-2" value="cabr"
type="checkbox">
                Cab
            </label>
        <label class="radio-inline col-md-2" for="radios-2">
            <input name="brent" id="radios-3" value="bus"
type="checkbox">
        </label>
    </div>
</div>

```

```

        Bus
    </label>
</div>
</div>

<div class="form-group">
    <label class="col-md-4 control-label" for="textinput">Any
Query ?</label>
    <div class="col-md-8">
        <input id="textinput" name="query" placeholder="Enter
your query" class="form-control input-md" type="text">
    </div>
</div>

<div class="form-group">
    <div class="control-label"></div>
    <div class="col-md-12">
        <button type="submit" class="btn btn-primary btn-
block">BOOK Now</button>
    </div>
</div>
</fieldset>
</form>
</div>
</div>
</div>

<script src="js/jquery.js"></script>
<script src="js/bootstrap.min.js"></script>
</body>
</html>

/******************* competition.jsp  *****/
*******/

<%--
 Document : competition
 Created on : 3 Jun, 2017, 1:20:18 PM
 Author   : Nitish Aryan
--%>

<% @page contentType="text/html" pageEncoding="UTF-8"%>

```

```

<!DOCTYPE html>
<html>
  <head>
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
      <meta name="viewport" content="width=device-width, initial-scale=1">
    <title>Competition</title>

    <link rel="stylesheet" href="css/bootstrap.min.css">
    <link rel="stylesheet" href="css/mycss.css">
    <link rel="stylesheet" href="css/mycs.css">
  </head>
  <body style="background-color: grey;">

    <!-- Navigation section
=====
-->
<section class="navbar navbar-fixed-top q1" role="navigation"
style="position:relative;">
  <div class="container q3" >

    <div id="p1">
      <button class="navbar-toggle collapsed" data-
toggle="collapse" data-target=".navbar-collapse">

        <span class="icon icon-bar"></span>
          <span class="icon icon-bar"></span>
        <span class="icon icon-bar"></span>
      </button>
      <a href="index.html"> </a>
    </div>
    <div class="collapse navbar-collapse q2" >
      <ul class="nav navbar-nav navbar-right">

        <li><a href="newsfeed.jsp" >News Feed</a></li>
        <li><a href="Package.jsp">Packages</a></li>
        <li><a href="gallery.jsp">Gallery</a></li>
        <li ><a href="competition.jsp"> Competition </a> <!--<ul
class="collapse navbar-collapse" >
          <li ><a href="#" >Week of the Pic</a></li>
          <li data-toggle="collapse" ><a href="#" >Month of the
Pic</a></li></ul> --></li>
          <li><a href="ClientD.jsp" >Registration /LOGIN</a></li>
          <li><a href="contact.jsp" >Contact</a></li>
        </ul>
      </div>

```

```

        </div>
    </section>

    <div style="">
        <ul class="nav nav-tabs">

            <li class="active"><a data-toggle="tab" href="#home">Pick of the Week</a></li>
            <li><a data-toggle="tab" href="#menu1">Pick of the Month</a></li>
        </ul>

        <div class="tab-content">
            <div id="home" class="tab-pane fade in active">
                <div class="col-md-5 hoverable z-depth-2">
                    
                    <h1 style="text-align: center">Winner</h1>

                    <div class="container profile">
                        <h4>Name:</h4>
                        <h4>Address:</h4>
                        <h4>Contact no:</h4>
                        <h4>Location:</h4>
                    </div>
                </div>
            </div>
            <div id="menu1" class="tab-pane fade">
                <div class="col-md-5 hoverable z-depth-2" style="margin: 0 , auto">
                    
                    <h1 style="text-align: center">Winner</h1>

                    <div class="container profile">
                        <h4>Name:</h4>
                        <h4>Address:</h4>
                        <h4>Contact no:</h4>
                        <h4>Location:</h4>
                    </div>
                </div>
            </div>

            <div class="col-md-5 hoverable z-depth-2">
                
                <h1 style="text-align: center">Runner up</h1>

                <div class="container profile">
                    <h4>Name:</h4>
                    <h4>Address:</h4>
                    <h4>Contact no:</h4>
                </div>
            </div>
        </div>
    </div>

```

```

        <h4>Location:</h3>
    </div>
</div>
</div>
</div>
</div>

<script src="js/jquery.js"></script>
<script src="js/bootstrap.min.js"></script>
</body>
</html>

*****
***** contact.jsp *****
****

<%--
 Document : contact
 Created on : 3 Jun, 2017, 1:05:40 PM
 Author   : Nitish Aryan
--%>

<%@page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
    <meta http-equiv="Content-Type" content="text/html;
charset=UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1">
    <title>Any Query/Contact us</title>

    <link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/mycss.css">
<link rel="stylesheet" href="css/client.css">
<meta name="viewport" content="width=device-width, initial-
scale=1">

</head>

```

```

<body style="background-color: grey; padding-top:0px;">

    <!-- Navigation section
    -----
    ->
<section class="navbar navbar-fixed-top q1" role="navigation"
style="position: relative;">
    <div class="container q3" >

        <div id="p1">
            <button class="navbar-toggle collapsed" data-
toggle="collapse" data-target=".navbar-collapse">
                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
            </button>
            <a href="index.html"> </a>
            </div>
            <div class="collapse navbar-collapse q2" >
                <ul class="nav navbar-nav navbar-right">

                    <li><a href="newsfeed.jsp" >News Feed</a></li>
                    <li><a href="Package.jsp">Packages</a></li>
                    <li><a href="gallery.jsp">Gallery</a></li>
                    <li><a href="competition.jsp"> Competition </a> <!--
-<ul class="collapse navbar-collapse" >
                    <li ><a href="#" >Week of the Pic</a></li>
                    <li data-toggle="collapse" ><a href="#" >Month of the
Pic</a></li></ul> --></li>
                    <li><a href="ClientD.jsp" >Registration
/LOGIN</a></li>
                    <li><a href="contact.jsp" >Contact</a></li>
                </ul>
            </div>

        </div>
    </section>

```

```

<!-- Begin Help -->
<div class="jumbotron jumbotron-sm">
  <div class="container">
    <div class="row">
      <div class="col-sm-12 col-lg-12">
        <h1 class="h1">Contact us <small>Feel free to
contact us</small></h1>
        </div>
      </div>
    </div>
  </div>
  <div class="container">
    <div class="row">
      <div class="col-md-8">
        <div class="well well-sm">
          <form action="query" method="post">
            <div class="row">
              <div class="col-md-6">
                <div class="form-group">
                  <label for="name"> Name</label>
                  <input type="name" class="form-
control" id="name" placeholder="Enter name" required="required" />
                </div>
                <div class="form-group">
                  <label for="email">Email
Address</label>
                  <div class="input-group">
                    <span class="input-group-addon">
                      <span class="fa fa-
envelope"></span>
                    </span>
                    <input type="email" name="email"
class="form-control" id="email" placeholder="Enter email"
required="required" />
                  </div>
                </div>
                <div class="form-group">
                  <label for="subject">Subject</label>

```

```

<select id="subject" name="subject"
class="form-control" required="required">
    <option value="na"
selected="">Choose One:</option>
    <option value="service">General
Customer Service</option>
    <option
value="suggestions">Suggestions</option>
    <option value="product">Product
Support</option>
</select>
</div>
</div>
<div class="col-md-6">
    <div class="form-group">
        <label for="name">Message</label>
        <textarea name="message" id="message"
class="form-control" rows="9" cols="25" required="required"
placeholder="Message"></textarea>
    </div>
    </div>
    <div class="col-md-12">
        <button type="submit" class="btn btn-
primary pull-right" id="btnContactUs">Send Message</button>
    </div>
    </div>
    </form>
</div>
<div class="col-md-4">
    <form>
        <legend><span class="fa fa-globe"></span> Our
office</legend>
        <address>
            <strong>KNect Tourism</strong><br>
            5th Flore , Supoo Bhawan<br>
            Basant Bihar, New Delhi<br>
            <abbr title="Phone">P:</abbr>
            (+91) 8271237935
        </address>
        <address>

```

```
<strong>Email:</strong><br>
<a href="mailto:#"
style="color:#23527c;">knect_tourism@gmail.com</a>
</address>
</form>
</div>
</div>
</div>
```

```
<script src="js/jquery.js"></script>
<script src="js/bootstrap.min.js"></script>
</body>
</html>
```

```
*****editpr.jsp*****
*****
```

```
<!DOCTYPE html>
<html lang="en">
<head>
<title>Client | KNET TOURISM</title>

<link rel="stylesheet" href="css/client.css">
<link rel="stylesheet" href="css/bootstrap.min.css">
<meta name="viewport" content="width=device-width, initial-scale=1">
<link rel="stylesheet" href="css/mycs.css">
```

```
<%
if(session.getAttribute("mail")==null )
{
    response.sendRedirect("login.html");
}
String check=session.getAttribute("admin")+"";
if(check.equals("admin")){
    response.sendRedirect("Ahome.jsp");
}
```

```

%>

<link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.6.3/css/font-
awesome.min.css" rel="stylesheet" integrity="sha384-
T8Gy5hrqNKT+hzMclPo118YTQO6cYprQmhrYwLiQ/3axmI1hQomh7Ud2hPOy
8SP1" crossorigin="anonymous">
<style>
  table{
    border: 1px solid black;
  }

  table tr td{
    padding-left: 5px;
  }
  @media(max-width:1200px)and(min-width:990px){
    .page-header{ margin-top:84px;
      height:10px;}
  }

  @media(max-width:650px){
    #q2 {
      font-size:150%;

    }
    #f4{
      font-size: 100%;
    }
    #q3 {
      display: none;
    }
  }

  #settings div table th , tr td{
    font-size:15px;
  }

}

```

```

        }

    </style>

</head>
<body>



Welome to Knect Tourism


#### A Unit of Bihar Travel Agency


</div>
<div class="row">
<div class="col-md-12 ">

<ul class="dashboard-tabs" >

<li >
<a href="ClientD.jsp" class="btn disabled" title=" First CLick On Cancel " aria-controls="profile" role="tab" data-toggle="tab">
<span class="fa fa-home" id="q2" ></span>
<h4 id="q3">Home</h4>
</a>
</li>
<li>
<a href="ClientD.jsp" class="btn disabled" title=" First CLick On Cancel " aria-controls="statistics" role="tab" data-toggle="tab">
<span id="q2" class="fa fa-road"></span>
<h4 id="q3">Tour Package</h4>
</a>
</li>
<li>
<a href="ClientD.jsp" class="btn disabled" title=" First CLick On Cancel " aria-controls="donate" role="tab" data-toggle="tab">


```

```

        <span id="q2" class="fa fa-camera"></span>
        <h4 id="q3">Ur Photo</h4>
    </a>
</li>
<li class="active" style="padding-top: 10px;">
    <a href="ClientD.jsp" class="btn" aria-controls="settings" role="tab"
data-toggle="tab">
        <!--<span id="q2" class="fa fa-user"></span> --> 
        <h4 id="q3">Profile</h4>
    </a>
</li>
<li>
    <a href="logout" class="btn" aria-controls="help" role="tab" >
        <span id="q2" class="fa fa-power-off"></span>
        <h4 id="q3">Logout</h4>
    </a>
</li>
</ul>
</div>

```

```

<div role="tabpanel" class="tab-pane active" id="settings">

    <div class="hek" style=" font-size: 40px; ">
        <form action="editpro" method="post" enctype="multipart/form-
data">
            <table align="center" class="tb">
                <th colspan="2" style="text-align: center; font-family: Alexuss Heavy;
padding: 10px; background: black;color:white;"><u>Profile</u></th>

                <tr>
                    <td><b>User Name:</b> </td><td> <input style="width:95%;"
type="text" name="name" placeholder="<% =session.getAttribute("name")
%">"></td>
                </tr>
                <tr>
                    <td><b>Address:</b> </td><td> <input type="text"
style="width:95%;" name="address"
placeholder="<% =session.getAttribute("address") %>"></td>
                </tr>
                <tr>

```

```

<td><b>Gender: </b></td><td> <input type="text"
style="width:95%;" name="ling" placeholder=<%=session.getAttribute("ling")
%>"> </td>
</tr>

<tr>
<td><b>E-mail: </b></td><td> <%=session.getAttribute("mail")>
%></td>
</tr>

<tr>
<td><b>Photo: </b></td><td style="text-align: center;"> <input
style="width:95%;" name="image" type="file"></td>
</tr>
<tr >
<td colspan="2" style="text-align: center;"><button class="btn btn-
success" name="use" value="cancel" id="sb">Cancel</button> <button
class="btn btn-info" name="use" value="save" id="sb" >Save</button> </td>
</tr>

</table>
</form>
</div>

</div>
<!-- <div role="tabpanel" class="tab-pane help-pane" id="help">
<!-- End Help -- >
</div> -->
</div>
</div>
</div>

<script src="js/jquery.min.js"></script>
<script src="js/client.js"></script>
<script src="js/modal.js"></script>
<script src="js/bootstrap.min.js"></script>

<script src="js/jquery-2.1.1.min.js"></script>

</body>
</html>

```

```

*****
***** gallery.jsp *****
****

<%--
 Document : gallery
 Created on : 3 Jun, 2017, 12:53:06 PM
 Author   : Nitish Aryan
--%>




<% @page import="java.sql.ResultSet"%>
<% @page import="java.sql.Statement"%>
<% @page import="control.ConnectDB"%>
<% @page import="java.sql.Connection"%>
<% @page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
<title>Gallery</title>
<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/mycss.css">
<link rel="stylesheet" href="css/mycs.css">
<meta name="viewport" content="width=device-width, initial-scale=1">

</head>
<body style="background-color: grey;">

    <!-- Navigation section
=====
=>
<section class="navbar navbar-fixed-top q1" role="navigation"
style="position:relative;">
    <div class="container q3" >

        <div id="p1">
            <button class="navbar-toggle collapsed" data-
toggle="collapse" data-target=".navbar-collapse">

                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
            </button>
            <a href="index.html"> </a>
        </div>
        <div class="collapse navbar-collapse q2" >

```

```

<ul class="nav navbar-nav navbar-right">
    <li><a href="newsfeed.jsp" >News Feed</a></li>
    <li><a href="Package.jsp">Packages</a></li>
    <li><a href="gallery.jsp">Gallery</a></li>
    <li ><a href="competition.jsp"> Competition </a> <!--<ul
class="collapse navbar-collapse" >
        <li ><a href="#" >Week of the Pic</a></li>
        <li data-toggle="collapse" ><a href="#" >Month of the
Pic</a></li></ul> --></li>
        <li><a href="ClientD.jsp" >Registration /LOGIN</a></li>
        <li><a href="contact.jsp" >Contact</a></li>
    </ul>
</div>
</section>

```

```

<div class="row">
    <div class="col-lg-12">
        <h1 class="page-header" style="text-align: center; color:
white;">Gallery</h1>
        <%
            Connection con;
            con=ConnectDB.connect();
            Statement st=con.createStatement();
            String phl;
            ResultSet rs,rs1;
            rs=st.executeQuery("select * from gallery ");
            String p;
            Boolean b;int f;
            b=rs.next();
            do
            {

```

```

            %>
<div class="col-lg-3 col-md-4 col-xs-12 col-sm-6 thumb">
    <% f=rs.getInt("likes"); %>

```

```

<% p="image/gallery/"+rs.getString("Photo"); %>
<a class="thumbnail" href="#" data-image-
id=<%=rs.getString("PhotoId")%> data-toggle="modal" data-
title=<%=rs.getString("Description")%> data-caption=" Likes :<%=f%>" data-
image=<%=p%>" data-target="#image-gallery">

    <img class="img-responsive" src=<%=p%> alt="Short alt text">
</a>
</div>
<% }while(rs.next());%>
</div>

<div class="modal fade" id="image-gallery" tabindex="-1" role="dialog" aria-
labelledby="myModalLabel" aria-hidden="true">
    <div class="modal-dialog">
        <div class="modal-content">
            <div class="modal-header">
                <button type="button" class="close" data-dismiss="modal"><span aria-
hidden="true"></span><span class="sr-only">Close</span></button>
                <h4 class="modal-title" id="image-gallery-title"></h4>
            </div>
            <div class="modal-body">
                <img id="image-gallery-image" class="img-responsive" src="">
            </div>
            <div class="modal-footer">

                <div class="col-md-2">
                    <button type="button" class="btn btn-primary" id="show-previous-
image">Previous</button>
                </div>
                <div class="col-md-2" style="padding: 0px;">
                    
                </div>
                <div class="col-md-6 text-justify" id="image-gallery-caption">

                </div>

                <div class="col-md-2">
                    <button type="button" id="show-next-image" class="btn btn-
default">Next</button>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

<script src="js/jquery.js"></script>
<script src="js/bootstrap.min.js"></script>
<script src="js/modal.js"></script>
</body>
</html>

/***** newsfeed.jsp *****/
<%-- Document : newsfeed
   Created on : 3 Jun, 2017, 11:49:53 AM
   Author   : Nitish Aryan
--%>

<%@page import="java.sql.ResultSet"%>
<%@page import="java.sql.Statement"%>
<%@page import="control.ConnectDB"%>
<%@page import="java.sql.Connection"%>
<%@page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
  <head>
    <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
    <title>News Feed</title>
    <link rel="stylesheet" href="css/bootstrap.min.css">
    <link rel="stylesheet" href="css/mycss.css">
    <link rel="stylesheet" href="css/mycs.css">

    <link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.6.3/css/font-awesome.min.css" rel="stylesheet" integrity="sha384-T8Gy5hrqNKT+hzMclPo118YTQO6cYprQmhrYwLiQ/3axmI1hQomh7Ud2hPOy8SP1" crossorigin="anonymous">
    <meta name="viewport" content="width=device-width, initial-scale=1">
    <style>
      @media(max-width:640px){
        h1 a{
          font-size: 40%;
          word-break: break-all;
        }
      }
    </style>
  </head>
  <body>
    <div class="container">
      <h1>News Feed</h1>
      <table border="1">
        <thead>
          <tr>
            <th>Category</th>
            <th>Title</th>
            <th>Author</th>
            <th>Published Date</th>
          </tr>
        </thead>
        <tbody>
          <tr>
            <td>Technology</td>
            <td>Java Interview Questions</td>
            <td>Nitish Aryan</td>
            <td>3 Jun, 2017, 11:49:53 AM</td>
          </tr>
          <tr>
            <td>Technology</td>
            <td>Java Interview Questions</td>
            <td>Nitish Aryan</td>
            <td>3 Jun, 2017, 11:49:53 AM</td>
          </tr>
          <tr>
            <td>Technology</td>
            <td>Java Interview Questions</td>
            <td>Nitish Aryan</td>
            <td>3 Jun, 2017, 11:49:53 AM</td>
          </tr>
          <tr>
            <td>Technology</td>
            <td>Java Interview Questions</td>
            <td>Nitish Aryan</td>
            <td>3 Jun, 2017, 11:49:53 AM</td>
          </tr>
        </tbody>
      </table>
    </div>
  </body>
</html>

```

```

}

}h1 a:hover{
    text-decoration: none;
}

</style>

</head>
<body style="background-color: grey;">

    <!-- Navigation section
=====
<section class="navbar navbar-fixed-top q1" role="navigation"
style="position:relative;">
    <div class="container q3" >

        <div id="p1">
            <button class="navbar-toggle collapsed" data-
toggle="collapse" data-target=".navbar-collapse">

                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
            </button>
            <a href="index.html"> </a>
            </div>
            <div class="collapse navbar-collapse q2" >
                <ul class="nav navbar-nav navbar-right">

                    <li><a href="newsfeed.jsp" >News Feed</a></li>
                    <li><a href="Package.jsp">Packages</a></li>
                    <li><a href="gallery.jsp">Gallery</a></li>
                    <li ><a href="competition.jsp"> Competition </a> <!--<ul
class="collapse navbar-collapse" >
                        <li ><a href="#" >Week of the Pic</a></li>
                        <li data-toggle="collapse" ><a href="#" >Month of the
Pic</a></li></ul> --></li>
                    <li><a href="ClientD.jsp" >Registration /LOGIN</a></li>

```

```

<li><a href="contact.jsp" >Contact</a></li>
    </ul>
</div>

</div>
</section>



# News Feed


```

```

</div>
<% }while(rs.next());%>

</div>

</div>

</div>

<script src="js/jquery.js"></script>
<script src="js/bootstrap.min.js"></script>

</body>
</html>
/*********************************************************
***** packaged.jsp *****
*********************************************************/
<%--
 Document : packaged
 Created on : 3 Jun, 2017, 2:13:47 PM
 Author   : Nitish Aryan
--%>

<%@page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
<title>Package Detail</title>

<link href="https://maxcdn.bootstrapcdn.com/font-awesome/4.6.3/css/font-awesome.min.css" rel="stylesheet" integrity="sha384-T8Gy5hrqNKT+hzMclPo118YTQO6cYprQmhrYwLiQ/3axmI1hQomh7Ud2hPOy8SP1" crossorigin="anonymous">

<link rel="stylesheet" href="css/mycss3.css">
<link rel="stylesheet" href="css/bootstrap.min.css">
<link rel="stylesheet" href="css/mycss.css">

<meta name="viewport" content="width=device-width, initial-scale=1">

<style>
    @media(max-width:700px)

```

```

{
    table tr td h3 , h4 ,h1{
        font-size: 100%;
    }
    #v5{
        font-size: 80%;
    }
}

</style>

</head>
<body style="background-color: grey;">

    <!-- Navigation section
=====
-->
<section class="navbar navbar-fixed-top q1" role="navigation"
style="position:relative;">
    <div class="container q3" >

        <div id="p1">
            <button class="navbar-toggle collapsed" data-
toggle="collapse" data-target=".navbar-collapse">

                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
                <span class="icon icon-bar"></span>
            </button>
            <a href="index.html"> </a>
            </div>
            <div class="collapse navbar-collapse q2" >
                <ul class="nav navbar-nav navbar-right">

                    <li><a href="newsfeed.jsp" >News Feed</a></li>
                    <li><a href="Package.jsp">Packages</a></li>
                    <li><a href="gallery.jsp">Gallery</a></li>
                    <li ><a href="competition.jsp"> Competition </a> <!--<ul
class="collapse navbar-collapse" >
                        <li ><a href="#" >Week of the Pic</a></li>
                        <li data-toggle="collapse" ><a href="#" >Month of the
Pic</a></li></ul> --></li>
                    <li><a href="ClientD.jsp" >Registration /LOGIN</a></li>

```

```

<li><a href="contact.jsp" >Contact</a></li>
    </ul>
</div>

</div>
</section>

<section class="jk-slider" style="margin-top: -20px; border: 3px solid
rgb(36,36,36);">
    <div id="carousel-example " class="carousel slide" data-ride="carousel" >
        <ol class="carousel-indicators">
            <li data-target="#carousel-example" data-slide-to="0" class="active"></li>
            <li data-target="#carousel-example" data-slide-to="1"></li>
            <li data-target="#carousel-example" data-slide-to="2"></li>
        </ol>

        <div class="carousel-inner">

            <div class="item active">
                <div class="hero">

                    </div>
                    <div class="overlay"></div>
                    <a href="#"></a>

                </div>
                <div class="item">
                    <div class="hero">

                        </div>
                    </div>
                    <div class="overlay"></div>
                    <a href="#"></a>

                </div>
                <div class="item">
                    <div class="hero">

                        </div>
                        <div class="overlay"></div>
                        <a href="#"></a>

                    </div>
                </div>
            </div>
        </div>
    </div>
</section>

```

```

</div>
</div>

</div>
</section>

<div class="container" >
    <table style="text-align: center; margin-bottom: 10px;">
        <tr>
            <td colspan="2"><h3>Destination Tour:</h3></td><td> <h1>
Rajgir</h1> </td> </tr>
            <tr><td colspan="2"> <h3>About:</h3></td> <td><h4 id="v5"> Lorem
Ipsum is simply dummy text of the printing and typesetting industry. Lorem Ipsum
has been the industry's standard dummy text ever since the 1500s, when an
unknown printer took a galley of type and scrambled it to make a type specimen
book. It has survived not only five centuries, but also the leap into electronic
typesetting, remaining essentially unchanged</h4>
            </td ></tr><tr><td colspan="2"><h3>Day Of Tour:</h3></td> <td>
<h4> 3</h4> </td></tr>
            <tr><td colspan="2"> <h3>Date Of Journey:</h3></td><td> <h4>
12/07/2015</h4></td></tr>
            <tr> <td colspan="2"> <h3>No. Of Available Person:</h3></td>
<td><h4> 93(Hurry Up!!)</h4></td></tr>
            <tr><td colspan="2"> <h3>Tour Price: </h3></td><td> <h4> 1700 /-
</h4> </td></tr>
            <tr><td colspan="2"> <h3>Car Rent: </h3></td><td> <h4>
2500</h4></td></tr>
            <tr><td colspan="2"> <h3>Bus Rent: </h3></td><td> <h4>
1500</h4></td></tr>
            <tr><td colspan="3"> <a href="book.jsp"> <button class="btn btn-
success" style="width:60%;"> Book Now</button></a></td></tr>
        </table>
    </div>

    <script src="js/jquery.js"></script>
    <script src="js/bootstrap.min.js"></script>
</body>
</html>

```

Coding of Servlet (Back-end)

```

***** AGallery.java *****

/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import static control.ConnectDB.Con;
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.InputStream;
import java.io.OutputStream;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.sql.Statement;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.servlet.RequestDispatcher;
import javax.servlet.ServletException;
import javax.servlet.annotation.MultipartConfig;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;
import javax.servlet.http.Part;

/**
 *
 * @author Nitish Aryan
 */
@MultipartConfig(fileSizeThreshold = 1024 * 1024 * 10, maxFileSize =
1024 * 1024 * 50, maxRequestSize = 1024 * 1024 * 100)
public class AGallery extends HttpServlet {

```

```

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
        throws ServletException, IOException {
    response.sendRedirect("ClientD.jsp");

}

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click
on the + sign on the left to edit the code.">
/**
 * Handles the HTTP <code>GET</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doGet(HttpServletRequest request, HttpServletResponse
response)
    throws ServletException, IOException {
    processRequest(request, response);
}

private static final long serialVersionUID = 1L;
private String getFileName(Part part) {
final String partHeader = part.getHeader("content-disposition");
System.out.println("***** partHeader: " + partHeader);
for (String content : part.getHeader("content-disposition").split(";")) {
if (content.trim().startsWith("filename")) {
return content.substring(content.indexOf('=') + 1).trim()
.replace("\\"", "");
}
}

```

```

}
}

return null;
}

/**
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doPost(HttpServletRequest request, HttpServletResponse
response)
    throws ServletException, IOException {

    response.setContentType("text/html");
    PrintWriter out = response.getWriter();
    HttpSession session=request.getSession();

    Connection con=null;
    String s1=null,s2=null,s3=null,s4=null,s5=null,s6;
    InputStream inputStream = null;
    OutputStream outputStream = null;
    try {
        con=ConnectDB.connect();

        PreparedStatement ps=con.prepareStatement("insert into gallery set
PhotoId=?, Photo=?,likes=?,Email=?,Description=?");

        s2=request.getParameter("des");

        s4="0";

        String imageName=null;
        /* out.println("dfs 1st5      55555:"+ s1);*/
        Part filePart = request.getPart("image");
        /* out.println("dfs 1st5558888888888888888555:"+ s1);*/
        imageName = getFileName(filePart);
}

```

```

s3=imageName;

String basePath = "E:\\net\\tourism\\web\\image\\gallery\\";

File outputFilePath = new File(basePath + imageName);

    inputStream = filePart.getInputStream();
    outputStream = new FileOutputStream(outputFilePath);

    int read = 0;
    final byte[] bytes = new byte[1024];
    while ((read = inputStream.read(bytes)) != -1) {
        outputStream.write(bytes, 0, read);

    }

}

s1=imageName;
s3=(String) session.getAttribute("mail");

int z=1;
Statement st=Con.createStatement();
ResultSet rs=st.executeQuery("SELECT S_no FROM gallery
WHERE S_no = ( SELECT MAX(S_no) FROM registration)");
while(rs.next()) {

z=rs.getInt("S_no")+z;

}

s5=s1+"_"+s3+z;

ps.setString(1, s5);
ps.setString(2, s1);

ps.setLong(3, Long.parseLong(s4));
ps.setString(4, s3);

ps.setString(5, s2);

ps.execute();

```

```

RequestDispatcher rd=request.getRequestDispatcher("ClientD.jsp");
rd.include(request, response);

        out.println("<html>\n" +
"<body>\n" +
"<script type=\"text/javascript\">\n" +
"alert(\"Your Photo Added Successfully...\" );\n" +
"</script>\n" +
"</body>\n" +
"</html>");

    } catch (ClassNotFoundException ex) {
        Logger.getLogger(AGallery.class.getName()).log(Level.SEVERE,
null, ex);
    } catch (SQLException ex) {
        Logger.getLogger(AGallery.class.getName()).log(Level.SEVERE,
null, ex);
    }
}

/**
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}
***** Adelete.jsp *****
***** ***** */

```

```

/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

/**
 *
 * @author Nitish Aryan
 */
public class Adelete extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
        throws ServletException, IOException {
        response.setContentType("text/html;charset=UTF-8");
        try (PrintWriter out = response.getWriter()) {
            /* TODO output your page here. You may use following sample
code. */
            out.println("<!DOCTYPE html>");

```

```

        out.println("<html>");
        out.println("<head>");
        out.println("<title>Servlet Adelete</title>");
        out.println("</head>");
        out.println("<body>");
        out.println("<h1>Servlet Adelete at " + request.getContextPath() +
"</h1>");
        out.println("</body>");
        out.println("</html>");
    }

}

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click
on the + sign on the left to edit the code.">
/***
 * Handles the HTTP <code>GET</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doGet(HttpServletRequest request, HttpServletResponse
response)
    throws ServletException, IOException {

    PrintWriter out=response.getWriter();
    Connection con;

    try {
        con=ConnectDB.connect();

        PreparedStatement ps=con.prepareStatement("delete from book
where TransactionID=?");

        ps.setString(1,request.getParameter("check"));

        ps.executeUpdate();
        response.sendRedirect("Aorder.jsp");

    } catch (Exception ex) {
        Logger.getLogger(delete.class.getName()).log(Level.SEVERE, null,
ex);
    }
}

```

```

        }

    }

/***
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doPost(HttpServletRequest request, HttpServletResponse
response)
        throws ServletException, IOException {

    PrintWriter out=response.getWriter();
    Connection con;

    try {
        con=ConnectDB.connect();

        PreparedStatement ps=con.prepareStatement("delete from
registration where Email=?");

        ps.setString(1,request.getParameter("check"));

        ps.executeUpdate();
        response.sendRedirect("ListProfile.jsp");

    } catch (Exception ex) {
        Logger.getLogger(delete.class.getName()).log(Level.SEVERE, null,
ex);
    }

}

/***
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description

```

```

/*
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}

*****
***** ConnectDB.java *****
*****



package control;

import static java.lang.Character.UnicodeBlock.forName;
import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.SQLException;

/*
 * To change this license header, choose License Headers in Project Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
/**
 *
 * @author Nitish Aryan
 */
public class ConnectDB {
    static Connection Con;
    public static Connection connect() throws ClassNotFoundException{
        try{
            Class.forName("com.mysql.jdbc.Driver");
            Con=DriverManager.getConnection("jdbc:mysql://localhost:3306/tourism","root","");
            System.out.println("Done");
        }
        catch(SQLException ex){
            System.out.println(ex);
        }
    }
}

```

```

        }
        return Con;
    }
    public static void main(String...s) throws ClassNotFoundException
    {
        connect();
    }

}

/*****
***** addp.java *****
****/



/*
 * To change this license header, choose License Headers in Project Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.InputStream;
import java.io.OutputStream;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import javax.servlet.DispatcherType;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;
import javax.servlet.http.Part;

/**
 *
 * @author Nitish Aryan
 */
public class addp extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>

```

```

* methods.
*
* @param request servlet request
* @param response servlet response
* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
    throws ServletException, IOException {
    response.sendRedirect("AddPackage.jsp");
}
private static final long serialVersionUID = 1L;
// <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click on
the + sign on the left to edit the code.">
/**
 * Handles the HTTP <code>GET</code> method.
 *
* @param request servlet request
* @param response servlet response
* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
@Override
protected void doGet(HttpServletRequest request, HttpServletResponse
response)
    throws ServletException, IOException {
    processRequest(request, response);
}

private String getFileName(Part part) {
final String partHeader = part.getHeader("content-disposition");
System.out.println("***** partHeader: " + partHeader);
for (String content : part.getHeader("content-disposition").split(";")) {
if (content.trim().startsWith("filename")) {
return content.substring(content.indexOf('=') + 1).trim()
.replace("\"", "");
}
}
return null;
}

/**
 * Handles the HTTP <code>POST</code> method.
 *
* @param request servlet request
* @param response servlet response

```

```

* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
@Override
protected void doPost(HttpServletRequest req, HttpServletResponse res)
    throws ServletException, IOException {

    HttpSession session=req.getSession();
    res.setContentType("text/html;charset=UTF-8");
    System.out.println("scdsv");
    PrintWriter out=res.getWriter();
    System.out.println("scdsv");

    try{

        Connection Con= ConnectDB.connect();
        out.println("dfs 12222st555555:");
        PreparedStatement ps=Con.prepareStatement("insert into
addp(tourname,tourid,day,date,tprice,hrent,crent,brent,seat,source,p1,p2,p3,about)
value(?,?,?,?,?,?,?,?,?,?,?,?,?,?)");

        ps.setString(1, req.getParameter("name"));

        out.println("dfs 12222st555555:"+req.getParameter("name"));
        ps.setString(2, req.getParameter("idk"));
        String s5=req.getParameter("idk");
        out.println("dfs sdvvsd:"+ s5 );

        out.println("dfs 6565595959599:"+ s5 );
        s5=req.getParameter("dayy");

        out.println("dfs sdvvsd:" +s5);
        ps.setLong(3, Long.parseLong(s5));
        out.println("dfs iiiiiiiiiiiii:");
        ps.setString(4,req.getParameter("date"));
        ps.setInt(5,Integer.parseInt(req.getParameter("trent")));
        ps.setInt(6,Integer.parseInt(req.getParameter("hrent")));
        ps.setInt(7,Integer.parseInt(req.getParameter("crent")));
        ps.setInt(8,Integer.parseInt(req.getParameter("brent")));
        out.println("dfs jhghj:");

        ps.setInt(9,Integer.parseInt(req.getParameter("seat")));
        out.println("dfs kjhkhgj:");
        ps.setString(10,"source");
        String s4;

        String imageName=null;
    }
}

```

```
InputStream inputStream = null;
    OutputStream outputStream = null;
Part filePart = req.getPart("p1");

    imageName = getFileName(filePart);

s4=imageName;

out.println("dfs 12222st555555:");

String basePath = "E:\\net\\tourism\\web\\image\\";

File outputFilePath = new File(basePath + imageName);
out.println("dfs 1st555555:");
    inputStream = filePart.getInputStream();
    outputStream = new FileOutputStream(outputFilePath);

    int read = 0;
    byte[] bytes = new byte[1024];
    while ((read = inputStream.read(bytes)) != -1) {
        outputStream.write(bytes, 0, read);
    }

s4=imageName;

ps.setString(11,s4);

filePart = req.getPart("p2");

imageName = getFileName(filePart);

s4=imageName;

out.println("dfs 12222st555555:");

basePath = "E:\\net\\tourism\\web\\image\\";
```

```

outputFilePath = new File(basePath + imageName);
out.println("dfs 1st555555:");
    inputStream = filePart.getInputStream();
    outputStream = new FileOutputStream(outputFilePath);

    read = 0;
    bytes = new byte[1024];
    while ((read = inputStream.read(bytes)) != -1) {
        outputStream.write(bytes, 0, read);
    }

s4=imageName;

ps.setString(12,s4);

filePart = req.getPart("p3");

imageName = getFileName(filePart);

s4=imageName;

out.println("dfs 12222st555555:");
basePath = "E:\\net\\tourism\\web\\image\\";

outputFilePath = new File(basePath + imageName);
out.println("dfs 1st555555:");
    inputStream = filePart.getInputStream();
    outputStream = new FileOutputStream(outputFilePath);

    read = 0;
    bytes = new byte[1024];
    while ((read = inputStream.read(bytes)) != -1) {
        outputStream.write(bytes, 0, read);
    }

s4=imageName;

```

```

ps.setString(13,s4);
ps.setString(14,req.getParameter("about"));

ps.execute();
RequestDispatcher rd=req.getRequestDispatcher("AddPackage.jsp");
rd.include(req, res);

out.println("<html>\n" +
"<body>\n" +
"<script>\n" +
"alert(\"Your Have added tour Successfully. \");\n" +
"</script>\n" +
"</body>\n" +
"</html>");

}

catch(Exception e)
{
    System.out.println(e);
}

}

/***
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}
***** booking.java *****
***** /*****

```

```

/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import static control.ConnectDB.Con;
import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.Statement;
import javax.servlet.RequestDispatcher;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

/**
 *
 * @author Nitish Aryan
 */
public class booking extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
        throws ServletException, IOException {
        response.sendRedirect("book.jsp");
    }
}

```

```

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click
on the + sign on the left to edit the code.">
/**
 * Handles the HTTP <code>GET</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doGet(HttpServletRequest req, HttpServletResponse res)
    throws ServletException, IOException {
    res.setContentType("text/html;charset=UTF-8");
    System.out.println("scdsv");
    PrintWriter out=res.getWriter();
    RequestDispatcher rd=req.getRequestDispatcher("book.jsp");
    rd.include(req, res);

    out.println("<html>\n" +
    "<body>\n" +
    "<script>\n" +
    "alert(\"Sorry Booking Available. \\\n Kindly request Book Next Time.\");\n"
    +
    "</script>\n" +
    "</body>\n" +
    "</html>");

}

/** 
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doPost(HttpServletRequest req, HttpServletResponse res)
    throws ServletException, IOException {

```

```

res.setContentType("text/html;charset=UTF-8");
System.out.println("scdsv");
PrintWriter out=res.getWriter();
System.out.println("scdsv");

try{

Connection Con= ConnectDB.connect();

PreparedStatement ps=Con.prepareStatement("insert into
book(Name,Address,Mobile,Email,Persons,date,Destination,Tourrent,Hotelr
ent,Cabrent,Busrent,query,TransactionID,Amount)
value(?,?,?,?,?,?,?,?,?,?,?,?,?,?)");

ps.setString(1, req.getParameter("name"));

ps.setString(2, req.getParameter("address"));
ps.setLong(3, Long.parseLong(req.getParameter("mobile")));

ps.setString(4,req.getParameter("email"));
ps.setString(5,req.getParameter("date"));
int k5;
k5=Integer.parseInt(req.getParameter("person"));
ps.setInt(6,k5);
String f=req.getParameter("destination") ,f2=null,f3,f4,f5,f6;
f3=req.getParameter("trent");
f4=req.getParameter("hrent");
f5=req.getParameter("crent");
f6=req.getParameter("brent");
int i1=0,i2=0,i3=0,i4=0,total=0,p=0,u=0;
Statement st=Con.createStatement();
ResultSet rs=st.executeQuery("SELECT * FROM addpac WHERE
TourName = "+f+"");
while(rs.next()) {

f2=rs.getString("TourID");
i1=rs.getInt("trent");
i2=rs.getInt("hrent");
i3=rs.getInt("crent");
i4=rs.getInt("brent");
p=rs.getInt("person");
}
}

```

```

}
f2=f2+k5+p;
u=p-k5;
if(l==1){
    Connection Con1=null;
    PreparedStatement ps1=Con1.prepareStatement("update addp set
person=? where TourID=?");
    ps1.setInt(1,u );
    ps1.setString(2,f );
    ps1.executeUpdate();

}
if(p==0)
{
    doGet(req, res);

}

if(f3.equals("yes"))
{
    total=total+i1;
}
if(f4.equals("yes"))
{
    total=total+i2;
}
if(f5.equals("yes"))
{
    total=total+i3;
}
if(f6.equals("yes"))
{
    total=total+i4;
}
ps.setString(7,f);
ps.setInt(8,i1);
ps.setInt(9,i2);
ps.setInt(10,i3);
ps.setInt(11,i4);
ps.setString(12,req.getParameter("query"));

```

```

ps.setString(13,f2);

total=total*k5;
ps.setInt(14,total);

ps.execute();
if(p!=0){
RequestDispatcher rd=req.getRequestDispatcher("book.jsp");
rd.include(req, res);

out.println("<html>\n" +
"<body>\n" +
"<script>\n" +
"alert(\"Your Booking is Successfully and \\\n Your TransactionID <b>" +
"+f2+"</b> and Amount is <b>" +total+" </b> \");\n" +
"</script>\n" +
"</body>\n" +
"</html>");

}

}

catch(Exception e)
{
System.out.println(e);
}

}

/***
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

```

```

}

 *****
***** delete.java *****
****/



/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.Statement;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;

/**
 *
 * @author Nitish Aryan
 */
public class delete extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response

```

```

* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
    throws ServletException, IOException {
    response.setContentType("text/html;charset=UTF-8");

}

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click
on the + sign on the left to edit the code.">
/**
 * Handles the HTTP <code>GET</code> method.
*
* @param request servlet request
* @param response servlet response
* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
@Override
protected void doGet(HttpServletRequest request, HttpServletResponse
response)
    throws ServletException, IOException {
    PrintWriter out=response.getWriter();
    Connection con;

    try {
        con=ConnectDB.connect();

        PreparedStatement ps=con.prepareStatement("delete from gallery
where PhotoId=?");

        ps.setString(1,request.getParameter("check"));

        ps.executeUpdate();
        response.sendRedirect("ClientD.jsp");

    } catch (Exception ex) {
        Logger.getLogger(delete.class.getName()).log(Level.SEVERE, null,
ex);
    }
}

```

```

    /**
     * Handles the HTTP <code>POST</code> method.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    @Override
    protected void doPost(HttpServletRequest request, HttpServletResponse
response)
        throws ServletException, IOException {

    PrintWriter out=response.getWriter();
    Connection con,conn;

    HttpSession session=request.getSession();

    try {
        con=ConnectDB.connect();

        PreparedStatement ps=con.prepareStatement("delete from book
where TransactionID=?");
        String f5=null;int e5=0;
        f5=request.getParameter("check");
        {
            Statement stt3=con.createStatement();
            ResultSet rss=stt3.executeQuery("select Persons from book
Where TransactionID=?");
            Boolean stt=rss.next();
            e5=rss.getInt("Persons");

        }
        ps.setString(1,f5);

        if(1==1){
            conn=ConnectDB.connect();
            PreparedStatement ps1=conn.prepareStatement("update addp set
Persons=? ");

```

```
Statement stt31=conn.createStatement();
ResultSet rss1=stt31.executeQuery("select Persons from addp ");
Boolean stt=rss1.next();
e5=e5+ rss1.getInt("Persons");

ps1.setInt(1, e5);

ps1.executeUpdate();

}

ps.executeUpdate();

} catch (Exception ex) {
Logger.getLogger(delete.class.getName()).log(Level.SEVERE, null,
ex);
}

}

/**
```

```

* Returns a short description of the servlet.
*
* @return a String containing servlet description
*/
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}

/********************* deletec.java *****/
/********************* deletec.java *****/
/********************* deletec.java *****/

/*
* To change this license header, choose License Headers in Project
Properties.
* To change this template file, choose Tools | Templates
* and open the template in the editor.
*/
package control;

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

/**
*
* @author Nitish Aryan
*/
public class deletec extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.

```

```

*
* @param request servlet request
* @param response servlet response
* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
    throws ServletException, IOException {
    response.setContentType("text/html;charset=UTF-8");
    try (PrintWriter out = response.getWriter()) {
        /* TODO output your page here. You may use following sample
code. */
        out.println("<!DOCTYPE html>");
        out.println("<html>");
        out.println("<head>");
        out.println("<title>Servlet deletec</title>");
        out.println("</head>");
        out.println("<body>");
        out.println("<h1>Servlet deletec at " + request.getContextPath() +
"</h1>");
        out.println("</body>");
        out.println("</html>");
    }
}

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click
on the + sign on the left to edit the code.">
/** 
 * Handles the HTTP <code>GET</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doGet(HttpServletRequest request, HttpServletResponse
response)
    throws ServletException, IOException {
    PrintWriter out=response.getWriter();
    Connection con;
}

```

```

try {
    con=ConnectDB.connect();

    PreparedStatement ps=con.prepareStatement("delete from potw
where PhotoId=?");

    ps.setString(1,request.getParameter("check"));

    ps.executeUpdate();
    response.sendRedirect("POTW.jsp");

} catch (Exception ex) {
    Logger.getLogger(delete.class.getName()).log(Level.SEVERE, null,
ex);
}

}

/***
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doPost(HttpServletRequest request, HttpServletResponse
response)
    throws ServletException, IOException {
    PrintWriter out=response.getWriter();
    Connection con;

    try {
        con=ConnectDB.connect();

        PreparedStatement ps=con.prepareStatement("delete from query
where Date=?");

        ps.setString(1,request.getParameter("check"));

        ps.executeUpdate();

```

```
        response.sendRedirect("Query.jsp");

    } catch (Exception ex) {
        Logger.getLogger(delete.class.getName()).log(Level.SEVERE, null,
ex);
    }

}

/***
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}

/********************* editpro.java ********************/
/********************* /****************************/
```

```
package control;

/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
```

```
import java.io.File;
import java.io.FileOutputStream;
import java.io.IOException;
import java.io.InputStream;
import java.io.OutputStream;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.util.logging.Level;
```

```

import java.util.logging.Logger;
import javax.servlet.ServletException;
import javax.servlet.annotation.MultipartConfig;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;
import javax.servlet.http.Part;

import java.sql.SQLException;

/**
 *
 * @author Nitish Aryan
 */
@MultipartConfig(fileSizeThreshold = 1024 * 1024 * 10, maxFileSize =
1024 * 1024 * 50, maxRequestSize = 1024 * 1024 * 100)
public class editpro extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
        throws ServletException, IOException {

    }

    // <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click
on the + sign on the left to edit the code.">
    /**
     * Handles the HTTP <code>GET</code> method.
     *

```

```

* @param request servlet request
* @param response servlet response
* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
private static final long serialVersionUID = 1L;
@Override
public void doGet(HttpServletRequest request, HttpServletResponse
response)
throws ServletException, IOException {

}

private String getFileName(Part part) {
final String partHeader = part.getHeader("content-disposition");
System.out.println("***** partHeader: " + partHeader);
for (String content : part.getHeader("content-disposition").split(";")) {
if (content.trim().startsWith("filename")) {
return content.substring(content.indexOf('=') + 1).trim()
.replace("\\\"", "");
}
}
return null;
}

/**
* Handles the HTTP <code>POST</code> method.
*
* @param request servlet request
* @param response servlet response
* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
@Override
protected void doPost(HttpServletRequest request, HttpServletResponse
response)
throws ServletException, IOException {
String s=request.getParameter("use");
response.setContentType("text/html");
PrintWriter out = response.getWriter();
HttpSession session=request.getSession();

Connection con=null;

```

```

String s1=null,s2=null,s3=null,s4=null,s5=null,s6;
InputStream inputStream = null;
    OutputStream outputStream = null;
    if(s.equals("save")){
try {
    con=ConnectDB.connect();

    PreparedStatement ps=con.prepareStatement("update registration set
name=? ,gender=? ,Address=? ,photo=? where Email=?");

    s1=request.getParameter("name");
    s2=request.getParameter("ling");

    if(s1.equals ""){
        s1=(String) session.getAttribute("name");
    }

    if(s2.equals ""){
        s2=(String) session.getAttribute("ling");
    }
    out.println("dfs 22nd:"+ s2);

    ps.setString(1, s1);

    s3=request.getParameter("address");

    out.println("dfs 1st:"+ s1);
    if(s3.equals ""){
        s3=(String) session.getAttribute("address");
    }
    ps.setString(2,s2);

    ps.setString(3, s3);

    String imageName=null;
    out.println("dfs 1st5      55555:"+ s1);
    Part filePart = request.getPart("image");
    out.println("dfs 1st5558888888888888888555:"+ s1);
        imageName = getFileName(filePart);
    out.println("dfs 1st5555599999999999555555:"+ s1);

```

```

s4=imageName;
if(s4.equals("")){
    imageName=(String) session.getAttribute("pic");
}
else{

    out.println("dfs 12222st555555:"+ s1);

    String basePath = "E:\\net\\tourism\\web\\image\\";

    File outputFilePath = new File(basePath + imageName);
out.println("dfs 1st555555:"+ s1);
    inputStream = filePart.getInputStream();
    outputStream = new FileOutputStream(outputFilePath);

    int read = 0;
    final byte[] bytes = new byte[1024];
    while ((read = inputStream.read(bytes)) != -1) {
        outputStream.write(bytes, 0, read);
    }

}

s4=imageName;
out.println("dfs56:"+ s3);
out.println("dfffffffffffffllllllllllllllllllllllllllllll");

ps.setString(4, s4);
out.println("5555");
ps.setString(5, (String) session.getAttribute("mail"));
out.println("9999999");
ps.executeUpdate();

String s8=(String) session.getAttribute("admin")+"";
session.setAttribute("name", s1);
session.setAttribute("address", s3);
session.setAttribute("ling", s2);

session.setAttribute("pic", s4);

```

```

if(s8.equals("admin")){response.sendRedirect("AProfile.jsp");}else{
    response.sendRedirect("ClientD.jsp");}
}

    } catch (ClassNotFoundException | SQLException | IOException ex)
{
    Logger.getLogger(editpro.class.getName()).log(Level.SEVERE,
null, ex);
}

    finally {
if (outputStream != null) {
outputStream.close();
}
if (inputStream != null) {
inputStream.close();
}
}
}

    else{
        response.sendRedirect("ClientD.jsp");
}
}

}

    /**
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}

***** logout.java *****

```

```
*****
```

```
/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import java.io.IOException;
import java.io.PrintWriter;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;

/**
 *
 * @author Nitish Aryan
 */
public class logout extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
        throws ServletException, IOException {
    response.setContentType("text/html;charset=UTF-8");

        HttpSession session=request.getSession();
    session.invalidate();
    response.sendRedirect("index.html");
}

}
```

```

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click
on the + sign on the left to edit the code.">
    /**
     * Handles the HTTP <code>GET</code> method.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    @Override
    protected void doGet(HttpServletRequest request, HttpServletResponse
response)
        throws ServletException, IOException {
        processRequest(request, response);
    }

    /**
     * Handles the HTTP <code>POST</code> method.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    @Override
    protected void doPost(HttpServletRequest request, HttpServletResponse
response)
        throws ServletException, IOException {
        processRequest(request, response);
    }

    @Override
    public String getServletInfo() {
        return "Short description";
    } // </editor-fold>

}

***** match.java *****

```

```
*****/
```

```
/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.ResultSet;
import java.sql.Statement;
import javax.servlet.RequestDispatcher;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;

/**
 *
 * @author Nitish Aryan
 */
public class match extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
        throws ServletException, IOException {
        response.sendRedirect("login.html");
    }
}
```

```

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods. Click
on the + sign on the left to edit the code.">
/*
 * Handles the HTTP <code>GET</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doGet(HttpServletRequest request, HttpServletResponse
response)
    throws ServletException, IOException {
    processRequest(request, response);
}

/*
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doPost(HttpServletRequest req, HttpServletResponse res)
    throws ServletException, IOException {

    res.setContentType("text/html");
    PrintWriter pw=res.getWriter();
    try{

        Connection Con= ConnectDB.connect();
        String q,w,e,r,t,y,u,b,log,ph;
        Long n;
        q=req.getParameter("email");
        w=req.getParameter("password");
        Statement st=Con.createStatement();
        ResultSet ty=st.executeQuery("SELECT * from registration ");
        HttpSession session=req.getSession();
        while(ty.next())

```

```

{
    e=ty.getString("Email");
    r=ty.getString("password");
    t=ty.getString("name");
    y=ty.getString("Address");
    u=ty.getString("gender");

    log=ty.getString("log");
    ph=ty.getString("photo");
    if((q.equals(e ))&& (w.equals(r)))
    {
        session.setAttribute("mail", e);
        session.setAttribute("name", t);
        session.setAttribute("address", y);
        session.setAttribute("ling", u);

        session.setAttribute("pic",ph);
        session.setAttribute("admin", log);

        if(log.equals("admin")){
            res.sendRedirect("Ahome.jsp");}else{res.sendRedirect("ClientD.jsp");}
    }
}

RequestDispatcher rd=req.getRequestDispatcher("login.html");
rd.include(req, res);

pw.println("<html>\n" +
"<body>\n" +
"    <script type=\"text/javascript\">\n" +
"        alert(\"Your Email Id or Password Invalid.\");\n" +
"    </script>\n" +
"</body>\n" +
"</html>");

}catch(Exception e)
{
}

```

```

}

/**
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}

/*****************
***** query.java *****
*****************/
/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.text.SimpleDateFormat;
import java.util.Date;

```

```

import javax.servlet.RequestDispatcher;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

/**
 *
 * @author Nitish Aryan
 */
public class query extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
        HttpServletResponse response)
        throws ServletException, IOException {

        response.sendRedirect("contact.jsp");
    }

    // <editor-fold defaultstate="collapsed" desc="HttpServlet methods.
    Click on the + sign on the left to edit the code.">
    /**
     * Handles the HTTP <code>GET</code> method.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    @Override

```

```

protected void doGet(HttpServletRequest request,
HttpServletResponse response)
    throws ServletException, IOException {
    processRequest(request, response);
}

/**
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doPost(HttpServletRequest req, HttpServletResponse
res)
    throws ServletException, IOException {

    res.setContentType("text/html;charset=UTF-8");
    System.out.println("scdsv");
    PrintWriter out=res.getWriter();
    System.out.println("scdsv");

    try{
        Connection Con= ConnectDB.connect();

        PreparedStatement ps=Con.prepareStatement("insert into
query(Name,Email,Subject,Message,Date) value(?,?,?,?,?)");

        ps.setString(1, req.getParameter("name"));

        ps.setString(2, req.getParameter("email"));
        ps.setString(3, req.getParameter("subject"));

        ps.setString(4,req.getParameter("message"));
        Date now = new Date();
        SimpleDateFormat ft = new SimpleDateFormat
("dd/MM/yyyy");

```

```

ps.setString(5, (String)ft.format(now));

ps.execute();
RequestDispatcher rd=req.getRequestDispatcher("contact.jsp");
rd.include(req, res);

        out.println("<html>\n" +
"<body>\n" +
"<script>\n" +
"alert(\"Your query have send Successfully. \\\n Please wait for
respond.\");\n" +
"</script>\n" +
"</body>\n" +
"</html>");

    }

catch(Exception e)
{
    System.out.println(e);
}

}

/***
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}

```

```
*****  
***** refresh.java *****  
*****  
/*  
 * To change this license header, choose License Headers in Project  
Properties.  
 * To change this template file, choose Tools | Templates  
 * and open the template in the editor.  
 */  
package control;  
  
import java.io.IOException;  
import java.io.PrintWriter;  
import java.sql.Connection;  
import java.sql.PreparedStatement;  
import java.sql.ResultSet;  
import java.sql.SQLException;  
import java.sql.Statement;  
import java.text.SimpleDateFormat;  
import java.util.Date;  
import javax.servlet.ServletException;  
import javax.servlet.http.HttpServlet;  
import javax.servlet.http.HttpServletRequest;  
import javax.servlet.http.HttpServletResponse;  
  
/**  
 *  
 * @author Nitish Aryan  
 */  
public class refresh extends HttpServlet {  
  
    /**  
     * Processes requests for both HTTP <code>GET</code> and  
     <code>POST</code>  
     * methods.  
     *  
     * @param request servlet request  
     * @param response servlet response  
     * @throws ServletException if a servlet-specific error occurs  
     * @throws IOException if an I/O error occurs  
     */
```

```

protected void processRequest(HttpServletRequest request,
HttpServletRequest response)
throws ServletException, IOException,
ClassNotFoundException, SQLException {

    Connection connl;
    connl=ConnectDB.connect();
    PrintWriter out=response.getWriter();
    Statement sttl=connl.createStatement();
    ResultSet rss23=sttl.executeQuery("select date,PhotoId
from potw Where date = (SELECT MAX(date) from potw )");
    Boolean sttt=rss23.next();
    out.println("sdfvsd ");

    int i=Integer.parseInt(rss23.getString("date"));
    String t=rss23.getString("PhotoId");
    i=i+7;
    out.println("sdfvsd ");
    Date now1 = new Date();
    SimpleDateFormat ft1 = new SimpleDateFormat
("yyyyMMdd");
    String g=(String)ft1.format(now1);
    int i1=Integer.parseInt(rss23.getString(g));
    out.println("sdfvsd ");
    out.println("sdfvsd ");
    if(i>=i1)
    {
        String y,y2,y3,y4; int y1;
        ResultSet rssl=sttl.executeQuery("select * from
gallery Where likes = (SELECT MAX(likes) from gallery )");
        Boolean sttl=rssl.next();

        y=rssl.getString("PhotoId");
        y1=rssl.getInt("likes");
        y2=rssl.getString("Email");

        ResultSet rss2=sttl.executeQuery("select *
from registration Where Email=' "+y2+" '");
        Boolean sttll=rss2.next();
}
}

```

```

y3=rss2.getString("name");
out.println("sdfvsd 3333");
y4=rss2.getString("Adress");

if(t.equals(y)){response.sendRedirect("POTW.jsp");}else{
    PreparedStatement ps=connl.prepareStatement("insert
into potw(Name,Email,PhotoId,Address,Likes,date)
value(?,?,?,?,?,?)");
    ps.setString(1, y3);
    ps.setString(2, y2);
    out.println("sdfvsd6666666 ");
    ps.setString(3, y);
    ps.setString(4, y4);
    ps.setInt(5, y1);
    Date now = new Date();
    SimpleDateFormat ft = new SimpleDateFormat
("yyyyMMdd");

    ps.setString(6, (String)ft.format(now));
    ps.execute();

}
}

response.sendRedirect("POTW.jsp");

}

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods.
Click on the + sign on the left to edit the code.">
/***
 * Handles the HTTP <code>GET</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */

```

```
/*
@Override
protected void doGet(HttpServletRequest request,
HttpServletResponse response)
throws ServletException, IOException {

}

/**
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doPost(HttpServletRequest request,
HttpServletResponse response)
throws ServletException, IOException {

}

/**
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}
```

```

*****
***** store.java *****
****

/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.Statement;
import javax.servlet.RequestDispatcher;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

/**
 *
 * @author Nitish Aryan
 */
public class store extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
HttpServletResponse response)

```

```

    throws ServletException, IOException {
    response.setContentType("text/html;charset=UTF-8");
    response.sendRedirect("login.html");
}

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods.
Click on the + sign on the left to edit the code.">
/***
 * Handles the HTTP <code>GET</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doGet(HttpServletRequest request,
HttpServletResponse response)
    throws ServletException, IOException {
    processRequest(request, response);
}

/***
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
public void doPost(HttpServletRequest req, HttpServletResponse
res) throws IOException
{
    res.setContentType("text/html;charset=UTF-8");
    System.out.println("scdsv");
    PrintWriter out=res.getWriter();
    System.out.println("scdsv");

    try{

```

```

Connection Con= ConnectDB.connect();

PreparedStatement ps=Con.prepareStatement("insert into
registration(name,Email,password,Address,gender,photo,log)
value(?,?,?,?,?,?);");

ps.setString(1, req.getParameter("name"));

ps.setString(2, req.getParameter("Email"));
ps.setString(3, req.getParameter("password"));

ps.setString(4, " ");
ps.setString(5, " ");
ps.setString(6, "user.png");
ps.setString(7,"client");



ps.execute();
RequestDispatcher rd=req.getRequestDispatcher("login.html");
rd.include(req, res);

out.println("<html>\n" +
"<body>\n" +
"<script>\n" +
"alert(\"Your Have Created Account Successfully. \\\n Please Login for
Order Our Packages...\\");\n" +
"</script>\n" +
"</body>\n" +
"</html>");





}

catch(Exception e)
{
    System.out.println(e);
}

/***
 * Returns a short description of the servlet.
 *

```

```

* @return a String containing servlet description
*/
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}

/*****************
***** subscribe.java *****
*****************/
/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.text.SimpleDateFormat;
import java.util.Date;
import javax.servlet.RequestDispatcher;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;

/**
 *
 * @author Nitish Aryan
 */
public class subscribe extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>

```

```

* methods.
*
* @param request servlet request
* @param response servlet response
* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
protected void processRequest(HttpServletRequest request,
HttpServletResponse response)
    throws ServletException, IOException {
response.setContentType("text/html;charset=UTF-8");
try (PrintWriter out = response.getWriter()) {
/* TODO output your page here. You may use following
sample code. */
    out.println("<!DOCTYPE html>");
    out.println("<html>");
    out.println("<head>");
    out.println("<title>Servlet subscribe</title>");
    out.println("</head>");
    out.println("<body>");
    out.println("<h1>Servlet subscribe at " +
request.getContextPath() + "</h1>");
    out.println("</body>");
    out.println("</html>");
}
}

// <editor-fold defaultstate="collapsed" desc="HttpServlet methods.
Click on the + sign on the left to edit the code.">
/**
 * Handles the HTTP <code>GET</code> method.
*
* @param request servlet request
* @param response servlet response
* @throws ServletException if a servlet-specific error occurs
* @throws IOException if an I/O error occurs
*/
@Override
protected void doGet(HttpServletRequest request,
HttpServletResponse response)
    throws ServletException, IOException {

```

```

        response.sendRedirect("index.html");
    }

/**
 * Handles the HTTP <code>POST</code> method.
 *
 * @param request servlet request
 * @param response servlet response
 * @throws ServletException if a servlet-specific error occurs
 * @throws IOException if an I/O error occurs
 */
@Override
protected void doPost(HttpServletRequest req, HttpServletResponse
res)
    throws ServletException, IOException {

    res.setContentType("text/html;charset=UTF-8");
    System.out.println("scdsv");
    PrintWriter out=res.getWriter();
    System.out.println("scdsv");

    try{

        Connection Con= ConnectDB.connect();

        PreparedStatement ps=Con.prepareStatement("insert into
subscribe(email,date) value(?,?)");

        ps.setString(1, req.getParameter("email"));
        Date now = new Date();
        SimpleDateFormat ft = new SimpleDateFormat
("dd/MM/yyyy");
        ps.setString(2, (String)ft.format(now));

        ps.execute();
        RequestDispatcher rd=req.getRequestDispatcher("index.html");
        rd.include(req, res);

        out.println("<html>\n" +
"<body>\n" +

```

```

" <script>\n" +
" alert(\"Thank You Subscribe...\\\" );\n" +
" </script>\n" +
" </body>\n" +
" </html>");

        }

    catch(Exception e)
    {
        System.out.println(e);
    }

}

/***
 * Returns a short description of the servlet.
 *
 * @return a String containing servlet description
 */
@Override
public String getServletInfo() {
    return "Short description";
}// </editor-fold>

}

/*
***** upass.java *****
***** /*****
*/
/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package control;

```

```

import java.io.IOException;
import java.io.PrintWriter;
import java.sql.Connection;
import java.sql.PreparedStatement;
import java.sql.ResultSet;
import java.sql.Statement;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.servlet.DispatcherType;
import javax.servlet.ServletException;
import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.http.HttpSession;

/**
 *
 * @author Nitish Aryan
 */
public class upass extends HttpServlet {

    /**
     * Processes requests for both HTTP <code>GET</code> and
     <code>POST</code>
     * methods.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    protected void processRequest(HttpServletRequest request,
                                  HttpServletResponse response)
        throws ServletException, IOException {
        response.setContentType("text/html;charset=UTF-8");
        response.sendRedirect("ClientD.jsp");
    }

    // <editor-fold defaultstate="collapsed" desc="HttpServlet methods.
    Click on the + sign on the left to edit the code.">

```

```


    /**
     * Handles the HTTP <code>GET</code> method.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    @Override
    protected void doGet(HttpServletRequest request,
    HttpServletResponse response)
        throws ServletException, IOException {
        processRequest(request, response);
    }

    /**
     * Handles the HTTP <code>POST</code> method.
     *
     * @param request servlet request
     * @param response servlet response
     * @throws ServletException if a servlet-specific error occurs
     * @throws IOException if an I/O error occurs
     */
    @Override
    protected void doPost(HttpServletRequest request,
    HttpServletResponse response)
        throws ServletException, IOException {
        response.setContentType("text/html");
        PrintWriter pw=response.getWriter();
        String s1,s2,s3;
        HttpSession session=request.getSession();
        Connection Con;
        try {
            Con=ConnectDB.connect();

            s1=request.getParameter("opass");
            s2=request.getParameter("npass");
            String s=null;
            s=(String) session.getAttribute("admin")+"";
            s3=request.getParameter("cpass");
        }


```

```

if(s2.equals(s3))
{
    Statement st=Con.createStatement();

    ResultSet ty=st.executeQuery("SELECT Password from
registration where Email='"++session.getAttribute("mail")+"'");
    if(ty.next())
    {
        s3=ty.getString("password");
    }

    if(s1.equals(s3)){
        PreparedStatement ps=Con.prepareStatement("update
registration set password=? where Email=?");
        ps.setString(1, s2);
        ps.setString(2, (String) session.getAttribute("mail"));
        ps.executeUpdate();

        if(s.equals("client")){
            RequestDispatcher
rd=request.getRequestDispatcher("ClientD.jsp");
            rd.include(request, response); }else{ RequestDispatcher
rd=request.getRequestDispatcher("AProfile.jsp");
            rd.include(request, response); }
            pw.println("<html>\n" +
"<body>\n" +
"<script type=\"text/javascript\">\n" +
"alert(\"Your Password Change SuccessFully...\\");\n" +
"</script>\n" +
"</body>\n" +
"</html>");

    }else{
        if(s.equals("client")){
            RequestDispatcher
rd=request.getRequestDispatcher("ClientD.jsp");

```

```

rd.include(request, response); } else{ RequestDispatcher
rd=request.getRequestDispatcher("AProfile.jsp");
    rd.include(request, response);
    pw.println("<html>\n" +
"<body>\n" +
"<script type=\"text/javascript\">\n" +
"alert(\"Your Old Password did not Match...\" );\n" +
"</script>\n" +
"</body>\n" +
"</html>");

}

} else{
    if(s.equals("client")){
        RequestDispatcher
rd=request.getRequestDispatcher("ClientD.jsp");
        rd.include(request, response); } else{ RequestDispatcher
rd=request.getRequestDispatcher("AProfile.jsp");
        rd.include(request, response);}

    pw.println("<html>\n" +
"<body>\n" +
"<script type=\"text/javascript\">\n" +
"alert(\"Your Confirm Password did not Match...\" );\n" +
"</script>\n" +
"</body>\n" +
"</html>");

}

} catch (Exception ex) {
    Logger.getLogger(upass.class.getName()).log(Level.SEVERE,
null, ex);
}

```

```

    }

    /**
     * Returns a short description of the servlet.
     *
     * @return a String containing servlet description
     */
    @Override
    public String getServletInfo() {
        return "Short description";
    } // </editor-fold>

}

```

/* web.xml (for servlet url mapping & register) */

```

<?xml version="1.0" encoding="UTF-8"?>
<web-app version="3.1" xmlns="http://xmlns.jcp.org/xml/ns/javaee"
    xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xsi:schemaLocation="http://xmlns.jcp.org/xml/ns/javaee
    http://xmlns.jcp.org/xml/ns/javaee/web-app_3_1.xsd">
    <servlet>
        <servlet-name>store</servlet-name>
        <servlet-class>control.store</servlet-class>
    </servlet>
    <servlet>
        <servlet-name>delete</servlet-name>
        <servlet-class>control.delete</servlet-class>
    </servlet>
    <servlet>
        <servlet-name>upass</servlet-name>
        <servlet-class>control.upass</servlet-class>
    </servlet>
    <servlet>
        <servlet-name>match</servlet-name>
        <servlet-class>control.match</servlet-class>
    </servlet>

```

```
<servlet>
    < servlet-name>editpro</servlet-name>
    < servlet-class>control.editpro</servlet-class>
</servlet>
<servlet>
    < servlet-name>AGallery</servlet-name>
    < servlet-class>control.AGallery</servlet-class>
</servlet>
<servlet>
    < servlet-name>booking</servlet-name>
    < servlet-class>control.booking</servlet-class>
</servlet>
<servlet>
    < servlet-name>subscribe</servlet-name>
    < servlet-class>control.subscribe</servlet-class>
</servlet>
<servlet>
    < servlet-name>Adelete</servlet-name>
    < servlet-class>control.Adelete</servlet-class>
</servlet>
<servlet>
    < servlet-name>refresh</servlet-name>
    < servlet-class>control.refresh</servlet-class>
</servlet>
<servlet>
    < servlet-name>deletec</servlet-name>
    < servlet-class>control.deletec</servlet-class>
</servlet>
<servlet>
    < servlet-name>query</servlet-name>
    < servlet-class>control.query</servlet-class>
</servlet>
<servlet>
    < servlet-name>addp</servlet-name>
    < servlet-class>control.addp</servlet-class>
</servlet>
<servlet-mapping>
    < servlet-name>store</servlet-name>
    < url-pattern>/store</url-pattern>
</servlet-mapping>
<servlet-mapping>
    < servlet-name>delete</servlet-name>
    < url-pattern>/delete</url-pattern>
</servlet-mapping>
```

```
<servlet-mapping>
    < servlet-name > upass </ servlet-name >
    < url-pattern > /upass </ url-pattern >
</servlet-mapping>
<servlet>
    < servlet-name > logout </ servlet-name >
    < servlet-class > control.logout </ servlet-class >
</servlet>
<servlet-mapping>
    < servlet-name > logout </ servlet-name >
    < url-pattern > /logout </ url-pattern >
</servlet-mapping>
<servlet-mapping>
    < servlet-name > match </ servlet-name >
    < url-pattern > /match </ url-pattern >
</servlet-mapping>
<servlet-mapping>
    < servlet-name > editpro </ servlet-name >
    < url-pattern > /editpro </ url-pattern >
</servlet-mapping>
<servlet-mapping>
    < servlet-name > AGallery </ servlet-name >
    < url-pattern > /AGallery </ url-pattern >
</servlet-mapping>
<servlet-mapping>
    < servlet-name > booking </ servlet-name >
    < url-pattern > /booking </ url-pattern >
</servlet-mapping>
<servlet-mapping>
    < servlet-name > subscribe </ servlet-name >
    < url-pattern > /subscribe </ url-pattern >
</servlet-mapping>
<servlet-mapping>
    < servlet-name > Adelete </ servlet-name >
    < url-pattern > /Adelete </ url-pattern >
</servlet-mapping>
<servlet-mapping>
    < servlet-name > refresh </ servlet-name >
    < url-pattern > /refresh </ url-pattern >
</servlet-mapping>
<servlet-mapping>
    < servlet-name > deletec </ servlet-name >
    < url-pattern > /deletec </ url-pattern >
</servlet-mapping>
```

```
<servlet-mapping>
  < servlet-name>query</servlet-name>
  < url-pattern>/query</url-pattern>
</servlet-mapping>
<servlet-mapping>
  < servlet-name>addp</servlet-name>
  < url-pattern>/addp</url-pattern>
</servlet-mapping>
<session-config>
  < session-timeout>
    30
  </session-timeout>
</session-config>
</web-app>
```



SECURITY MECHANISM

- We have used services and “jsp pages which provided a strong security system.
- First of all an admin enter in the system through special User Id and password when is confidential.
- Client can book their package after registering through site and can also add his pic.
- A session has been created for all client and admin panel so that they can safety maintain their profile.



TESTING

Testing is a necessary quality control activity. When an item is tested, Errors are detected. These are then corrected so that the item performs the way it is supported to. Testing is performed at various levels. Broadly, testing done while developing system is classified as,

- Black Box testing.
- White Box testing.

BLACK BOX TESTING:- A Software testing technique whereby the internal structure of the item being tested are not known by the tester. The tester does not ever examine the programming code and does not need any further knowledge of the program other than its specification, Black Box testing is not a type. It instead is a testing strategy, which does not need any knowledge of internal design or code etc. As the name “Black Box” suggests, no knowledge of internal logic or code is structure is required.

WHITE BOX TESTING:- Also known as glass box, structural, clear box and open box testing. White box testing strategy deals with the internal logic and structure of the code.

White box testing uses specific knowledge of programming code to examine outputs. The test is accurate only if the knows what the program is supposed to do. He or she can then see if the program diverges from its intended goal.



LIMITATION

Due to the limitation some of the features that could have been explored have not been used. This site only provided OFF-LINE Payment.No facility for On-Line transaction.

- This software is connected only through Intranet networking.
- Software can only be used in web based environment.
- The admin must required some basic knowledge and management him should be manual.
- There can be delay in response due to heavy load.
- Occasional long network failure may disturb the system.



IMPLEMENTATION AND EVALUATION

Once the application are closed using a high-level language, the next job is to assemble them into a computer software system. This is known as system implementation. Implementation is nothing but coding, testing and installing a developed software package on the computer system. The successful implementation of the new software package is the most important part of the system development life cycle.

System implementation comprises of:-

- Create computer compatible files.
- Training the people who are going to actually operate the system.
- Installing the necessary hardware, terminals and network (if required).
- Installing the application packages, testing and performing audit trail.



FUTURE SCOPE

This project was developed to fulfil travellers requirement ; however there is a lot of scope to improve the performance of “**BIHAR TOUR & TRAVEL**” in the area of user interface , database performance and query processing time etc.

- This site is Currently available through intranet but in future Intranet but in Future we are going to host it on Internet.
- Client dashboard will be made User Friendly and attractive.
- Another important feature like online-Payment and Airway- Services will be added.



BIBLIOGRAPHY

The following books and manuals provide lot of help to us in making this project a reality.

- getbootstrap.com
- Bootsnipp.com
- Tutorialspoint.com



THANK YOU