

Identify minimal failure-causing schemas for multiple faults

XINTAO NIU and CHANGHAI NIE, State Key Laboratory for Novel Software Technology, Nanjing University
HARETON LEUNG, Hong Kong Polytechnic University

Combinatorial testing(CT) is proven to be effective to reveal the potential failures caused by the interaction of the inputs or options of the System Under Test(SUT). To extend and make full use of CT, the theory of Minimal Failure-Causing Schema(MFS) has been proposed. The use of MFS helps to isolate the root cause of the failure, which is desired after detecting them by CT. Most existed algorithms based on MFS theory focus on identifying the MFS in SUT with the single fault, however, we argue that multiple faults is the more common testing scenario, and under which masking effects may be triggered so that some expect faults will not be observed normally. Traditional MFS theory as well as its identifying algorithms lack a mechanism to handle such effects, hence will make them incorrectly isolate the MFS in SUT. To address this problem, we proposed a new MFS model with considering multiple faults. We first formally analyse the impact of the multiple faults on existed MFS isolating algorithms, especially when masking effects were triggered between these multiple faults. Based on this, we then give an approach that can assist traditional algorithms to better handle the multiple faults testing scenarios. Empirical studies with several open-source software were conducted, which show that multiple faults with masking effects do negatively affect on traditional MFS identifying approach and our approach can help them to alleviate these effects.

Categories and Subject Descriptors: D.2.5 [Software Engineering]: Testing and debugging—*Debugging aids, testing tools*

General Terms: Reliability, Verification

Additional Key Words and Phrases: Software Testing, Combinatorial Testing, Failure-causing schemas, Masking effects

ACM Reference Format:

Xintao Niu, Changhai Nie and Hareton Leung, 2014. Identify failure-causing schemas for multiple faults. *ACM Trans. Embedd. Comput. Syst.* 9, 4, Article 39 (March 2010), 29 pages.
DOI: <http://dx.doi.org/10.1145/0000000.0000000>

1. INTRODUCTION

With the increasing complexity and size of modern software, many factors, such as input parameters and configuration options, can influence the behaviour of the SUT. The unexpected faults caused by the interaction among these factors can make testing such software a big challenge if the interaction space is too large. In the worst case we need to examine every possible combination of these factors as each such combination can contain unique faults[Song et al. 2012]. While conducting such exhaustive testing is ideal and necessary in theory, it is impractical and not economical in consideration of the limited testing time and computing resource. One remedy for this problem is

This work was supported by the National Natural Science Foundation of China (No. 61272079), the Research Fund for the Doctoral Program of Higher Education of China (No.20130091110032), the Science Fund for Creative Research Groups of the National Natural Science Foundation of China(No. 61321491), and the Major Program of National Natural Science Foundation of China (No. 91318301)

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies show this notice on the first page or initial screen of a display along with the full citation. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, to republish, to post on servers, to redistribute to lists, or to use any component of this work in other works requires prior specific permission and/or a fee. Permissions may be requested from Publications Dept., ACM, Inc., 2 Penn Plaza, Suite 701, New York, NY 10121-0701 USA, fax +1 (212) 869-0481, or permissions@acm.org.

© 2010 ACM 1539-9087/2010/03-ART39 \$15.00

DOI: <http://dx.doi.org/10.1145/0000000.0000000>

Table I. MS word example

id	Highlight	Status bar	Bookmarks	Smart tags	Outcome
1	On	On	On	Off	PASS
2	On	Off	Off	On	PASS
3	Off	On	Off	Off	Fail
4	Off	Off	On	Off	PASS
5	Off	On	On	On	PASS

combinatorial testing, which systematically sample the interaction space and select a relatively small set of test cases that cover all the valid iterations with the number of factors involved in the interaction no more than a prior fixed integer, i.e., the *strength* of the interaction. Many works in CT aims to construct the smallest set of such efficient testing object [Cohen et al. 1997; Bryce et al. 2005; Cohen et al. 2003], which also called *covering array*.

Once failures are detected by covering array, it is desired to isolate the failure-inducing combinations in these failing test cases. This task is important in CT as it can facilitate the debugging efforts by reducing the code scope that needed to inspected [Ghandehari et al. 2012]. Only with the information stum from the covering array sometimes is far from clear to identify the location and magnitude of the failure-inducing combinations [Colbourn and McClary 2008]. Thus, deeper analysis needed to be conducted. Take an example [Bach and Schroeder 2004], Fig I present a 2-way covering array for testing the MS word application, in which we want to examine various combination of options ‘Highlight’, ‘Status Bar’, ‘Bookmarks’ and ‘Smart tags’ of MS word. Assume the third test case failed, then we can get that there are five 2-way suspicious combinations may be responsible for this failure: (Highlight: Off, Bookmarks: Off), (Highlight: Off, Smart tags: Off), (Status Bar: On, Bookmarks: Off), (Status Bar: On, Smart tags: Off), (Bookmarks: Off, Smart tags: Off). (Note that (Highlight: Off, Status Bar: On) excludes in this set as it appeared in the fifth passing test case). Without any more information, we cannot figure out which one or some in this suspicious set caused this failure. In fact, taking account of the higher-strength combination, e.g., (Highlight: Off, Status Bar: On, Smart tags: Off), the problem will grow more complicated.

To address this problem, prior work [Nie and Leung 2011a] specifically studied the properties of the minimal failure-causing schemas in SUT, based on which, a further diagnosis with generating additional test cases was applied and therefore can identify the MFS in the test case. Other works have been proposed to identify the MFS in SUT, which include approaches such as building tree model [Yilmaz et al. 2006], exploiting the methodology of minimal failure-causing schema [Nie and Leung 2011a], ranking suspicious classification ous combinations based on some rules [Ghandehari et al. 2012], using graphic-based deduction [Martínez et al. 2008] and so on. These approaches can be partitioned into two categories [Colbourn and McClary 2008]: *adaptive*—test cases are chosen based on the outcomes of the executed tests [Nie and Leung 2011a; Ghandehari et al. 2012; Niu et al. 2013; Zhang and Zhang 2011; Shakya et al. 2012; Wang et al. 2010; Li et al. 2012] or *nonadaptive*—test cases are chosen independently and can be executed parallel [Yilmaz et al. 2006; Colbourn and McClary 2008; Martínez et al. 2008; 2009; Fouché et al. 2009].

The MFS methodology as well as other MFS identifying approaches mainly focus on the ideal scenario that SUT only contains one fault, i.e., the test case under testing can either fails or passes the testing. However, in this paper, we argue that SUT with multiple distinguished faults is the more common testing scenario in practice, and moreover, this do have impact on the Failure-inducing Combinations Identifying (FCI) approaches. One main impact of multiple faults on FCI approaches is the masking effects. A masking effect [Dumlu et al. 2011; Yilmaz et al. 2013] is an effect that some

failures prevents test cases from normally checking combinations that are supposed to be tested. Take the Linux command—*Grep* for example, we noticed that there are two different faults reported in the bug tracker system. The first one¹ claims that *Grep* incorrectly match unicode patterns with ‘\<\>’, while the second one² claims an incompatibility between option ‘-c’ and ‘-o’. When we put this two scenarios into one test case, only one fault information will be observed, which means another fault is masked by the observed one. This effects will prevent test cases normally executing, consequently make approaches make a incorrectly judgements on the correlation between the combinations checked in the test case and the fault that been prevented to be observed.

As known that masking effects negatively affect the performance of FCI approaches, a natural question is how this effect bias the results of FCI approaches. In this paper, we formalized the process of identifying MFS under the circumstance that masking effects exist in SUT and try to answer this question. One insight from the formal analysis is that we cannot completely get away from the impact of the masking effect even if we do exhaustive testing. Furthermore, both ignoring the masking effects and regarding multiple faults as one fault are harmful for FCI process.

Based on the insight we proposed a strategy to alleviate this impact. This strategy adopts the divide and conquer framework, i.e., separately handles each fault in SUT. For a particular fault under analysis, when applying traditional FCI approaches to identify the failure-inducing combinations, we pick the test cases generated by FCI approaches that trigger unexpected faults and replace them with regenerated newly test cases. These newly test cases should either pass or trigger the same fault under analysis.

Our initial work demonstrated that the extent varies to what different FCI approaches suffered from the masking effects, as a result, follow-on work in this paper was proposed to construct an additional voting system, in which we take comprehensive account of various result from different algorithms. We rank the suspicious MFS according to the frequency it appeared in each algorithm’s output, and recommend the MFS which has a high ranking.

To evaluate the performance of our strategy and the voting system, we applied our strategy on three FCI approaches, which are CTA [Yilmaz et al. 2006], OFOT [Nie and Leung 2011a], FIC_BS [Zhang and Zhang 2011] respectively. The subjects we used are several open-source software with the developers’ forum in Source-Forge community. Through studying their bug reports in the bug tracker system as well as their user’s manual guide, we built the testing model which can reproduce the reported bugs with specific test cases. We then applied the traditional FCI approaches and their augmented versions to identify the failure-inducing combinations in the subjects respectively. The results of our empirical studies shows that the masking effects do impact on the FCI approaches, although to what the extent varies, and the approaches augmented with our strategy can identify failure-inducing combinations more accurately than traditional ones when facing masking effects, and moreover, this performance can get further improvement with using voting system.

The main contributions of this paper are:

- We studied the impact of the masking effects among multiple faults on the isolation of the failure-inducing combinations in SUT.
- We proposed a divide and conquer strategy of selecting test cases to alleviate the impact of this effects.

¹<http://savannah.gnu.org/bugs/?29537>

²<http://savannah.gnu.org/bugs/?33080>

```

public float foo(int a, int b, int c, int d){
    //step 1 will cause an exception when b == c
    float x = (float)a / (b - c);

    //step 2 will cause an exception when c < d
    float y = Math.sqrt(c - d);

    return x+y;
}

```

Fig. 1. A toy program with four input parameters

Table II. test inputs and their corresponding result

id	test inputs	results	id	test inputs	result
1	(7, 2, 4, 3)	PASS	13	(11, 2, 4, 3)	PASS
2	(7, 2, 4, 5)	Ex 2	14	(11, 2, 4, 5)	Ex 2
3	(7, 2, 6, 3)	PASS	15	(11, 2, 6, 3)	PASS
4	(7, 2, 6, 5)	PASS	16	(11, 2, 6, 5)	PASS
5	(7, 4, 4, 3)	Ex 1	17	(11, 4, 4, 3)	Ex 1
6	(7, 4, 4, 5)	Ex 1	18	(11, 4, 4, 5)	Ex 1
7	(7, 4, 6, 3)	PASS	19	(11, 4, 6, 3)	PASS
8	(7, 4, 6, 5)	PASS	20	(11, 4, 6, 5)	PASS
9	(7, 5, 4, 3)	PASS	21	(11, 5, 4, 3)	PASS
10	(7, 5, 4, 5)	Ex 2	22	(11, 5, 4, 5)	Ex 2
11	(7, 5, 6, 3)	PASS	23	(11, 5, 6, 3)	PASS
12	(7, 5, 6, 5)	PASS	24	(11, 5, 6, 5)	PASS

- We designed a voting system for different FCI approaches which further improve the performance at finding MFS in SUT.
- We conducted several empirical studies and showed that our strategy can assist FCI approaches to get better performance on identifying failure-inducing combinations in SUT with masking effects.

2. MOTIVATING EXAMPLE

This section constructed a small program example, for convenience to illustrate the motivation of our approach. Assume we have a method *foo* which has four input parameters : *a*, *b*, *c*, *d*. The types of these four parameters are all integers and the values that they can take are: $v_a = \{7, 11\}$, $v_b = \{2, 4, 5\}$, $v_c = \{4, 6\}$, $v_d = \{3, 5\}$. The detail code of the method is listed in Figure 1.

Inspecting the simple code in Figure 1, we can find two potential faults: First, in the step 1 we can get an *ArithmeticException* when *b* is equal to *c*, i.e., $b = 4$ & $c = 4$, that makes division by zero. Second, another *ArithmeticException* will be triggered in step 2 when $c < d$, i.e., $c = 4$ & $d = 5$, which makes square roots of negative numbers. So the expected failure-inducing combinations in this example should be $(-, 4, 4, -)$ and $(-, -, 4, 5)$.

Traditional FCI algorithms do not consider the detail of the code, instead, they apply black-box testing to test this program, i.e., feed inputs to those programs and execute them to observe the result. The basic justification behind those approaches is that the failure-inducing combinations for a particular fault must only appear in those inputs that trigger this fault. As traditional FCI approaches aim at using as few inputs as possible to get the same or approximate result as exhaustive testing, so the results derived from a exhaustive testing set must be the best that these FCI approaches can reach. Next we will illustrate how exhaustive testing works on identifying the failure-inducing combinations in the program.

Table III. Identified failure-inducing combinations and their corresponding Exception

Failure-inducing combinations	Exception
(-, 4, 4, -)	Ex 1
(-, 2, 4, 5)	Ex 2
(-, 3, 4, 5)	Ex 2

We first generate every possible inputs listed in the Column “test inputs” of Table II, and their execution results are listed in Column “result” of Table II. In this Column, *PASS* means that the program runs without any exception under the input in the same row. *Ex 1* indicates that the program triggered an exception corresponding to the step 1 and *Ex 2* indicates the program triggered an exception corresponding to the step 2. According to data listed in table II, we can figure out that (-, 4, 4, -) must be the failure-inducing combination of Ex 1 as all the inputs triggered Ex 1 contain this combination. Similarly, the combination (-, 2, 4, 5) and (-, 3, 4, 5) must be the failure-inducing combinations of the Ex 2. We listed this three combinations and their corresponding exception in Table III.

Note that we didn’t get the expected result with traditional FCI approaches in this case. The failure-inducing combinations we get for Ex 2 are (-,2,4,5) and (-,3,4,5) respectively instead of the expected combination (-,-,4,5). So why we failed in getting the (-,-,4,5)? The reason lies in *input 6*: (7,4,4,5) and *input 18*: (11,4,4,5). This two inputs contain the combination (-,-,4,5), but didn’t trigger the Ex 2, instead, Ex 1 was triggered.

Now let us get back to the source code of *foo*, we can find that if Ex 1 is triggered, it will stop executing the remaining code and report the exception information. In another word, Ex 1 has a higher fault level than Ex 2 so that Ex 1 may mask Ex 2. Let us re-examine the combination (-,-,4,5): if we supposed that *input 6* and *input 18* should trigger Ex 2 if they didn’t trigger Ex 1, then we can conclude that (-,-,4,5) should be the failure-inducing combination of the Ex 2, which is identical to the expected one.

However, we cannot validate the supposition, i.e., *input 6* and *input 18* should trigger Ex 2 if they didn’t trigger Ex 1, unless we have fixed the code that trigger Ex 1 and then re-executed all the test cases. So in practice, when we do not have enough resource to re-execute all the test cases again and again or can only take black-box testing, the more economic and efficient approach to alleviate the masking effect on FCI approaches is desired.

3. FORMAL MODEL

This section presents some definitions and propositions to give a formal model for the FCI problem.

3.1. Failure-causing Schemas in CT

Assume that the SUT is influenced by n parameters, and each parameter p_i has a_i discrete values from the finite set V_i , i.e., $a_i = |V_i|$ ($i = 1, 2, \dots, n$). Some of the definitions below are originally defined in [Nie and Leung 2011b].

Definition 3.1. A *test case* of the SUT is an array of n values, one for each parameter of the SUT, which is denoted as a n -tuple (v_1, v_2, \dots, v_n) , where $v_1 \in V_1, v_2 \in V_2 \dots v_n \in V_n$.

In practice, these parameters in the test case can represent many factors, such as input variables, run-time options, building options or various combination of them. We need to execute the SUT with these test cases to ensure the correctness of the behaviour of the software.

We consider the fact that the abnormally executing test cases as a *fault*. It can be a thrown exception, compilation error, assertion failure or constraint violation. When faults are triggered by some test cases, what is desired is to figure out the cause of these faults, and hence some subsets of this test case should be analysed.

Definition 3.2. For the SUT, the n -tuple $(-, v_{n_1}, \dots, v_{n_k}, \dots)$ is called a k -value *schema* ($0 < k \leq n$) when some k parameters have fixed values and the others can take on their respective allowable values, represented as “-”.

In effect a test case itself is a k -value *schema*, when $k = n$. Furthermore, if a test case contain a *schema*, i.e., every fixed value in the combination is in this test case, we say this test case *hits* the *schema*.

Definition 3.3. let c_l be a l -value schema, c_m be an m -value schema in SUT and $l < m$. If all the fixed parameter values in c_l are also in c_m , then c_m *subsumes* c_l . In this case we can also say that c_l is a *sub-schema* of c_m and c_m is a *parent-schema* of c_l , which can be denoted as $c_l \prec c_m$.

For example, in the motivation example section, the 2-value schema $(-, 4, 4, -)$ is a sub-schema of the 3-value schema $(-, 4, 4, 5)$, that is, $(-, 4, 4, -) \prec (-, 4, 4, 5)$.

Definition 3.4. If all test cases contain a schema, say c , trigger a particular fault, say F , then we call this schema c the *failure-causing schema* for F . Additionally, if none sub-schema of c is the *faulty schema* for F , we then call the combination c the *Minimal Failure-causing Schema*, i.e., (MFS) for F .

In fact, MFS is identical to the failure-inducing combinations we discussed previously. Figuring it out can eliminate all details that are irrelevant for causing the failure and hence facilitate the debugging efforts.

Let c_m be a m -value schema, we denote the set of all the test cases can *hit* the schema c_m as $T(c_m)$. Further, for the test case t , let $\mathcal{I}(t)$ to denote the set of all the schemas that are hit by t , and for the set of test cases T , we let $\mathcal{I}(T) = \bigcup_{t \in T} \mathcal{I}(t)$. Then we have the following propositions.

PROPOSITION 3.5. *if $c_l \prec c_k$, then $T(c_k) \subset T(c_l)$*

PROOF. Suppose $\forall t \in T(c_k)$, we have that t hits c_k . Then as $c_l \prec c_k$, so t must also hit c_l , as all the element in c_l must in c_k , which also in the test case t . Therefore we get $t \in T(c_l)$. Thus $t \in T(c_k)$ implies $t \in T(c_l)$, so it follows that $T(c_k) \subset T(c_l)$. \square

Table IV illustrates an example of SUT with four binary parameters (Unless otherwise specified, following examples also assume the SUT with binary parameters). The left column lists the schema $(0, 0, -, -)$ as well as all the test cases hit this schema, while the right column lists the test cases for schema $(0, -, -, -)$. We can observe that $(0, -, -, -) \prec (0, 0, -, -)$ and the the set of test cases which hit $(0, -, -, -)$ contains the set that hits $(0, 0, -, -)$.

PROPOSITION 3.6.

For any set T of test cases of a SUT, we can always get a set of minimal schemas $\mathcal{C}(T)$ = $\{c \mid \nexists c' \in \mathcal{C}(T), s.t. c' \prec c\}$, such that,

$$T = \bigcup_{c \in \mathcal{C}(T)} T(c)$$

PROOF. We prove by producing this set of schemas.

We denote the exhaustive test cases for SUT as T^* . And let $T^* \setminus T$ be the test cases that in T^* but not in T . It is obviously $\forall t \in T$, we can always find at least one schema $c \in \mathcal{I}(t)$, such that $c \notin \mathcal{I}(T^* \setminus T)$. Specifically, at least the test case t itself as schema holds.

Table IV. Example of the proposition 1

c	
$(0, -, -, -)$	$T(c)$
$(0, 0, -, -)$	$(0, 0, 0, 0)$
$(0, 0, 0, 0)$	$(0, 0, 0, 1)$
$(0, 0, 0, 1)$	$(0, 0, 1, 0)$
$(0, 0, 1, 0)$	$(0, 0, 1, 1)$
$(0, 0, 1, 1)$	$(0, 1, 0, 0)$
	$(0, 1, 0, 1)$
	$(0, 1, 1, 0)$
	$(0, 1, 1, 1)$

Table V. Example of the minimal schemas

T	$S(T)$	$\mathcal{C}(T)$
$(0, 0, 0, 0)$	$(0, 0, 0, 0)$	$(0, 0, 0, -)$
$(0, 0, 0, 1)$	$(0, 0, 0, 1)$	$(0, 0, -, 0)$
$(0, 0, 1, 0)$	$(0, 0, 1, 0)$	
	$(0, 0, 0, -)$	
	$(0, 0, -, 0)$	

Then we collect all the satisfied schemas($c \in \mathcal{I}(t)$ and $c \notin \mathcal{I}(T^* \setminus T)$) in each test case t of T , which can be denoted as: $S(T) = \{\mathcal{I}(T) - \mathcal{I}(T^* \setminus T)\}$.

For the set $S(T)$, we can have $\bigcup_{c \in S(T)} T(c) = T$. This is because first, for $\forall t \in T(c)$, $(T(c) \subset \bigcup_{c \in S(T)} T(c))$. it must have $t \in T$, as if not so, then $t \in T^* \setminus T$, which contradict with the definition of $S(T)$. So $t \in T$. Hence, $\bigcup_{c \in S(T)} T(c) \subset T$.

Then second, for any test case t in T , as we have learned at least find one c in $\mathcal{I}(t)$, such that c in $S(T)$. Then for $T(c) \subset \bigcup_{c \in S(T)} T(c)$ and $t \in T(c)$, so $t \in \bigcup_{c \in S(T)} T(c)$, therefore, $T \subset \bigcup_{c \in S(T)} T(c)$.

Since $\bigcup_{c \in S(T)} T(c) \subset T$ and $T \subset \bigcup_{c \in S(T)} T(c)$, so it follows $\bigcup_{c \in S(T)} T(c) = T$.

Then we denote the minimal schemas of $S(T)$ as $M(S(T)) = \{c | c \in S(T) \text{ and } \nexists c' \prec c, s.t., c' \in S(T)\}$. For this set, we can still have $\bigcup_{c \in M(S(T))} T(c) = T$. We also prove this by two steps, first and obviously, $\bigcup_{c \in M(S(T))} T(c) \subset \bigcup_{c \in S(T)} T(c)$. Then we just need to prove that $\bigcup_{c \in S(T)} T(c) \subset \bigcup_{c \in M(S(T))} T(c)$.

In fact by definition of $M(S(T))$, for $\forall c' \in S(T) \setminus M(S(T))$, we can have some $c \in M(S(T))$, such that $c \prec c'$. According to the Proposition 1, $T(c') \subset T(c)$. So for any test case $t \in \bigcup_{c \in S(T)} T(c)$, as we have either $\exists c' \in S(T) \setminus M(S(T))$, s.t., $t \in T(c')$ or $\exists c \in M(S(T))$, s.t., $t \in T(c)$. Both cases can deduce $t \in \bigcup_{c \in M(S(T))} T(c)$. So, $\bigcup_{c \in S(T)} T(c) \subset \bigcup_{c \in M(S(T))} T(c)$.

Hence, $\bigcup_{c \in S(T)} T(c) = \bigcup_{c \in M(S(T))} T(c)$, and $M(S(T))$ is the set of schemas that holds this proposition. \square

For example, table V lists the $S(T)$ and minimal schemas $\mathcal{C}(T)$ for set of test cases T . We can see that for any other schemas not in $\mathcal{C}(T)$, either can we find a test case not in T hit the schema, e.g., $(0,0,-,-)$ with the test case $(0,0,1,1)$ not in T , or is the parent schema of one of this two minimal schemas, e.g., $(0,0,0,0)$ the parent schema of both $(0,0,0,-)$ and $(0,0,-,0)$.

Let $\mathcal{C}(T_{F_m})$ denote the set of all the test cases triggering fault F_m , then $\mathcal{C}(T_{F_m})$ actually is the set of MFS of F_m by definition of MFS. And obviously for $\forall c_m$ we have $\mathcal{C}(T(c_m)) = \{c_m\}$.

From the construction process of $\mathcal{C}(T)$, one observation is that the schemas in $S(T)$ either belongs to $\mathcal{C}(T)$, or be the parent schema of one element of $\mathcal{C}(T)$. Then we can have the following proposition.

PROPOSITION 3.7. *For any $T(c) \subset T$, then it must be that $c \in S(T)$.*

PROOF. We first have $\mathcal{C}(T(c)) = \{c\}$, and $\mathcal{C}(T(c)) \subset S(T(c))$. Then as $T(c) \subset T$, it follows $S(T(c)) \subset S(T)$ by definition. So we can have $\mathcal{C}(T(c)) \subset S(T)$ and hence $c \in S(T)$. \square

For two different set of test cases, there exist some relationships between the minimal schemas of these two set, which varies in the relevancy between this two different set of test cases. In fact, there are three possible associations between two different set of test cases: *inclusion*, *disjoint*, and *intersection* as listed in figure 2. We didn't list the condition that two set that are identical, because on that condition the minimal schemas must also be identical by proposition 3.6. To discuss the properties of the relationship of the minimal schemas between two different set of test cases is important as we can learn later the masking effects between multiple faults will make the MFS identifying process incorrectly works, i.e., these FCI approaches may isolate the minimal schemas for biased set of test cases from the expected failing set of test cases. Next we will separately discuss the relationship between minimal schemas under the three conditions.

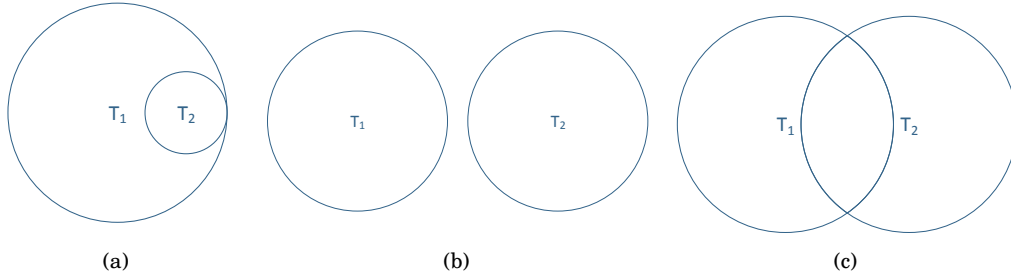


Fig. 2. Test Suites relationship

3.2. Inclusion

It is the first relationship corresponding to Fig. 2(a). We can have the following proposition with two set of test cases which have the inclusion relationship.

PROPOSITION 3.8. *For two set of test cases T_l and T_k , assume that $T_l \subset T_k$. Then we have*

$$\forall c_l \in \mathcal{C}(T_l) \text{ either } c_l \in \mathcal{C}(T_k) \text{ or } \exists c_k \in \mathcal{C}(T_k), \text{ s.t., } c_k \prec c_l.$$

PROOF. Obviously for $\forall c_l \in \mathcal{C}(T_l)$ we can get $T(c_l) \subset T_l \subset T_k$. According to the proposition 3, we can have $c_l \in S(T_k)$. So this proposition holds as the schema in $S(T_k)$ either is also in $\mathcal{C}(T_k)$, or must be the parent of some schemas in $\mathcal{C}(T_k)$. \square

. Based on this proposition, in fact, the $c_k \in \mathcal{C}(T_k)$ remains the following three possibilities: 1) $c_k \in \mathcal{C}(T_l)$, or 2) $\exists c_l \in \mathcal{C}(T_l), \text{ s.t., } c_k \prec c_l$, or 3) $\nexists c_l \in \mathcal{C}(T_l), \text{ s.t., } c_k \prec c_l$ or $c_k = c_l$, or $c_l \prec c_k$. For the third case, we call c_k is *irrelevant* to $\mathcal{C}(T_l)$

We illustrate these scenarios in Table VI. There are two parts in this table, each part shows two set of test cases: T_l and T_k , which have $T_l \subset T_k$. For the left part, we can see

Table VI. Example of the scenarios

T_l	T_k	T_l	T_k
(0, 0, 0)	(0, 0, 0)	(0, 0, 0)	(0, 0, 0)
(0, 0, 1)	(0, 0, 1)	(0, 0, 1)	(0, 0, 1)
(0, 1, 0)	(0, 1, 0)	(0, 1, 0)	(0, 1, 0)
	(0, 1, 1)		(1, 1, 0)
			(1, 1, 1)
$\mathcal{C}(T_l)$	$\mathcal{C}(T_k)$	$\mathcal{C}(T_l)$	$\mathcal{C}(T_k)$
(0, 0, -)	(0, -, -)	(0, 0, -)	(0, 0, -)
(0, -, 0)		(0, -, 0)	(0, -, 0)
			(1, 1, -)

Table VII. Example of disjoint examples

T_l	T_k
(0, 0, 0)	(1, 0, 0)
(0, 1, 0)	(1, 0, 1)
	(1, 1, 0)
$\mathcal{C}(T_l)$	$\mathcal{C}(T_k)$
(0, -, 0)	(1, 0, -)
	(1, -, 0)

that the schema in $\mathcal{C}(T_l)$: (0, 0, -) and (0, -, 0), both are the parent of the schema of the one in $\mathcal{C}(T_k)$: (0, -, -). While for the right part, the schemas in $\mathcal{C}(T_l)$: (0, 0, -) and (0, -, 0) are both also in $\mathcal{C}(T_k)$. Furthermore, one schema in $\mathcal{C}(T_k)$: (1, 1, -) is irrelevant to $\mathcal{C}(T_l)$.

3.3. Disjoint

This relationship is corresponding to the Fig.2(b), For two different set of test cases, one obvious properties is listed as follows:

PROPOSITION 3.9. *For two set T_1, T_2 , if $T_1 \cap T_2 = \emptyset$, we have, $S(T_1) \cap S(T_2) = \emptyset$.*

PROOF. If $S(T_1) \cap S(T_2) \neq \emptyset$. Without loss of generality, we let $c \in S(T_1) \cap S(T_2)$ we can learn that $T(c)$ must both in T_1 and T_2 , which is contradiction. \square

This properties tells that the minimal schemas of two disjoint test cases should be irrelevant to each other, Table VII list the example of this scenario, we can learn in this table that for two different test cases set T_l, T_k , their minimal schemas, i.e., (0, -, 0) and (1, 0, -), (1, -, 0) respectively, are irrelevant to each other.

3.4. Intersect

This relationship is corresponding to the Fig.2(c). This scenario is the most common scenario for two set of test cases, but also the most complicated scenario for analysis. For convenience to illustrate the properties of the minimal schemas of this scenario, we assume without loss of generality that $T_1 \cap T_2 = T_3$ as depicted in Fig.2(c). Then we can have the following properties:

PROPOSITION 3.10. *It must have $\exists c_1 \in \mathcal{C}(T_1)$ and $c_2 \in \mathcal{C}(T_2)$. s.t. c_1 and c_2 are irrelevant.*

PROOF. Firstly, we can learn that $\mathcal{C}(T_1 - T_3)$ are irrelevant to $\mathcal{C}(T_2 - T_3)$, as $T_1 - T_3 \cap T_2 - T_3 = \emptyset$.

As $\mathcal{C}(T_1 - T_3)$ is either identical to some schemas in $\mathcal{C}(T_1)$ or be parent schemas of them. If some of them are identical, then these identical ones must be irrelevant to $\mathcal{C}(T_2)$ as $T_1 - T_3 \cap T_2 = \emptyset$. This is also holds if $\mathcal{C}(T_2 - T_3)$ is identical to some schemas in $\mathcal{C}(T_2)$.

Table VIII. Example of Intersect by irrelevant examples

T_1	T_2
(1, 0, 0)	(1, 0, 0)
(1, 0, 1)	(1, 1, 0)
$\mathcal{C}(T_1)$	$\mathcal{C}(T_2)$
(1, 0, -)	(1, -, 0)

Table IX. Example of Intersect by identical examples

T_1	T_2	T_3
(0, 1, 0)	(0, 0, 0)	(1, 1, 0)
(1, 1, 0)	(0, 0, 1)	(1, 1, 1)
(1, 1, 1)	(1, 1, 0)	
	(1, 1, 1)	
$\mathcal{C}(T_1)$	$\mathcal{C}(T_2)$	$\mathcal{C}(T_3)$
(-, 1, 0)	(0, 0, -)	(1, 1, -)
(1, 1, -)	(1, 1, -)	

Next, if both $\mathcal{C}(T_1 - T_3)$ and $\mathcal{C}(T_2 - T_3)$ are parent schemas of some of $\mathcal{C}(T_1)$ and $\mathcal{C}(T_2)$ respectively, without loss of generality, we make $c_{1-3} \prec c_1$ ($c_{1-3} \in \mathcal{C}(T_1 - T_3)$ and $c_1 \in \mathcal{C}(T_1)$) and $c_{2-3} \prec c_2$ ($c_{2-3} \in \mathcal{C}(T_2 - T_3)$ and $c_2 \in \mathcal{C}(T_2)$). Then these corresponding subschemas in $\mathcal{C}(T_1)$ and $\mathcal{C}(T_2)$, i.e., c_1 and c_2 respectively, must also be irrelevant to each other. This is because $T(c_1) \supset T(c_{1-3})$ and $T(c_2) \supset T(c_{2-3})$. And as $T(c_{1-3}) \cap T(c_{2-3}) = \emptyset$ So $T(c_1)$ and $T(c_2)$ are neither identical nor including each other. \square

For example, Table VIII shows two test cases interact each other at test case (1,0,0), but their minimal schemas, (1,0,-) and (1,-,0) respectively, are irrelevant to each other.

PROPOSITION 3.11. *If there we can find $\exists c_1 \in \mathcal{C}(T_1)$ and $c_2 \in \mathcal{C}(T_2)$, s.t., c_1 is identical to c_2 , Then it must have $c_1 = c_2 \in \mathcal{C}(T_3)$*

PROOF. As we get that the identical schema must share the identical test cases, then the only identical test cases between T_1 and T_2 is $T_1 \cap T_2 = T_3$. So the only possible identical schemas between $\mathcal{C}(T_1)$ and $\mathcal{C}(T_2)$ is in $\mathcal{C}(T_3)$. \square

We must know that this proposition holds when some schemas in $\mathcal{C}(T_3)$ also in $\mathcal{C}(T_1)$ and $\mathcal{C}(T_2)$, this can be satisfied at some condition because $T_3 \in T_1$ and $T_3 \in T_2$.

For example, Table IX shows two test cases interact each other at test cases (1,1,0) and (1,1,1), and they have identical minimal schemas, i.e., (1,1,-), which is also the minimal schema in $\mathcal{C}(T_3)$.

PROPOSITION 3.12. *If there we can find $\exists c_1 \in \mathcal{C}(T_1)$ and $c_2 \in \mathcal{C}(T_2)$, s.t., c_1 is parent-schema of c_2 , Then it must have $c_1 \in \mathcal{C}(T_3)$. (and vice versa).*

PROOF. It is also obviously that if two schemas have subsumes relationship, then their test cases must also have inclusion relationship. And as the only inclusion relationship between T_1 and T_2 is that $T_1 \subset T_3$ and $T_2 \subset T_3$. So the parent schemas must be in $\mathcal{C}(T_3)$. \square

It is noted that this proposition holds when holds when some schema in $\mathcal{C}(T_3)$ is also in $\mathcal{C}(T_1)$ (or $\mathcal{C}(T_2)$), and simultaneously the same schemas in $\mathcal{C}(T_3)$ must be the parent-schema of the minimal schemas of another set of test cases, i.e., $\mathcal{C}(T_2)$ (or $\mathcal{C}(T_1)$).

Table X illustrates this scenario, in which, the minimal schemas of T_1 : (1,0,-), (1,-,0), which is also the schemas in $\mathcal{C}(T_3)$, is the parent schema of the minimal schema of T_2 : (1,-,-).

It is noted that this three scenario can appear at one time.

Table X. Example of Intersect by subsume examples

T_1	T_2	T_3
(0, 1, 0)	(0, 0, 0)	(1, 0, 0)
(1, 0, 0)	(1, 0, 0)	(1, 0, 1)
(1, 0, 1)	(1, 0, 1)	(1, 1, 0)
(1, 1, 0)	(1, 1, 0)	
	(1, 1, 1)	
$\mathcal{C}(T_1)$	$\mathcal{C}(T_2)$	$\mathcal{C}(T_3)$
(-, 1, 0)	(-, 0, 0)	(1, 0, -)
(1, 0, -)	(1, -, -)	(1, -, 0)
(1, -, 0)		

3.5. Identify the MFS

According to aforehand analysis, we can get that $\mathcal{C}(T_{F_m})$ actually is the set of failure-causing schemas of F_m . Then in theory, if we want to accurately figure out the MFS in SUT, we need to exhaustively execute each possible test case, and collect the failing test cases T_{F_m} . This is impossible in practice especially when the testing space is too large.

So for traditional FCI approaches, they need to select the subset of the exhaustive test cases, and then either take some assumption to make prediction of the remaining test cases or just give a suspicious rank. As giving a suspicious rank can also be regard as a special case of making prediction(with computing the possibility), so we next only formally describe the mechanism of FCI approaches belong to the first type. We refer the observed failing test case to $T_{fail_{observed}}$, and refer the remaining test cases the approach predict to be failed as $T_{fail_{predicted}}$. We also denote the actual complete failing test cases as T_{fail} . Then the MFS identified by FCI approaches can be depicted as:

$$MFS = \mathcal{C}(T_{fail_{observed}} \cup T_{fail_{predicted}}).$$

For each FCI approach, the way it predict the $T_{fail_{predicted}}$ according to observed failing test cases varies, further more, as the test cases it generates is different, the failing test cases observed by different test cases, i.e., $T_{fail_{observed}}$ also varies. We take an example using OFOT approach to illustrate this formula.

Suppose SUT has 3 parameters, each can take 2 values. And assume the test case (1, 1, 1) failed. Then we can describe the FCI process as Table XI. In this table, test case t failed, and OFOT mutated one factor of the t one time to generate new test cases: $t_1 - t_3$. It found the t_1 passed, which indicates that this test case break the MFS in the original test case t . So the (1,-,-) should be one failure-causing factor, and as other mutating process all failed, which means no other failure-inducing factors were broken, therefore, the MFS in t is (1,-,-).

Now let us explain this process with our formal model. Obviously the $T_{fail_{observed}}$ is {(1,1,1),(1,0,1),(1,1,0)}. And as having found (0,-,-) broke the MFS, hence by OFOT theory, all the test cases contain (0,-,-) should pass the test cases (This conclusion is built on the assumption that SUT just contain one failure-causing schema). As a result, (0,1,1),(0,0,1),(0,1,0),(0,0,0) should pass the testing. Further, as obviously the test case either passes or fails the testing(we label the skip the testing as a special case of failing), so the remaining test case(1,0,0), will be predicted as failing, i.e., $T_{fail_{predicted}}$ is {(1,0,0)}. Taking together, the MFS using OFOT strategy can be described as: $\mathcal{C}(T_{fail_{observed}} \cup T_{fail_{predicted}}) = \mathcal{C}(\{(1, 1, 1), (1, 0, 1), (1, 1, 0), (1, 0, 0)\}) = (1, -, -)$, which is identical to the one it got previously.

Similarly, other FCI approaches can also be modeled into this formal description. We will not in detail discuss how to model each FCI approach into this formal description as this is not the point of this paper. It is noted that the test cases FCI predict to be

Table XI. OFOT with our strategy

original test case				Outcome
t	1	1	1	Fail
observed				
t_1	0	1	1	Pass
t_2	1	0	1	Fail
t_3	1	1	0	Fail
predicted				
t_4	0	0	1	Pass
t_5	0	1	0	Pass
t_6	1	0	0	Fail
t_7	0	0	0	Pass

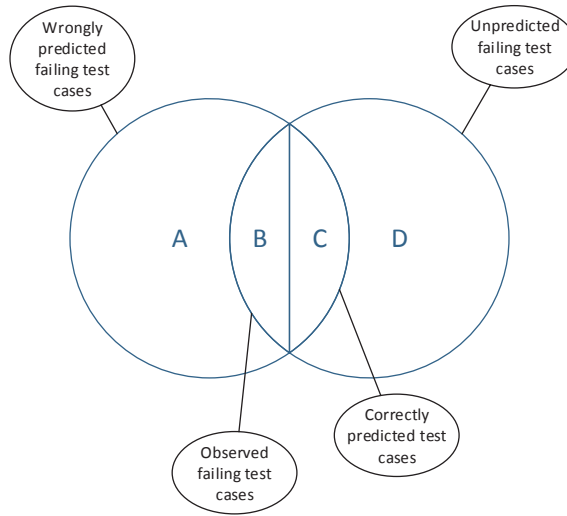


Fig. 3. generally modeling of FCI

failing is not always identical to the actually failing test cases. In fact, we can generally depict the process of FCI approaches like Fig. 3.

We can see in this figure, area A denotes the test cases that should be passing while it predicted to be failing, area B depicts the test cases that the approach observed to be failing test cases, area C refers to the failing test cases that doesn't to be observed but be predicted to be failing test cases and area D illustrates the failing test cases that neither to be observed nor predicted. This figure is actually one sample of the condition that two set of test cases interest with each other, in specific, area $A \cup B \cup C = T_1$, area $D \cup B \cup C = T_2$ and area $B \cup C = T_3$.

We learned previously this scenario makes the schemas identified in T_1 based from the expected MFS in T_2 , in specific, their must be irrelevant schemas between $\mathcal{C}(T_1)$ and $\mathcal{C}(T_2)$, which means that FCI approach will identify some minimal schemas that is irrelevant to actual MFS, and must ignore some actual MFS. Moreover, under the appropriate condition list in proposition 3.11 and 3.12, FCI may identify the identical schemas or parent-schema or sub-schema of the actual MFS. So for FCI approaches aiming to identify the schemas as accurate as possible, it needs to make T_1 as similar

as possible to T_2 , specifically, makes area B and area C as large as possible, and make area A as small as possible.

However, even though each FCI approach tries its best to make area B and C as large as possible, masking effects raised from test cases will make their efforts in vain. We next will discuss the masking problem and how it affects the FCI approaches.

4. MASKING EFFECT

Definition 4.1. A *masking effect* is the effect that while a test case t hit a MFS for a particular fault, however, t didn't trigger the expected fault because other fault was triggered ahead which prevents t to be normally checked.

Taking the masking effects into account, when identifying the MFS for a specific fault, say, F_m , we should not ignore these test cases which should have triggered F_m if they didn't trigger other faults. We call these test cases $T_{mask(F_m)}$. Hence, the MFS for fault F_m should be $\mathcal{C}(T_{F_m} \cup T_{mask(F_m)})$.

As an example, in the motivation example in section 2, the $F_{mask(F_{Ex2})}$ is $\{(7,4,4,5), (11,4,4,5)\}$. So the MFS for $Ex2$ is $\mathcal{C}(T_{F_{Ex2}} \cup T_{mask(F_{Ex2})})$, which is $(-, -, 4, 5)$.

In practice with masking effects, however, it is not possible to correctly identify the MFS, unless we fix some bugs in the SUT and re-execute the test cases to figure out $T_{mask(F_m)}$.

In effect for traditional FCI approaches, without knowledge of $T_{mask(F_m)}$, only two strategies can be adopted when facing the multiple faults problem.

4.1. Regard as one fault

The first one is the most common strategy, it doesn't distinguish the faults, i.e., regard all the types of faults as one fault—*failure*, others as the *pass*.

With this strategy, the FCI process turns into identifying the set $\mathcal{C}(\bigcup_{i=1}^L T_{F_i})$, L is the number of all the faults in the SUT. Obviously, $T_{F_m} \cup T_{mask(F_m)} \subset \bigcup_{i=1}^L T_{F_i}$. So in this case, by Proposition 3.8, some schemas we get may be the sub-schemas of some of the MFS, or irrelevant to the MFS.

As an example, Suppose we take this strategy in the motivation example, then the failure-inducing combinations we get will be $(- 4 4 -)$ and $(- - 4 5)$. In this example, with *regard as one fault strategy* we consider that combination $(- 4 4 -)$ and $(- - 4 5)$ should be the cause of both Ex 1 and Ex 2, which in fact, $(- 4 4 -)$ is irrelevant to the failure-inducing combinations of Ex 2 and $(- - 4 5)$ is irrelevant to the failure-inducing combinations of Ex 1.

4.2. Distinguish faults

Distinguishing the faults by the exception traces or error code can help make FCI approaches focus on particular fault. Yilmaz in [Yilmaz et al. 2013] proposed the *multiple-class* failure characterize method instead of *ternary-class* approach to make the characterizing process more accurately. Besides, other approaches can also be easily extended with this strategy to be applied on SUT with multiple faults.

This strategy in fact identifies the set of $\mathcal{C}(T_{F_m})$, and as $T_{F_m} \cup T_{mask(F_m)} \supset T_{F_m}$, consequently, some schemas get through this strategy may be the parent-schema of some MFS. Moreover, some MFS may be irrelevant to the schemas get with this strategy, which means this schemas set ignore these MFS.

It is noted that, the FCI approach listed in motivation example in section 2 actually adopted this strategy, which made the schemas identified for Ex 2: $(-, 2, 4, 5)$, $(-, 3, 4, 5)$ are the parent-schemas of the correct MFS $(-, -, 4, 5)$.



Fig. 4. FCI with masking effects

4.3. masking effects for FCI approaches

Previously we just discussed how masking effects affect the exhaustive testing with two strategies. Next we see how traditional FCI process will be interfered with, i.e., how $T_{fail_{observed}}$ and $T_{fail_{predicted}}$ will grow into.

The abstract scenario of FCI approaches with masking effects will grow into the Figure 4, in which area A, C and D is the same as Figure 3. Area B is divided into three sub-areas, in which B_1 is still the observed failing test cases for the current analysed fault, area B_2 is the test cases triggered other fault which masked the current fault, area B_3 is the test cases triggered other fault which did not mask the current fault.

With this model, if we have known which test cases mask the expect fault, i.e., figured out the B_2 and B_3 , then the schemas FCI approach will identify can be described as $C(A \cup B_1 \cup B_2 \cup C)$. However, as we discussed forehead, this is not possible and what can do is the forehead two strategies.

Then for *regard as one fault* strategy, the MFS traditional FCI identify are $C(A \cup B_1 \cup B_2 \cup B_3 \cup C)$. And for *distinguish faults* strategy, the MFS is $C(A \cup B_1 \cup C)$.

4.3.1. using regard as one fault strategy. For the first strategy: *regard as one fault*, the influence can be described as Figure 5. To understand the content of this figure, let us get back to the properties of minimal schemas' relationship between two different set of test cases. We known if we have known masking effects, the result identified by FCI approach, i.e., $C(A \cup B_1 \cup B_2 \cup C)$, grow into the condition of the *intersect* s-cenario. It means that the minimal schemas get in this condition can be identical, parent-schema, sub-schema, irrelevant to the actual MFS. And then apply the *regard as one fault*, the result is $C(A \cup B_1 \cup B_2 \cup B_3 \cup C)$. It is obviously $A \cup B_1 \cup B_2 \cup B_3 \cup C \supset A \cup B_1 \cup B_2 \cup C$. So the minimal schema get by this strategy is either the sub-schema or identical to some schemas from the known masking effects, or irrelevant to all the ones. Taking together this two properties together, we will get Figure 5.

Now we can easily understand this figure, the left column in this figure means the schemas identified by FCI knowing masking effects at ahead, then as we take the *regard as one fault* strategy, the schemas will be either sub-schema or identical or

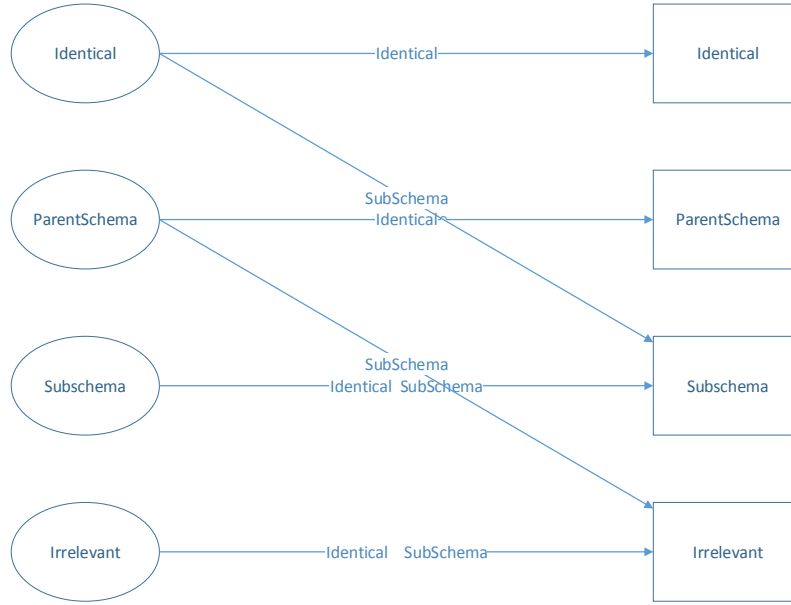


Fig. 5. masking effects influence on FCI with regard as one fault

irrelevant to the previous schemas. So if we originally get the identical schema to actual MFS with knowing masking effects, then after applying the strategy, if we still get the identical as originally identified, then the final result is still identical to the actual MFS, else if we get the sub-schema to the originally identified, then the final result is the sub-schema to the actual MFS. In this figure, the directed-line represent the changing method from the original identified, and the right column represent the final transformed result against the actual MFS.

Some transformation in this figure is obviously, such as original sub-schema changing by sub-schema is still the sub-schema. Next we just prove the transformation that is hard to understand.

PROPOSITION 4.2. *Original parent-schema, the sub-schema must be irrelevant.*

PROOF. Without loss of generality, we assume c is the parent schema to the actual MFS. Based on previous proposition 3.12, we have $c \in \mathcal{C}(T_3)$, which means $c \in \mathcal{C}(B_1 \cup B_2)$.

Then apply *regard as one fault*, i.e., the B_3 is appended for analysis. Now if we find some schema, say $c' \prec c$, s.t., $c' \in \mathcal{C}(A \cup B_1 \cup B_2 \cup B_3)$, then $T(c')$ must contain some test cases in B_3 (if not, c must be the minimal schemas).

This time, for c' , as $T(c')$ contain other test cases besides $T_{failing}$, then c' is not the parent-schema or identical of any MFS. And c' is also not possible the sub-schema of some MFS. This is because, based on proposition 3.12, if exist c_m is the parent-schema of some identified minimal schema, then the MFS must have $c_m \in \mathcal{C}(T_3)$, and $T(c_m) \subset T(c')$. As we see all the set $T(c')$ contained in the failing test cases is $T(c)$. So either $T(c) \supset T(c_m)$ or $T(c) = T(c_m)$, which means that $c \prec c_m$ or $c = c_m$, this is impossible as c is the parent-schema of some MFS, and c_m is the MFS. So c' is not possible the sub-schema of some MFS.

Thus, at last c' must be irrelevant to the actual MFS. \square

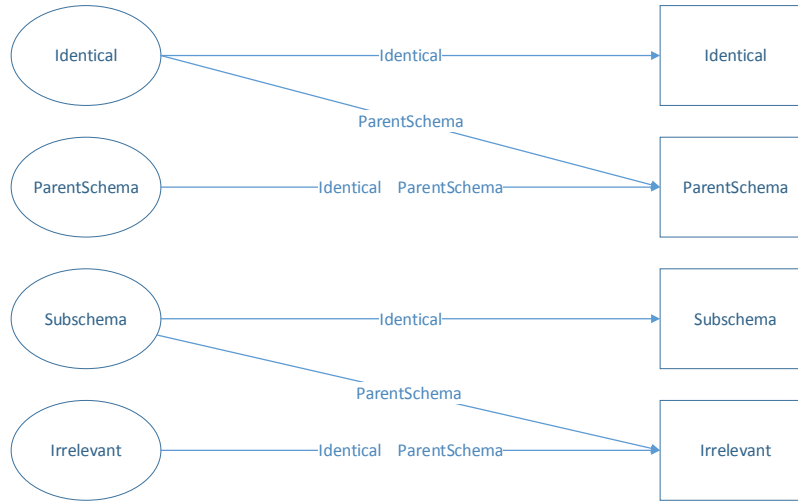


Fig. 6. masking effects influence on FCI with distinguish faults

PROPOSITION 4.3. *Original irrelevant, the sub-schema must be irrelevant.*

PROOF. Without loss of generality, we assume c is irrelevant to the actual MFS. Then $T(c)$ must contain some other test cases in A . After using the *regard as one fault* strategy, the same as the previous proposition, if we have $c' \prec c$, then $T(c')$ must append some test cases in B_3 .

Still c' is not possible the parent-schema or identical ones. If we assume there is MFS c_m s.t., $c' \prec c_m$, we must have $T(c') \supset T(c_m)$. Then as $T_{c'}$ is just some test case in B_3 with T_c , so we must also have $T_c \supset T(c_m)$, which means $c \prec c_m$, which is not possible, as c is irrelevant to the MFS.

Thus, c' must be irrelevant. \square

For the newly derived irrelevant ones, we can have

PROPOSITION 4.4. *Newly irrelevant ones must be irrelevant or subsume to MFS.*

PROOF. Without loss of generality, we get new c irrelevant to $\mathcal{C}(A \cup B_1 \cup B_3)$. Similarly as previous propositions, it must have that $T(c)$ contain some test cases in B_3 .

So as $T(c)$ contain other test cases, then c neither be the parent-schema nor be the identical ones.

\square

4.3.2. using distinguish strategy. And for the second strategy: *distinguish faults*, the influence can be described as Figure 6.

This figure is organised the same way as figure 5. As with distinguish strategy, the minimal schemas identified are actually $\mathcal{C}(A \cup B_1 \cup C)$. Obviously $A \cup B_1 \cup C \subset A \cup B_1 \cup B_2 \cup C$. So this transformation should be either parent-schema or identical to the originally schemas.

Similarly, we just give the proof of some transformation that is not so obviously.

PROPOSITION 4.5. *Original sub-schema, the parent-schema must be irrelevant.*

PROOF.

□

PROPOSITION 4.6. *Original identical-schema, the parent-schema must be irrelevant.*

PROOF.

□

Another point need to be noted is that this transformation also mean some ignored ones(As MFS irrelevant to the set).

4.4. Summary of the masking effects on FCI approach

From the analysis of formal model, we can learn that masking effects do influence the FCI approaches, worse more, both strategies *regard as one fault* and *distinguish faults* are harmful, which specifically the former comparing the knowing masking effects have a large possibility that get more sub-schemas of the actual MFS and get more schemas which are irrelevant to the MFS, while the latter may get more parent schemas of the MFS and get more irrelevant MFS and also may ignore some of them.

Note that our discussion is based on that SUT is a deterministic software, i.e., the random failing information of test case will be ignored. The non-deterministic problem will complex our test scenario, which will not be discussed in this paper.

5. TEST CASE REPLACING STRATEGY

The main reason why both strategies cannot accurately identify the failure-inducing combinations is that we cannot figure out the $T(mask_{F_m})$. As $T(mask_{F_m}) \subset \bigcup_{i=1 \& j \neq m}^L T_{F_i}$, in order to weaken the influence of $T(mask_{F_m})$, we need to reduce the number of test cases that trigger other faults as much as possible.

In the exhaustive testing, as all the test cases will be used to identify the failure-inducing combinations, there is no room left to improve accuracy. However, when just needing to select part of the whole test cases to identify failure-inducing combinations, which is practical and sometimes the only solution for large-scale SUT, we can adjust the test cases we need to use by selecting proper ones so that we can limit the size of $T(mask_{F_m})$ to be as small as possible.

5.1. Replace test case triggering unexpected fault

The basic idea is to pick the test cases that trigger other faults and generate newly test cases to replace them. These regenerated test cases should either pass in the execution or trigger F_m . The replacement must satisfy that the newly generated ones will not negatively influence the original identifying process.

Commonly, when we replace the test case that triggers unexpected fault with a new test case, we should keep some part in the original test case, we call this part as *fixed part*, and mutate other part with different values from the original one. For example, if a test case (1,1,1,1) triggered an unexpected fault, and the fixed part is (-,-,1,1), then we can replace it with a test case (0,0,1,1) which may either pass or trigger expected fault.

The *fixed part* can be the factors that should not be changed in the OFOT algorithm, or the part that should not be mutated of the test case in the last iteration for FIC_BS algorithm.

The process of replacing a test case with a new one keeping some fixed part is depicted in Algorithm 1:

The inputs for this algorithm consists of a test case which trigger an unexpected fault – $t_{original}$, the fixed part which we want to keep from the original test case –

ALGORITHM 1: replace test cases triggering unexpected faults

Input: the original test case $t_{original}$, fault type F_m , fixed part s_{fixed} , values set that each option can take $Param$

Output: t_{new} the regenerate test case, The frequency number

$index = 0$; $FreNum_\alpha = -1$;

```

while not MeetEndCriteria() do
     $s_{mutant} \leftarrow t_{original} - s_{fixed}$ ;
    forall the  $opt \in s_{mutant}$  do
         $i = getIndex(Param, opt)$ ;
         $opt \leftarrow opt' \text{ s.t. } opt' \in Param[i] \text{ and } opt' \neq opt$ ;
    end
     $t_{new} \leftarrow s_{fixed} \cup s_{mutant}$ ;
     $result \leftarrow execute(t_{new})$ ;
    if  $result == PASS$  or  $result == F_m$  then
        return  $t_{new}$ ;
    else
        continue;
    end
end
return null

```

s_{fixed} , the fault type which we currently focus on – F_m , and the values sets that each option can take from respectively. The output of this algorithm is a test case t_{new} which either trigger the expected F_m or passes.

This algorithm is a loop(line 1 - 14) containing two parts:

The first part(line 2 - 7) generates a new test case which is different from the original one. This test case will keep the fixed part (line 7), and just mutate the factors which are not in that part(line 2). The mutation for each factor works by selecting one legal value(by random) which is different from the original one(line 3 - 6). The generated newly test case must be different from each iteration(we implemented it by hashing method).

Second part is to check whether the newly generated test case is as expected(line 8 - 13). We first execute the SUT under the newly generated test case(line 8) and then check the executed result. Either the test case passes or triggers the same fault – F_m meets the requirement(line 9), and if so we will directly return this test case(line 10). Otherwise, we will repeat the process, i.e., generate newly test case and check again(line 11 -12).

It is noted that the loop has another exit besides we find an expected test case(line 10), which is when the function *MeetEndCriteria()* returns *true*(line 1). We didn't explicitly show what the function *MeetEndCriteria()* is like, because this is depending on the computing resource and how accurate you want to the identifying result to be. In detail, if you want to get a high quality result and you have enough computing resource, you can try much times to get the expected test case, otherwise, a relatively small number of attempts is recommended.

In this paper, we just set 3 as the biggest repeated times for this function. When it ended with *MeetEndCriteria()* is true, we will return null(line 15), which means we cannot find an expected test case.

5.2. A case study with the replacing strategy

Suppose we have to test a system with four parameters, each has three options. And when we execute the test case (0 0 0 0), a failure-*Err1* is triggered. Next we will use the FCI approach – OFOT with replacing strategy to identify the failure-inducing

combinations for the *Err1*. The process is listed in Table XII. In this table, the test case which are labeled with a deleted line represent the original test case generated by OFOT, and it will be replaced by the regenerated test case which are labeled with a wave line under it.

From table XII, we can find the algorithm mutates one factor to take the different value from the original test case one time. Originally if the test case encounter the result different from the expected error, OFOT will derive the fact that the failure-inducing combination was broken, in another word, if we change one factor and it does not trigger the expect error, we will label it as one failure-inducing factor, after we changed all the elements, we will get the failure-inducing combinations. For this case, if we take the *regard as one fault* strategy, then the failure-inducing combination we got is (- - - 0) because the last case passed test case while the remaining test cases triggered either *Err1* or *Err2*(regard as one fault). Additionally when we take the *distinguish faults* strategy, the failure-inducing combinations obtained is (- 0 0 0) as when we changed the second factor, third factor and the fourth factor, it didn't trigger the *Err1* (for second factor, it triggered *Err2* and for the third and fourth, it passed).

However, if we replace the test case t_2 -(0 1 0 0) with t'_2 -(0 2 0 0) which triggered err 1 (in this case, the fixed part of the test case is (0, - - -)), and replace the test case t_3 -(0 0 1 0) with t'_3 -(0 0 2 0) which passed, we will find that only when we change the third and fourth factor will we broke the failure-inducing combination for err 1, therefore, the failure-inducing combination for err 1 should be (- - 0 0).

Table XII. OFOT with our strategy

	original test case				fault info
t	0	0	0	0	Err 1
t_1	1	0	0	0	Err 1
t_2	0	1	0	0	Err 2
t'_2	0	2	0	0	Err 1
t_3	0	0	1	0	Err 2
t'_3	0	0	2	0	Pass
t_4	0	0	0	1	Pass
regard as one fault					replacing strategy
(- - - 0)					(- - 0 0)
distinguish faults					
(- 0 0 0)					

5.3. Complexity analysis

This complexity is well lay on the number of faults and the magnitude and location of the MFS of each schema, we only analysis the average performance of our approach. Also this approach also lay on the number of tests need to be executed about each algorithm.

6. EMPIRICAL STUDIES

We conducted several empirical studies to address the following questions:

Q1: Do masking effects exist in real software when it contain multiple faults?

Q2: How much do traditional approaches suffer from these real masking effects?

Q3: Can our approach do better than traditional approaches when facing these masking effects?

Q4: Does voting system that consists of different approaches can make improvements?

Table XIII. Software under survey

software	versions	LOC	classes	bug pairs ³
HSQLDB	2.0rc8	139425	495	#981 & #1005
	2.2.5	156066	508	#1173 & #1179
	2.2.9	162784	525	#1286 & #1280
JFlex	1.4.1	10040	58	#87 & #80
	1.4.2	10745	61	#98 & #93

6.1. The existence of masking effects

In the first study, we surveyed two open-source software to gain an insight on the existence of multiple faults and their effects. The software under study are: HSQLDB and JFlex, the first is a database management software written in pure java and the second is a lexical analyser generator. Each of them contain different versions. All the two subjects are highly configurable so that the options and their combination can influence their behaviour. Additionally, they all have developers' community so that we can easily get the real bugs reported in the bug tracker forum. Table XIII lists the program, the number of versions we surveyed, number of lines of uncommented code, number of classes in the project and the bug's id of each software we studied.

6.1.1. Study setup. We first looked through the bug tracker forum of each software and picked some bugs which are caused by the options combination. For each bug, we will derive its failure-inducing combinations by analysing the bug description report and its attached test file which can reproduce the bug. For example, through analysing the source code of the test file of bug#981 for HSQLDB, we found the failure-inducing combinations for this bug is: (*preparestatement*, *placeholder*, *Long string*), this three factors together form the condition on which the bug will be triggered. These analysed results will be regarded as the "prior failure-inducing combinations" later.

We further selected pairs of bugs belong to the same version and merged their test file, so that we can reproduce different faults through controlling the inputs to that merged test file. This merging manipulation varies with the pair of bugs we selected, and for each pair of bugs, the source code of the merging file as well as other detailed experiment information is available at– <https://code.google.com/p/merging-bug-file>.

Next we built the input model which consist of the options related to the failure-inducing combinations and additional noise options. The detailed model information is in Table XIV and XV for HSQLDB and JFlex respectively. Each table is organised into four groups: 1)"common options", which lists the options as well as their values under which every version of this software can be tested. 2)"common boolean options", which lists additional common options whose values type is boolean. 3)"specific options", under which only the specific version of that software can be tested. 4)"configure space", which depicts the input model for each version of the software.

We then generated the exhaustive test suite consist of all the possible combinations of these options and under each of them we executed the merged test file. We recorded the output of each test case to observe whether there are test cases contain prior failure-inducing combination but do not produce the corresponding bug.

6.1.2. Result and discussion. Table XVI lists the results of our survey. Column "all tests" give the total number of test cases we executed, Column "failure" indicate the number of test cases that failed during testing and Column "masking" indicate the number of test cases which trigger the masking effect.

We observed that for each version of the software under analysis we listed in the Table XVI, the test cases with masking effects do exist, i.e., test cases containing failure inducing combinations did not trigger the corresponding bug. In effect, there is

Table XIV. Input model of HSQLDB

common options		values
Server Type		server, webserver, inprocess
existed form		mem, file
resultSetTypes		forwad, insensitive, sensitive
resultSetConcurrencys		read_only, updatable
resultSetHoldabilitys		hold, close
StatementType		statement, prepared
common boolean options		
sql.enforce_strict_size, sql.enforce_names, sql.enforce_refs		
versions	specific options	values
2.0rc8	more	true, false
	placeholder	true, false
	cursorAction	next,previous,first,last
2.2.5	multiple	one, multi, default
	placeholder	true, false
2.2.9	duplicate	dup, single, default
	default_commit	true, false
versions	Config space	
2.0rc8	$2^9 \times 3^2 \times 4^1$	
2.2.5	$2^8 \times 3^3$	
2.2.9	$2^8 \times 3^3$	

Table XV. Input model of JFlex

common options		values
generation		switch, table, pack
charset		default, 7bit, 8bit, 16bit
common boolean options		
public, apiprivate,cup,caseless,char,line,column,notunix, yyeof		
versions	specific options	values
1.4.1	hasReturn	true, false, default
	normal	true, false
1.4.2	lookAhead	one, multi, default
	type	true, false
	standalone	true, false
versions	Config space	
1.4.1	$2^{10} \times 3^2 \times 4^1$	
1.4.2	$2^{11} \times 3^2 \times 4^1$	

Table XVI. Number of faults and their masking effects

software	versions	all tests	failure	masking
HSQLDB	2cr8	18432	4608	768
-	2.2.5	6912	3456	576
-	2.2.9	6912	3456	1728
JFlex	1.4.1	36864	24576	6144
-	1.4.2	73728	36864	6144

about 768 out of 4608 test cases (16.7%) in hsqldb with 2rc8 version. This rate is about 16.7%, 50%, 25%, 16.7% respectively for the remaining software versions, which is not trivial.

So the answer to **Q1** is that in practice, when SUT have multiple faults, the masking effects do exist widely in the test cases.

6.2. Performance of the traditional algorithms

In the second study, our aim is to learn the degree that the masking effect impact on the traditional approaches. To conduct this study, we need to apply the traditional

algorithms to identify the failure-inducing combinations for the prepared software in Table XIII and compare them with the prior failure-inducing combinations.

6.2.1. Study setup. The traditional approaches we selected are: OFOT[Nie and Leung 2011a], FIC_BS [Zhang and Zhang 2011] and CTA[Yilmaz et al. 2006], in which CTA is a integrated failure characterization part of FDA-CIT[Yilmaz et al. 2013]. As CTA is a post-analysis technique applied on given test cases, different test cases will influence the result of characterization process. So to avoid randomness and to be fair, we fed the CTA with the same test cases generated by OFOT to get deterministic results. Additionally, the classified tree algorithms for CTA we chose is J48 implemented in Weka [Hall et al. 2009].

For each test case in the exhaustive set for a particular software, we applied OFOT, FIC_BS and CTA respectively to isolate the failure-inducing combinations in this test case. As the subject under test has multiple faults, there are two strategies we adopted in this case study, i.e., *regard as one fault* and *distinguish faults* described in Section 3.2. We then collected all the failure-inducing combinations identified by each algorithm for each strategy respectively and refer them as *identified combinations* for convenience.

We next compared the result with the prior failure-inducing combinations to quantify the degree that traditional approaches suffers from masking effect. There are five metrics we need to care in this study, which are listed as follows:

- (1) The number of the common combinations appeared in both identified combinations and prior failure-inducing combinations. We denote it as *accurate number* later.
- (2) The number of the identified combinations which is the parent combinations of some prior failure-inducing combinations. We refer it to *parent number*.
- (3) The number of the identified combinations that is the sub combinations of some prior failure-inducing combinations, which is referred to *sub number*.
- (4) The number of ignored failure-inducing combinations. This metric counts these combinations in prior failure-inducing combinations, which are irrelevant to the identified combinations. We label it as *ignored number*.
- (5) The number of irrelevant combinations. This metric counts these combinations in these identified combinations, which are irrelevant to the prior failure-inducing combinations. It is referred to the *irrelevant number*.

Among these five metrics, high *accurate number* value indicates FCI approaches performs effectively, while *ignored number* and *irrelevant number* indicate the degree of deviation for the FCI approaches. For *parent number* and *sub number*, they indicate FCI approaches that, although with additional noisy information, can determine part parameter values about the failure-inducing combinations.

This case study was conducted on the five subjects: HSQLDB with version 2rc8, 2.2.5 and 2.2.9, JFlex with versions 1.4.1 and 1.4.2. We summed up these metrics for each subject and illustrated them together in Figure 7 for analysis.

6.2.2. Result and discussion. Figure 7 depicts the result of the second case study. There are three sub-figures, respectively, corresponding to the result of three approaches: FIC_BS, OFOT and CTA. In each sub-figure, the five columns “accurate”, “parent”, “sub”, “ignore” and “irrelevant” respectively presents the five metrics mentioned above. Two bars in each column respectively illustrate the result of strategy for *regard as one fault* and *distinguish faults*.

We first observed that, traditional approaches do suffer from the masking effect to some extent. Specifically, in the Figure 7(a), FIC_BS approach only correctly identified 12 and 10 accurate combinations for the two traditional strategies respectively, while wrongly identified 14 and 69 combinations, among which *parent number*, *sub number*,

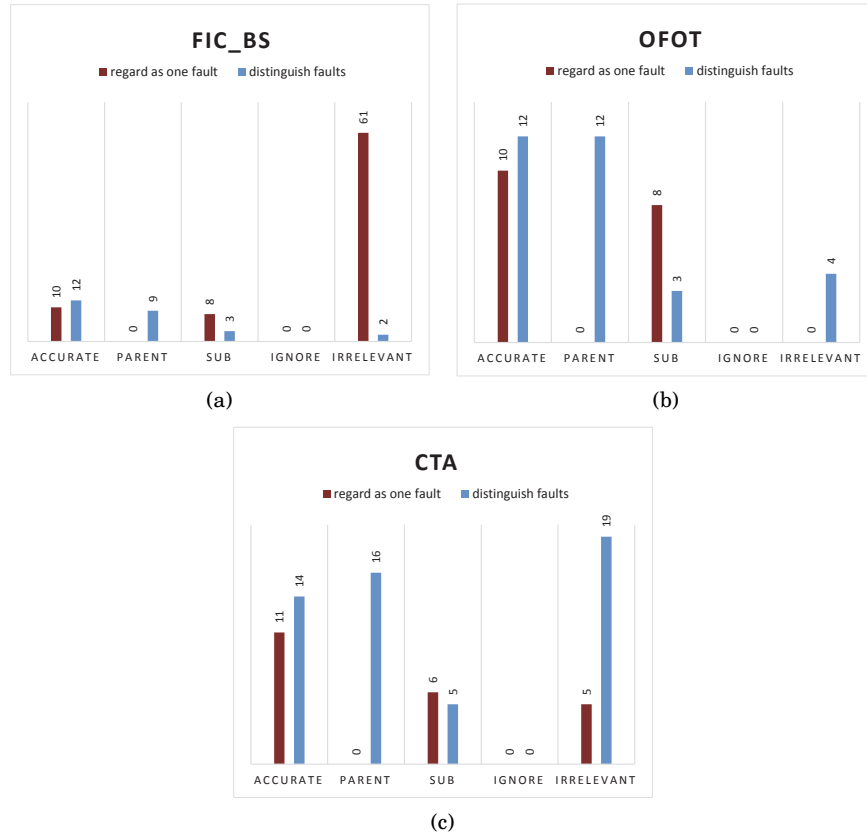


Fig. 7. Results of two strategies for traditional approaches: FIC_BS, OFOT and CTA

irrelevant number are 9,3,2 and 0,8,61 respectively. Similar results can be observed in Figure 7(b) and 7(c) for approach OFOT and CTA .

Another interesting observations is that for the *regard as one fault* and *distinguish faults* strategy, the former get more *sub combinations* than latter, while *distinguish faults* strategy get more *parent combinations* than *regard as one* strategy. This result accorded with our formal analysis in section 3.2. With respect to the metrics *irrelevant combinations*, however, we didn't get as expected as the formal analysis. In fact, both the case that *regard as one fault* has more *irrelevant combinations* (see Figure 7(a)) and the case that *distinguish faults* obtained more *irrelevant combinations* (see Figure 7(b) and 7(c)) exist. With checking the executing process and the combinations they got, we believed one possible main reason for this result is that the algorithm encountered the problem of importing newly faults which bias their identifying process.

We further observed that, for different algorithms, the extent to what they suffered from masking effects varied. For instance, for FIC_BS approach, under the masking effects, they identified the 61 and 2 irrelevant combinations for two strategies, while for OFOT and CTA, this value is 0 and 4, 5 and 19 respectively. There are two factors caused this difference: the chosen test cases and the analysis method. For FIC_BS and OFOT, the test cases they chosen for isolating failure-inducing combinations is different, which consequently changed the masking effects they may encountered. For OFOT an CTA, while the test cases they chose are the same, the difference lies at

the way they characterizing the failure-inducing combinations in the test cases: OFOT directly identify the parameter according to the passed test cases while CTA used classified tree analysis.

Therefore, the answer we got for **Q2** is: traditional algorithms do suffer from the multiple faults and their masking effect, although the extent varies in different algorithms.

6.3. Performance of our approach

The third empirical study aims to observe the performance of our approach and compare it with the result got by the traditional approaches. Our approach augments the three traditional FCI approaches with replacing test cases strategy described in Section 4.

6.3.1. Study setup. The setup of this case study is almost the same as the second case study. The difference is that the algorithms we choose are three augmented ones.

6.3.2. Result and discussion. Figure 8 presents the result of the last case study. The organization of this figure is similar to the second study. The bar in each column depicts the results of the augmented approaches, which is labelled as “replacing strategy”. We marked two additional points in each column which represent the result of *regard as one fault* and *distinguish faults* strategy to get a comparison with the augmented approaches.

Comparing our approach with two traditional strategies in Figure 8, we observed that there is significant improvement for augmented approaches in reducing the wrongly identified combinations. For instance, CTA approach in Figure 8(c) only got 2 irrelevant combinations with replacing strategy, while the traditional two strategy got 5 and 19 irrelevant combinations respectively. And for FIC_BS in Figure 8(a) this comparison is 2 for replacing strategy, and 2, 61 for two traditional strategies.

Besides, the augmented approaches also get a good performance at limiting the number of sub combinations and parent combination. In effect, compared with *distinguish faults* which is good at limiting sub combinations while producing more parent combinations and *regard as one fault* which is the other way around, the augmented ones get a more balanced result. Specifically, for instance, in Figure 8(a) for approach FIC_BS, *distinguish faults* strategy obtained 9 parent combinations while got 3 sub combinations. And for *regard as one fault* strategy, it got none parent combination but attained 8 sub combinations. For the replacing strategy, it only identified 4 parent combinations, which smaller than *distinguish faults* strategy, and obtained 3 sub combinations which is smaller than *regard as one fault* strategy and equal to *distinguish faults* strategy.

Apart from these improvement, there is some slight decline for the augmented approaches in some specific situation. For example, we noted that for replacing strategy, it nearly got 2 less accurate combinations on average than traditional strategies, and ignored 1 more failure-inducing combinations on average than traditional ones.

In summary, the answer for **Q3** is: our approach do make the FCI approaches, to some extent, get better better performance at identifying failure-inducing combinations when facing masking effect between multiple faults.

6.4. Voting System

The last empirical study aims to observe the performance of our approach and compare it with the result got by the traditional approaches. Our approach augments the three traditional FCI approaches with replacing test cases strategy described in Section 4.

6.4.1. Study setup. The setup of this case study is almost the same as the second case study. The difference is that the algorithms we choose are three augmented ones.

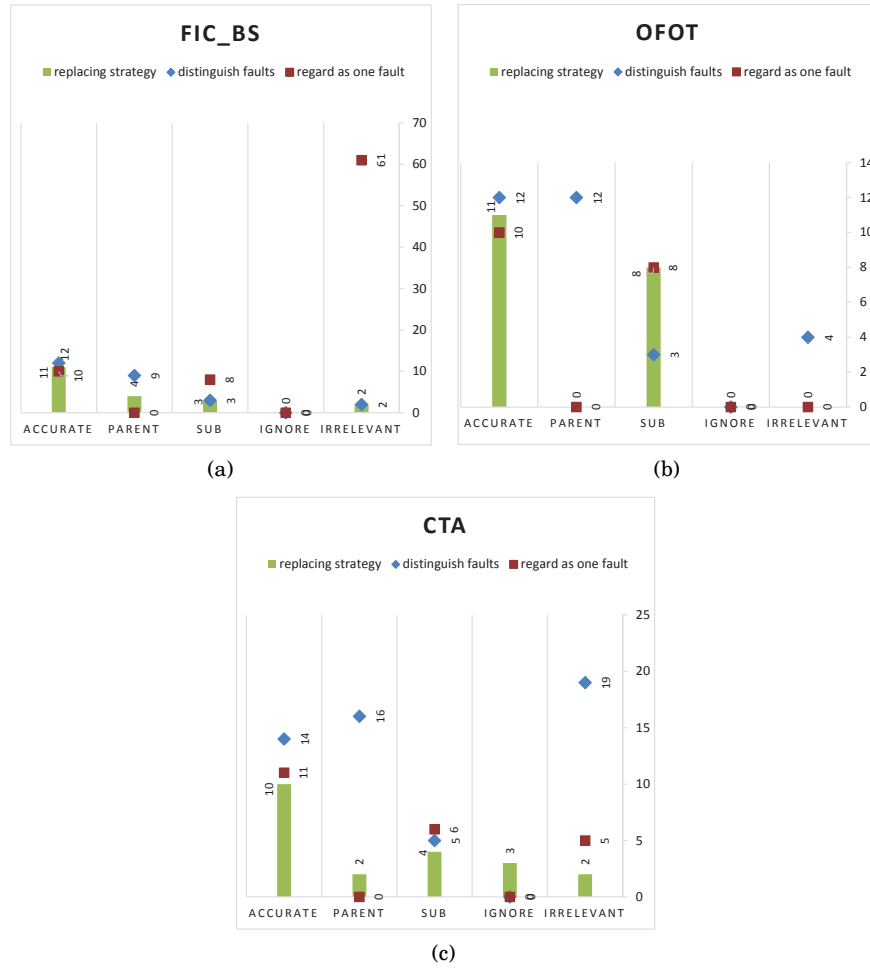


Fig. 8. Three approaches augmented with the replacing strategy

6.4.2. Result and discussion.

6.5. Threats to validity

There are several threats to validity for these empirical studies. First, we have only surveyed five open-source software, four of which are medium-sized and one is large-sized. This may impact the generality of our observations. Although we believe it is quite possible a common phenomenon in most software that contain multiple faults which can mask each other, we need to investigate more software to support our conjecture.

The second threat comes from the input model we built. As we focused on the options related to the perfect combinations and only augmented it with some noise options, there is a chance we will get different result if we choose other noise options. More different options needed to be opted to see whether our result is common or just appeared in some particular input model.

The third threat is that we just observed three failure-inducing combinations identifying algorithms, further works needed to examine more algorithms in this field to get a more general result.

7. RELATED WORKS

Shi and Nie presented a further testing strategy for fault revealing and failure diagnosis [Shi et al. 2005], which first tests SUT with a covering array, then reduces the value schemas contained in the failed test case by eliminating those appearing in the passed test cases. If the failure-causing schema is found in the reduced schema set, failure diagnosis is completed with the identification of the specific input values which caused the failure; otherwise, a further test suite based on SOFOT is developed for each failed test case, testing is repeated, and the schema set is then further reduced, until no more failure is found or the fault has been located. Based on this work, Wang proposed an AIFL approach which extended the SOFOT process by mutating the changing strength in each iteration of characterizing failure-inducing combinations [Wang et al. 2010].

Nie et al. introduced the notion of Minimal Failure-causing Schema (MFS) and proposed the OFOT approach which extended from SOFOT that can isolate the MFS in SUT [Nie and Leung 2011a]. The approach mutates one value with different values for that parameter, hence generating a group of additional test cases each time to be executed. Compared with SOFOT, this approach strengthens the validation of the factor under analysis and also can detect the newly imported faulty combinations.

Delta debugging [Zeller and Hildebrandt 2002] proposed by Zeller is an adaptive divide-and-conquer approach to locate interaction faults. It is very efficient and has been applied to real software environment. Zhang et al. also proposed a similar approach that can identify the failure-inducing combinations that has no overlapped part efficiently [Zhang and Zhang 2011]. Later Li improved the delta-debugging based failure-inducing combination by exploiting the useful information in the executed covering array [Li et al. 2012].

Colbourn and McClary proposed a non-adaptive method [Colbourn and McClary 2008]. Their approach extends the covering array to the locating array to detect and locate interaction faults. C. Martinez proposed two adaptive algorithms. The first one needs safe value as their assumption and the second one removes the assumption when the number of values of each parameter is equal to 2 [Martínez et al. 2008; 2009]. Their algorithms focus on identifying the faulty tuples that have no more than 2 parameters.

Ghandehari et al. defined the suspiciousness of tuple and suspiciousness of the environment of a tuple [Ghandehari et al. 2012]. Based on this, they rank the possible tuples and generate the test configurations. They further utilized the test cases generated from the inducing combination to locate the faults inside the source code [Ghandehari et al. 2013].

Yilmaz proposed a machine learning method to identify inducing combinations from a combinatorial testing set [Yilmaz et al. 2006]. They construct a classified tree to analyze the covering arrays and detect potential faulty combinations. Besides this, Fouché [Fouché et al. 2009] and Shakya [Shakya et al. 2012] made some improvements in identifying failure-inducing combinations based on Yilmaz's work.

Our previous work [Niu et al. 2013] have proposed an approach that utilizes the tuple relationship tree to isolate the failure-inducing combinations in a failing test case. One novelty of this approach is that it can identify the overlapped faulty combinations. This work also alleviates the problem of introducing newly failure-inducing combinations in additional test cases.

In addition to the works that aim at identifying the failure-inducing combinations in test cases, there are some studies focus on working around the masking effects:

With having known masking effects in prior, Cohen [Cohen et al. 2007a; 2007b; 2008] studied the impacts that the masking effects render some generated test cases invalid in CT, and they proposed the approach that integrate the incremental SAT solver with covering array generating algorithms to avoid these masking effects in test cases generating process. Further study was conducted [Petke et al. 2013] to show the fact that with considering constraints, the higher-strength covering arrays with early fault detection is practical. Besides, additional constraints impacts in CT were studied in works like [Garvin et al. 2011; Bryce and Colbourn 2006; Calvagna and Gargantini 2008; Grindal et al. 2006; Yilmaz 2013].

Chen et al. addressed the issues of shielding parameters in combinatorial testing and proposed the Mixed Covering Array with Shielding Parameters (MCAS) to solve the problem caused by shielding parameters [Chen et al. 2010]. The shielding parameters can disable some parameter values to expose additional interaction errors, which can be regarded as a special case of masking effects.

Dumlu and Yilmaz proposed a feedback-driven approach to work around the masking effects [Dumlu et al. 2011]. In specific, it first use CTA classify the possible failure-inducing combinations and then eliminate them and generate new test cases to detect possible masked interaction in the next iteration. They further extended their work [Yilmaz et al. 2013], in which they proposed a multiple-class CTA approach to distinguish faults in SUT. In addition, they empirically studied the impacts on both ternary-class and multiple-class CTA approaches.

Our work differs from these ones mainly in the fact that we formally studied the masking effects on FCI approaches and further proposed a divide-and-conquer strategy to alleviate this impact.

8. CONCLUSIONS

Masking effects of multiple faults in SUT can bias the result of traditional failure-inducing combinations identifying approaches. In this paper, we formally analysed the impact of masking effects on FCI approaches and showed that both two traditional strategies are inefficient in handling such impact. We further presented a divide and conquer strategy for FCI approaches to alleviate this impact.

In the empirical studies, we extended three FCI approaches with our strategy. The comparison between this three traditional approaches and their improved variations was conducted on several open-source software. The results indicated that our strategy do assist traditional FCI approaches in getting a better performance when facing masking effects in SUT.

As a future work, we need to do more empirical studies to make our conclusion more general. Our current experimental subjects are several middle-sized software, we would like to extend our approach into more complicated and large-scaled testing scenarios. Another promising work in the future is to combine white-box testing technique to make the FCI approaches get more accurate results when handling masking effects. We believe that figuring out the fault levels of different bugs through white-box testing technique is helpful to reduce misjudgement in the failure-inducing combinations identifying process. At last, as the extent to what the FCI suffers from masking effects varies in different algorithms, the combination of different FCI approaches is desired in the future to further improve the performance for identifying failure-inducing combinations for multiple faults.

9. TYPICAL REFERENCES IN NEW ACM REFERENCE FORMAT

APPENDIX

ELECTRONIC APPENDIX

The electronic appendix for this article can be accessed in the ACM Digital Library.

ACKNOWLEDGMENTS

The authors would like to thank Dr. Maura Turolla of Telecom Italia for providing specifications about the application scenario.

REFERENCES

- James Bach and Patrick Schroeder. 2004. Pairwise testing: A best practice that isn't. In *Proceedings of 22nd Pacific Northwest Software Quality Conference*. Citeseer, 180–196.
- Renée C Bryce and Charles J Colbourn. 2006. Prioritized interaction testing for pair-wise coverage with seeding and constraints. *Information and Software Technology* 48, 10 (2006), 960–970.
- Renée C Bryce, Charles J Colbourn, and Myra B Cohen. 2005. A framework of greedy methods for constructing interaction test suites. In *Proceedings of the 27th international conference on Software engineering*. ACM, 146–155.
- Andrea Calvagna and Angelo Gargantini. 2008. A logic-based approach to combinatorial testing with constraints. In *Tests and proofs*. Springer, 66–83.
- Baiqiang Chen, Jun Yan, and Jian Zhang. 2010. Combinatorial testing with shielding parameters. In *Software Engineering Conference (APSEC), 2010 17th Asia Pacific*. IEEE, 280–289.
- David M. Cohen, Siddhartha R. Dalal, Michael L Fredman, and Gardner C. Patton. 1997. The AETG system: An approach to testing based on combinatorial design. *Software Engineering, IEEE Transactions on* 23, 7 (1997), 437–444.
- Myra B Cohen, Matthew B Dwyer, and Jiangfan Shi. 2007a. Exploiting constraint solving history to construct interaction test suites. In *Testing: Academic and Industrial Conference Practice and Research Techniques-MUTATION, 2007*. IEEE, 121–132.
- Myra B Cohen, Matthew B Dwyer, and Jiangfan Shi. 2007b. Interaction testing of highly-configurable systems in the presence of constraints. In *Proceedings of the 2007 international symposium on Software testing and analysis*. ACM, 129–139.
- Myra B Cohen, Matthew B Dwyer, and Jiangfan Shi. 2008. Constructing interaction test suites for highly-configurable systems in the presence of constraints: A greedy approach. *Software Engineering, IEEE Transactions on* 34, 5 (2008), 633–650.
- Myra B Cohen, Peter B Gibbons, Warwick B Mugridge, and Charles J Colbourn. 2003. Constructing test suites for interaction testing. In *Software Engineering, 2003. Proceedings. 25th International Conference on*. IEEE, 38–48.
- Charles J Colbourn and Daniel W McClary. 2008. Locating and detecting arrays for interaction faults. *Journal of combinatorial optimization* 15, 1 (2008), 17–48.
- Emine Dumlu, Cemal Yilmaz, Myra B Cohen, and Adam Porter. 2011. Feedback driven adaptive combinatorial testing. In *Proceedings of the 2011 International Symposium on Software Testing and Analysis*. ACM, 243–253.
- Sandro Fouché, Myra B Cohen, and Adam Porter. 2009. Incremental covering array failure characterization in large configuration spaces. In *Proceedings of the eighteenth international symposium on Software testing and analysis*. ACM, 177–188.
- Brady J Garvin, Myra B Cohen, and Matthew B Dwyer. 2011. Evaluating improvements to a meta-heuristic search for constrained interaction testing. *Empirical Software Engineering* 16, 1 (2011), 61–102.
- Laleh Sh Ghandehari, Yu Lei, David Kung, Raghu Kacker, and Richard Kuhn. 2013. Fault localization based on failure-inducing combinations. In *Software Reliability Engineering (ISSRE), 2013 IEEE 24th International Symposium on*. IEEE, 168–177.
- Laleh Shikh Gholamhossein Ghandehari, Yu Lei, Tao Xie, Richard Kuhn, and Raghu Kacker. 2012. Identifying failure-inducing combinations in a combinatorial test set. In *Software Testing, Verification and Validation (ICST), 2012 IEEE Fifth International Conference on*. IEEE, 370–379.
- Mats Grindal, Jeff Offutt, and Jonas Mellin. 2006. Handling constraints in the input space when using combination strategies for software testing. (2006).
- Mark Hall, Eibe Frank, Geoffrey Holmes, Bernhard Pfahringer, Peter Reutemann, and Ian H Witten. 2009. The WEKA Data Mining Software: An Update; SIGKDD Explorations, Volume 11, Issue 1. (2009).

- Jie Li, Changhai Nie, and Yu Lei. 2012. Improved Delta Debugging Based on Combinatorial Testing. In *Quality Software (QSIC), 2012 12th International Conference on*. IEEE, 102–105.
- Conrado Martínez, Lucia Moura, Daniel Panario, and Brett Stevens. 2008. Algorithms to locate errors using covering arrays. In *LATIN 2008: Theoretical Informatics*. Springer, 504–519.
- Conrado Martínez, Lucia Moura, Daniel Panario, and Brett Stevens. 2009. Locating errors using ELAs, covering arrays, and adaptive testing algorithms. *SIAM Journal on Discrete Mathematics* 23, 4 (2009), 1776–1799.
- Changhai Nie and Hareton Leung. 2011a. The minimal failure-causing schema of combinatorial testing. *ACM Transactions on Software Engineering and Methodology (TOSEM)* 20, 4 (2011), 15.
- Changhai Nie and Hareton Leung. 2011b. A survey of combinatorial testing. *ACM Computing Surveys (C-SUR)* 43, 2 (2011), 11.
- Xintao Niu, Changhai Nie, Yu Lei, and Alvin TS Chan. 2013. Identifying Failure-Inducing Combinations Using Tuple Relationship. In *Software Testing, Verification and Validation Workshops (ICSTW), 2013 IEEE Sixth International Conference on*. IEEE, 271–280.
- Justyna Petke, Shin Yoo, Myra B Cohen, and Mark Harman. 2013. Efficiency and early fault detection with lower and higher strength combinatorial interaction testing. In *Proceedings of the 2013 9th Joint Meeting on Foundations of Software Engineering*. ACM, 26–36.
- Kiran Shakya, Tao Xie, Nuo Li, Yu Lei, Raghu Kacker, and Richard Kuhn. 2012. Isolating Failure-Inducing Combinations in Combinatorial Testing using Test Augmentation and Classification. In *Software Testing, Verification and Validation (ICST), 2012 IEEE Fifth International Conference on*. IEEE, 620–623.
- Liang Shi, Changhai Nie, and Baowen Xu. 2005. A software debugging method based on pairwise testing. In *Computational Science-ICCS 2005*. Springer, 1088–1091.
- Charles Song, Adam Porter, and Jeffrey S Foster. 2012. iTree: Efficiently discovering high-coverage configurations using interaction trees. In *Proceedings of the 2012 International Conference on Software Engineering*. IEEE Press, 903–913.
- Ziyuan Wang, Baowen Xu, Lin Chen, and Lei Xu. 2010. Adaptive interaction fault location based on combinatorial testing. In *Quality Software (QSIC), 2010 10th International Conference on*. IEEE, 495–502.
- Cemal Yilmaz. 2013. Test case-aware combinatorial interaction testing. *Software Engineering, IEEE Transactions on* 39, 5 (2013), 684–706.
- Cemal Yilmaz, Myra B Cohen, and Adam A Porter. 2006. Covering arrays for efficient fault characterization in complex configuration spaces. *Software Engineering, IEEE Transactions on* 32, 1 (2006), 20–34.
- Cemal Yilmaz, Emine Dumlu, M Cohen, and Adam Porter. 2013. Reducing Masking Effects in Combinatorial Interaction Testing: A Feedback Driven Adaptive Approach. (2013).
- Andreas Zeller and Ralf Hildebrandt. 2002. Simplifying and isolating failure-inducing input. *Software Engineering, IEEE Transactions on* 28, 2 (2002), 183–200.
- Zhiqiang Zhang and Jian Zhang. 2011. Characterizing failure-causing parameter interactions by adaptive testing. In *Proceedings of the 2011 International Symposium on Software Testing and Analysis*. ACM, 331–341.

Received February 2007; revised March 2009; accepted June 2009

Online Appendix to: Identify minimal failure-causing schemas for multiple faults

XINTAO NIU and CHANGHAI NIE, State Key Laboratory for Novel Software Technology, Nanjing University
HARETON LEUNG, Hong Kong Polytechnic University

A. THIS IS AN EXAMPLE OF APPENDIX SECTION HEAD

B. APPENDIX SECTION HEAD

The primary consumer of energy in WSNs is idle listening. The key to reduce idle listening is executing low duty-cycle on nodes. Two primary approaches are considered in controlling duty-cycles in the MAC layer.