

תרגול עצמי

העלאה ל-Render

בל הזכויות שמורות לקרן יעקב 2025

מוטיבציה

- למדנו על צד השרת ועל צד הלקוח.
הם מתקשרים ביניהם אך לא ישבו ביחד על אותו השרת.
לכן, עלינו להעלות (deploy) את צד השרת לשירות אחר שנוכל לגשת אליו, Render הוא בלי חנימי למטרות הקורס.
שימו לב - בגירסה החינמית השרת לא תמיד יהיה באוויר ולכן יש לקחת בחשבון שהוא יתעורר לאחר 50 שניות.



הרשמה

פתחו את האתר [/https://render.com](https://render.com) והרשמו עם חשבון ה-Github שלכם

Render Product Pricing Blog Docs Changelog Careers About Sign In **Get Started**


Your fastest path to production

Build, deploy, and scale your apps with unparalleled ease – from your first user to your billionth.

Get Started for Free > **Contact Sales** >

בחירת סוג פרוייקט להעלות

● לאחר ההרשמה, בנסו ל- [/https://dashboard.render.com](https://dashboard.render.com) ובחרו ב- Web Services

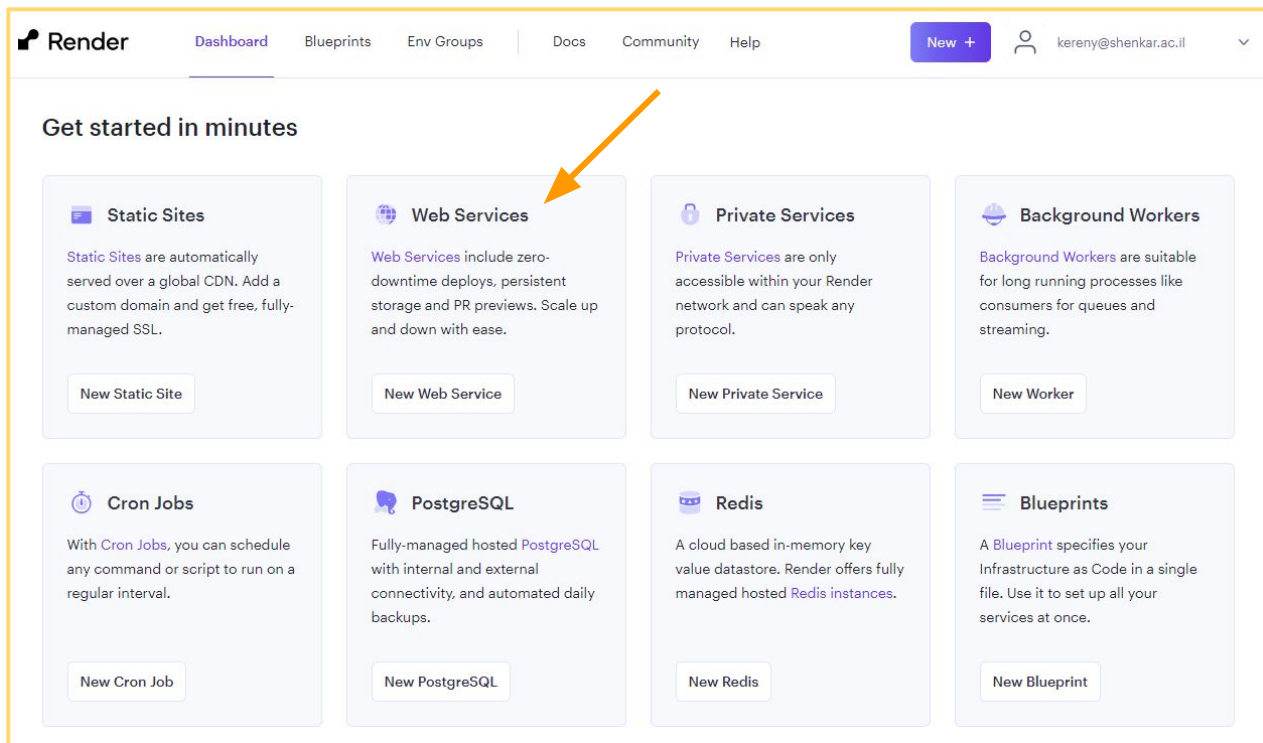

קישור ריפוזיטורי של גיטהאב

● נקשר ריפו של גיטהאב, כך שבכל שינוי השרת יתעדכן עם הקוד הכי חדש, שנמצא על הברנץ' הראשי.

Create a new Web Service

Connect a Git repository, or use an existing image.

How would you like to deploy your web service?

☒ Build and deploy from a Git repository
Connect a GitHub or GitLab repository.

☐ Deploy an existing image from a registry **ADVANCED**
Pull a public image from any registry or a private image from Docker Hub, GitHub, or GitLab.

Next

בחירת ריפוזיטורי של גיטהאב

● בחירת רפוזיטורי מגיטהאב כדי להעלות ל-Render

Create a new Web Service

Connect your Git repository or use an existing public repository URL.

Connect a repository

 KerenyShenkar / Tirgu11-2023-HTML-1 • a year ago

Connect

 KerenyShenkar / Tirgu11-2023-HTML • a year ago

Connect

 KerenyShenkar / github-desktop  • 2 years ago

Connect

 KerenyShenkar / html2022class • 2 years ago

Connect

 KerenyShenkar / html2022 • 2 years ago

Connect

 KerenyShenkar / final-projects-ideas  • 2 years ago

Connect

 **GitHub**
@KerenyShenkar • 17 repos
[Configure account](#)

 **GitLab**
[+ Connect account](#)

מאפייני ההעלאה

אפשר לבחור את שם השרת, מיקום גיאוגרפי, הברנץ' (ענף) בגיט הראשי ממנו ילקח הקוד ועוד.

You are deploying a web service for [KerenyShenkar/final-projects-ideas](#).

You seem to be using **Node**, so we've autofilled some fields accordingly. Make sure the values look right to you!

Name

A unique name for your web service.

Region

The [region](#) where your web service runs.

Oregon (US West)

Branch

The repository branch used for your web service.

master

Root Directory Optional

Defaults to repository root. When you specify a [root directory](#) that is different from your repository root, Render runs all your commands in the [specified directory](#) and ignores changes outside the directory.

Runtime

The runtime for your web service.

Node

Build Command

This command runs in the root directory of your repository when a new version of your code is pushed, or when you deploy manually. It is typically a script that installs libraries, runs migrations, or compiles resources needed by your app.

בחירת סוג השרת

חשוב חשוב חשוב!! לבחור בחינמי!

Instance Type

For hobby projects

Free
\$0 / month
512 MB (RAM)
0.1 CPU

Upgrade to enable more features
Free instances spin down after periods of inactivity. They do not support SSH access, scaling, one-off jobs, or persistent disks. Select any paid instance type to enable these features.

For professional use
For more power and to get the most out of Heroku, we recommend using one of our paid instance types. All paid instances support:

- Zero Downtime
- SSH Access
- Scaling
- One-off jobs
- Support for persistent disks

Starter
\$7 / month
512 MB (RAM)
0.5 CPU

Standard
\$25 / month
2 GB (RAM)
1 CPU

Pro
\$85 / month
4 GB (RAM)
2 CPU

Pro Plus
\$175 / month
8 GB (RAM)
4 CPU

Pro Max
\$225 / month
16 GB (RAM)
4 CPU

Pro Ultra
\$450 / month
32 GB (RAM)
8 CPU

Need a custom instance type? We support up to 512 GB RAM and 64 CPUs.

Environment Variables Optional
Set environment-specific config and secrets (such as API keys), then read those values from your code. [Learn more.](#)

NAME_OF_VARIABLE value [Generate](#)

+ Add Environment Variable Add from .env

Advanced ▾

Create Web Service

תחילת ה-deploy

בשלב הזה מחכים...

The screenshot displays the Google Cloud Platform console interface during a deployment. On the left, a sidebar lists navigation options: Events, Logs, Disks, Environment, Shell, Previews, Jobs, Metrics, Scaling, and Settings. The main content area features a purple notification banner at the top stating: "Your free instance will spin down with inactivity, which can delay requests by 50 seconds or more. [Upgrade now.](#)". Below this, a deployment summary shows the date and time "March 13, 2024 at 10:00 PM", a "Building" status with two progress dots, and the commit message "Od715fe Merge pull request #2 from KerenYShenkar/task4-add-crud ...". A pink "Cancel deploy" button is positioned to the right. The bottom section is the logs viewer, which has a dark theme and a header with "All logs", a search bar, a "Live tail" toggle, and a "GMT+2" time zone selector. The logs area is currently empty, displaying the message "No logs to show" and "New log entries that match your search parameters will appear here." with a link to "Learn more about logs."

לוגים בזמן ההעלאה


● דוגמה לשגיאה לאחר הרמת השרת (אבל עדיין ה-deploy הסתיים בהצלחה)

 Your free instance will spin down with inactivity, which can delay requests by 50 seconds or more. [Upgrade now.](#)

March 13, 2024 at 10:00 PM

Live

Od715fe Merge pull request #2 from KerenyShenkar/task4-add-crud ...

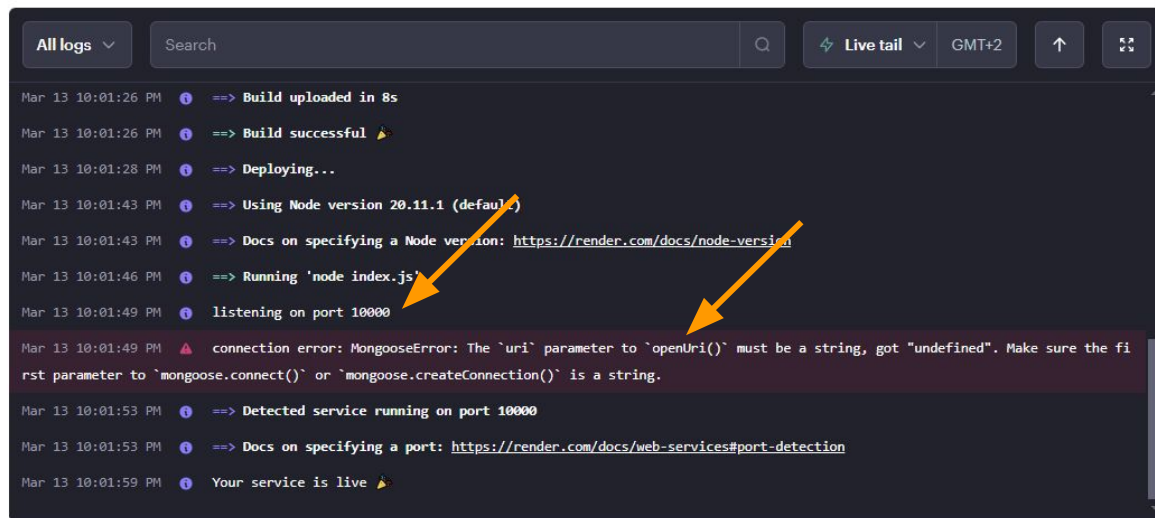

```
All logs Search Live tail GMT+2
Mar 13 10:01:26 PM ==> Build uploaded in 8s
Mar 13 10:01:26 PM ==> Build successful
Mar 13 10:01:28 PM ==> Deploying...
Mar 13 10:01:43 PM ==> Using Node version 20.11.1 (default)
Mar 13 10:01:43 PM ==> Docs on specifying a Node version: https://render.com/docs/node-version
Mar 13 10:01:46 PM ==> Running 'node index.js'
Mar 13 10:01:49 PM ==> listening on port 10000
Mar 13 10:01:49 PM connection error: MongooseError: The `uri` parameter to `openUri()` must be a string, got "undefined". Make sure the first parameter to `mongoose.connect()` or `mongoose.createConnection()` is a string.
Mar 13 10:01:53 PM ==> Detected service running on port 10000
Mar 13 10:01:53 PM ==> Docs on specifying a port: https://render.com/docs/web-services#port-detection
Mar 13 10:01:59 PM ==> Your service is live
```

ה-deploy הסתיים

Render Dashboard Blueprints Env Groups Docs Community Help

New + kereny@shenkar.ac.il

express-test Node Free Upgrade your instance →

Connect Manual Deploy

KerenyShenkar / express-heroku master

<https://express-test-8v5e.onrender.com>

Events

Logs

Disks

Environment

Shell

Previews

Jobs

Metrics

Scaling

Settings

March 13, 2024 at 9:47 PM **Live**

6acd2d0 Update package.json Move Morgan to dependencies

All logs Search

Mar 13 09:47:34 PM ==> Uploading build...

Mar 13 09:47:43 PM ==> Build uploaded in 8s

Mar 13 09:47:43 PM ==> Build successful

Mar 13 09:47:47 PM ==> Deploying...

Mar 13 09:48:49 PM ==> Using Node version 20.11.1 (default)

Mar 13 09:48:49 PM ==> Docs on specifying a Node version: <https://render.com/docs/node-version>

Mar 13 09:49:02 PM ==> Running 'node index.js'

Mar 13 09:49:03 PM Express server is running on port 10000

Mar 13 09:49:07 PM Your service is live

Mar 13 09:49:08 PM GET / 400 2.109 ms - 20

Mar 13 09:49:29 PM ==> Detected service running on port 10000

Mar 13 09:49:29 PM ==> Docs on specifying a port: <https://render.com/docs/web-services#port-detection>

← → ↺ 🌐 express-test-8v5e.onrender.com

Something is broken!

לאחר ההעלאה

ב

 [Dashboard](#) [Blueprints](#) [Env Groups](#) [Docs](#) [Community](#) [Help](#) [New +](#)  kereny@shenkar.ac.il 

Overview

 Search services

[Active 1](#) [Suspended 0](#) [All 1](#)

SERVICE NAME	STATUS	TYPE	RUNTIME	REGION	LAST DEPLOYED ↓
 final-projects-ideas	 Deployed	Web Service	Node	Oregon	3 minutes ago 

משתני סביבה

● הגדרת משתני סביבה – זוגות של שם וערך שהאפליקציה עושה בהם שימוש אבל לא נרצה שיופיעו במפורש בקוד

Events

Logs

Disks

Environment

Shell

Previews

Jobs

Metrics

Scaling

Settings

Environment Variables

Set environment-specific config and secrets (such as API keys), then read those values from your code. [Learn more.](#)

Key	Value
NAME_OF_VARIABLE	value Generate

Create Environment Group

+ Add Environment Variable

Add from .env

Save Changes

Secret Files

Store plaintext files containing secret data (such as a .env file or a private key).

Read these files during builds and at runtime from your app's specified root directory, or from the absolute path `/etc/secrets/<filename>`.

+ Add Secret File