

MySQL installation (step by step)

<https://dev.mysql.com/downloads/mysql/>

MySQL Community Downloads

MySQL Installer

General Availability (GA) Releases

Archives



MySQL Installer 8.0.19

Select Operating System:

Microsoft Windows

Looking for previous GA versions?

Windows (x86, 32-bit), MSI Installer

8.0.19

18.6M

Download

(mysql-installer-web-community-8.0.19.0.msi)

MD5: 32043776cb2239db45fddaa86dc0ad61 | Signature

Windows (x86, 32-bit), MSI Installer

8.0.19

398.9M

Download

(mysql-installer-community-8.0.19.0.msi)

MD5: 1a882015da7fb93f20c4717e63b6817c | Signature



We suggest that you use the MD5 checksums and GnuPG signatures to verify the integrity of the packages you download.

Choose MAC OR
Windows



MySQL Community Downloads

Login Now or Sign Up for a free account.

An Oracle Web Account provides you with the following advantages:

- Fast access to MySQL software downloads
- Download technical White Papers and Presentations
- Post messages in the MySQL Discussion Forums
- Report and track bugs in the MySQL bug system

Login »

using my Oracle Web account


Sign Up »


for an Oracle Web account


MySQL.com is using Oracle SSO for authentication. If you already have an Oracle Web account, click the Login link. Otherwise, you can signup for a free account by clicking the Sign Up link and following the instructions.


No thanks, just start my download.




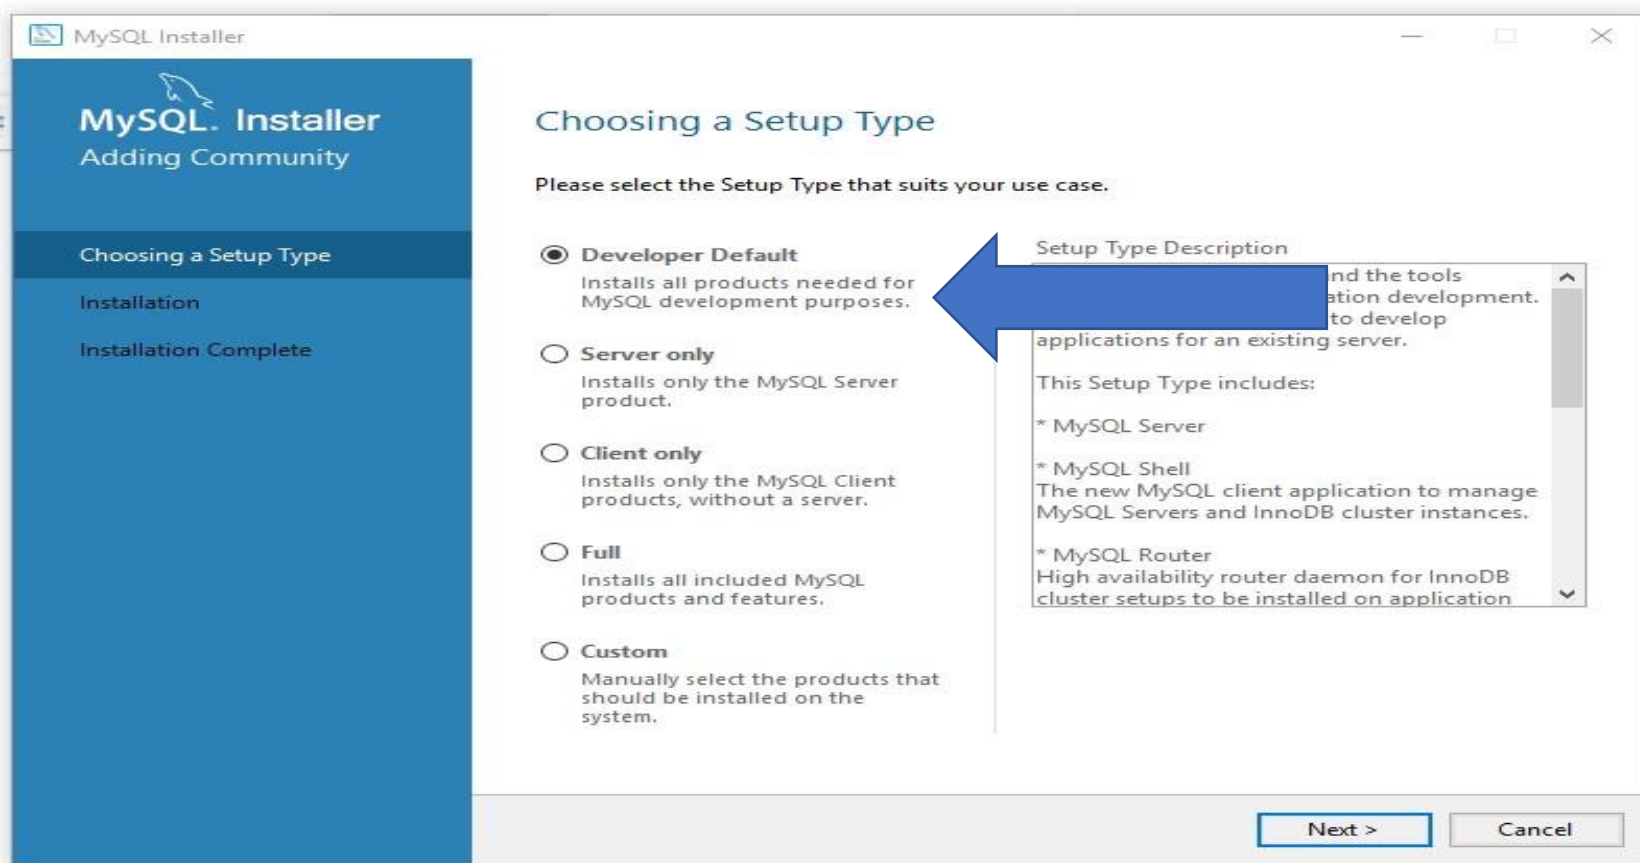


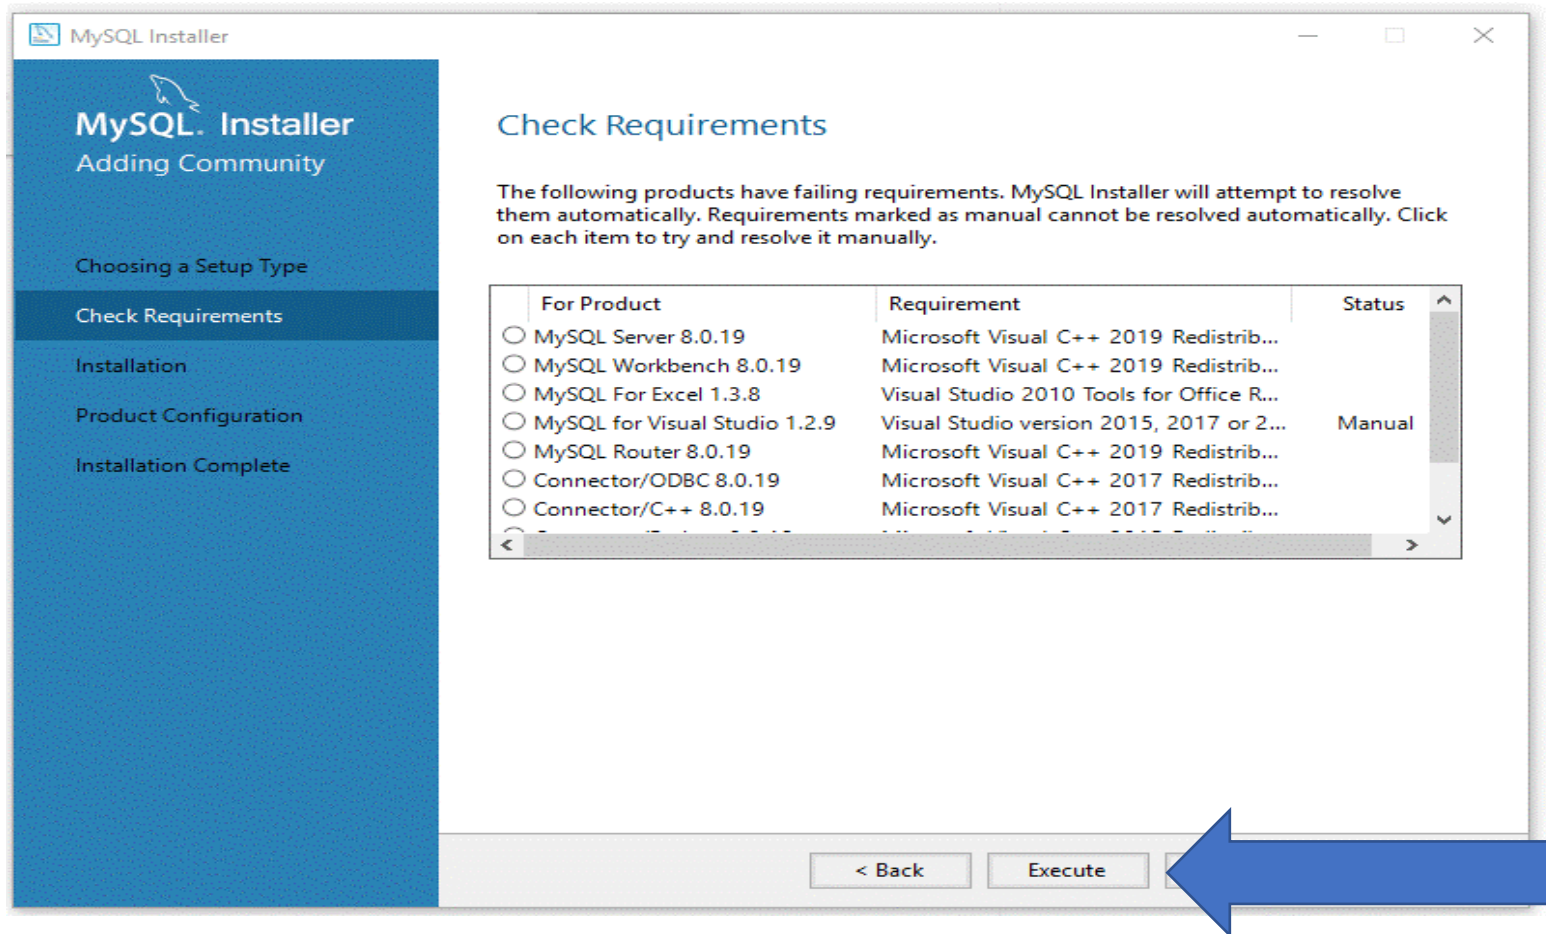


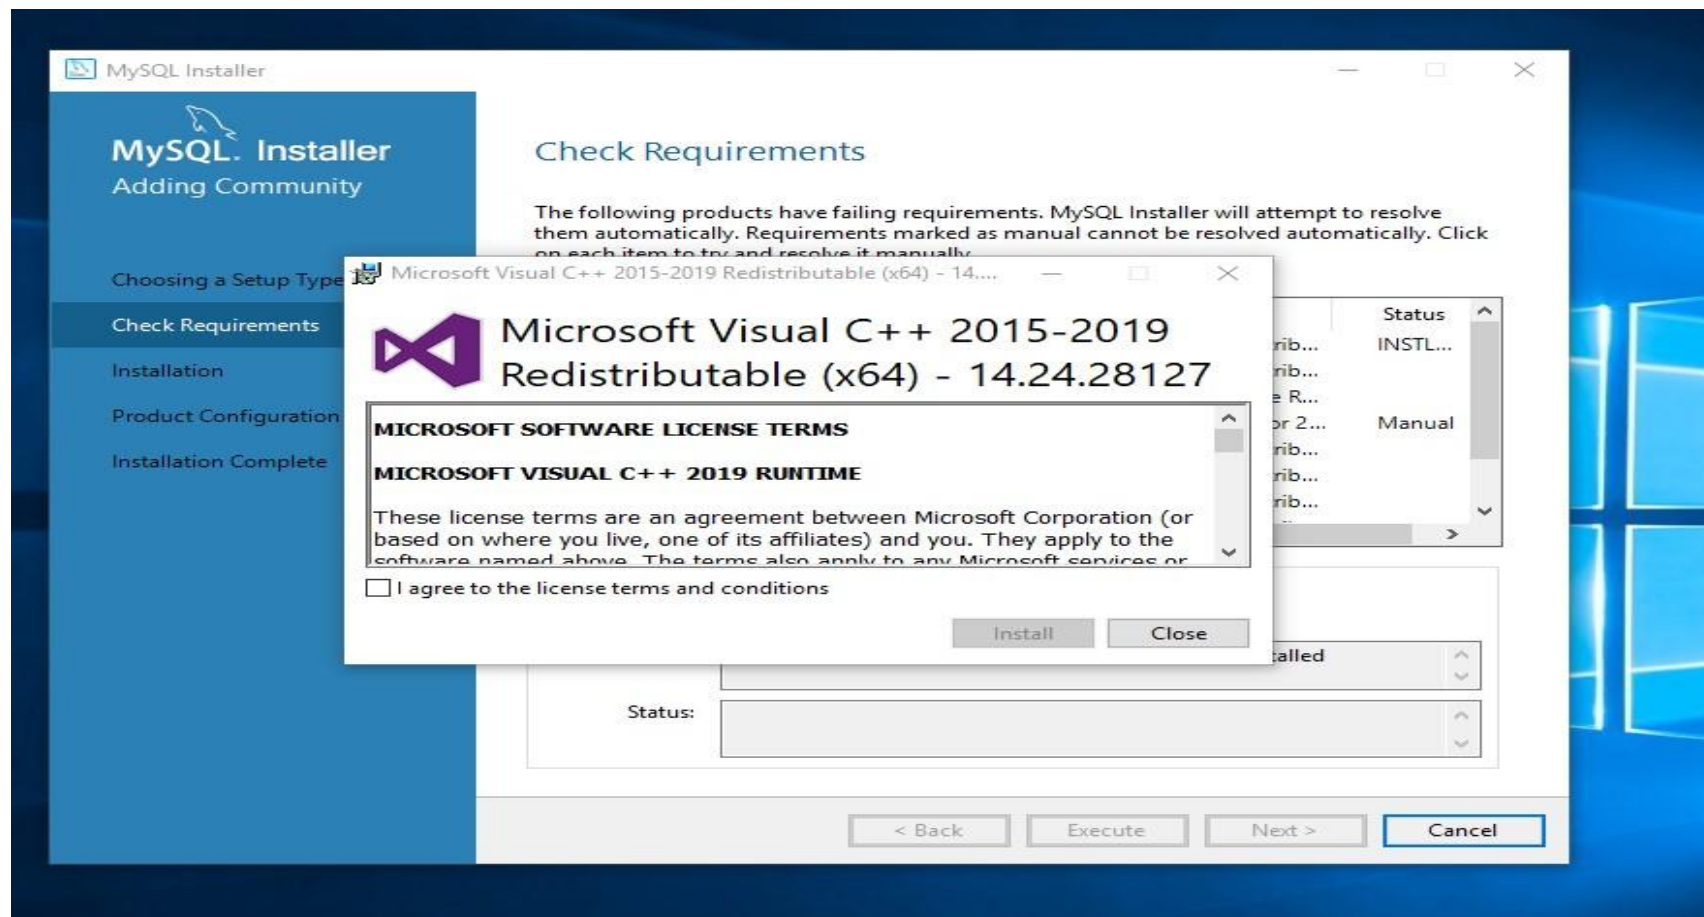

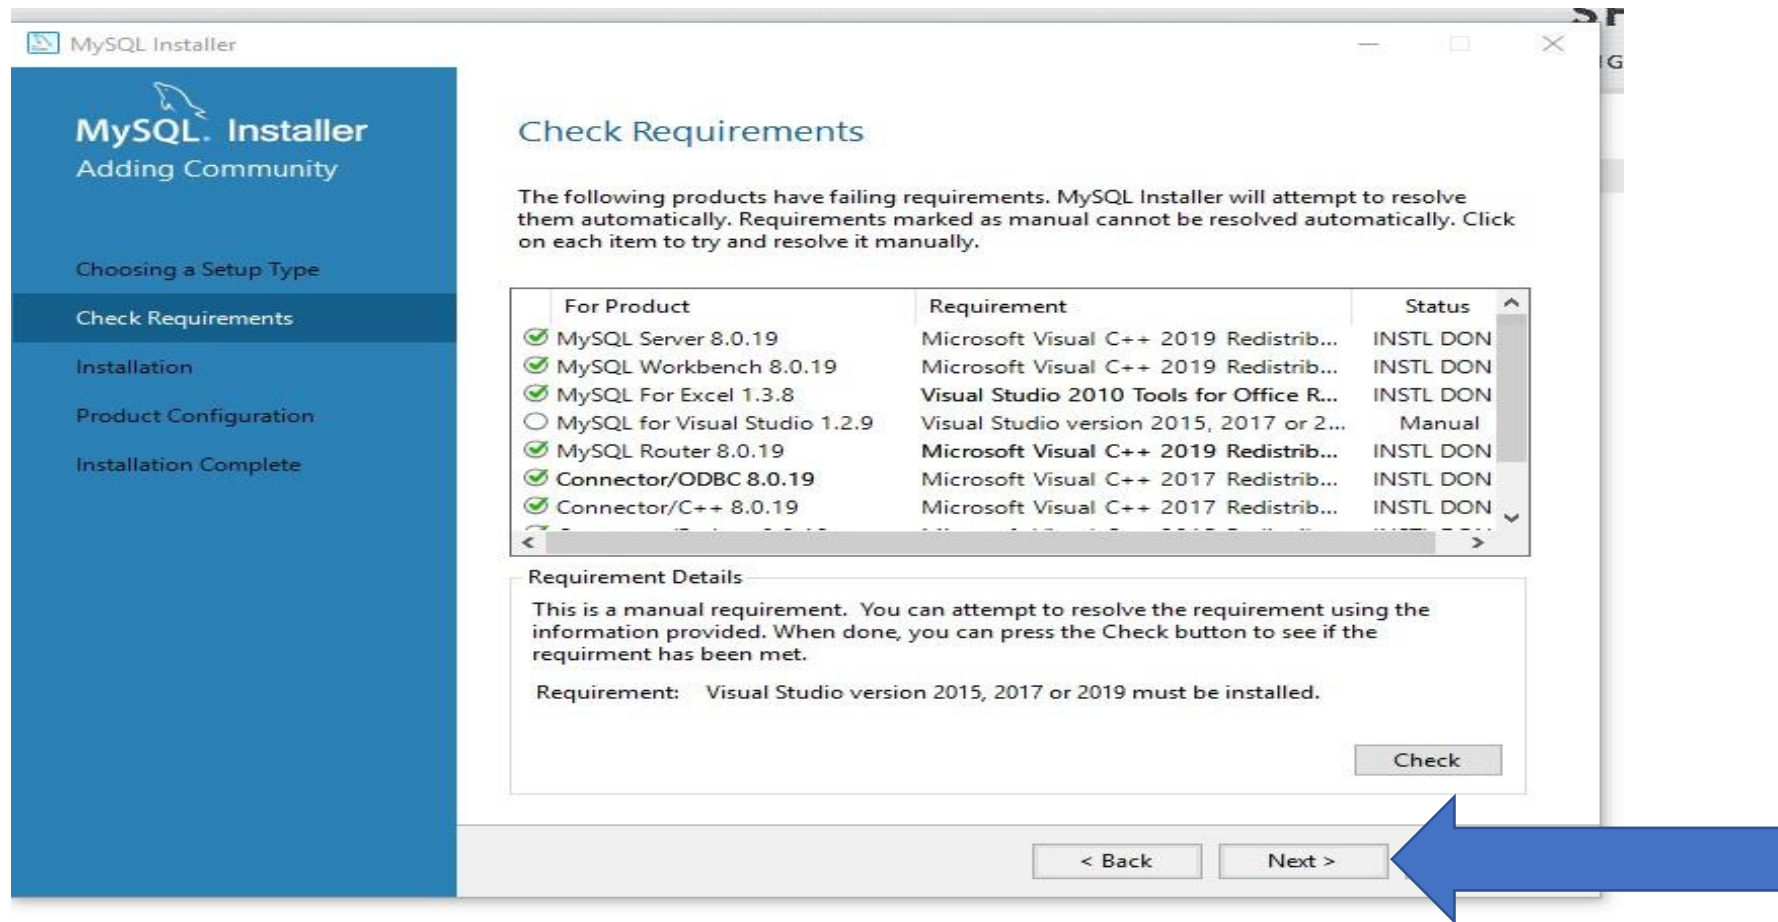

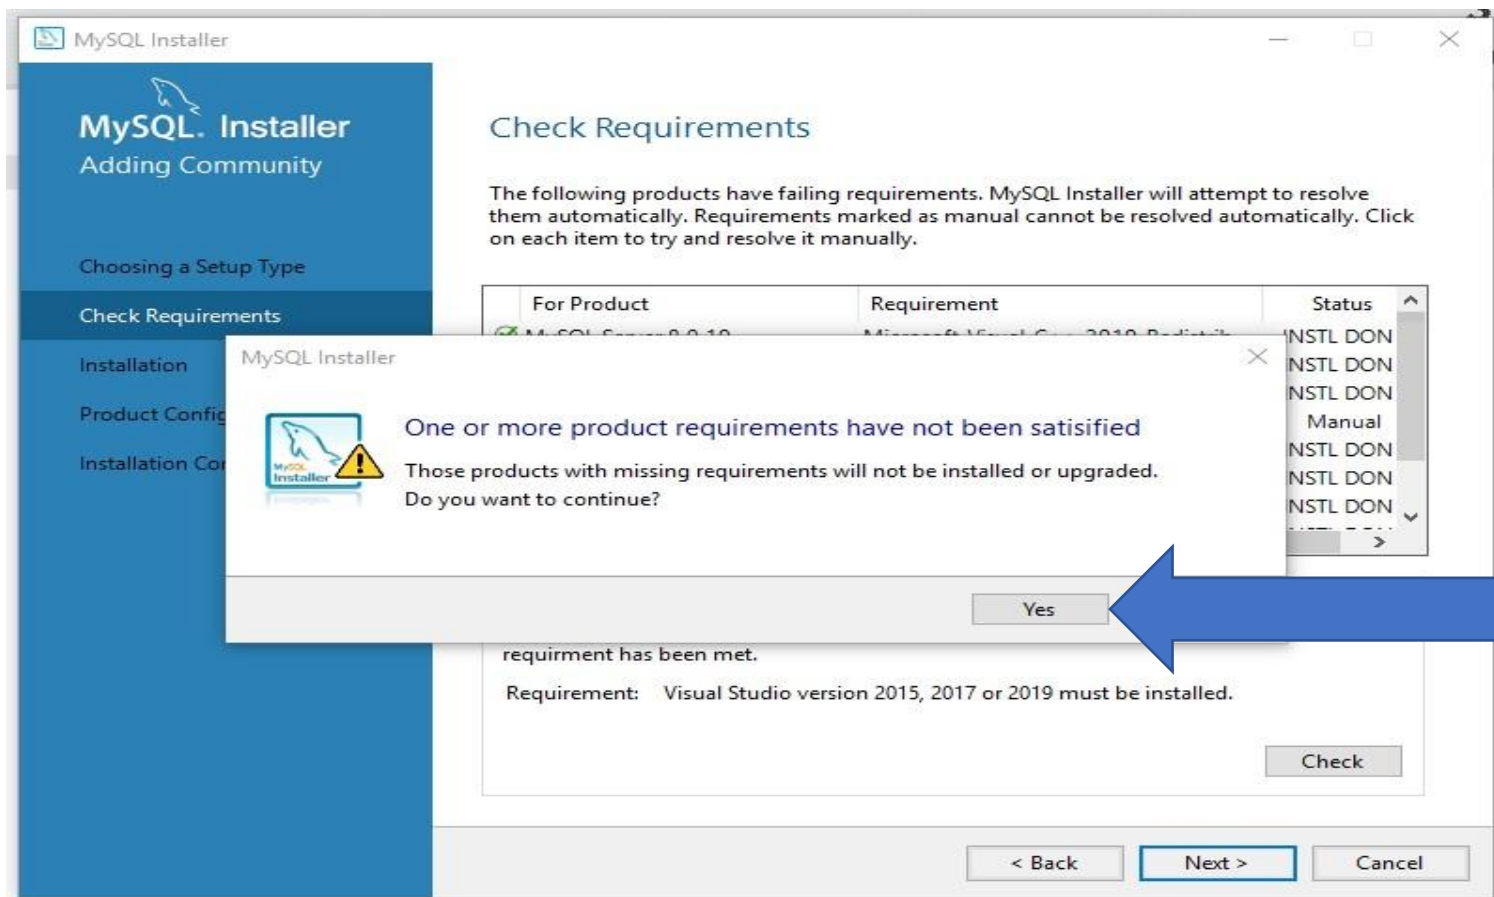

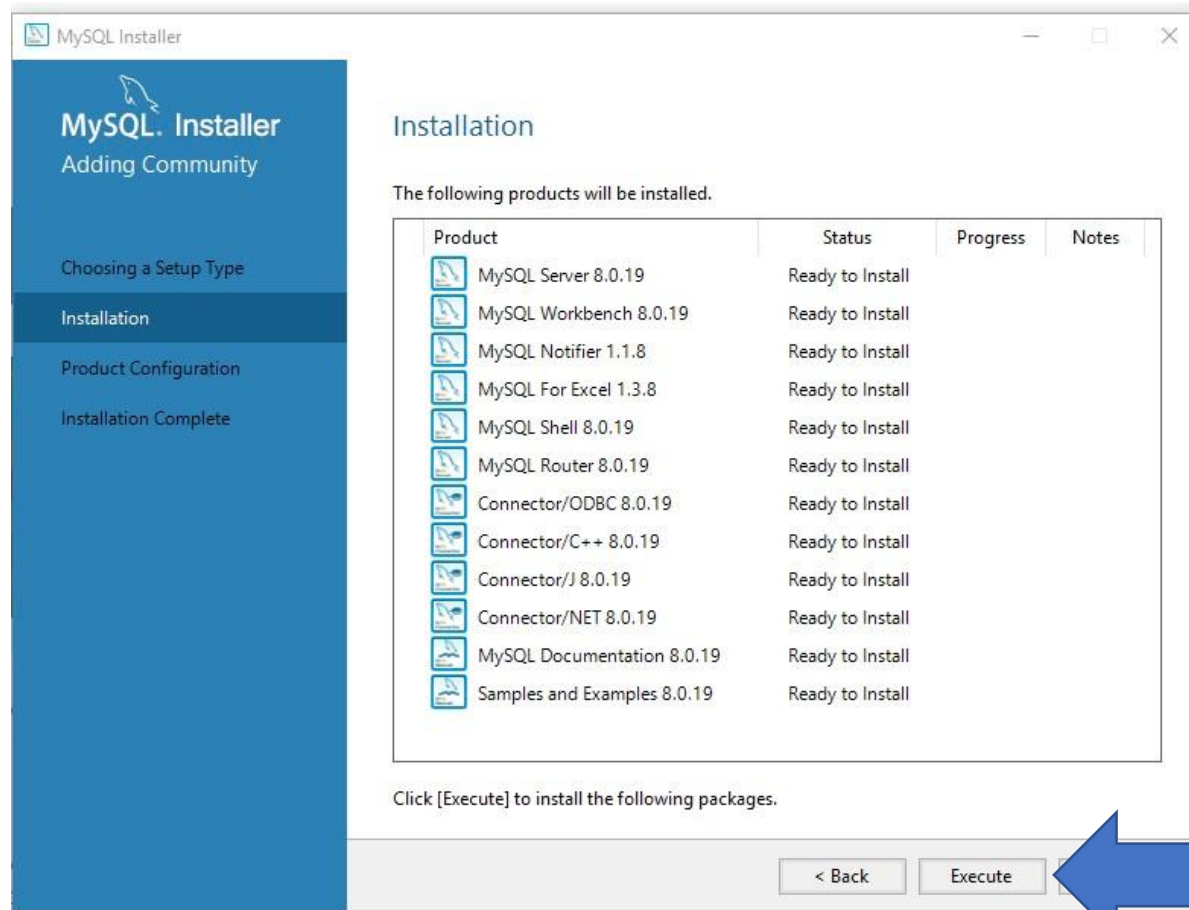

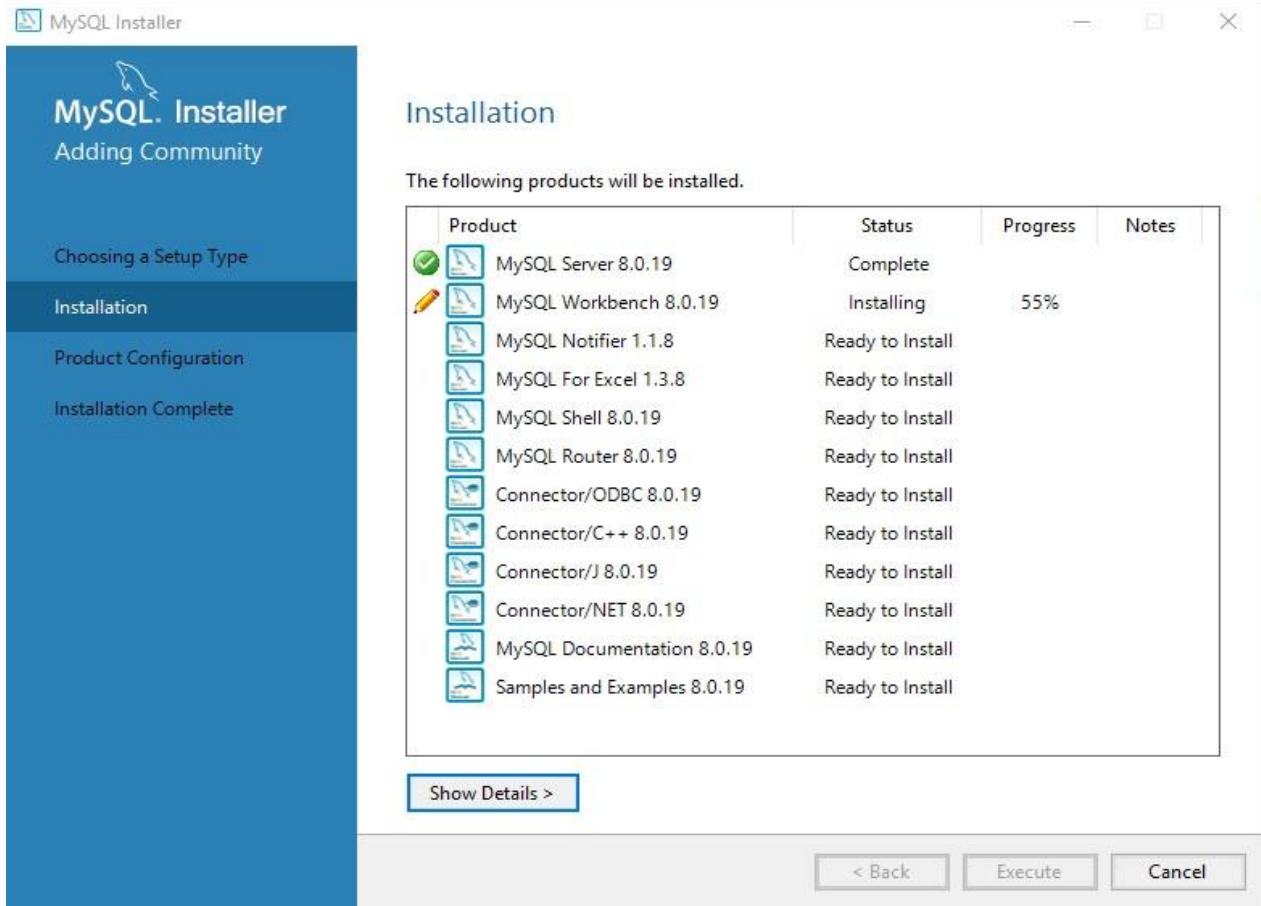

MySQL. Installer

Adding Community

Choosing a Setup Type

Installation

Product Configuration

Installation Complete

Product Configuration


We'll now walk through a configuration wizard for each of the following products.

You can cancel at any point if you wish to leave this wizard without configuring all the products.

Product	Status
MySQL Server 8.0.19	Ready to configure
MySQL Router 8.0.19	Ready to configure
Samples and Examples 8.0.19	Ready to configure

Next >

Cancel

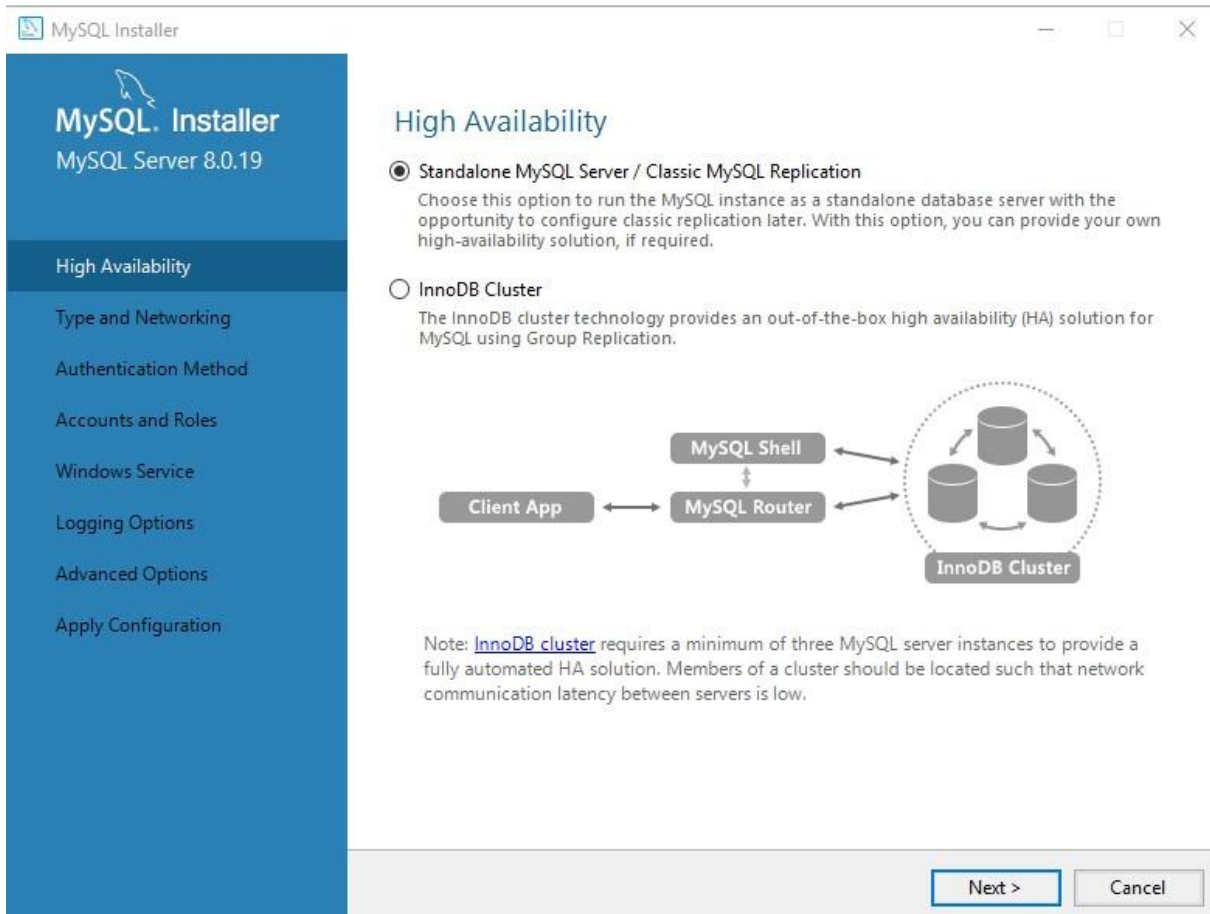

MySQL Installer

MySQL Server 8.0.19

High Availability

Type and Networking

Authentication Method

Accounts and Roles

Windows Service

Logging Options

Advanced Options

Apply Configuration

Type and Networking

Server Configuration Type

Choose the correct server configuration type for this MySQL Server installation. This setting will define how much system resources are assigned to the MySQL Server instance.

Config Type: Development Computer

Connectivity

Use the following controls to select how you would like to connect to this server.

☒ TCP/IP Port: 3306 X Protocol Port: 33060

☒ Open Windows Firewall ports for network access

☐ Named Pipe Pipe Name: MYSQL


☐ Shared Memory Memory Name: MYSQL

Advanced Configuration

Select the check box below to get additional configuration pages where you can set advanced and logging options for this server instance.

☒ Show Advanced and Logging Options

< Back Next > Cancel

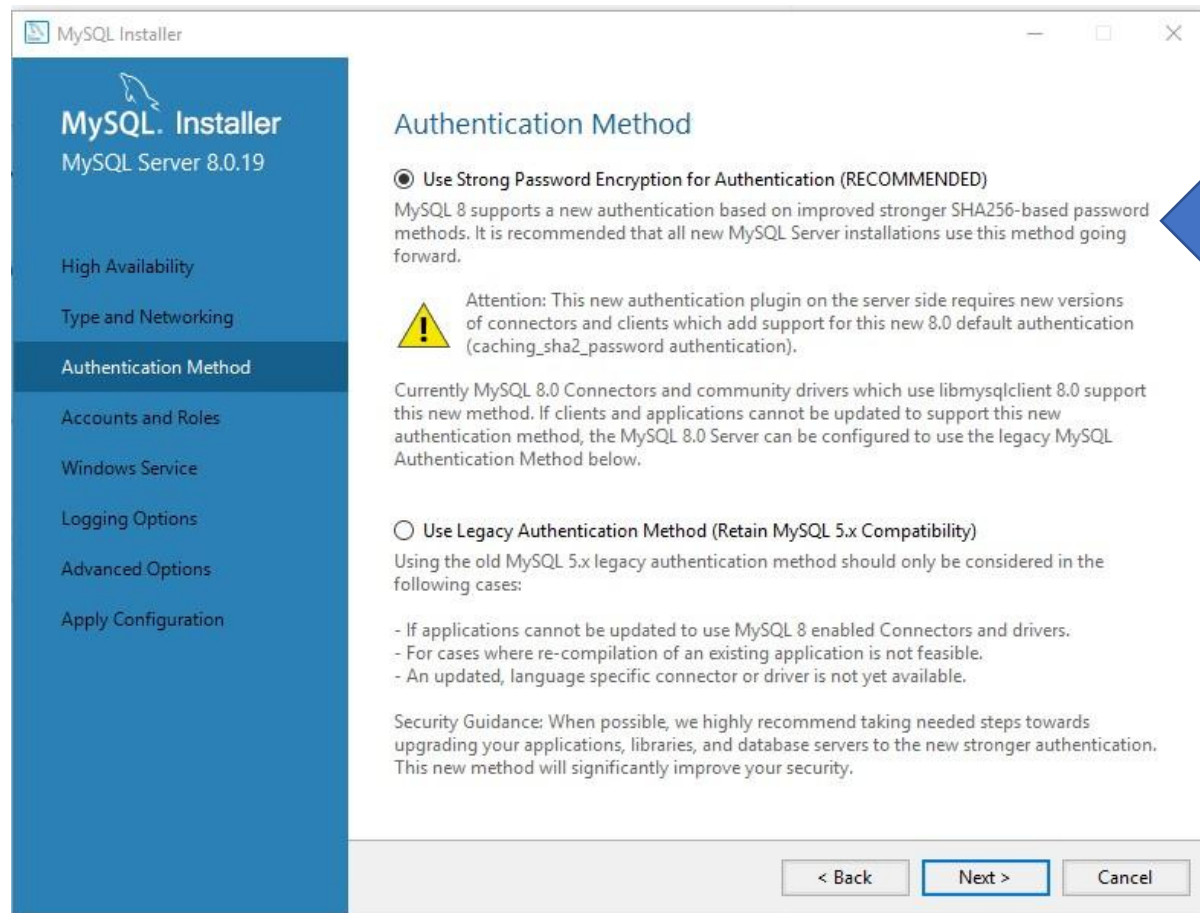

MySQL Installer

MySQL Server 8.0.19

High Availability

Type and Networking

Authentication Method

Accounts and Roles

Windows Service

Logging Options

Advanced Options

Apply Configuration

Accounts and Roles

Root Account Password

Enter the password for the root account. Please remember to store this password in a secure place.

MySQL Root Password:

Repeat Password:

Password strength: Strong

MySQL User Accounts

Create MySQL user accounts for your users and applications. Assign a role to the user that consists of a set of privileges.

MySQL User Name	Host	User Role
-----------------	------	-----------

Add User

Edit User

Delete

< Back

Next >

Cancel



MySQL Installer

MySQL Server 8.0.19

High Availability

Type and Networking

Authentication Method

Accounts and Roles

Windows Service

Logging Options

Advanced Options

Apply Configuration

Windows Service

☒ Configure MySQL Server as a Windows Service

Windows Service Details

Please specify a Windows Service name to be used for this MySQL Server instance. A unique name is required for each instance.

Windows Service Name:

☒ Start the MySQL Server at System Startup

Run Windows Service as ...

The MySQL Server needs to run under a given user account. Based on the security requirements of your system you need to pick one of the options below.

☒ Standard System Account

Recommended for most scenarios.

☐ Custom User

An existing user account can be selected for advanced scenarios.

< Back

Next >

Cancel

MySQL Installer

MySQL Server 8.0.19

High Availability

Type and Networking

Authentication Method

Accounts and Roles

Windows Service

Logging Options

Advanced Options

Apply Configuration

Logging Options

Please select the logs you want to activate for this server in addition to the error log. On production computers, it can be beneficial to separate the log files from the data. Specify a file name to save the logs in the data directory (default) or browse to a different location. You must provide an absolute path when specifying the path together with the file name.

Error Log:

BOAZ-LAPTOP.err

☐ General Log

The general query log is a general record of what the MySQL Server is doing. It should only be used to track down issues.

File Path:

BOAZ-LAPTOP.log

☒ Slow Query Log

The slow query log consists of SQL statements that took more than the given value of seconds to execute. It is recommended to turn this log on.

File Path:

BOAZ-LAPTOP-slow.log

Seconds:

10

☒ Bin Log

The binary log contains all database events and is used for replication and data recovery operations. Enabling the log has a performance impact on the server. Enter the log name without a file extension.


File Path:


BOAZ-LAPTOP-bin


< Back


Next >

Cancel

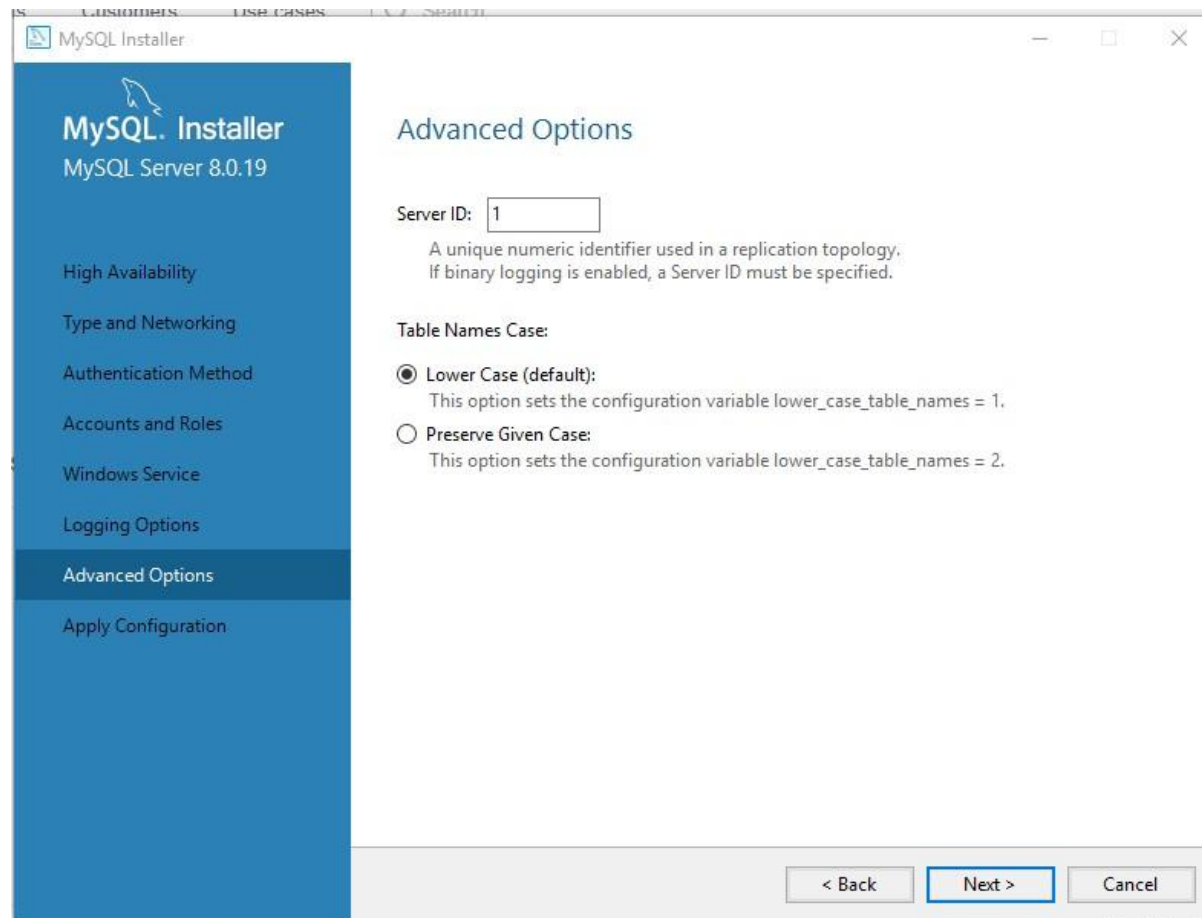

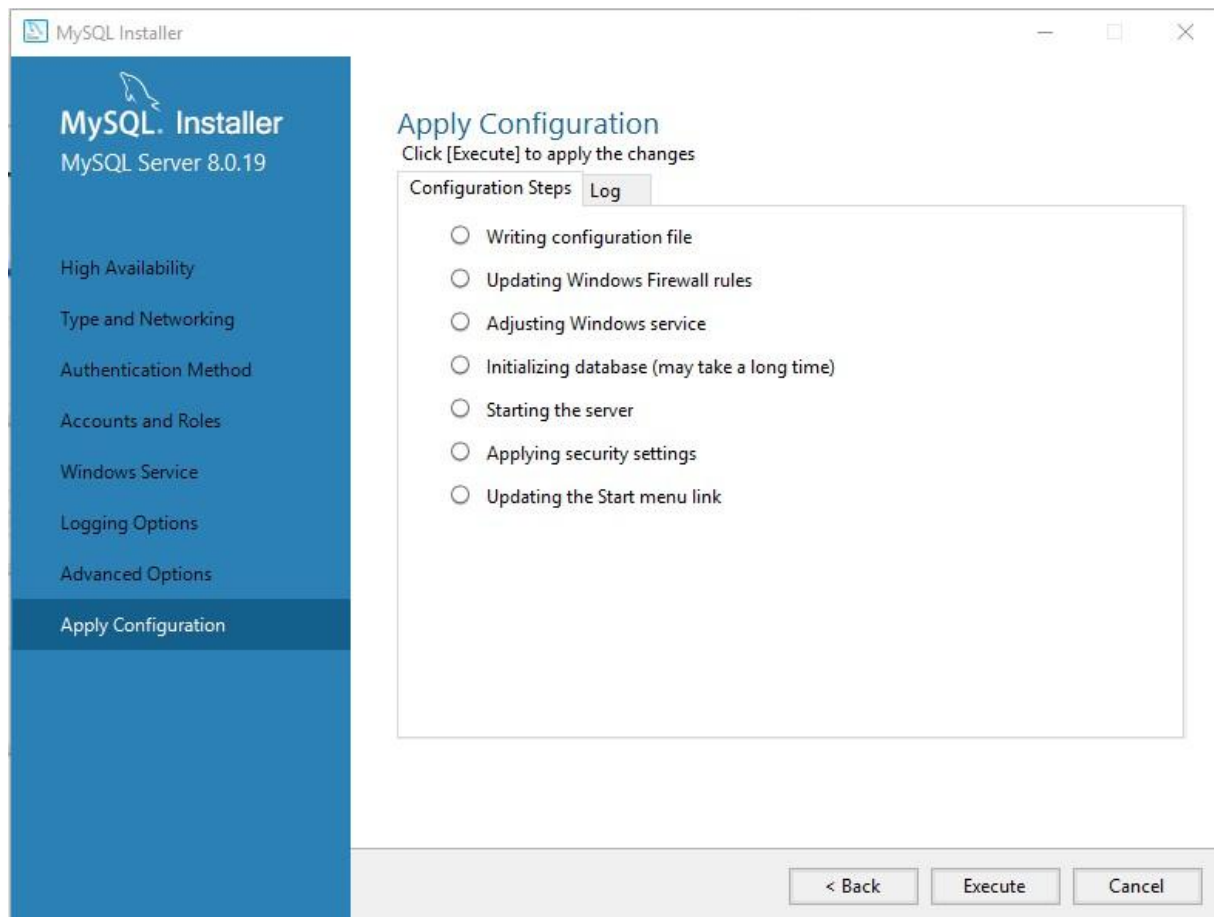

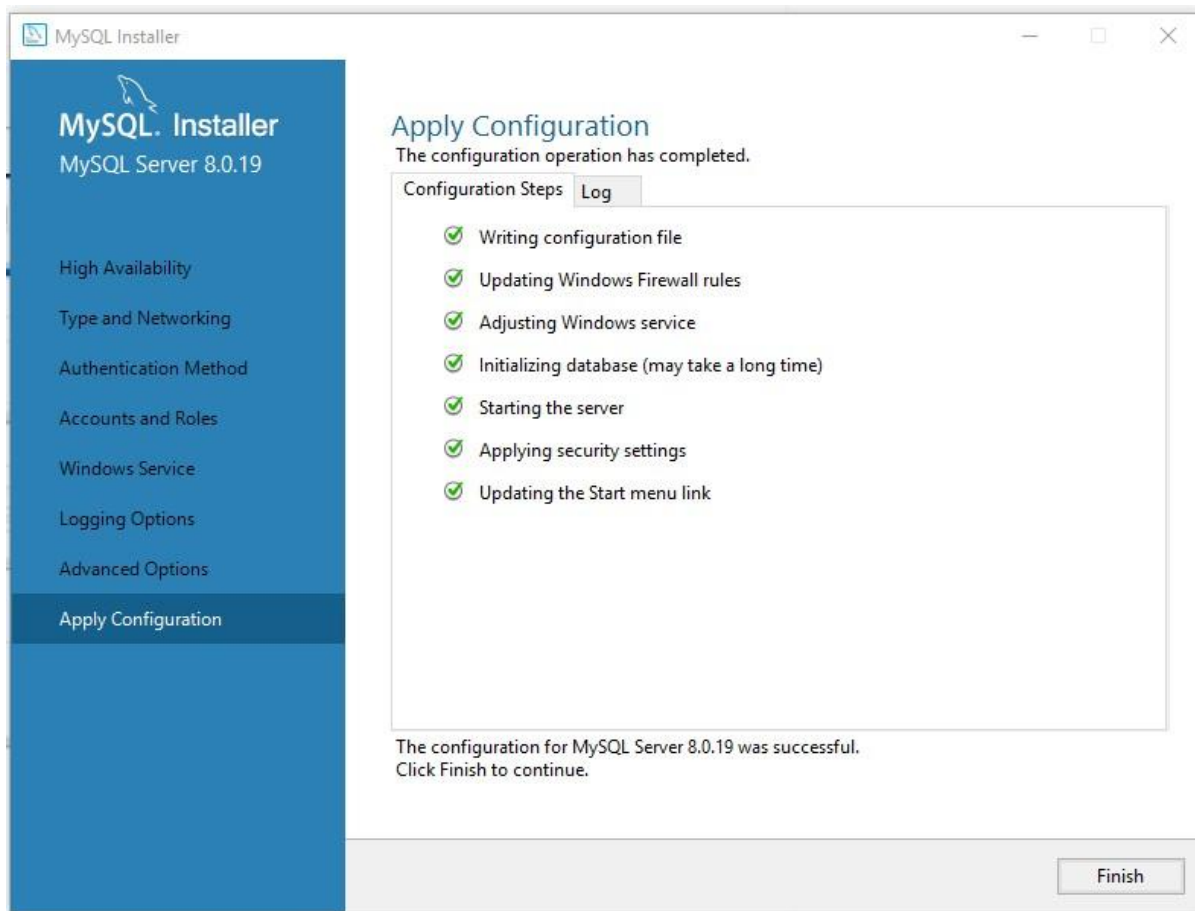

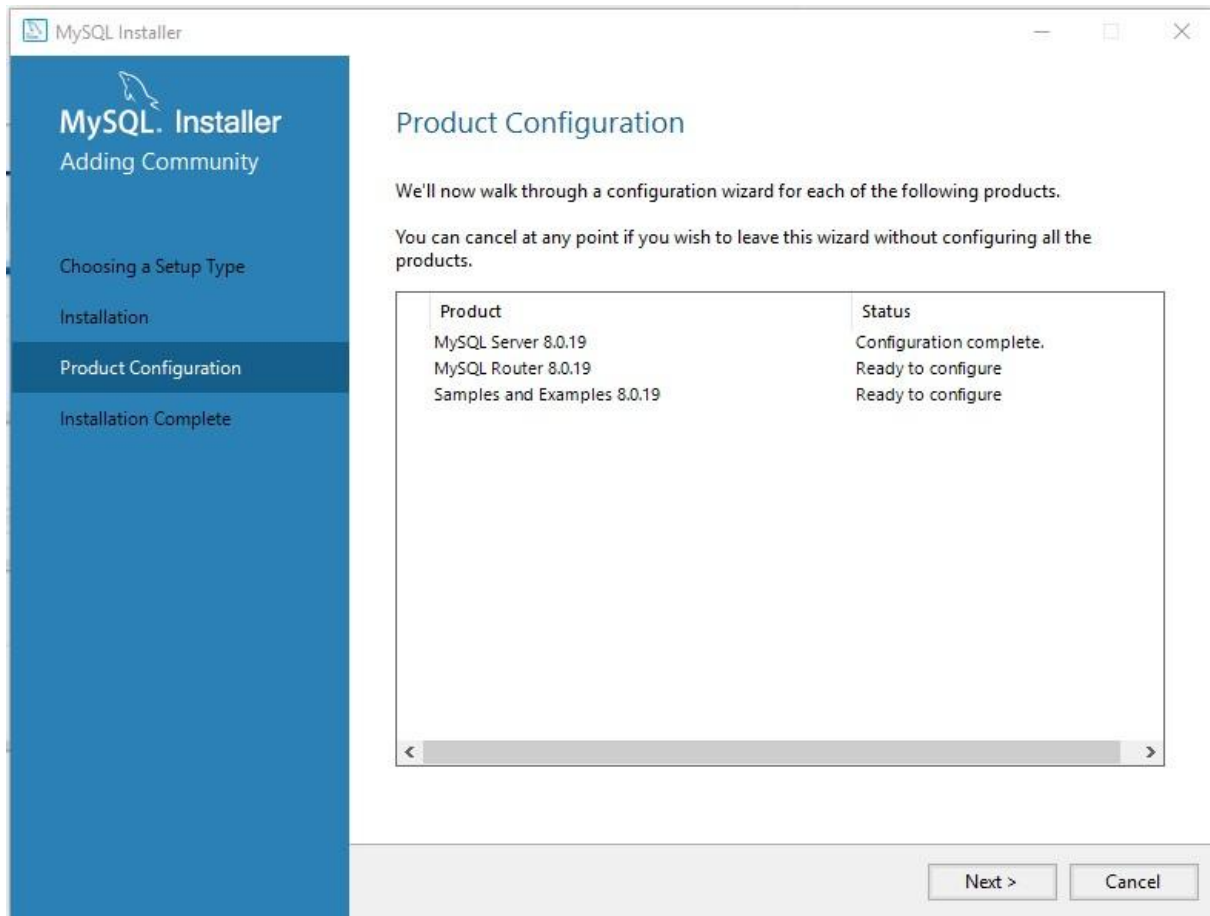

MySQL Installer

MySQL Router 8.0.19

MySQL Router Configuration

MySQL Router Configuration

☐ Bootstrap MySQL Router for use with InnoDB cluster

This wizard can bootstrap MySQL Router to direct traffic between MySQL applications and a MySQL InnoDB cluster. Applications that connect to the router will be automatically directed to an available read/write or read-only member of the cluster.

The bootstrapping process requires a connection to the InnoDB cluster. In order to register the MySQL Router for monitoring, use the current Read/Write instance of the cluster.

Hostname:

Host name or IP address is required.

Port:

3310

Management User:

root

Password:

Test Connection

MySQL Router requires specification of a base port (between 80 and 65532). The first port is used for classic read/write connections. The other ports are computed sequentially after the first port. If any port is indicated to be in use, please change the base port.

Classic MySQL protocol connections to InnoDB cluster:

Read/Write:

6446

Read Only:

6447

MySQL X protocol connections to InnoDB cluster:

Read/Write:

6448

Read Only:

6449

Finish

Cancel

MySQL. Installer

Adding Community

Choosing a Setup Type

Installation

Product Configuration

Installation Complete

Product Configuration

We'll now walk through a configuration wizard for each of the following products.

You can cancel at any point if you wish to leave this wizard without configuring all the products.

Product	Status
MySQL Server 8.0.19	Configuration complete.
MySQL Router 8.0.19	Configuration not needed.
Samples and Examples 8.0.19	Ready to configure

Next >

Cancel

MySQL Installer

MySQL. Installer
Samples and Examples

Connect To Server

Apply Configuration

Connect To Server

Select the MySQL server instances from the list to receive sample schemas and data.

☐ Show MySQL Server instances that may be running in read-only mode


Server	Port	Arch...	Type	Status
☒ MySQL Server 8.0.19	3306	X64	Stand-alone Server	Connection succeeded.


Provide the credentials that should be used (requires root privileges).
Click "Check" to ensure they work.


User name: Credentials provided in Server configuration


Password:



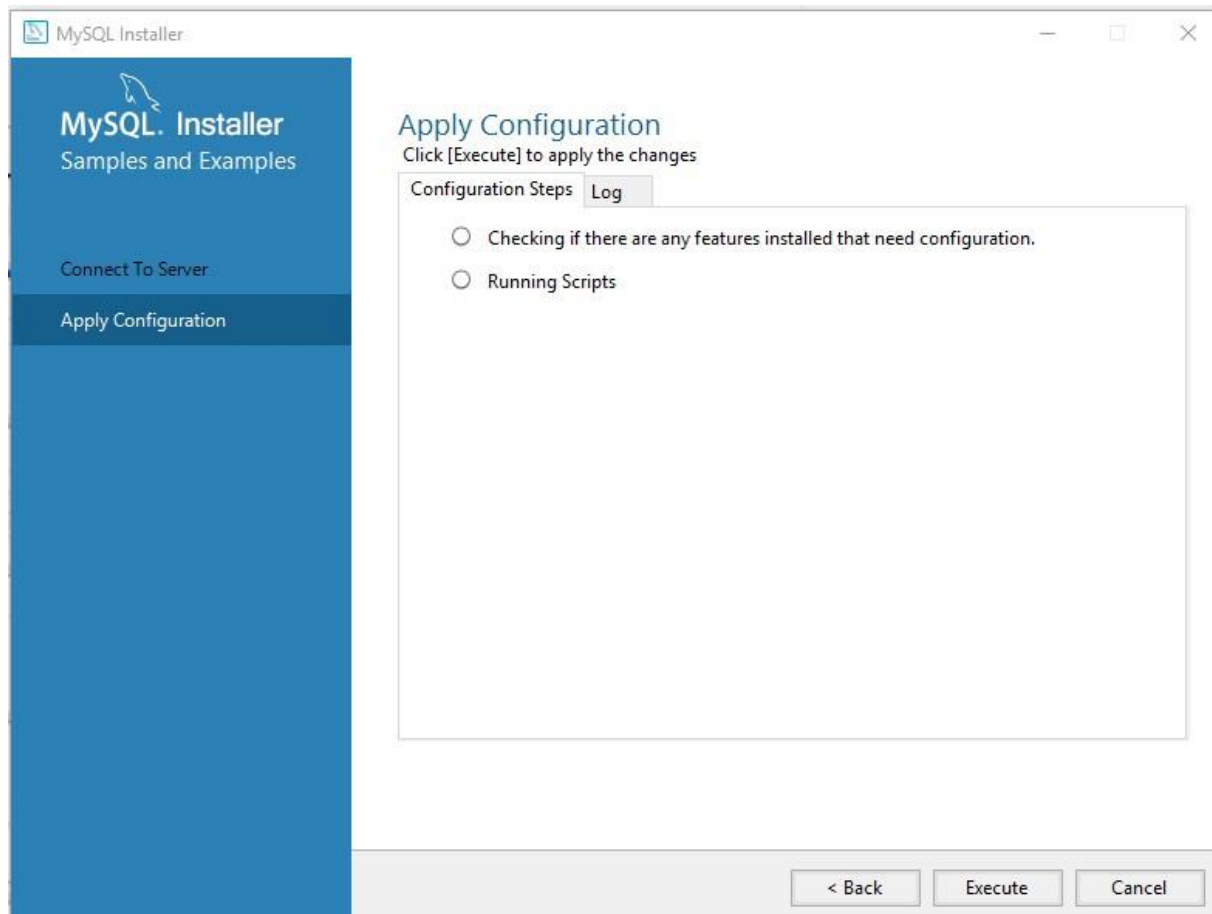

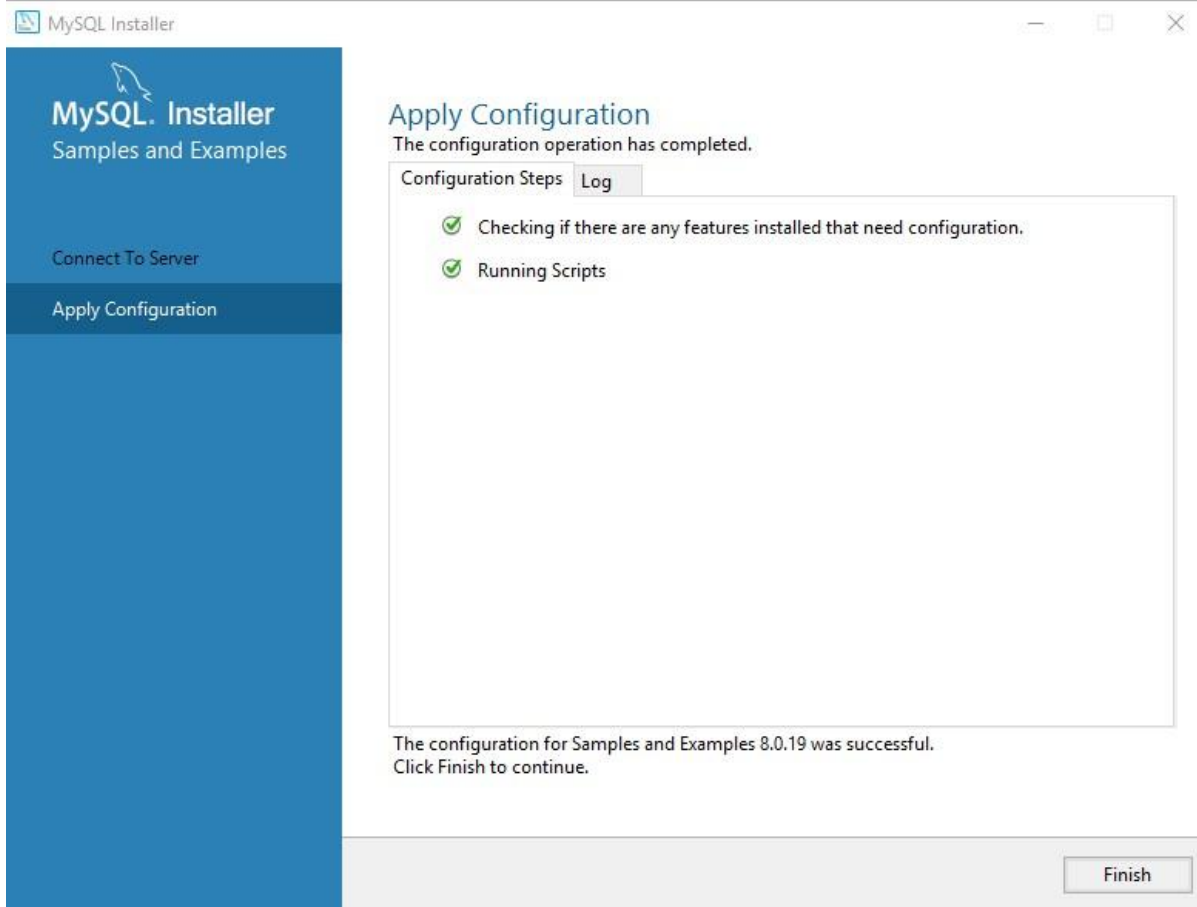

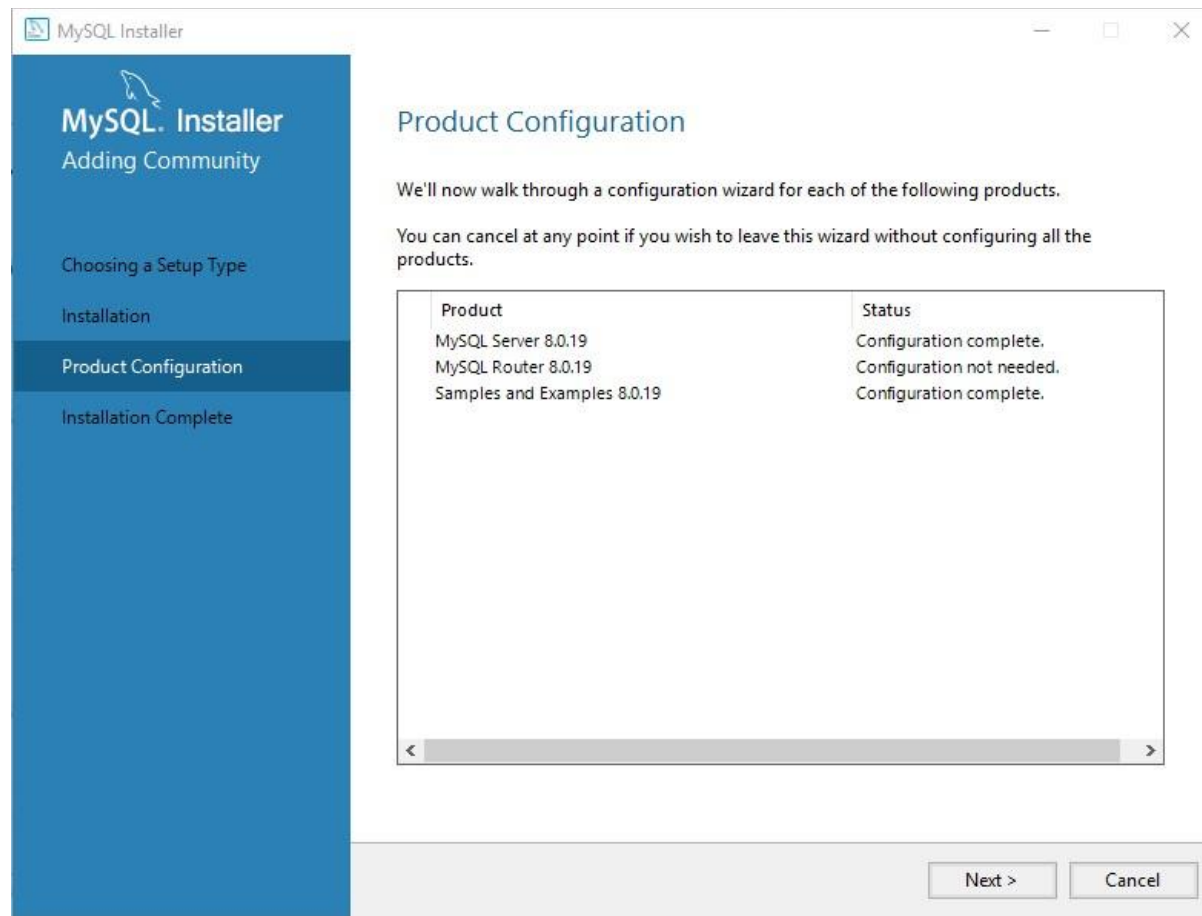

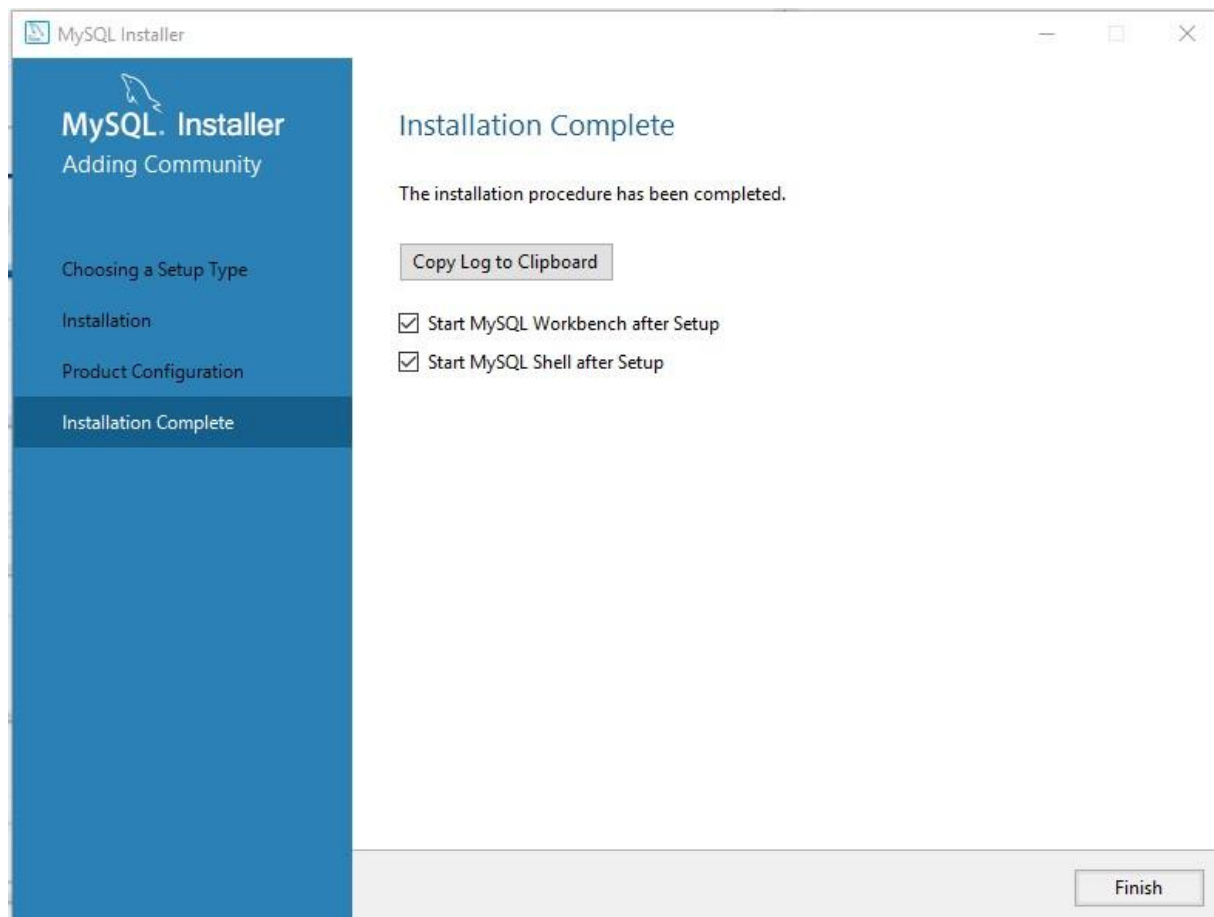



Welcome to MySQL Workbench

MySQL Workbench is the official graphical user interface (GUI) tool for MySQL. It allows you to design, create and browse your database schemas, work with database objects and insert data as well as design and run SQL queries to work with stored data. You can also migrate schemas and data from other database vendors to your MySQL database.

[Browse Documentation >](#)[Read the Blog >](#)[Discuss on the Forums >](#)

MySQL Connections

Local instance MySQL80

root
localhost:3306



Welcome to MySQL Workbench

MySQL Workbench is the official graphical user interface (GUI) tool for MySQL. It allows you to design, create and browse your database schemas, work with database objects and insert data as well as design and run SQL queries to work with stored data. You can also migrate schemas and data from other database vendors to your MySQL database.

[Browse Documentation >](#)[Read the Blog >](#)[Discuss on the Forums >](#)

MySQL Connections

Local instance MySQL80

 root

 localhost:3306

MySQL workbench

The screenshot displays the MySQL Workbench interface. The top menu bar includes File, Edit, View, Query, Database, Server, Tools, Scripting, and Help. Below the menu is a toolbar with various icons. The left sidebar shows the 'Navigator' pane with a 'SCHEMAS' section. Under 'SCHEMAS', there is a search bar 'Filter objects' and a list of databases: boaz, sakila, sys, and world. The 'world' database is selected. The main area shows a query editor with the following SQL code:

```
1 • show databases;
2
3 • use world;
4 • show tables ;
5
6
7 • select * from city
8
```


Below the query editor is the 'Result Grid' pane. It shows the results of the query 'select * from city'. The grid has columns: ID, Name, CountryCode, District, and Population. The results are as follows:

ID	Name	CountryCode	District	Population
1	Kabul	AFG	Kabul	1780000
2	Qandahar	AFG	Qandahar	237500
3	Herat	AFG	Herat	186800
4	Mazar-e-Sharif	AFG	Balkh	127800
5	Amsterdam	NLD	Noord-Holland	731200
6	Rotterdam	NLD	Zuid-Holland	593321
7	Haag	NLD	Zuid-Holland	440900
8	Utrecht	NLD	Utrecht	234323
9	Eindhoven	NLD	Noord-Brabant	201843
10	Tilburg	NLD	Noord-Brabant	193238
11	Groningen	NLD	Groningen	172701
12	Breda	NLD	Noord-Brabant	160398

The bottom status bar shows 'city 5' and a close button.

MySQL workbench - sakila

במידה ו sakila לא ברשימת ה schemas

1. Go to <https://downloads.mysql.com/docs/sakila-db.zip>
2. Extract the zip.
3. In MySQL Workbench:
 - File → Open SQL Script → Choose “sakila-schema.sql” from step 2
 - Click on 
 - File → Open SQL Script → Choose “sakila-data.sql” from step 2
 - Click on 
4. Click on the refresh button -  SCHEMAS 