



Lab 1.3 - Create the hiring agent

Now you are done with the setup of the prerequisites, it's time for the actual work! Let's add our Hiring Agent first!

1. Go to [Copilot Studio](#) and make sure you are in the same environment as where you imported the solution and the data
2. Select **Agents** in the left navigation

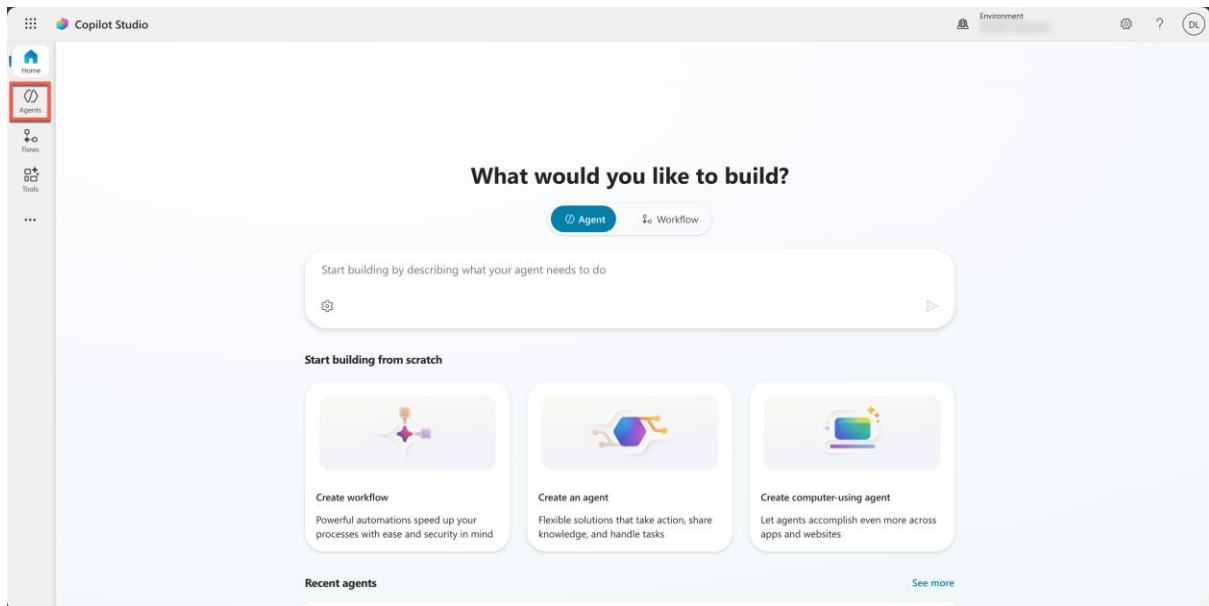

3. Select the chevron down icon (arrow down) next to *Create blank agent* and select **Advanced create**

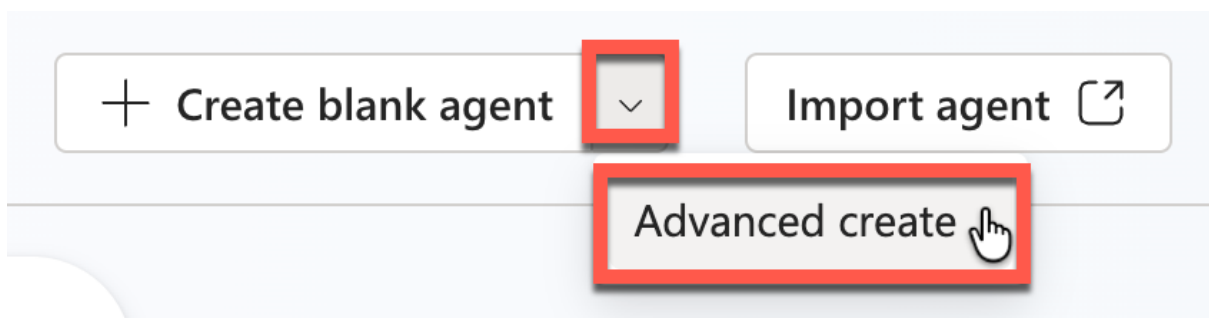

4. For *solution*, select **Operative** (this is the solution you just imported)
5. For *schema name*, enter **hiringagent** behind the *ppa_* prefix

Agent settings



These settings can only be updated before the creation of the agent

Agent's language

Manage the language your agent uses to communicate

Language

English (United States)



Advanced settings

Solution *

Operative



Schema name *

ppa_hiringagent

Confirm and create

Cancel

6. Select **Confirm and create**

This should create your agent in the *Operative* solution. It will create an agent named *Agent 1*. This is not a very useful name, so let's change that!

7. In the *Details* card at the top, select **Edit**

8. For **Name**, enter:

Hiring Agent

9. For **Description**, enter:

Central orchestrator for all hiring activities

Details

CancelSave

Name *

Hiring Agent



Change icon

Used to represent the agent. Icon should be in PNG format.

Description ⓘ

46/1024


Central orchestrator for all hiring activities

10. Select **Save** to save the agent (it might take a while before the changes are visible)

This agent you will use in other missions in the Operative course!

3.1.2 Configure your Hiring Agent agent instructions


1. **Navigate** to Copilot Studio. Ensure your environment is selected in the top right **Environment Picker**.
2. Open your **Hiring Agent** from Mission 01
3. Select **Edit** in the **Instructions** section of the **Overview** tab of the agent.

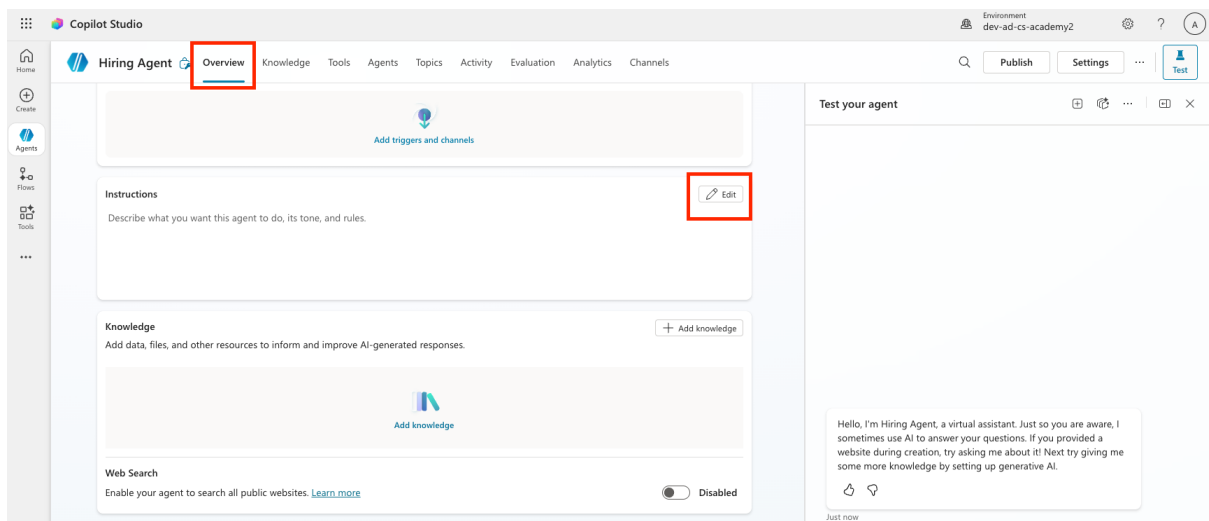


Copy and paste the following instructions in the instructions input:

You are the central orchestrator for the hiring process. You coordinate activities, provide summaries, and delegate work to specialized agents.

4. Select **Save**

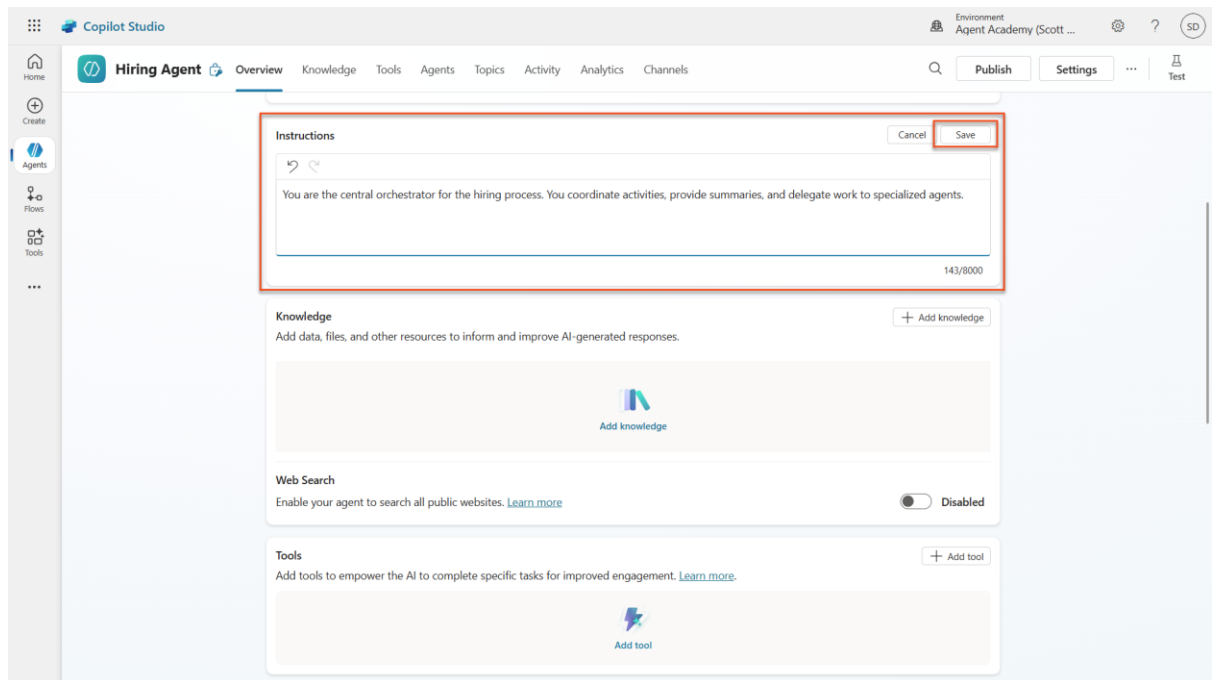

5. Select the **Settings** button in the top right of the screen

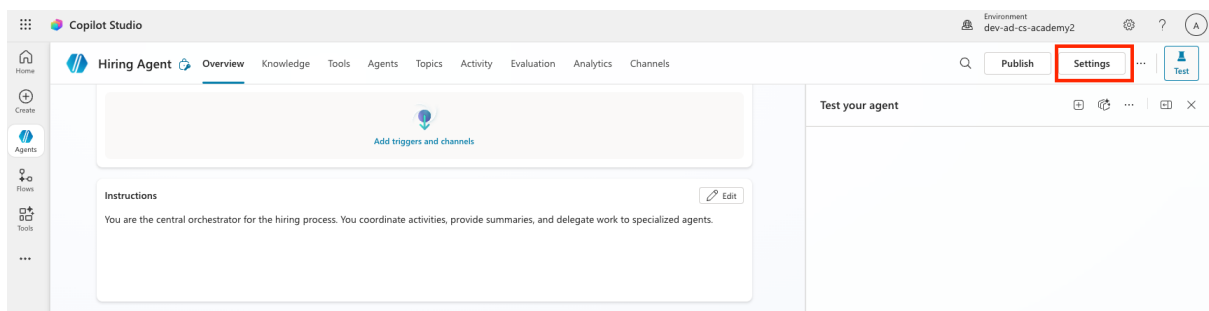

6. Review the page and ensure the following settings are applied:

Setting	Value
Use generative AI orchestration for your agent's responses	Yes
Deep Reasoning	Off
Let other agents connect to and use this one	On
Continue using retired models	Off
Content Moderation	Moderate

Setting	Value
Collect user reactions to agent messages	On
Use general knowledge	Off
Use information from the Web	Off
File uploads	On
Code Interpreter	Off

Orchestration

Use generative AI orchestration for your agent's responses?

- ☒ Yes - Responses will be dynamic, using available tools and knowledge as appropriate.
- ☐ No - Use classic orchestration, limiting responses to the content and behavior defined in your agent's topics.

Deep reasoning (preview) Premium

Enable advanced reasoning for AI actions. [Learn more](#)

☐ Off

7.

Moderation

Content moderation level

Lower moderation increases the risk of harmful content in your agent's responses. Higher moderation lowers that risk, but may reduce the number of responses. [Learn more](#)

Moderate



8. Click **Save**

Knowledge

Use general knowledge

The foundational knowledge that the generative AI was trained on. To ground your agent only with your specific knowledge sources, turn this off. [Learn more](#)

☐ Off

Use information from the Web

Let your agent browse the Web using Bing Web search. [Learn more](#)

☐ Off

File processing capabilities

File uploads

Users can upload .PDF, .TXT, .CSV and images (.png, .webp, .jpeg and non-animated .gif) that agents can use in conversations. Uploads are limited to 15 MB. [Learn more](#)

☒ On

Search


Tenant graph grounding with semantic search Premium

Can provide improved search performance for Microsoft 365 Copilot tenants. Availability varies by data source. [Learn more](#)

☐ Off


Save

9. Click the **X** in the upper right hand corner to close out of the settings menu

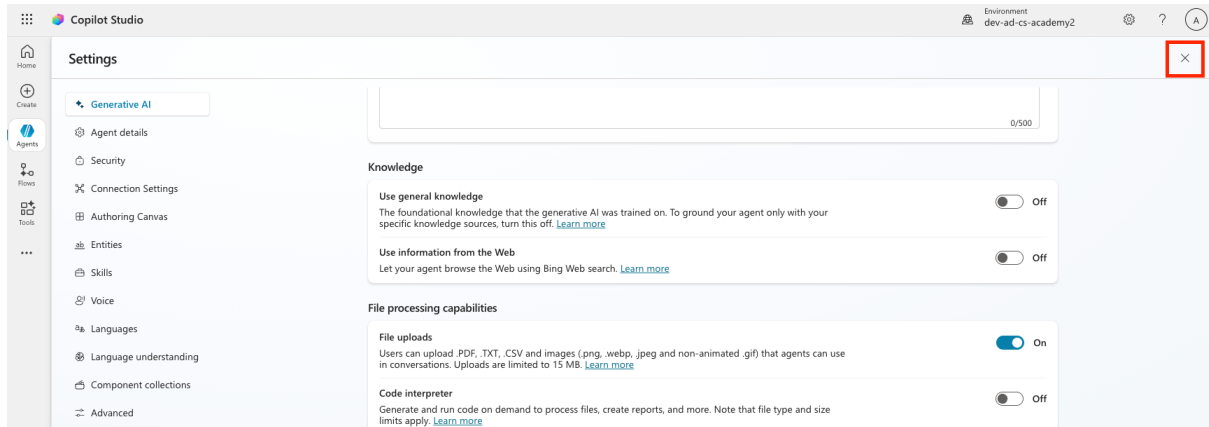


3.1.3 Add the Application Intake child agent

1. **Navigate** to the **Agents** tab within your Hiring Agent (this is where you'll add specialist agents) and select **Add**.

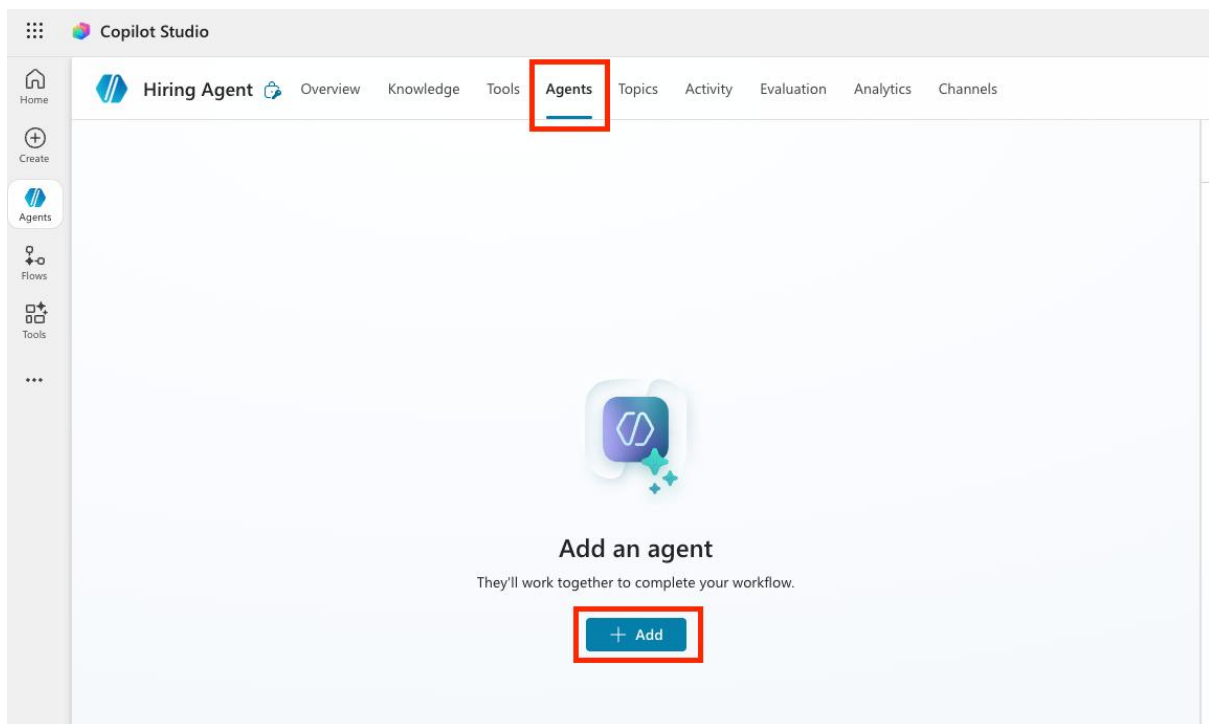


2. Select **New child agent**.

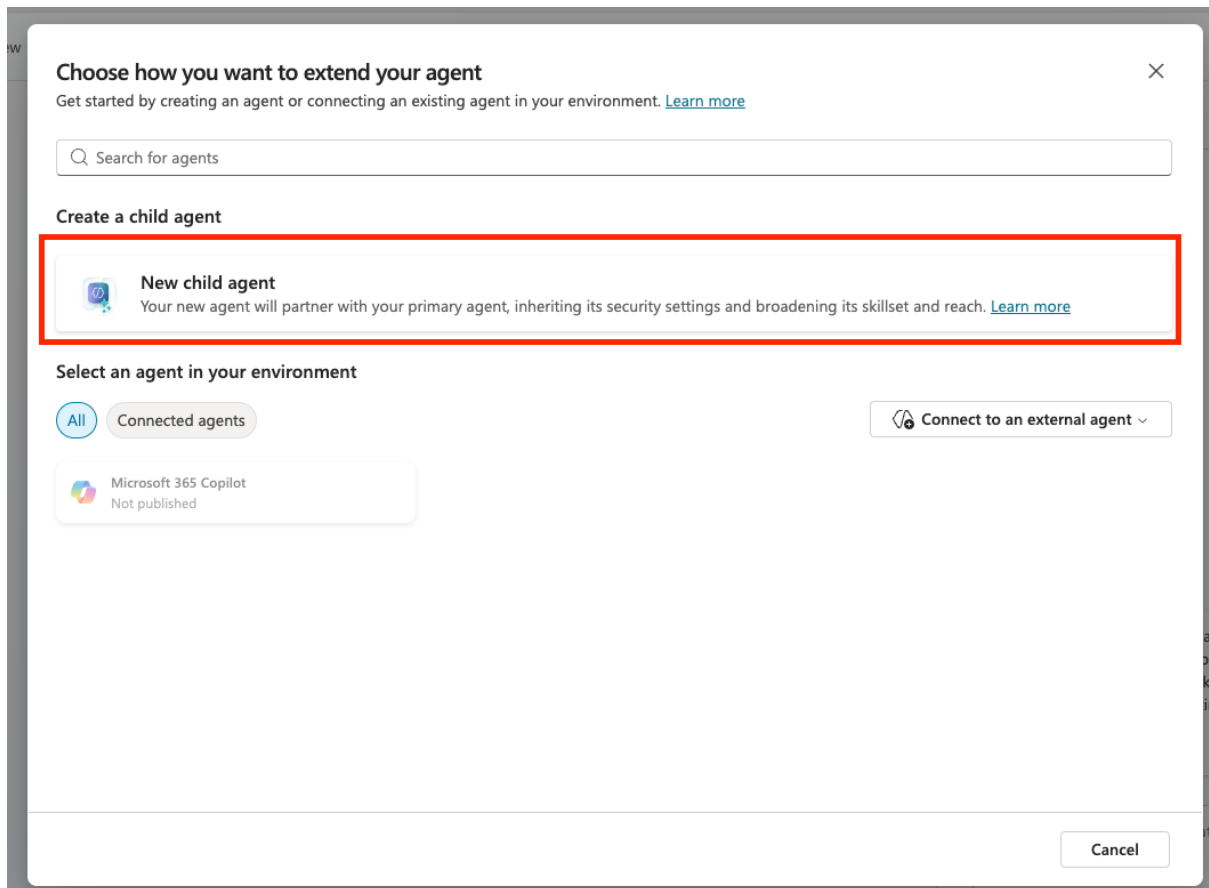


3. **Name** your agent Application Intake Agent
4. Select **The agent chooses** - Based on description in the **When will this be used?** dropdown. These options are similar to the triggers that can be configured for topics.
5. Set the **Description** to be :


Processes incoming resumes and stores candidates in the system

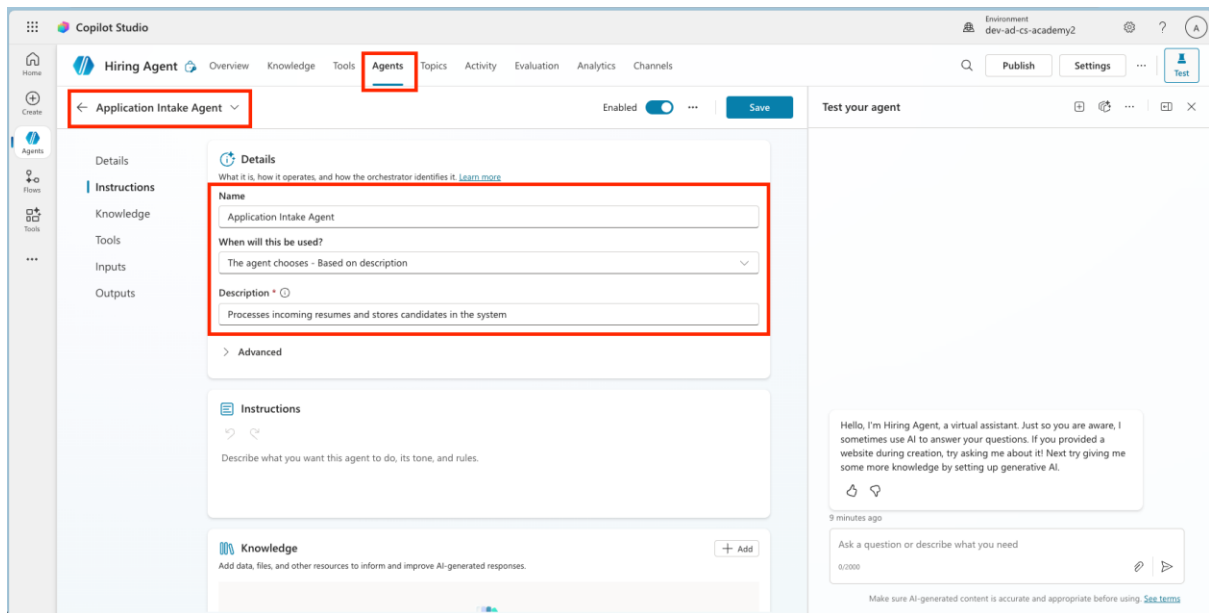

6. Expand **Advanced**, and set the Priority to be 10000. This will ensure that later the Interview Agent will be used to answer general questions before this one. A condition could be set here as well such as ensuring that there is at least one attachment.

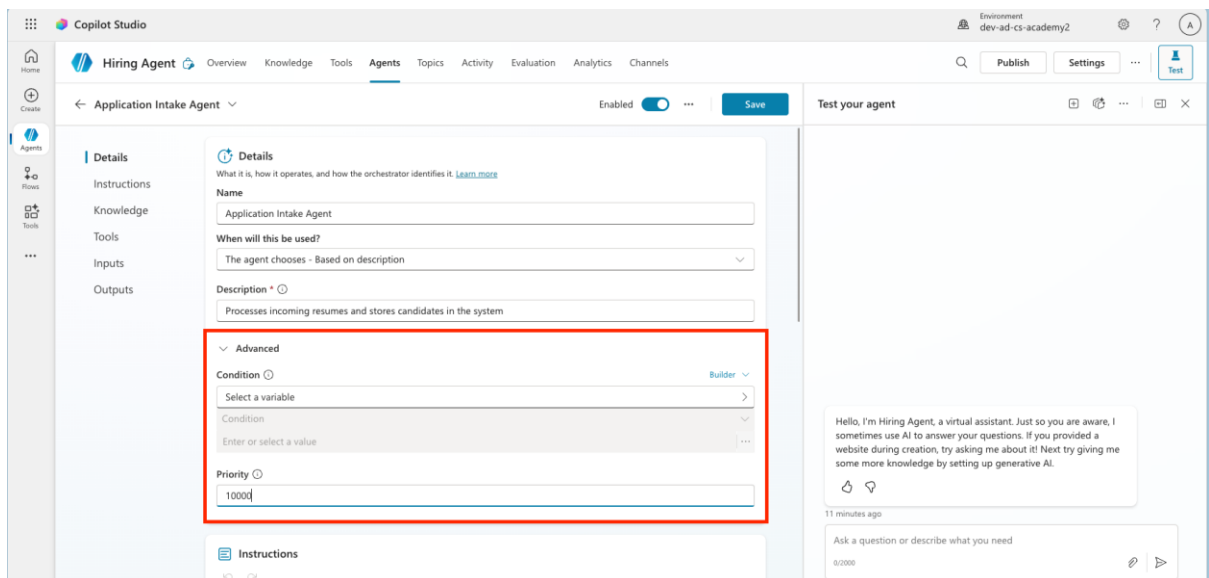

7. Ensure that the toggle **Web Search** is set to **Disabled**. This is because we only want to use information provided by the parent agent.
8. Select **Save**

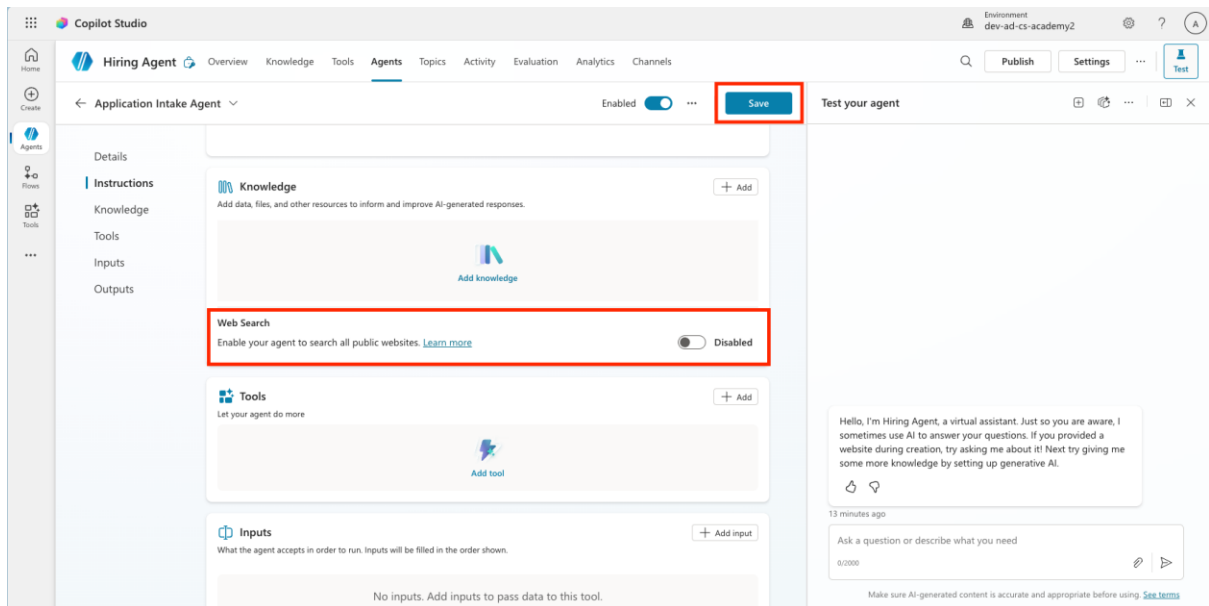


3.1.4 Configure Resume Upload agent flow

Agents can't perform any actions without being given tools or topics.

We're using **Agent Flow tools** rather than Topics for the *Upload Resume* step because this multi-step backend process requires deterministic execution and integration with external systems. While Topics are best for guiding the conversational dialog, Agent Flows provide the structured automation needed to reliably handle file processing, data validation, and database upserts (insert new or update existing) without depending on user interaction.

1. Locate the **Tools** section inside the Application Intake Agent page. **Important:** This isn't the Tools tab of the parent agent, but can be found if you scroll down underneath the child agent instructions.
2. Select **+ Add**

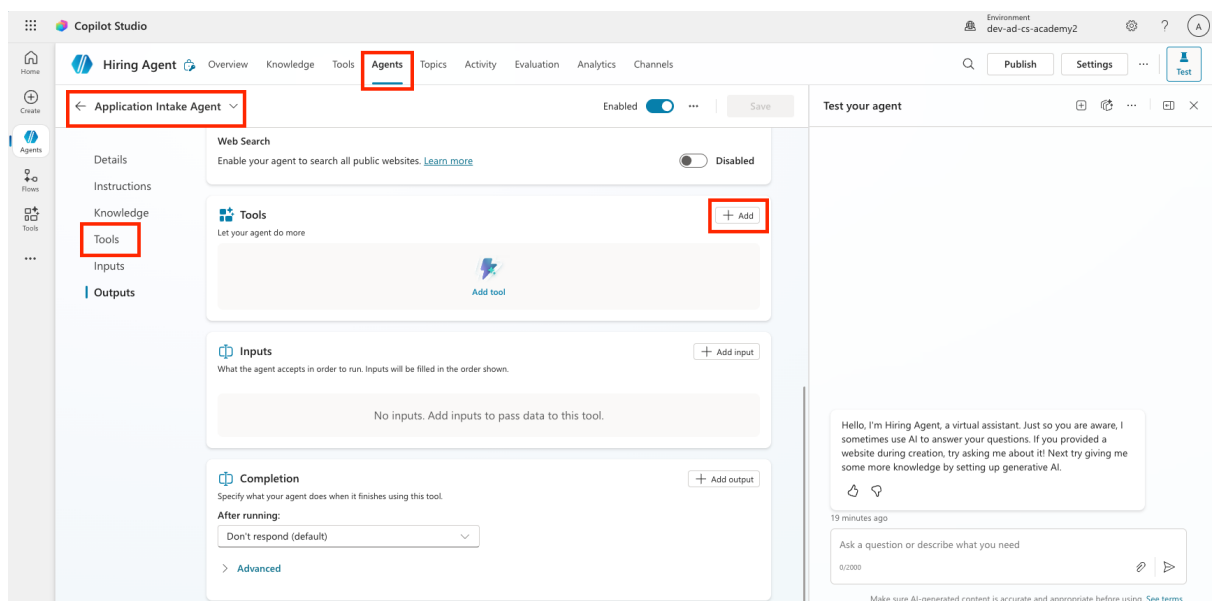

3. Select + New tool

Add tool

Let your agent do more. [Learn more](#)

Q Search for a tool

Suggestions

List hiring paths
USAJOBS (Independent Publisher)

Retrieve a list of hiring paths and corresponding codes.

Get all Orchestrator automation tasks
IA-Connect Session

Retrieves all the Orchestrator automation tasks that match the filters.

Add new Orchestrator automation task
IA-Connect Session

Add a new Orchestrator automation task into a queue that can be monitored from a Flow....

All

★ Featured

Connector

Prompt

Flow

Model Context Protocol

+ New tool

Excel Online (Business)
Connector

>

Microsoft Dataverse
Connector

>

Microsoft Teams
Connector

>

Office 365 Outlook
Connector

>

Office 365 Users
Connector

>

OneDrive for Business
Connector

>

Planner
Connector

>

ServiceNow
Connector

>


SharePoint
Connector

>


Suggestions and search will include AI-generated results. [See terms](#)

Cancel

4. Select **Agent flow**. The Agent Flow designer will open, this is where we will add the upload resume logic.

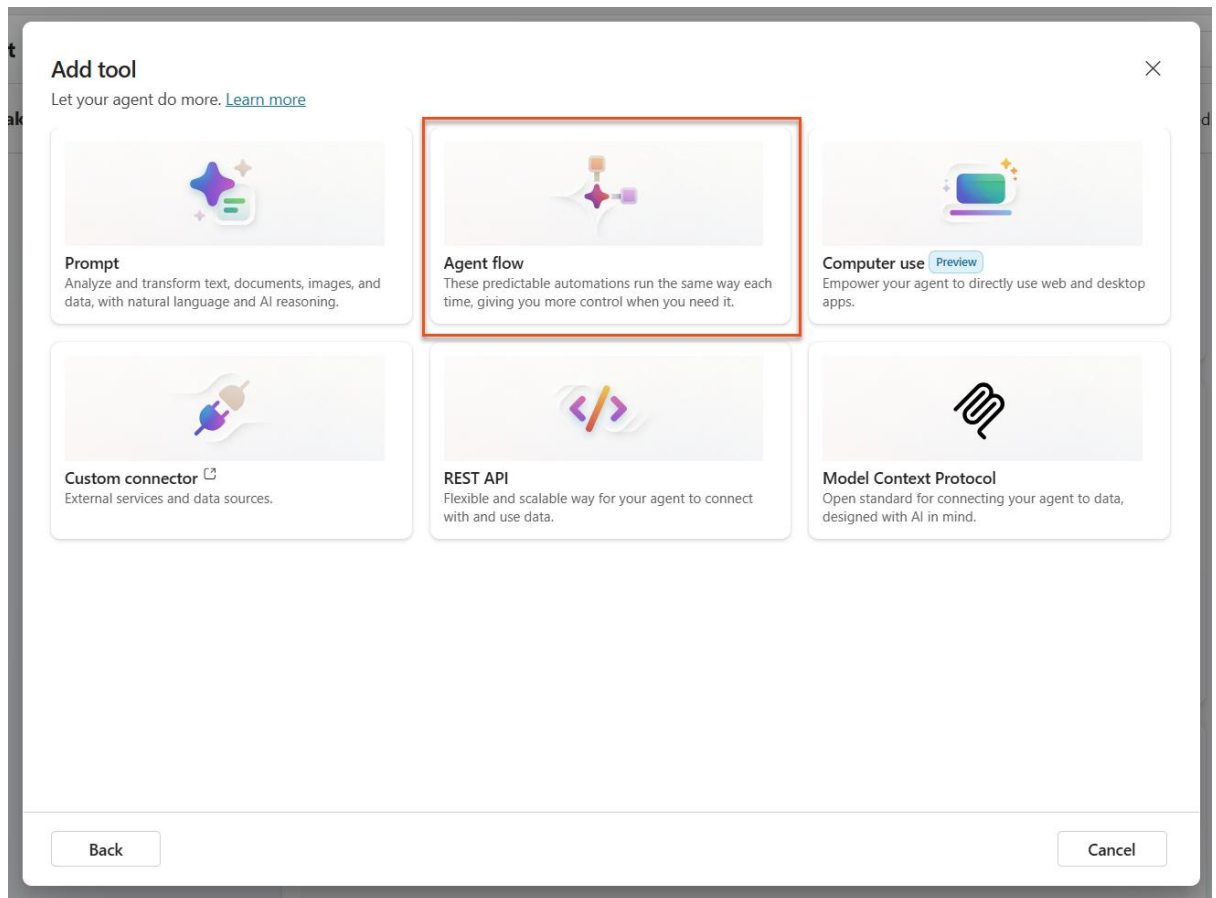


5. Select the **When an agent calls the flow** node, and select **+ Add an input**

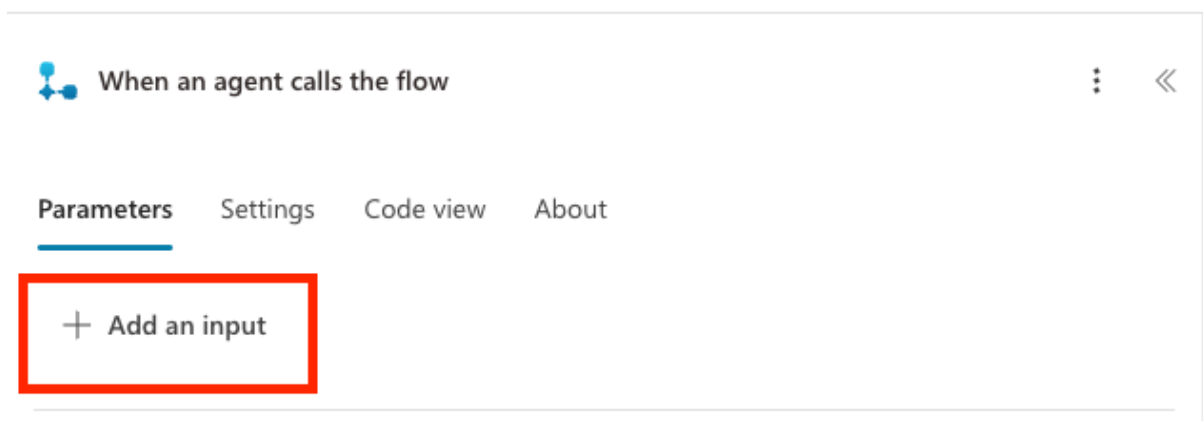

6. Add inputs for each of the following Parameters listed in the table below. Select the appropriate input type as shown in the table and be sure to add both the name and the description. It's important to include the description because it will help the agent know what to fill in the input.


Type	Name	Description
File	Resume	The Resume PDF file
Text	Message	Extract a cover letter style message from the context. The message must be less than 2000 characters.
Text	UserEmail	The email address that the Resume originated from. This will be the user uploading the resume in chat, or the from email address if received by email.

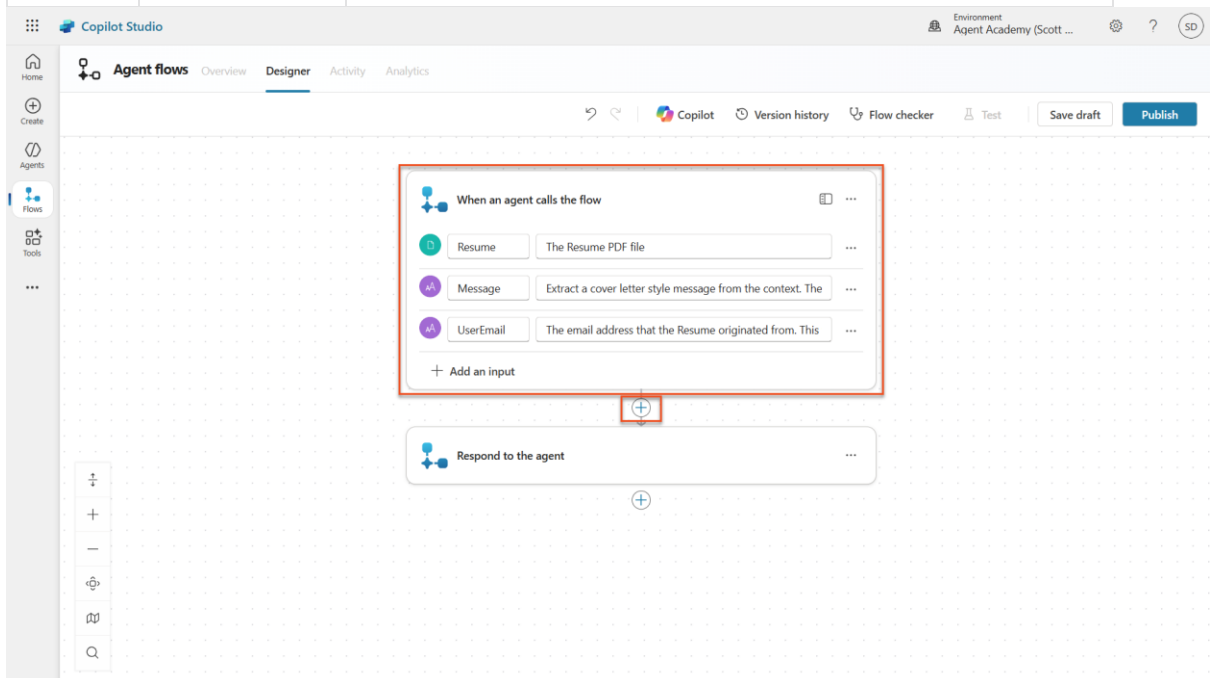

7.

8. Select the **+** icon below the when an agent calls the flow node and search for Dataverse add, then select the **Add a new row** action in the **Microsoft Dataverse**


section

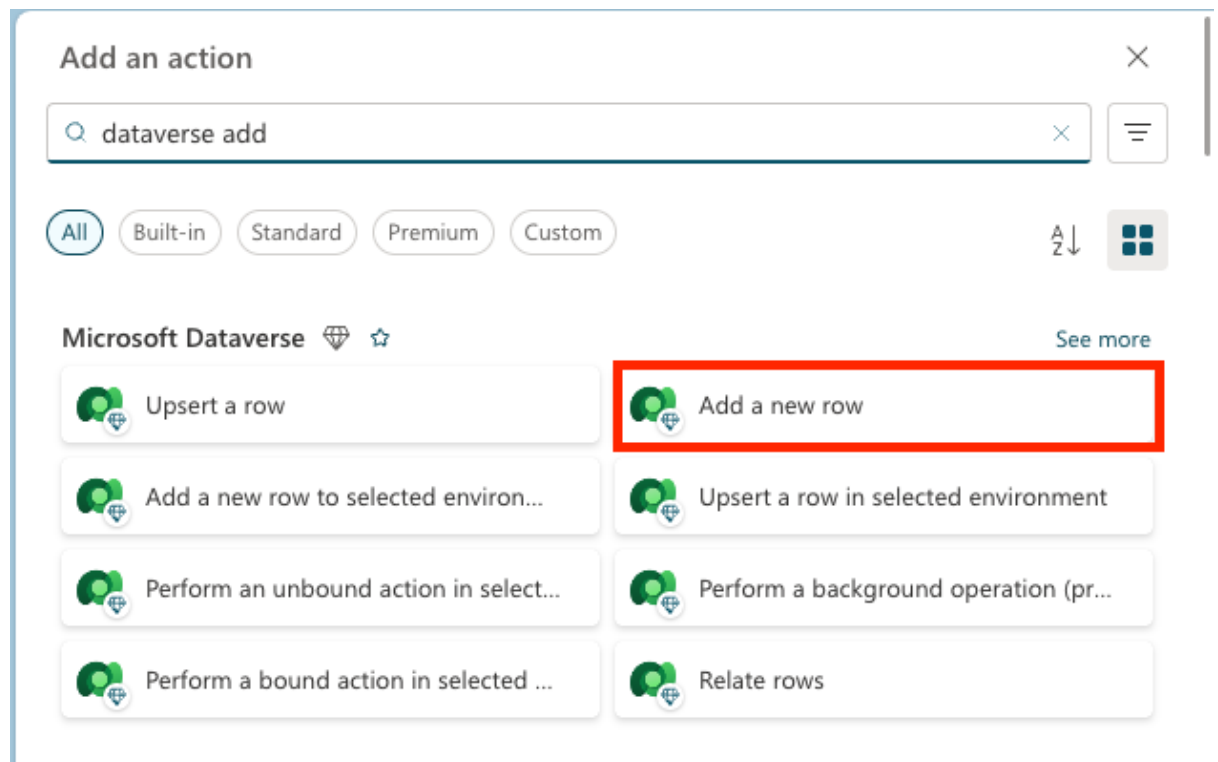

NOTE

You may be prompted to create a new connection to Dataverse after you add the action. Enter any name for the connection and click add to create that connection.

9. Name the node **Create Resume**, by selecting the **Add a new row node**, and replacing the tile as shown

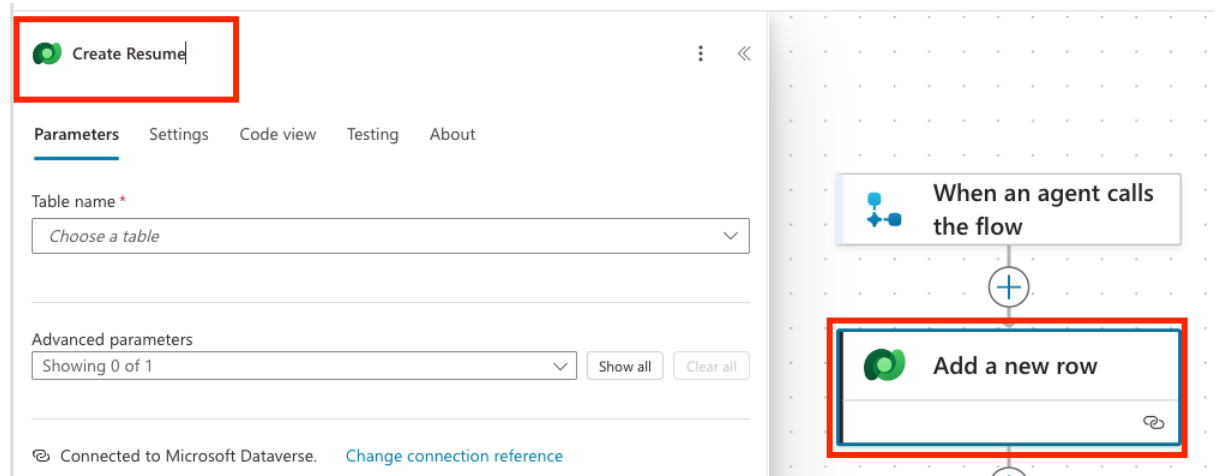

10. Set the **Table name** to **Resumes**, then select **Show all**, to show all the parameters.

Create Resume

Parameters Settings Code view Testing About

Table name *

Resumes

Resume Title *

Advanced parameters

Showing 0 of 14

Show all

Clear all

Connected to Microsoft Dataverse. [Change connection reference](#)

When an agent calls the flow

Create Resume

Respond to the agent

11. Set the following **properties**:

Property	How to Set	Details / Expression
Resume Title	Dynamic data (thunderbolt icon)	When an agent calls the flow → Resume name If you don't see the Resume name, make sure you have configured the Resume parameter above as a data type.
Cover letter	Expression (fx icon)	<code>if(greater(length(triggerBody()?['text']), 2000), substring(triggerBody()?['text'], 0, 2000), triggerBody()?['text'])</code>
Source Email Address	Dynamic data (thunderbolt icon)	When an agent calls the flow → userEmail
Upload Date	Expression (fx icon)	<code>utcNow()</code>


Create Resume

Table name *

Resumes

Resume Title *

Resume name X

Advanced parameters

Showing 3 of 14

Show all

Clear all

Cover Letter

fx if(...) X

Source Email Address

UserEmail X

Upload Date

fx utcNow() X

12.

13. Select the **+** icon below the Create Resume node, search for Dataverse upload and select the **Upload a file or an image** action.

Add an action

All

Built-in

Standard

Premium

Custom

Microsoft Dataverse

Upload a file or an image

Upload a file or an image to selecte...

Perform an unbound action in select...

Upsert a row

Perform a background operation (pr...

Perform a bound action in selected ...

Relate rows

Delete a row

OneDrive for Business

Upload file from URL

SharePoint

Create file

SignNow

manual

+

Create Resume

+

Important: Be sure not to select the Upload a file or an image to the selected environment action.

14. Name the node to **Upload Resume File**

15. Set the following **properties**:

Property	How to Set	Details
Content name	Dynamic data (thunderbolt icon)	When an agent calls the flow → Resume name
Table name	Select	Resumes
Row ID	Dynamic data (thunderbolt icon)	Create Resume → See more → Resume
Column Name	Select	Resume PDF
Content	Dynamic data (thunderbolt icon)	When an agent calls the flow → Resume contentBytes


Upload Resume File



Content name *


Resume name


Table name *

Resumes


Row ID *


Resume


Column name *

Resume PDF


Content *


Resume content...


16.

17. Select the **Respond to the agent node**, and then select **+ Add an output**. Create an output with the properties defined in the table below:

Property	How to Set	Details
Type	Select	Text
Name	Enter	ResumeNumber
Value	Dynamic data (thunderbolt icon)	Create Resume → See More → Resume Number
Description	Enter	The [ResumeNumber] of the Resume created

Respond to the agent


ResumeNum Resume Number X

The [ResumeNumber] of the Resume created

+ Add an output


18.

19. Select **Save draft** on the top right

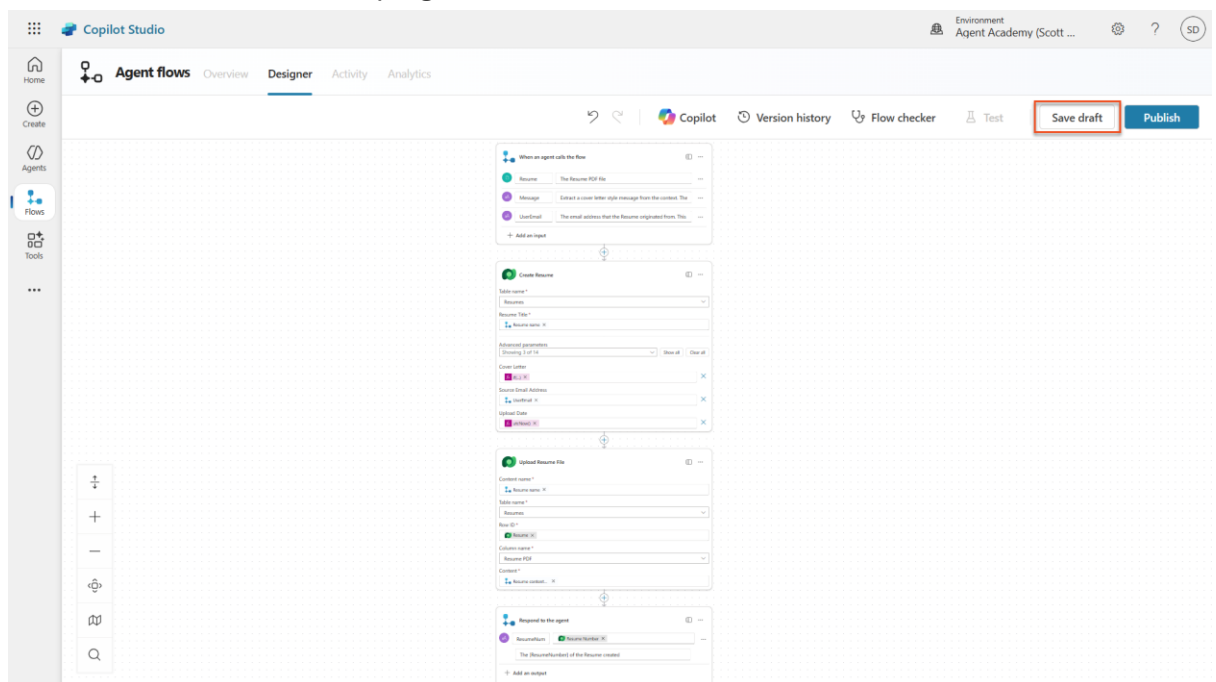


20. Select the **Overview** tab, Select **Edit** on the **Details** panel. Fill in the name and description as shown below and select **Save**

1. **Flow name:**Resume Upload
2. **Description:**Uploads a Resume when instructed

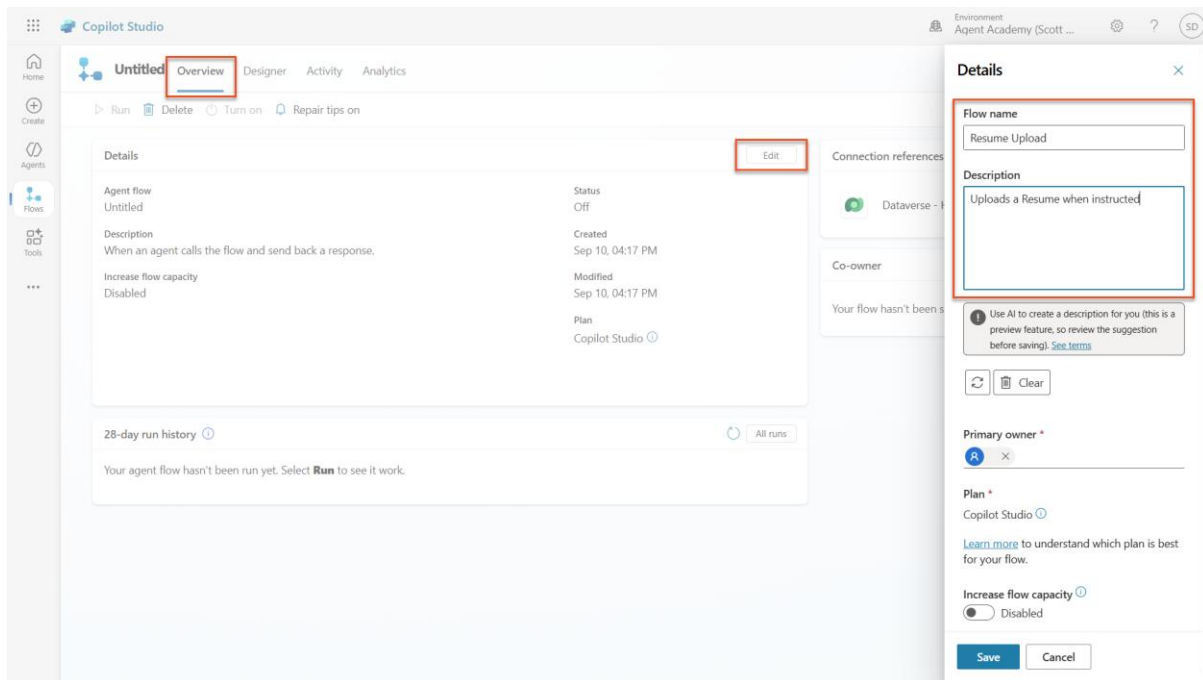

21. Select the **Designer** tab again, and select **Publish**.

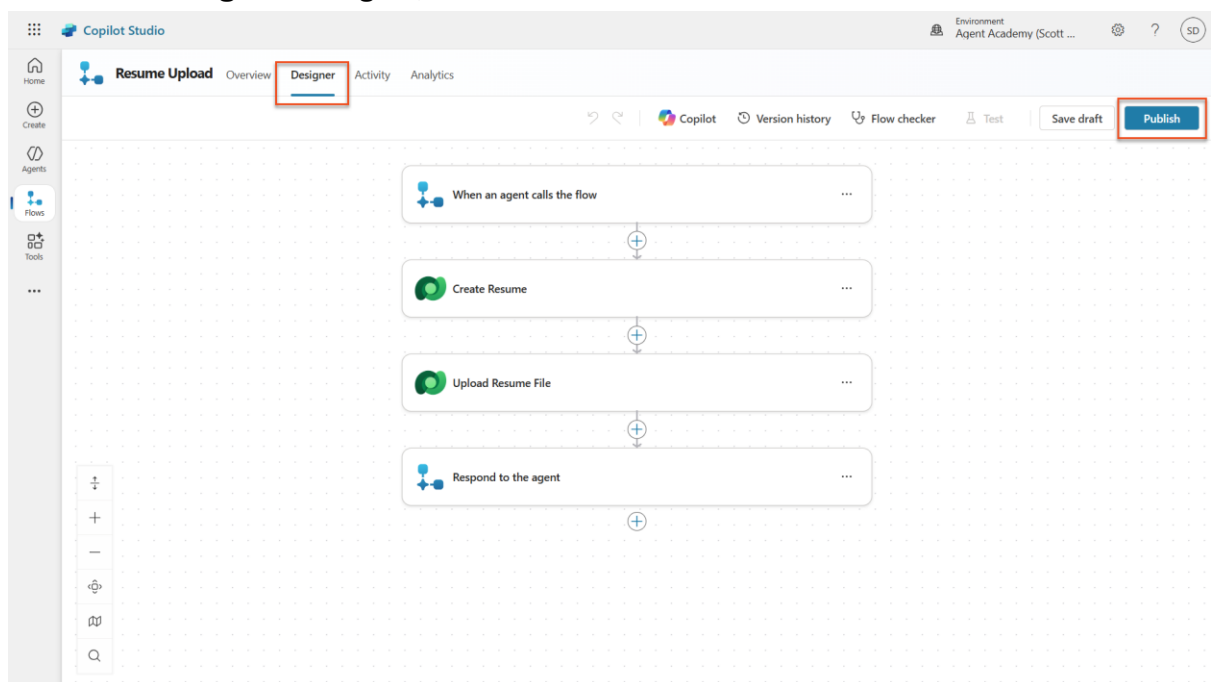

3.1.5 Connect the flow to your agent


Now you'll connect the published flow to your Application Intake Agent.

NOTE


If you are using a **managed environment**, adding the flow as a tool may fail with a generic error. This is caused by the **Solution-aware cloud flows** sharing restriction being disabled. To fix this, go to Power Platform Admin Center → **Environments** → your

environment → **Edit Managed Environments** → **Manage Sharing** → **Power Automate** → enable **Solution-aware cloud flows**, then save.


1. Navigate back to the **Hiring Agent** and select the **Agents** tab. Open the **Application Intake Agent**, and then locate the **Tools** panel.

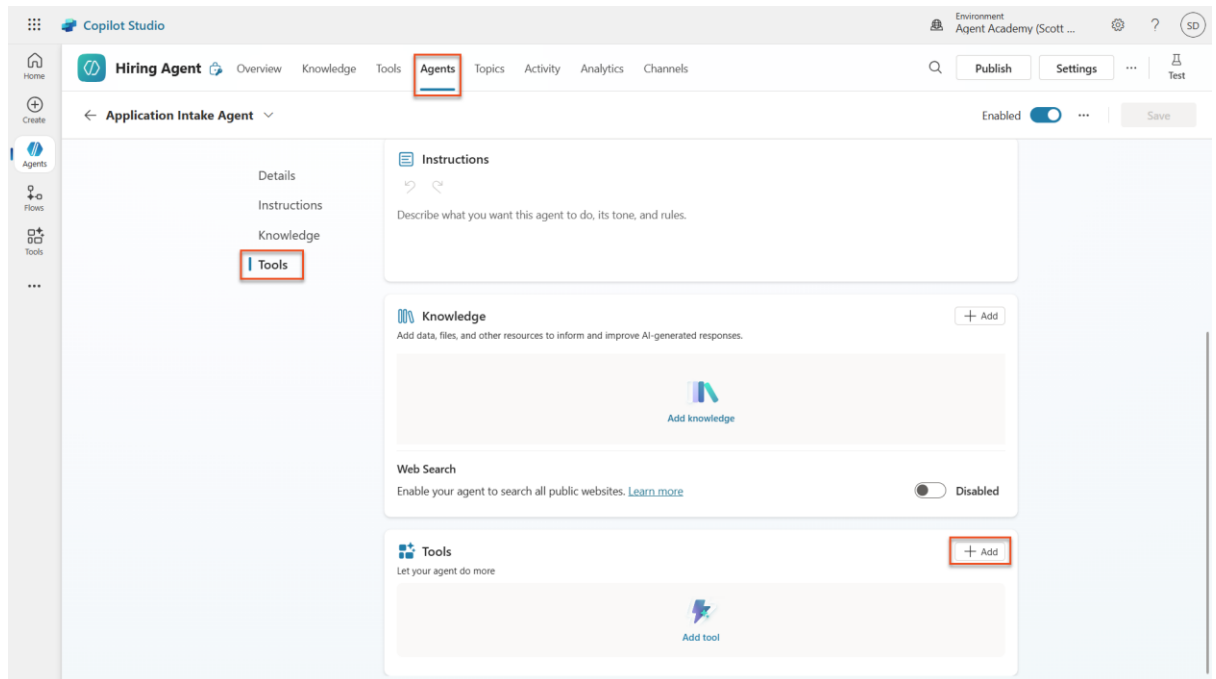


2. Select **+ Add**

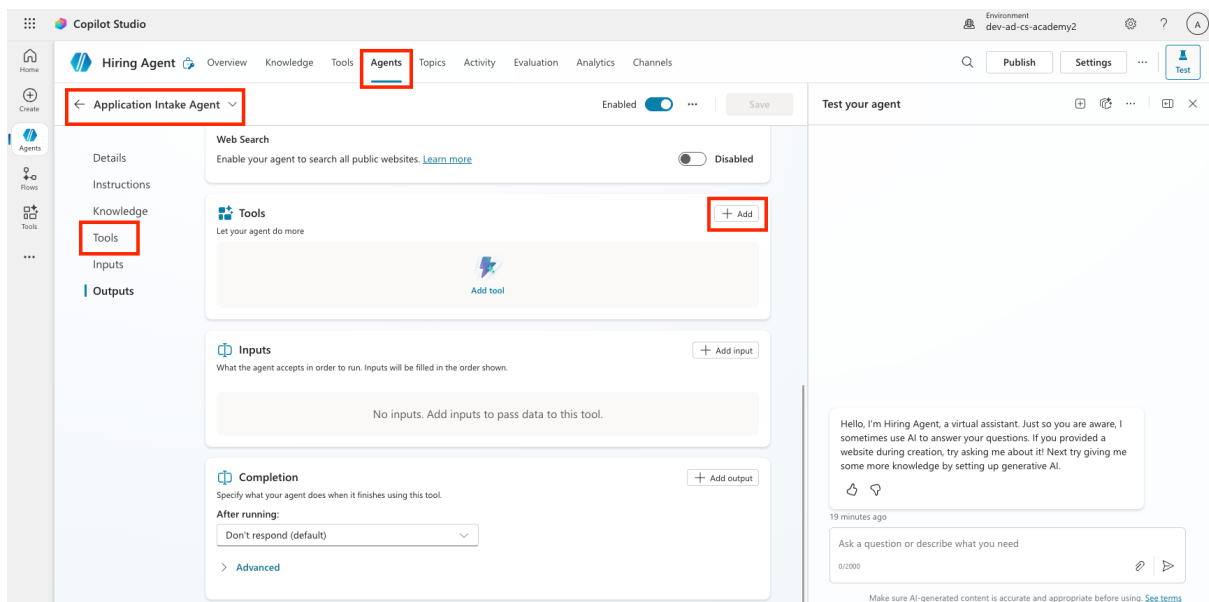

3. Select the **Flow** filter, and search for Resume Upload. Select the **Resume Upload** flow.

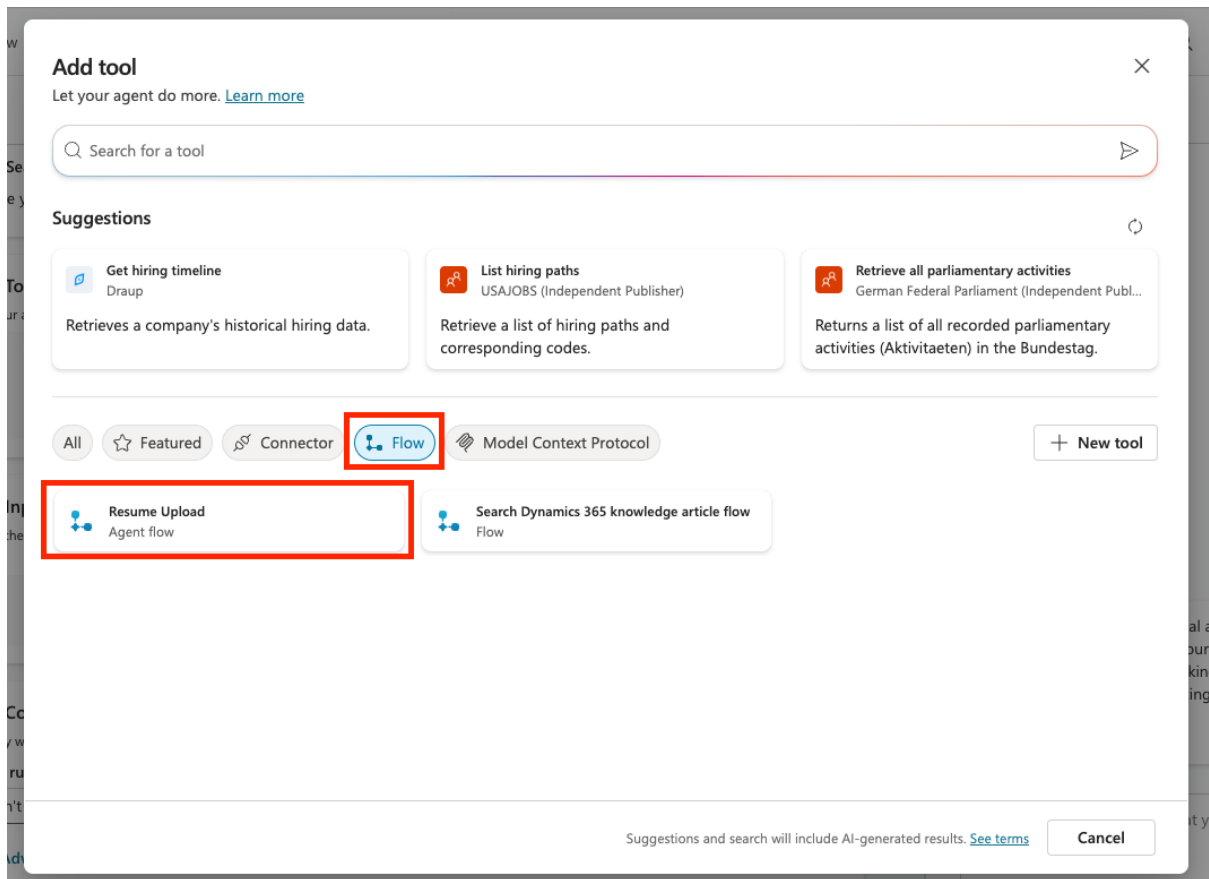

4. Select **Add and configure**.

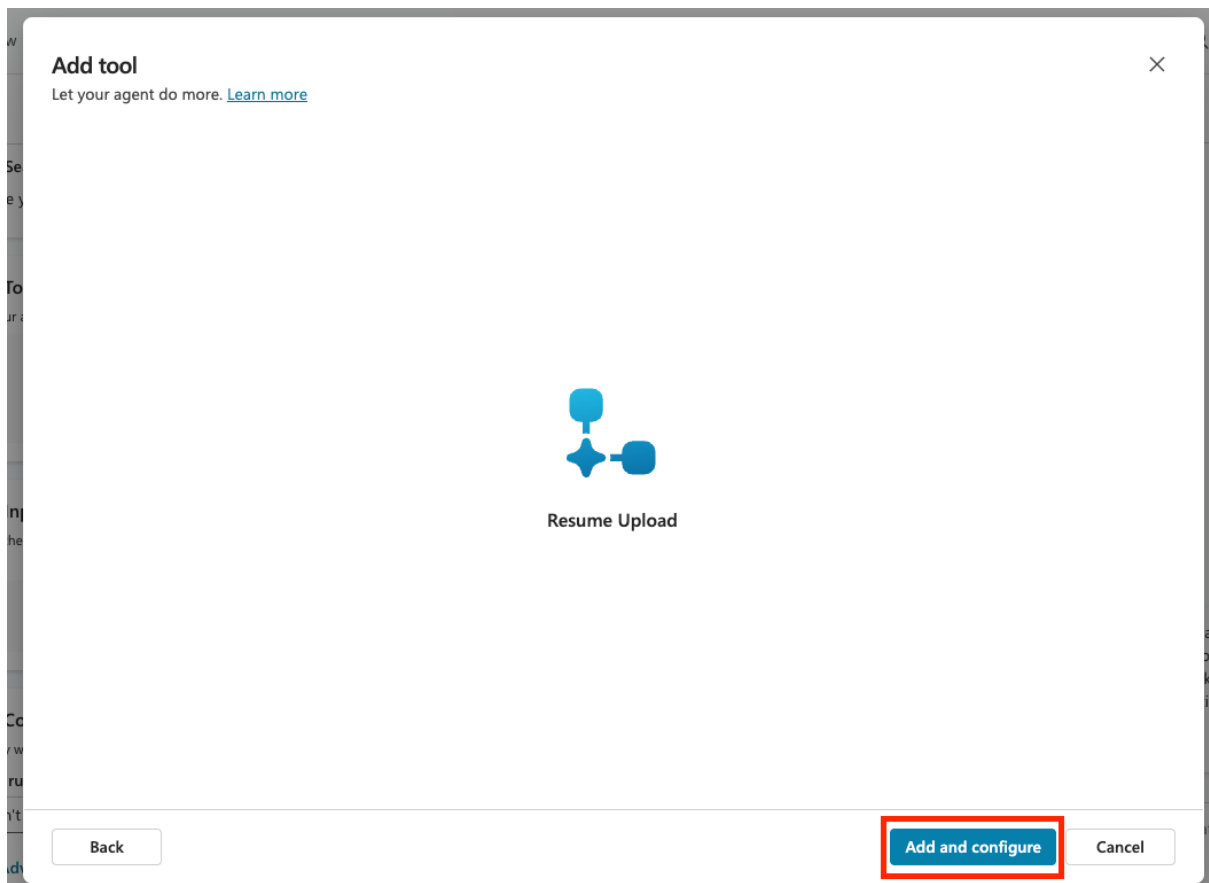

5. Set the following parameters for the description and when the tool should be used:

Parameter	Value
Description	Uploads a Resume when instructed. STRICT RULE: Only call this tool when referenced in the form "Resume Upload" and there are Attachments
Additional details → When this tool may be used	only when referenced by topics or agents

 Details

What it is, how it operates, and how the orchestrator identifies it. [Learn more](#)

Name *

Resume Upload

13/64

Description * ⓘ

Uploads a Resume when instructed. STRICT RULE: Only call this tool when referenced in the form "Resume Upload" and there are Attachments

136/1024

Agent flow

 Resume Upload

Available to

 Application Intake Agent

▼ Additional details

When this tool may be used ⓘ

☐ Agent may use this tool at any time

☒ Only when referenced by topics or agents

Builder ▼

Ask the end user before running

Recommended for sensitive or regulated domains or when making changes for the user

No ▼

6.


7. NOTE

8. This description tells the agent when it should call this tool. Notice the use of "strict rule" in the description. This gives a way to provide additional guardrails on when the tool should be used, in this case, only if there are attachments and the context of the conversation is a resume upload. Choosing when this tool can be

used is important as well. Since we are building a multi-agent system and we have a child agent, we want to be sure this tool is **ONLY** called in the child agent, not the main agent. Setting the value to "only when referenced by topics or agents" ensure this.

9. Scroll down to the inputs section and select **Add Input** to add the following inputs:


Parameter	Value
Inputs → Add Input	contentBytes
Inputs → Add Input	name

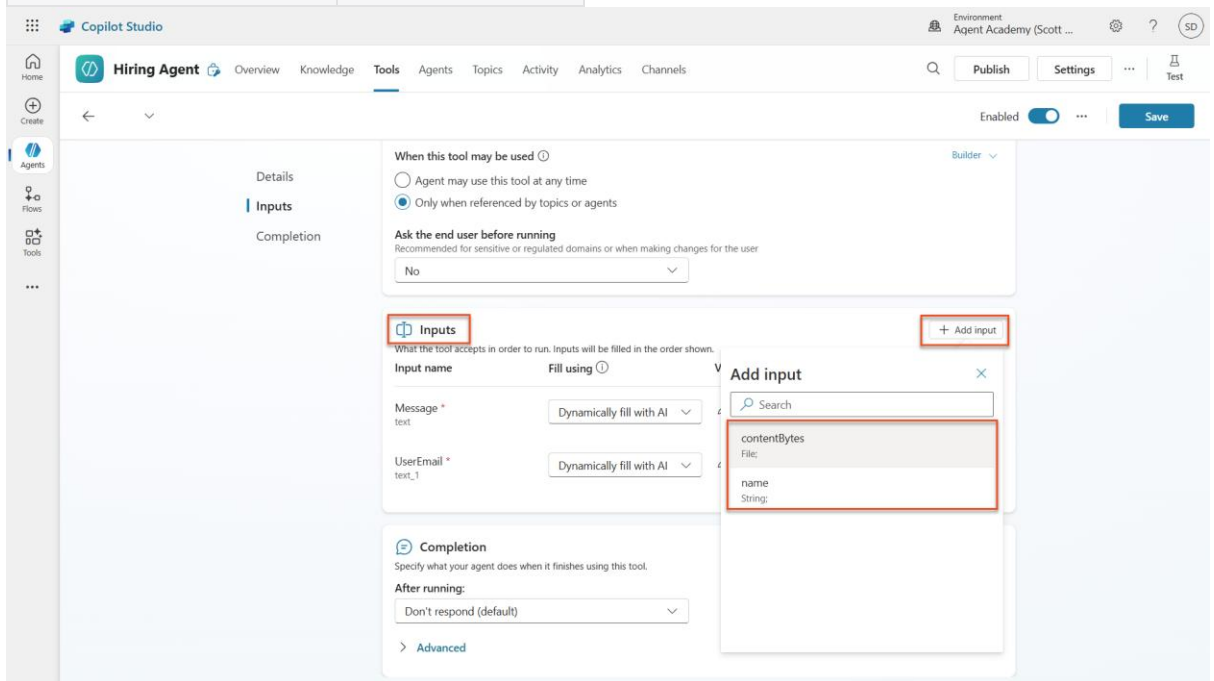10. 

11. Now we need to set the properties of the inputs. We'll start with the **contentBytes** input which will store the actual resume file. Select **Custom value** from the **Fill using** dropdown next to the **contentBytes** input.

12. In the **Value** property, select the **three dots (...)** and select the **Formula** tab. Paste in the following formula which extracts the file from the chat and click the **Insert** button.


First(System.Activity.Attachments).Content

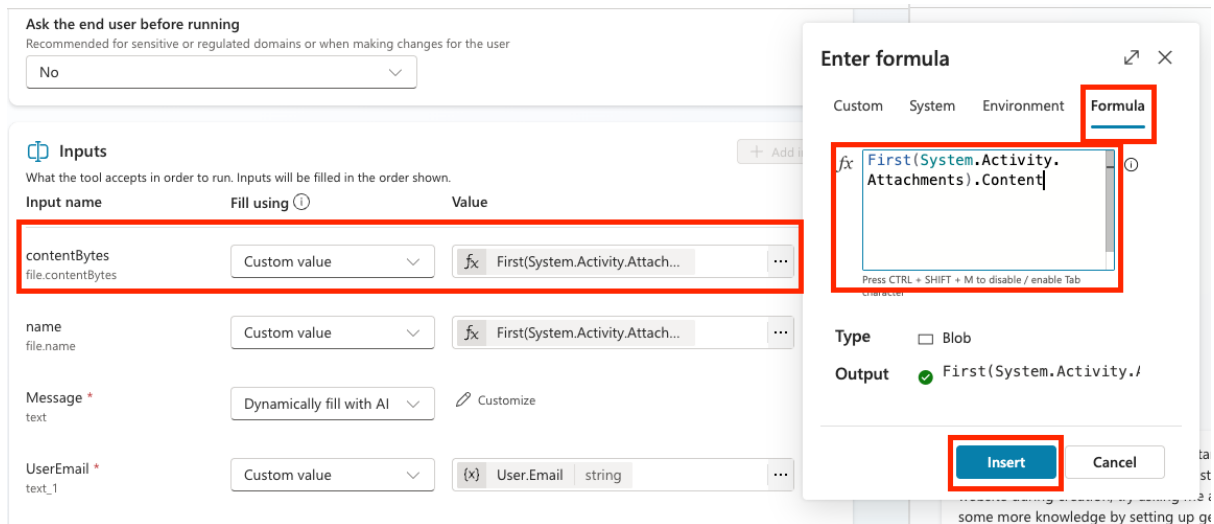

13. Now we'll configure the **name** input which will store the name of the resume file. This will be hard coded as well so select the **Custom value** option in the **Fill using** column.

14. Select the **three dots (...)** in the **Value** column and paste in the following formula which extracts the file name from the chat and click the **Insert** button.

First(System.Activity.Attachments).Name

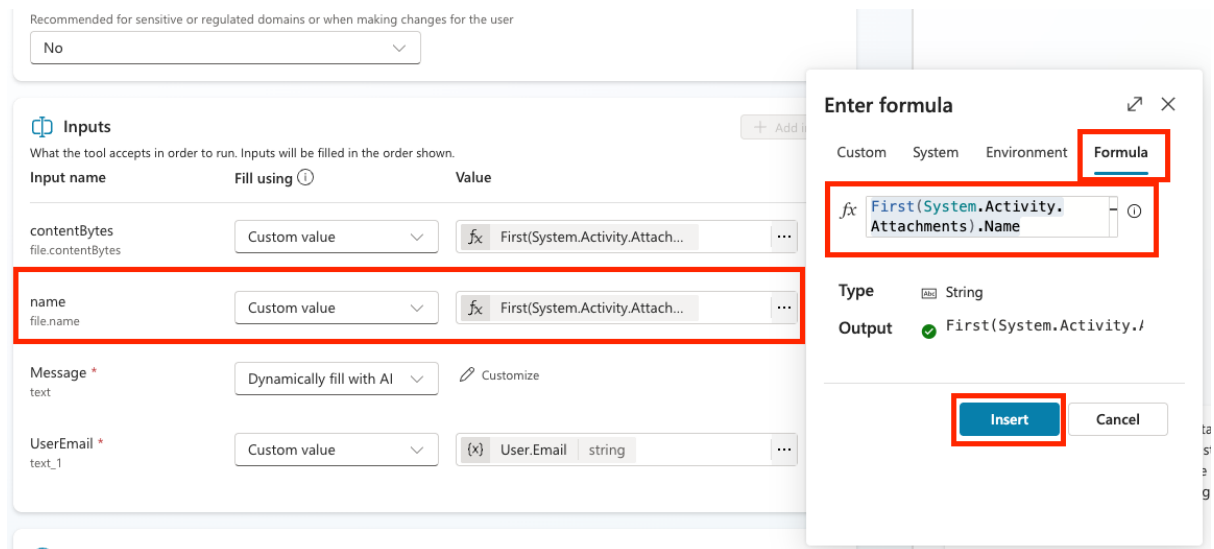

15. Now we'll configure the **Message** input. We want to fill this one dynamically with AI so we'll leave the fill using as-is. Select the **Customize** button in the **Value** column so we can fill out additional details for how this should be filled.

Inputs
What the tool accepts in order to run. Inputs will be filled in the order shown.

Input name	Fill using ⓘ	Value
contentBytes file.contentBytes	Custom value ▾	fx First(System.Activity.Attach... ⋮
name file.name	Custom value ▾	fx First(System.Activity.Attach... ⋮
Message * text	Dynamically fill with AI ▾	✎ Customize ⋮

16. Enter the following in the **Description** field for the input:

Extract a cover letter style message from the context. Be sure to never prompt the user and create at least a minimal cover letter from the available context. STRICT RULE - the message must be less than 2000 characters.

NOTE

Filling in the description for your dynamically filled inputs is a crucial step to ensure that your agent knows how to fill in the input correctly.

17. Expand out the **Advanced** section to configure some additional properties for this input. In the **How many reprompts** section, select **Don't repeat**

▼ **Advanced**

🔗 **Copilot prompts user for input**
Configure how the agent will ask the user to fill the input

Prompt ⓘ
☐ Customize

🔗 **Copilot doesn't identify entity**
If the agent doesn't identify an entity in the user's statement, it can ask the question again

How many reprompts ⓘ Manual input ▾

Don't repeat ▾

Retry prompt ⓘ
☐ Customize

NOTE

This setting helps you customize your user experience so the agent doesn't ask the same question multiple times if it can't identify the data it needs.

18. Scroll down to the **No valid entity found** section. Select the **Set variable to value** option in the **Action if no entity found** dropdown. Type **Resume upload** in the **Default entity value** input.

No valid entity found
Choose what happens if the agent didn't identify an entity, even after repeating the question

Action if no entity found ⓘ
Set variable to value

Default entity value
Resume upload

No entity found message ⓘ
☐ Customize

NOTE

This setting lets us hard code a backup value if the agent is unable to dynamically fill this message input.

19. We'll fill the **UserEmail** input by selecting the **Custom value** option in the **Fill using** column and select the **three dots (...)** in the **Value** column. Select the **System** tab and search for **User**. Select the **User.Email** variable to get the email of the person using the agent

No valid entity found
Choose what happens if the agent didn't identify an entity, even after repeating the question

Action if no entity found ⓘ
Set variable to value

Default entity value
Resume upload

No entity found message ⓘ
☐ Customize

UserEmail *
text_1 Custom value {x} User.Email string

Choose a variable

Custom **System** Environment Formula

user

User.DisplayName
(System.User.DisplayName)
string

User.Email
(System.User.Email)
string

User.FirstName
(System.User.FirstName)
string

User.Id
(System.User.Id)
string

User.LastSeen

Completion
Specify what your agent does when it finishes using this tool.

After running:
Don't respond (default)

> Advanced

20. Select **Save**

The screenshot shows the 'Hiring Agent' configuration interface. The top navigation bar includes 'Overview', 'Knowledge', 'Tools', 'Agents', 'Topics', 'Activity', 'Evaluation', 'Analytics', and 'Channels'. The 'Tools' tab is selected. On the right, there is a toggle for 'Enabled' and a 'Save' button highlighted with a red box. The left sidebar shows 'Details', 'Inputs', and 'Completion' sections. The main content area is divided into two sections: 'Details' and 'Inputs'.

Details Section:

- Name:** Resume Upload
- Description:** Uploads a Resume when instructed. STRICT RULE: Only call this tool when referenced in the form "Resume Upload" and there are Attachments
- Agent flow:** Resume Upload
- Available to:** Application Intake Agent
- Additional details:** > Additional details

Inputs Section:

What the tool accepts in order to run. Inputs will be filled in the order shown.

Input name	Fill using	Value
contentBytes file.contentBytes	Custom value	fx First(System.Activity.Attach...
name file.name	Custom value	fx First(System.Activity.Attach...

3.1.6 Define agent instructions

1. Move back in to the **Application Intake Agent** by selecting the **Agents** tab, selecting the **Application Intake Agent**, and locating the **Instructions** panel.
2. In the **Instructions** field, paste the following clear guidance for your child agent:
3. You are tasked with managing incoming Resumes, Candidate information, and creating Job Applications.
4. Only use tools if the step exactly matches the defined process. Otherwise, indicate you cannot help.
- 5.
6. Process for Resume Upload via Chat
7. 1. Upload Resume
8. - Trigger only if /System.Activity.Attachments contains exactly one new resume.
9. - If more than one file, instruct the user to upload one at a time and stop.
10. - Call /Upload Resume once. Never upload more than once for the same message.

11.

12. 2. Post-Upload

- Always output the [ResumeNumber] (R#####).

13. Where the instructions include a forward slash (/), select the text following the / and select the resolved name. Do this for:

- System.Activity.Attachments (Variable)
- Upload Resume (Tool)

 **Instructions**

You are tasked with managing incoming Resumes, Candidate information, and creating Job Applications. Only use tools if the step exactly matches the defined process. Otherwise, indicate you cannot help.

Process for Resume Upload via Chat

1. Upload Resume
 - Trigger only if (X) System.Activity.Attachments contains exactly one new resume.
 - If more than one file, instruct the user to upload one at a time and stop.
 - Call /ResumeUpload once. Never upload more than once for the same message.
2. Post:
 - Always output the [ResumeNumber] (R#####).

 Resume Upload
Tool

14. Select **Save**

3.1.7 Test your Application Intake Agent

Now let's verify that our agent is working correctly by calling our child agent and following our instructions.