

Lab 4 - Automating candidate application emails

We're next going to add an event trigger to the **Hiring Agent** and build an agent flow in the child **Application Intake Agent** to handle further processing for autonomy.

✦ Use case scenario

As an HR Recruiter

I want to be notified when an email with a resume arrives in my Inbox and is automatically uploaded to Dataverse

So that I can stay notified of resumes sent by email for applications automatically uploaded to Dataverse

We'll be achieving this using two techniques

1. An event trigger for when the email arrives,
 1. Check the contentType of the file equals PDF as the format type.
 2. Extract the file and upload to Dataverse using actions through the Dataverse connector.
 3. Then send a prompt to the agent for further processing by passing input parameters from the Dataverse actions.
2. An agent flow will be added to the child **Application Intake Agent** which is invoked by the prompt in the event trigger.
 1. Use the input parameters passed from the prompt of the event trigger in an adaptive card posted to a channel in Microsoft Teams to notify the HR Recruitment team. The adaptive card will have a link to the Dataverse row which can be viewed in the **Hiring Agent**.

Let's begin!

✦ Prerequisites to complete this mission

To complete this lab you will need to:

- **Have completed** [Mission 01](#) and [Mission 03](#) and have your Hiring Agent ready.
- You'll also need access to **Microsoft Teams** to complete the second lab exercise of posting an adaptive card to Microsoft Teams.

Lab 4.1 - Automate uploading resumes to Dataverse received by email

1. In the Hiring Agent, scroll down in the **Overview tab** to the **Triggers and Channels** section and select **+ Add**.

 **Hiring Agent** 

OverviewKnowledgeToolsAgentsTopicsActivityEvaluationAnalyticsChannels

Select your agent's model

Your agent will primarily use the model for reasoning and responding. Experimental models are subject to [preview terms](#). [Learn more](#)

GPT-4.1 (Default) ▾

Analytics Open Analytics

Check your agent's key performance info from the last 7 days.

Conversation sessions ⓘ	Engagement ⓘ	Satisfaction score ⓘ
0	0%	--

Triggers and Channels + Add


Tell your agent when to start and where to run. [Learn more](#).


Add triggers and channels

Instructions Edit

Describe what you want this agent to do, its tone, and rules.

-
2. A list of triggers will appear. Select **When a new email arrives (V3)** and select **Next**.

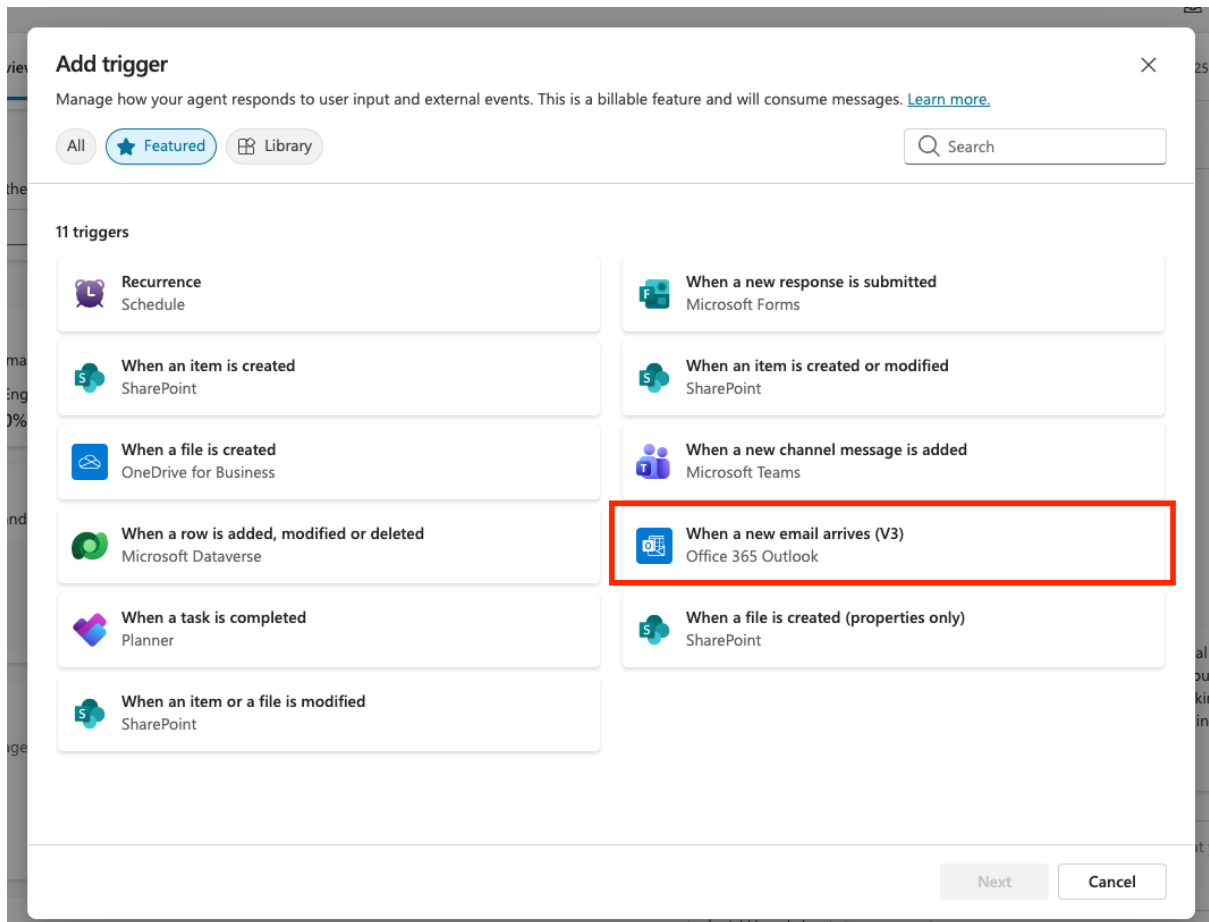

3. We'll now see the **Trigger name** and the **Sign in** connection references for the apps listed. Rename the trigger name to the following:

When a new email arrives from an applicant

NOTE: Make sure you see a green check by each of the connection references for the apps listed. If you don't see a green check, sign in through the ellipsis (...) and select **+ New connection reference** to create a new connection reference.

Add trigger

Manage how your agent responds to user input and external events. This is a billable feature and will consume messages. [Learn more.](#)

When a new email arrives (V3)

Trigger your agent with certain message upon event: When a new email arrives (V3).

Trigger name

When a new email arrives from an applicant

Sign in *

This trigger uses the following apps. A green check means you're ready to go.

	Microsoft Copilot Studio	apdunnam@capowerpla...	✓ ...
	Office 365 Outlook	apdunnam@capowerpla...	✓ ...

Next

Cancel

- The final step is to set the input properties of the trigger. Update the following properties to the following,

Property	How to Set	Details
Include Attachments (Optional)	Dropdown	Yes
Subject Filter (Optional)	Type/Enter with keyboard	Application
Only with Attachments (Optional)	Dropdown	Yes

- Select **Create trigger**.

Add trigger

Manage how your agent responds to user input and external events. This is a billable feature and will consume messages. [Learn more.](#)

When a new email arrives (V3)

Trigger your agent with certain message upon event: When a new email arrives (V3).

Recipient email addresses separated by semicolons (If any match, the trigger will run).

CC (Optional)
CC recipient email addresses separated by semicolons (If any match, the trigger will r...

To or CC (Optional)
To or CC recipient email addresses separated by semicolons (If any match, the trigger...

From (Optional)
Sender email addresses separated by semicolons (If any match, the trigger will run).

Include Attachments (Optional)
Yes

Subject Filter (Optional)
Application

Importance (Optional)
Select an item

Only with Attachments (Optional)
Yes

Additional instructions to the agent when it's invoked by this trigger
Use content from Body x

< Back

Create trigger

Cancel

-
-
-
-
-
-
- Once created, a confirmation message will appear that the trigger has been added to the agent. Select **Close** and the trigger will be listed in the **Triggers** section.
- We're now going to update the event trigger to add some more automation capabilities. Select the **ellipsis (...)** by the trigger and select **Edit in Power Automate**.

Analytics

Check your agent's key performance info from the last 7 days.

Runs	Successful runs	Average duration
0	0%	0 sec

[Open Analytics](#)

Triggers and Channels

Tell your agent when to start and where to run. [Learn more.](#)

When a new email arrives from an applicant

[See all channels](#)

Instructions

Describe what you want this agent to do, its tone, and rules.

+ Add


...

[Edit in Power Automate](#)

Delete

Edit


9. The trigger will then load as a flow in the Power Automate maker portal. It will open to the flow designer where we can add further logic and actions for more automation. The trigger will appear at the top, followed by **Sends a prompt to the specified copilot for processing** as the last action in the flow.

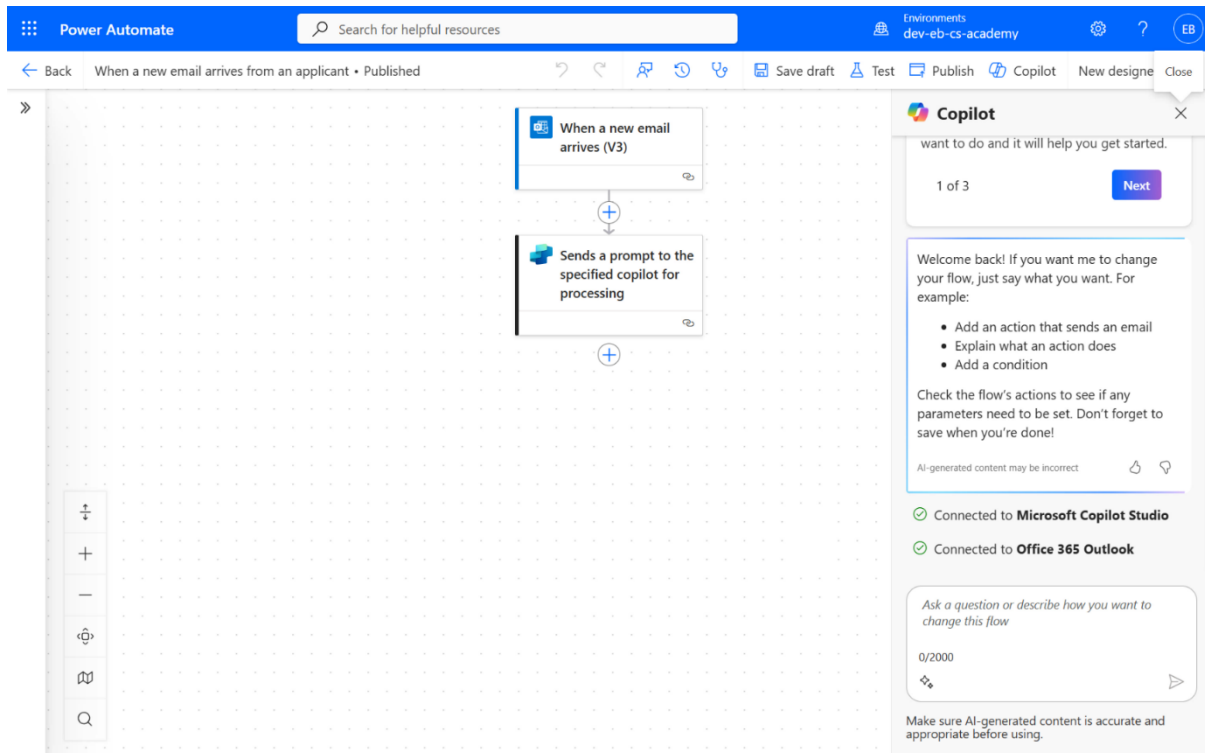


10. By default, the **When a new email arrives** trigger in Power Automate may process multiple emails together if several arrive at once, running the flow only once for the batch.

To ensure the flow runs separately for each email, enable the **Split On** setting in the trigger's settings and select `@triggerOutputs()?['body/value']` in the dropdown array field.


With **Split On** turned on and the array field set to `@triggerOutputs()?['body/value']`, the flow will run individually for each message, even if many arrive simultaneously.

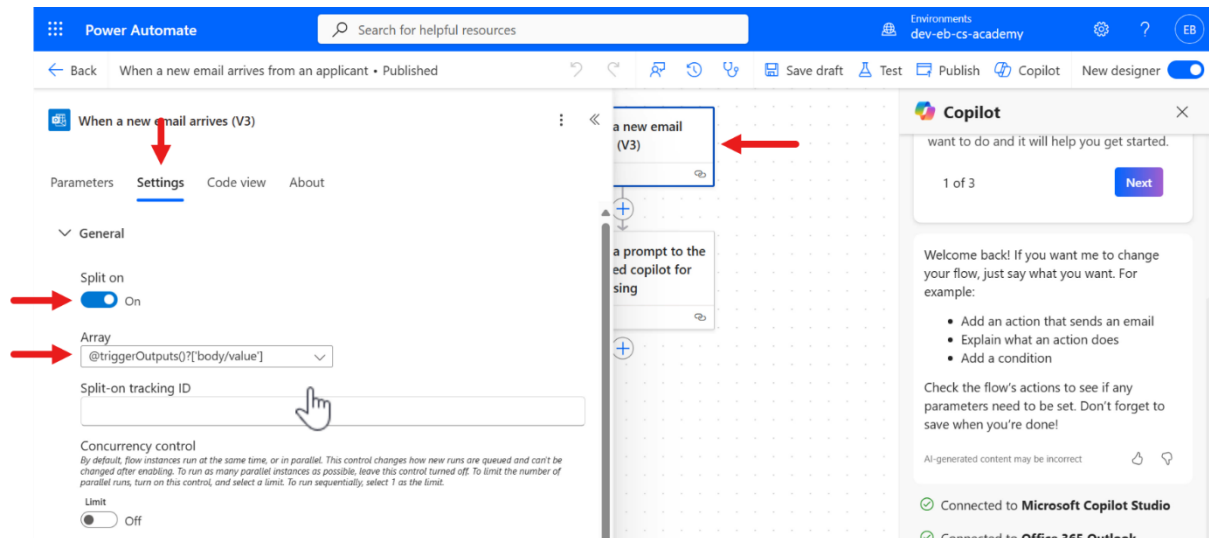

11. Let's next add some logic to check the file type of the attachment, we only want to upload .PDF file attachments and not images (these could come from email signatures). Select the + icon below the trigger and select **Control** under the **Built in tools** section.

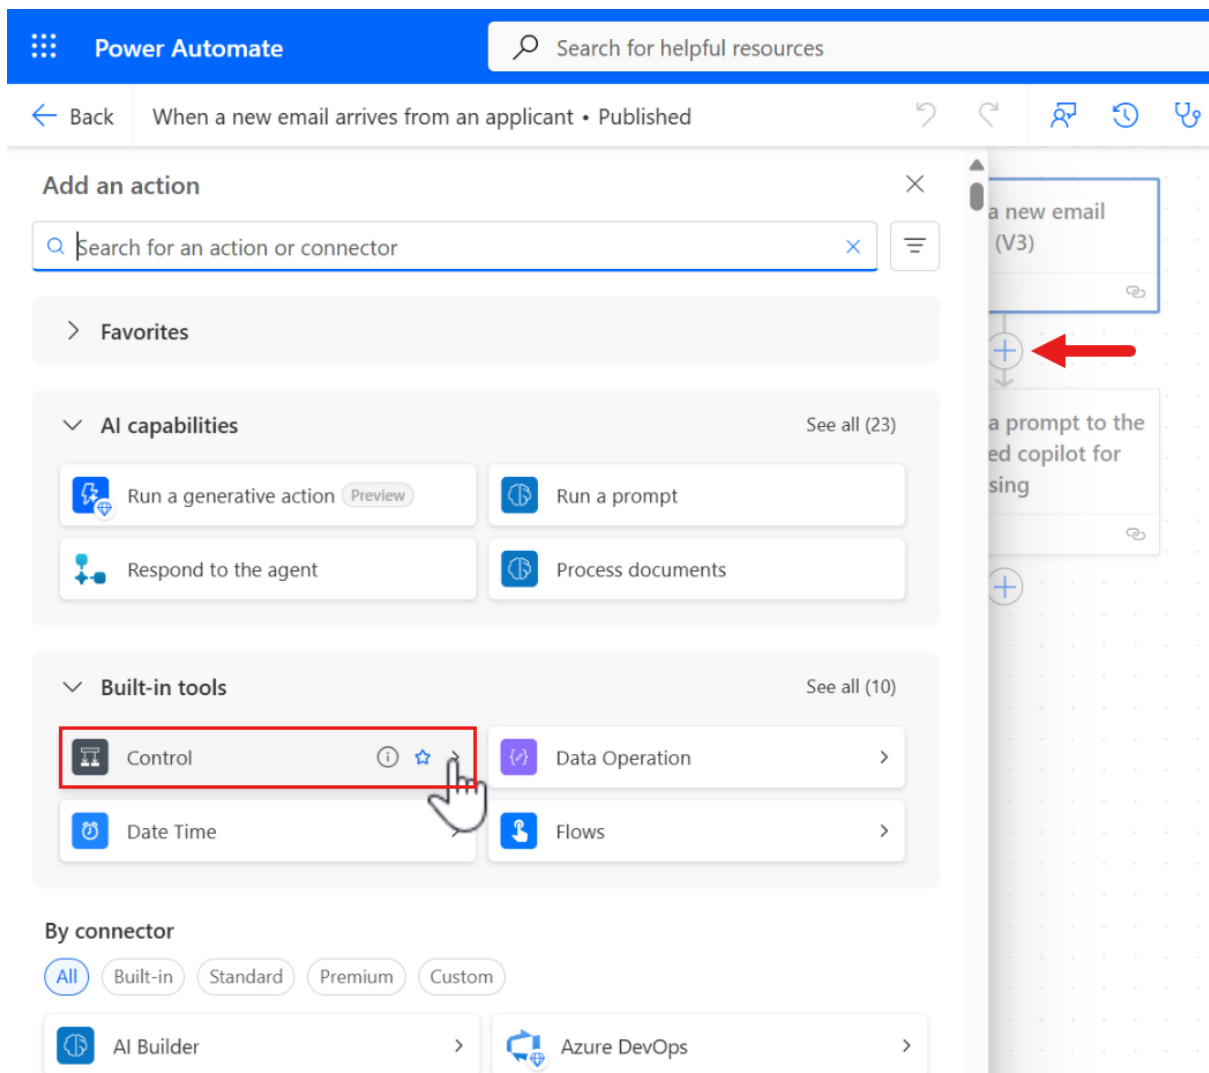

12. Select the **Condition** action.

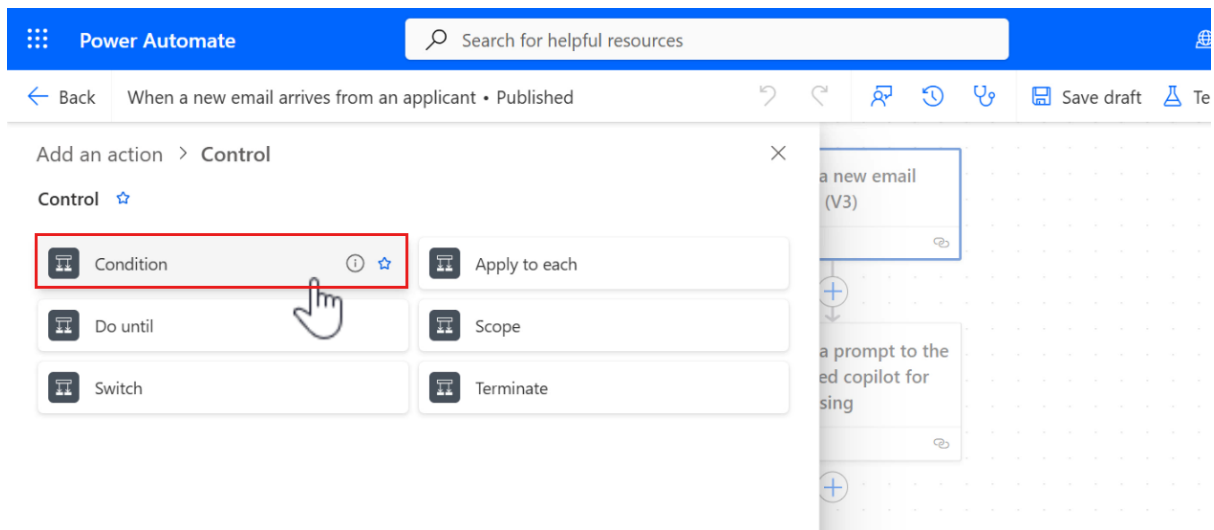


13. Now we configure the condition to check if the file attachment's type is .PDF. In the **Choose a value** field on the left, select the **lightning bolt icon**.


14. In the **Search** field type the following,

content type

15. Then select the **Attachments Content-Type** parameter from the trigger.

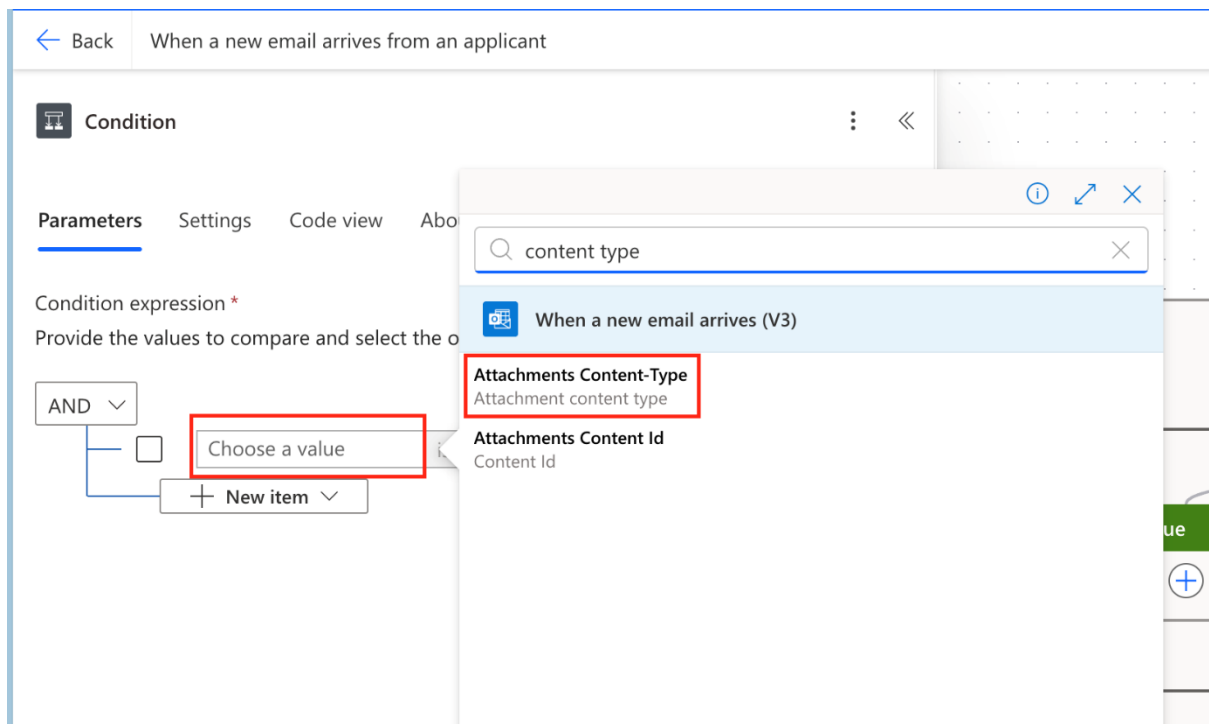

16. Let's pause here for a moment, you probably noticed that the **For each** action automatically appeared.

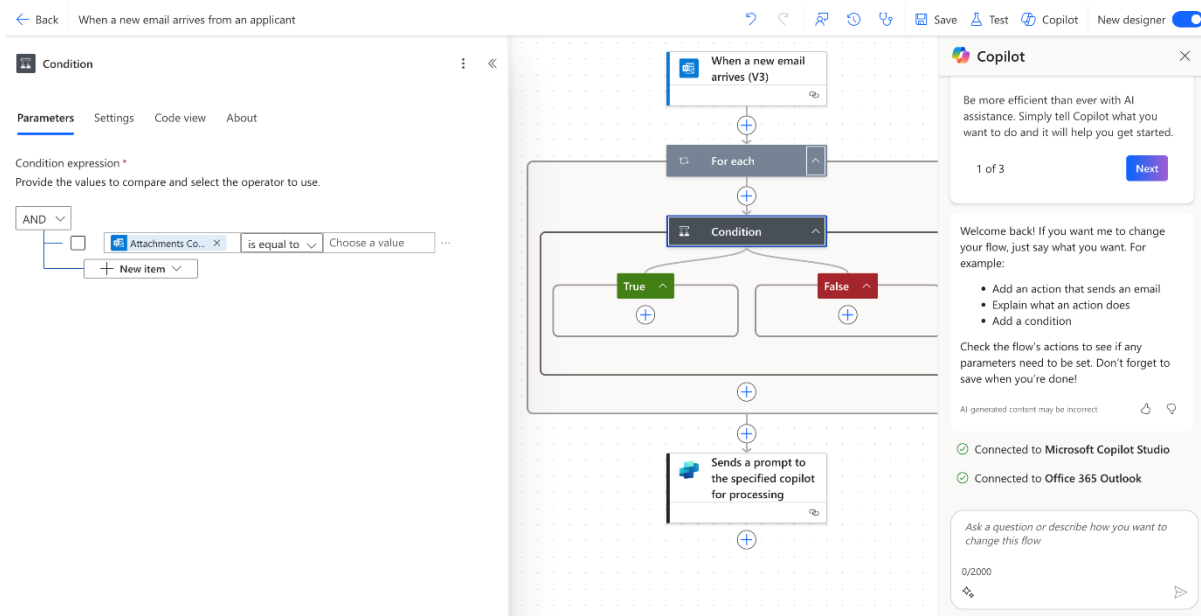

This action represents looping through each attachment in the email, since the **Attachments Content-Type** parameter is tied to each attachment.

Underneath the hood, it's an array and that's why the **For each** action was automatically added when we selected the **Attachments Content-Type** parameter in the **Condition** action.

To learn more about this, expand the following additional learning block.

🧐 Why does "Apply to each" or "For each" Automatically Appear?

When you select a parameter (dynamic content) that represents a list or array of items - for example, a list of attachments, emails, or rows - Power Automate recognizes that you might want to process each item individually.


To help you do this, Power Automate automatically adds an **"Apply to each"** (or **For each**) loop around your action. This ensures that your action will run once for every item in the list, rather than trying to process the whole list at once (which could cause errors).

🦋 Example

- If you select "Attachments" from a previous action (which is an array), and try to use it in an action that expects a single file, Power Automate wraps your action in an **"Apply to each"** (or **For each**) loop.
- This way, your action will run for **each attachment** - one at a time.

💡 Key Points

- **Automatic:** The loop appears automatically to help you process each item in a collection.
- **Prevents errors:** Without the loop, your action might fail because it can't handle multiple items at once.
- **Visual cue:** It's a visual way to show that your flow will repeat the action for every item in the list.

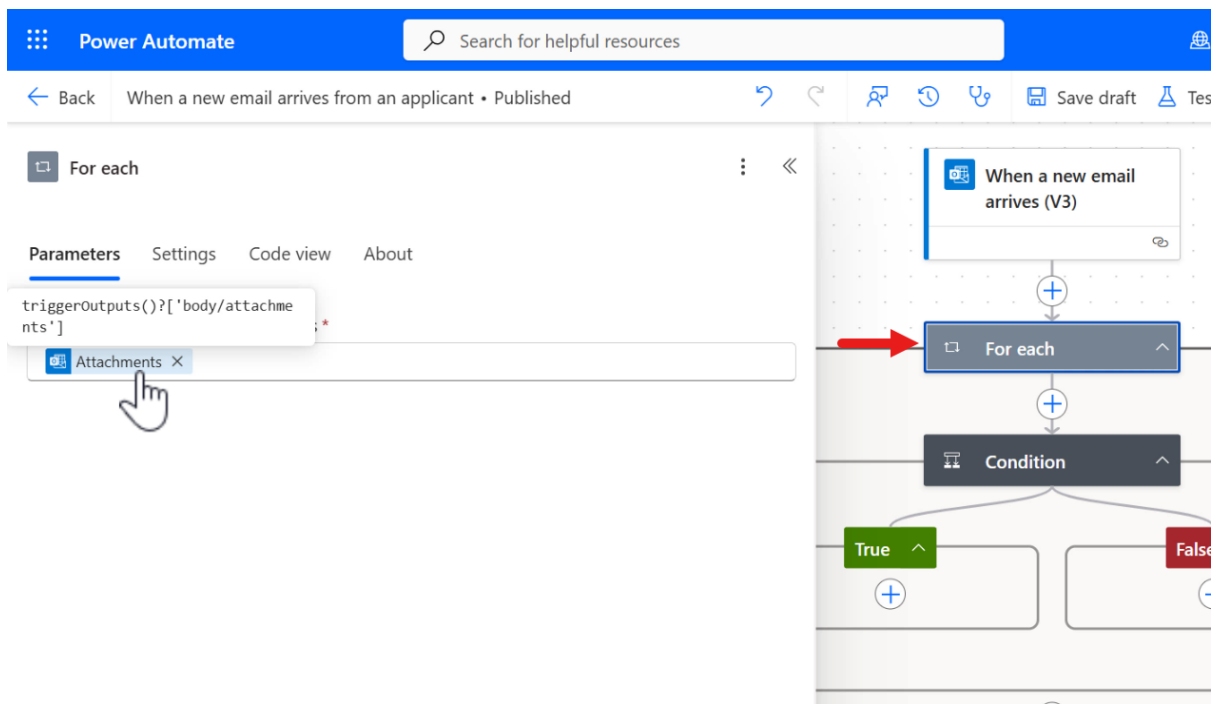

Trigger conditions extend the trigger itself with the ability to selectively fire 💡 As a performant alternative to doing the branching logic inside the flow, triggers in Power Automate can also contain trigger conditions themselves. Trigger conditions can access the triggers payload. In our case the attachments are in an array inside the trigger body called attachments. The following expression will check if the attachments array is not empty **AND** if the first item's content type is application/pdf. Note that this checks only the first attachment in the array.

```
@and(not(empty(triggerOutputs()?['body/attachments'])),equals(toLower(first(triggerOutputs()?['body/attachments'])?['contentType']),'application/pdf'))
```

This condition can be specified in the **Settings** tab when selecting the trigger

 When a new email arrives (V3) ⋮ ⏪

Parameters

Settings

Code view

About

▼

General

Split on ⓘ

☒ On

Array

@triggerOutputs()?['body/value'] ▼

Split-on tracking ID ⓘ

Concurrency control ⓘ

By default, flow instances run at the same time, or in parallel. This control changes how new runs are queued and can't be changed after enabling. To run as many parallel instances as possible, leave this control turned off. To limit the number of parallel runs, turn on this control, and select a limit. To run sequentially, select 1 as the limit.

Limit

☐ Off

Trigger conditions ⓘ


+ Add

@and(not(empty(triggerOutputs()?['body/attachments'])),equals(toLower(first(trigger...)) ✕

17. Next, in the other **Choose a value** field to the right in the **Condition** block, type the following,

application/pdf

This will ensure that for each file attachment, it will check the file extension format is .PDF.

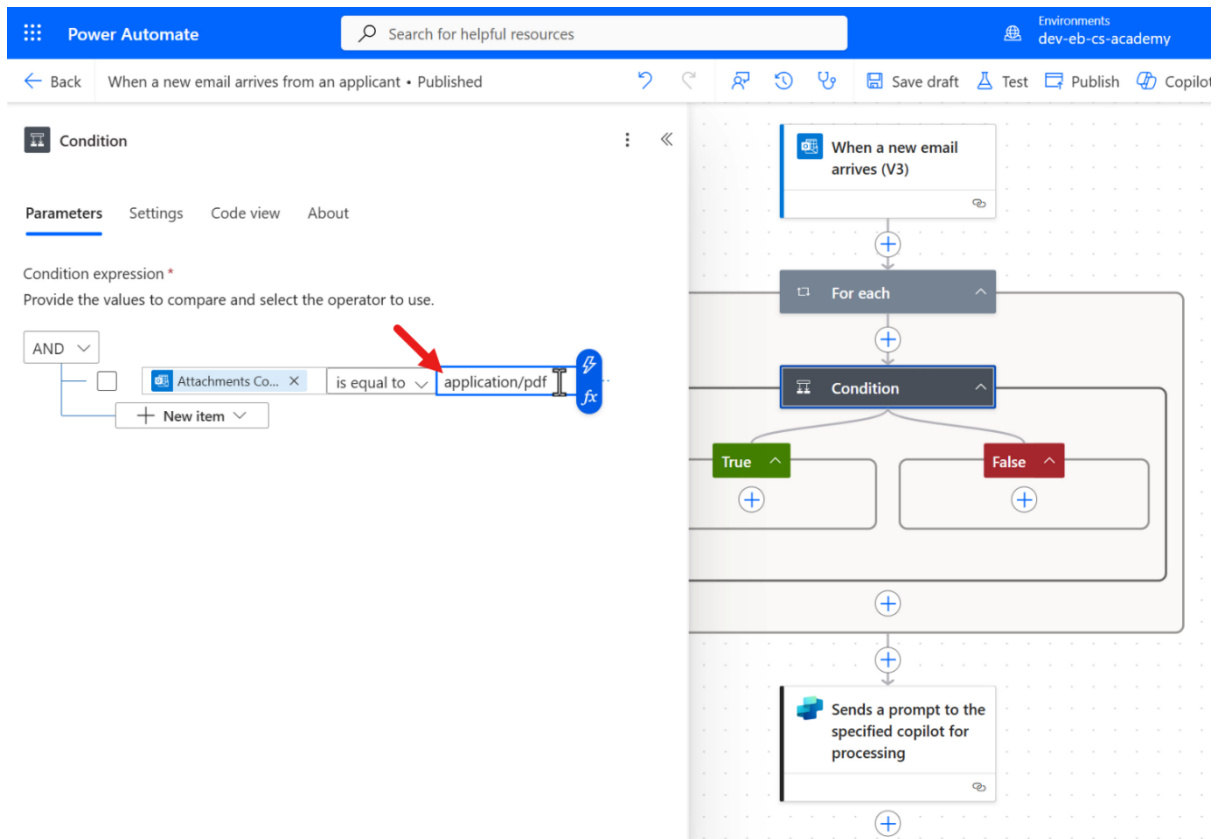

18. Now we'll configure the **True** path to extract the file from the email and upload it into the **Resume** Dataverse table.

Add a new action below in the **True** path and search for html to text. Select the **Html to text** action.

To learn more about the **Html to text** action, expand the following additional learning block.

🤖 What is the "HTML to text" Action?

The **HTML to text** action in Power Automate is used to convert HTML-formatted content into plain text. This is especially useful when you receive data (like emails, web content, or API responses) that contains HTML tags, and you want to extract just the readable text without any formatting or code.

⚙️ How does it work?

- **Input:** You provide a string of HTML content (for example, the body of an email).
- **Output:** The action removes all HTML tags and returns only the plain text.

👍 When should you use it?


- When you want to extract readable text from emails, web pages, or API responses that contain HTML.
- Before sending content to systems that don't support HTML formatting (like SMS, Teams messages, or databases).
- To clean up data for further processing or analysis.

Where to find it?


- In Agent Flows, search for the action called HTML to text. It's under the **Data Operations** connector.

Key Points


- It removes all HTML tags and leaves only the text.
- It does not interpret or execute scripts/styles - just strips tags.
- Useful for data cleaning and preparing content for plain-text outputs.

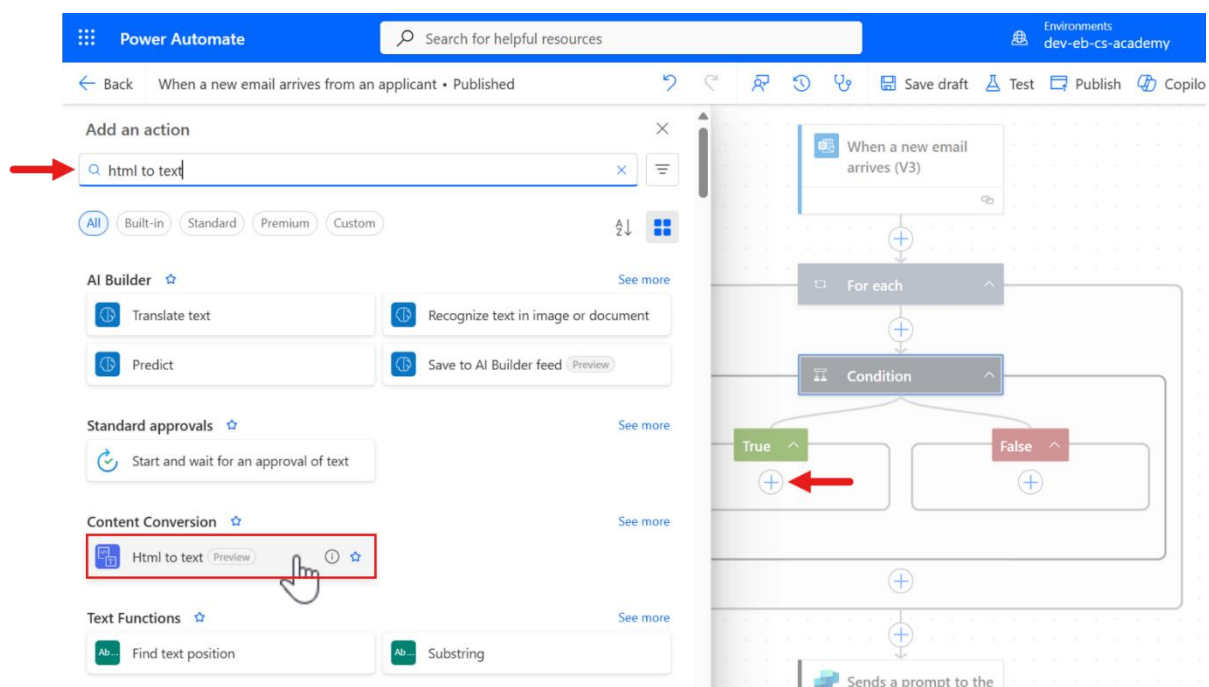


19. Next, we need to create a new connection reference for the **Html to text** action by selecting **Create new**.

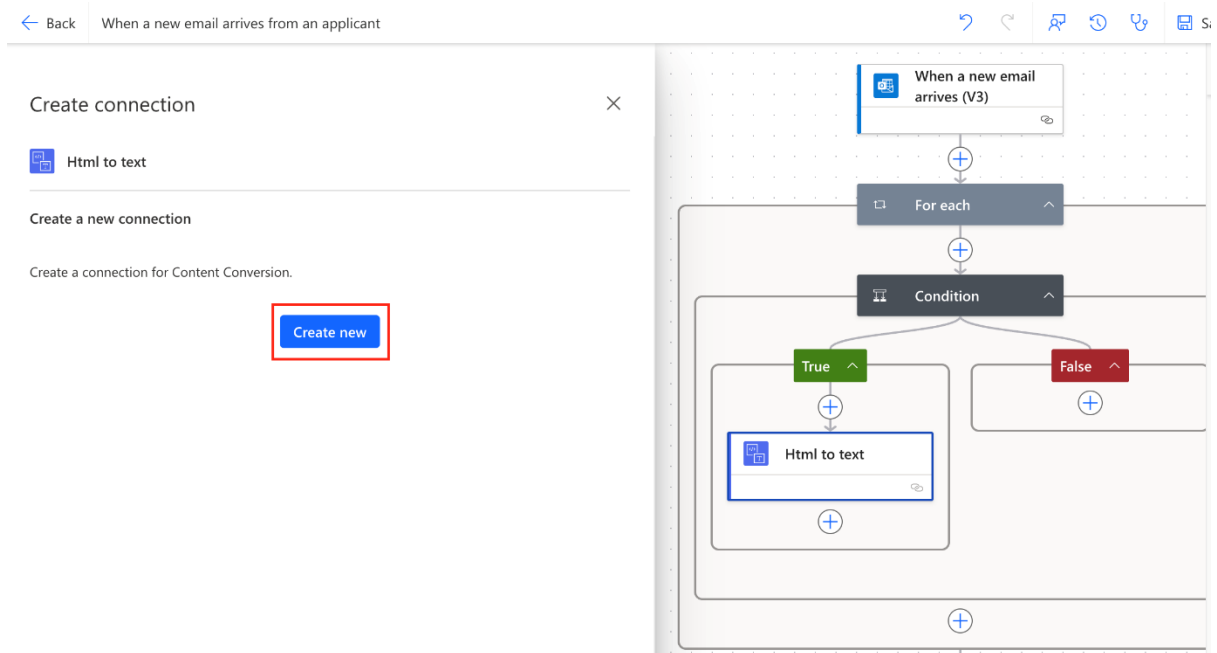


20. The action can now be configured. Let's add the **Body** parameter from the trigger. In the **Content** field, select the **lightning bolt icon** or **fx icon** to the right.

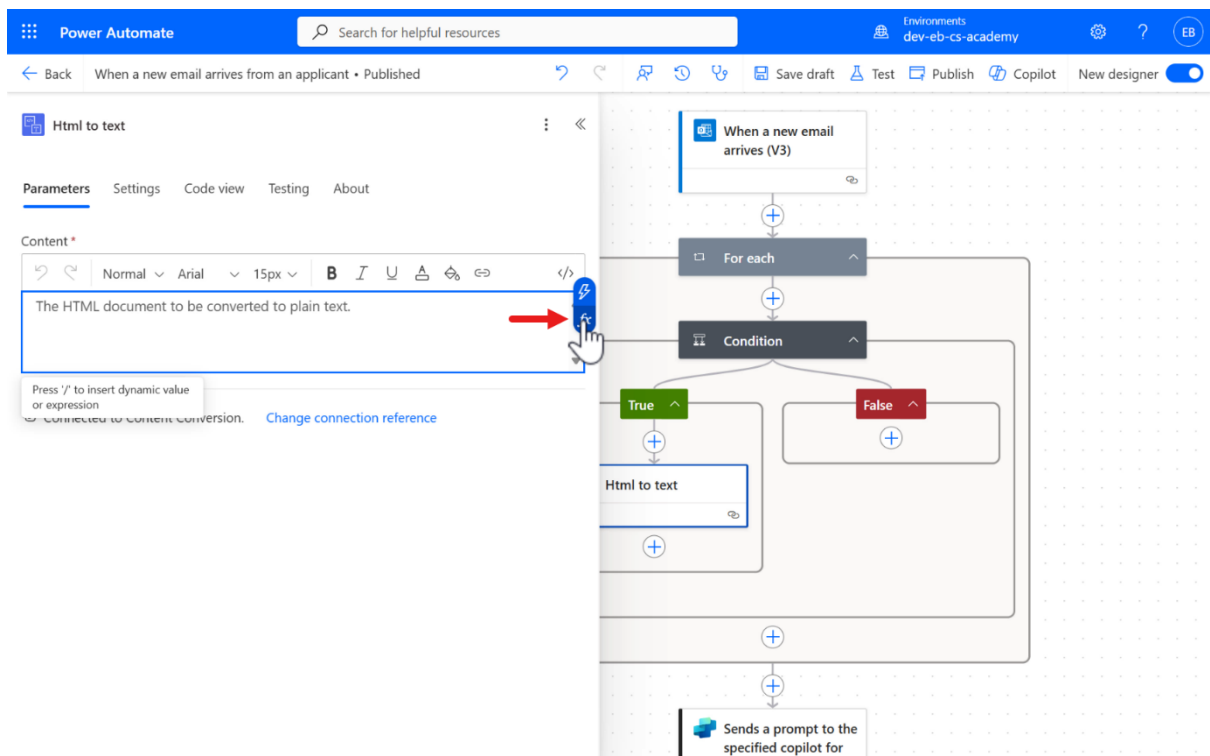


21. In the **Dynamic content** tab, search for **body** and select the **Body** parameter, followed by selecting **Add**.

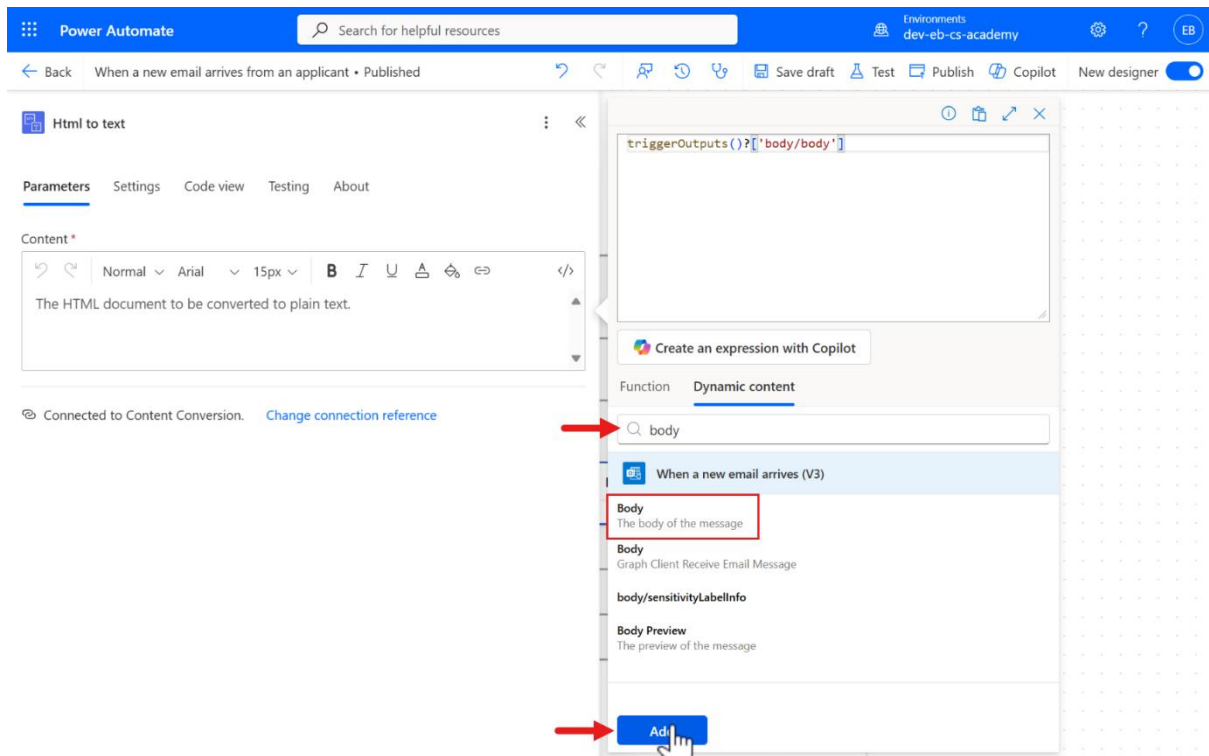

22. We've completed configuring this action so let's exit from the action by selecting the two angle brackets (◀) pointing to the left to collapse the panel.

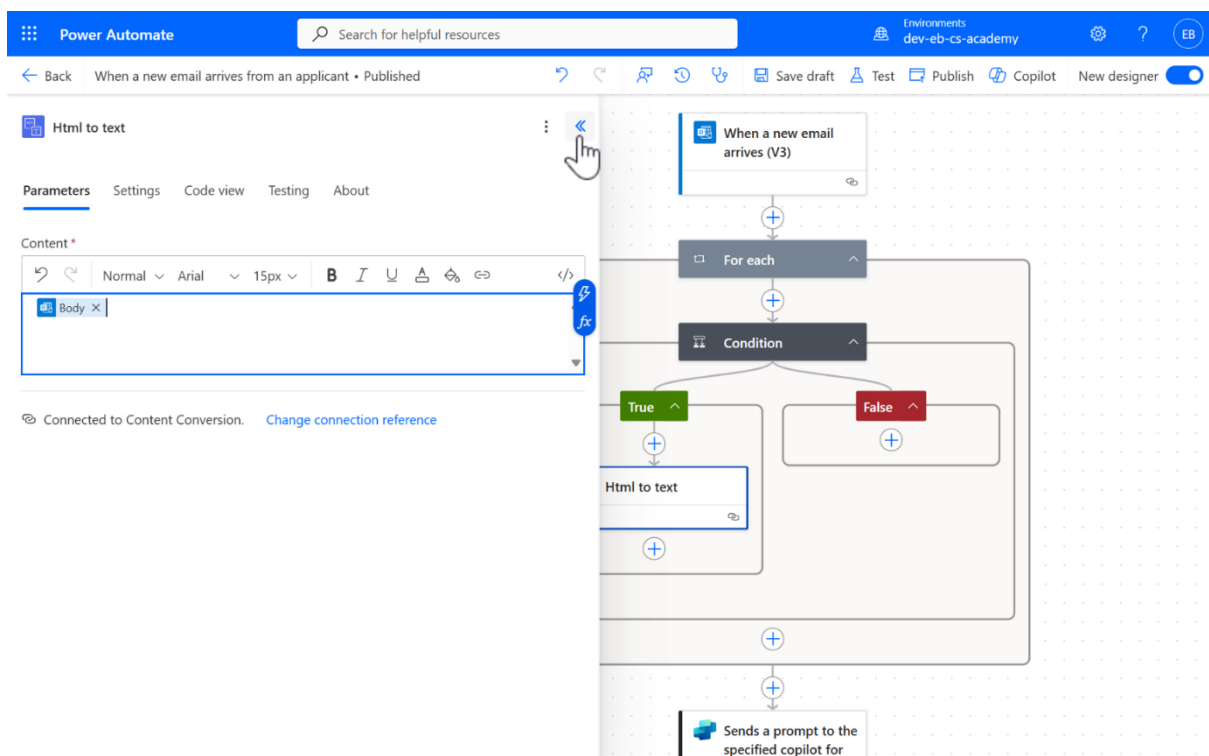


23. We'll add a new action by selecting the **+** icon underneath the **Html to text** action which will load the panel to add actions. Search for **Dataverse add**. Select the **Add a new row** action.

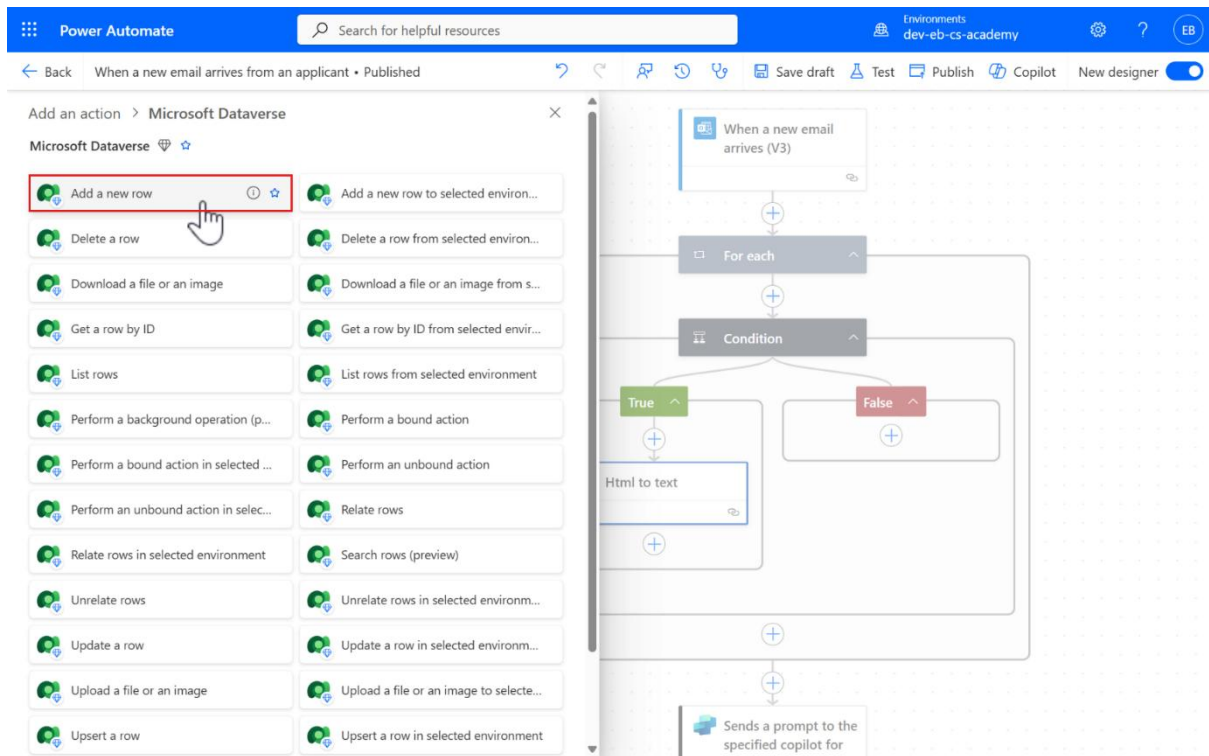


24. Rename the action by pasting the following as the name in the upper left hand corner of the properties panel,

Add a new Resume row

For the **Table name** parameter, search for res and select the **Resumes** table.

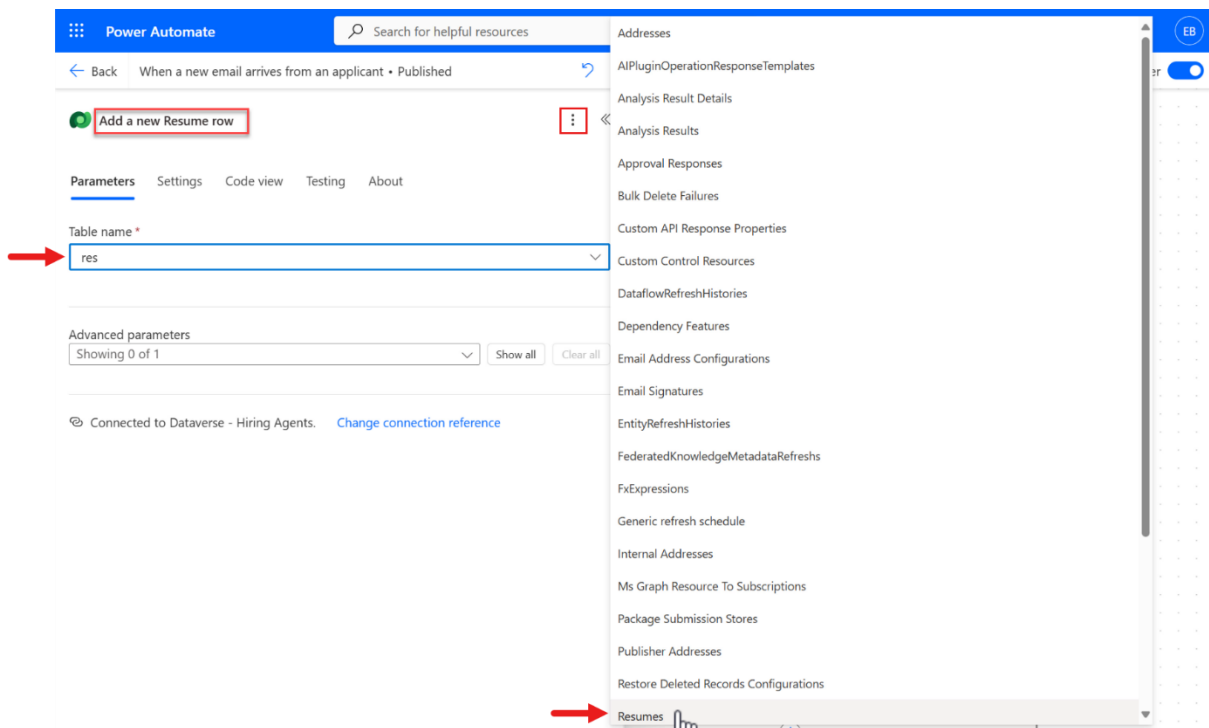

25. Select the **Resume Title** field next and select the **fx icon** to the right.

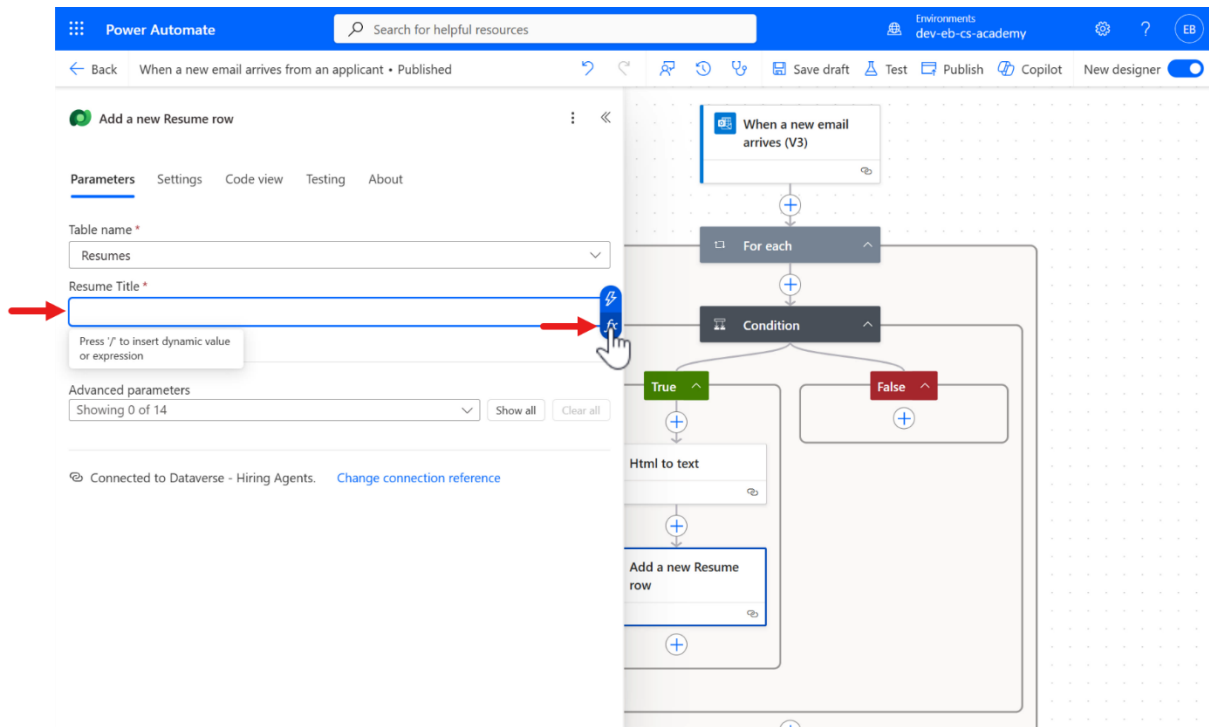

26. In the **Function tab**, enter the following expression that uses the `item()` function.

`item()?['name']`

Select **Add** to add the expression to the **Resume Title** parameter.

To learn more about the `item()` function, expand the following additional learning block.

🤖 What is the `item()` function?

- When you use an **Apply to each** action, Power Automate goes through each element in a collection (array).
- It's most often used inside actions like **Apply to each** (or **For each**), **Select**, or **Filter array**.

⚙️ How does it work?

- `item()` is a function that returns the current item being processed in a loop or array operation.
- Inside that loop, `item()` refers to the *current element* being processed.

📌 Where do you use it?


- **Apply to each:** to access properties of the current item.
- **Select:** to transform each item in an array.
- **Filter array:** to reference the current item being evaluated.

Example

- Expression inside a loop: - `item()?['Email']`
- This gets the Email property of the current item.

Key Points

- `item()` is *context-sensitive*: it always refers to the current item in the loop or array operation you're in.
- If you nest loops, you can use `items('LoopName')` to refer to items in a specific loop.

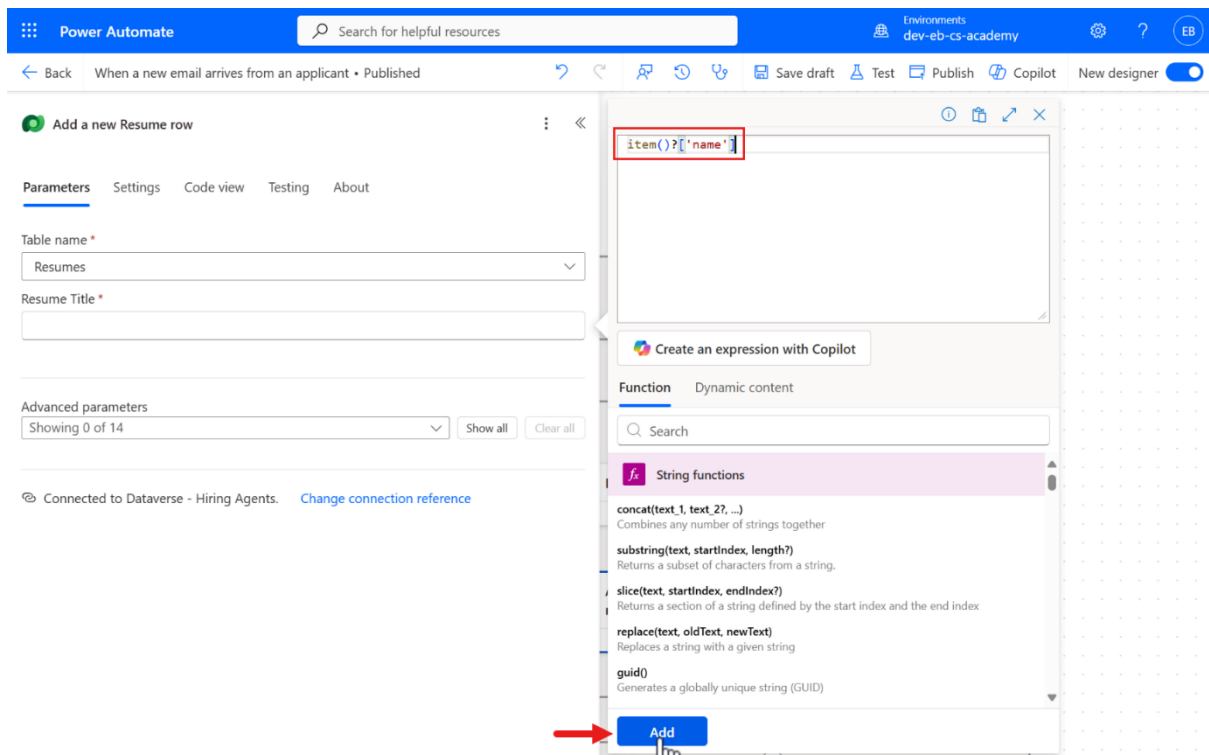


27. We still need to configure several more parameters, select **Show all** and in the **Cover Letter** field, select the **fx icon** to the right.


In the **Function** tab, enter the following expression that uses the same expression in the previous [mission](#).

```
if(greater(length(body('Html_to_text')), 2000), substring(body('Html_to_text'), 0, 2000), body('Html_to_text'))
```


This expression checks if the *text* from the **Html to text** action is longer than 2000 characters, and if so, returns only the first 2000 characters; otherwise, it returns the full text.

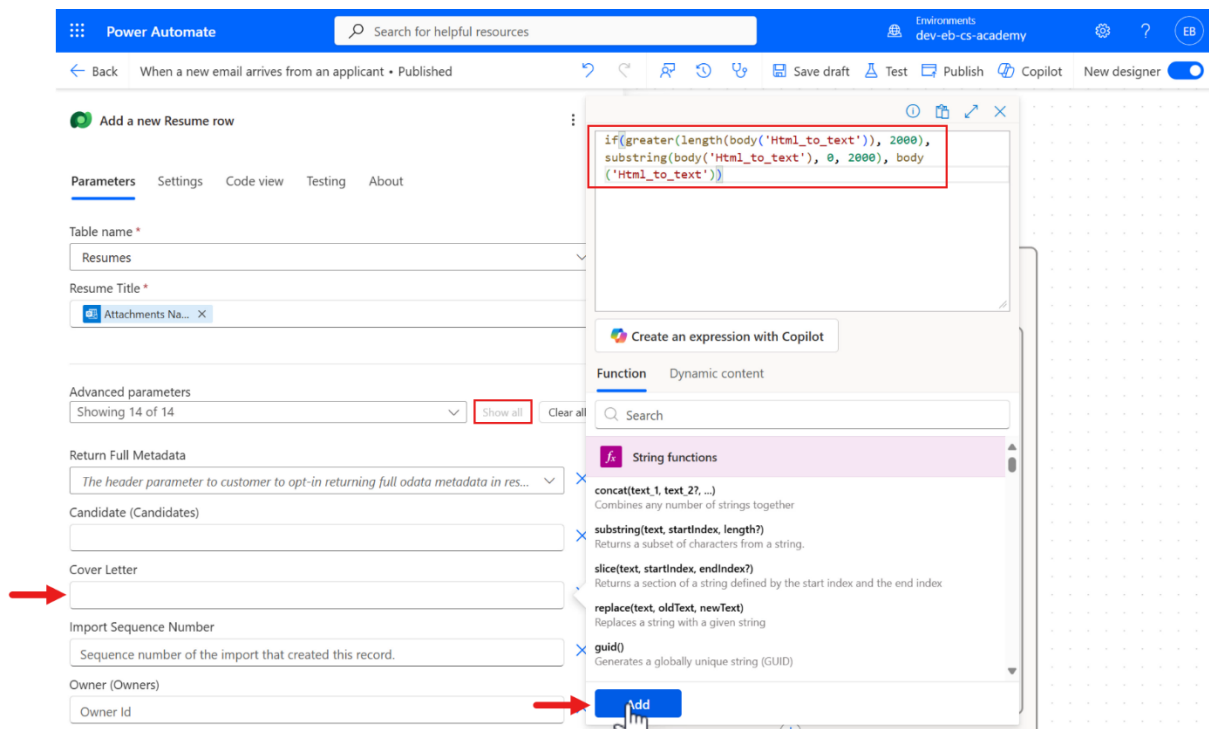

28. The expression will now be added to the **Cover Letter** field.

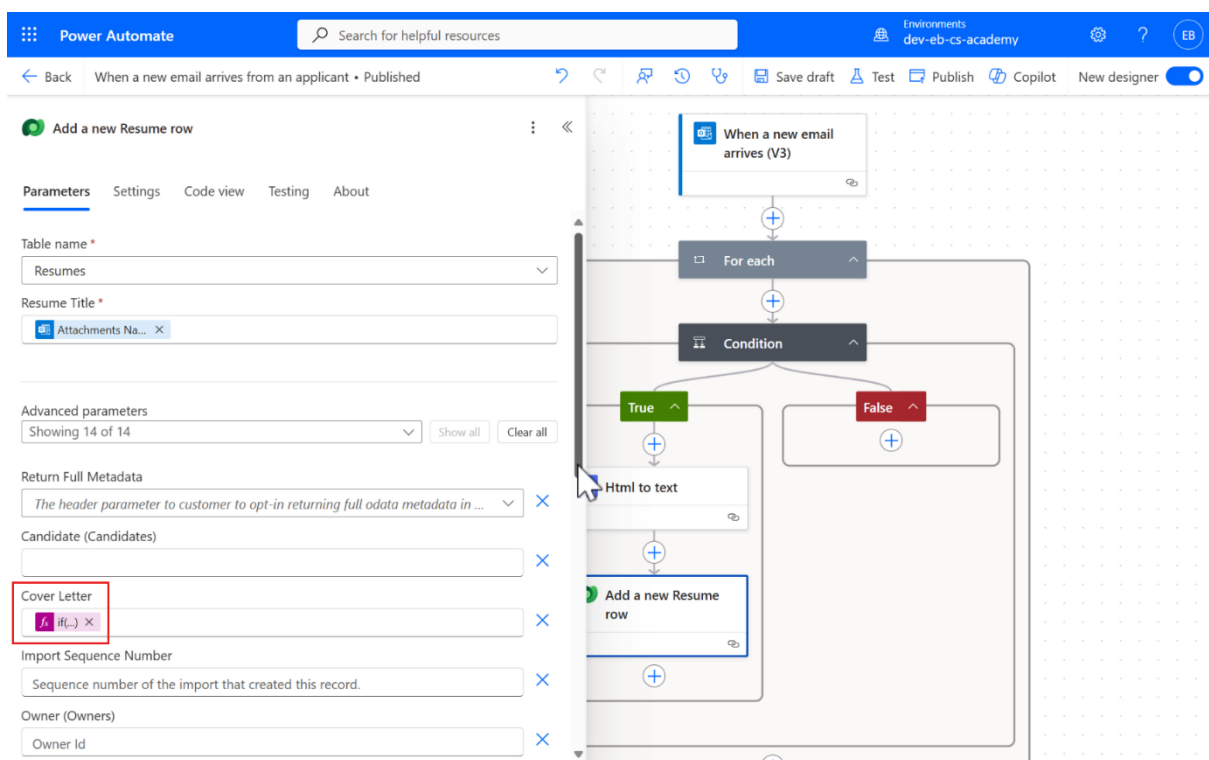

29. For the **Source Email Address** field, select the **lightning bolt icon** and search for from and select the **From** parameter from the trigger as this contains the email address value.

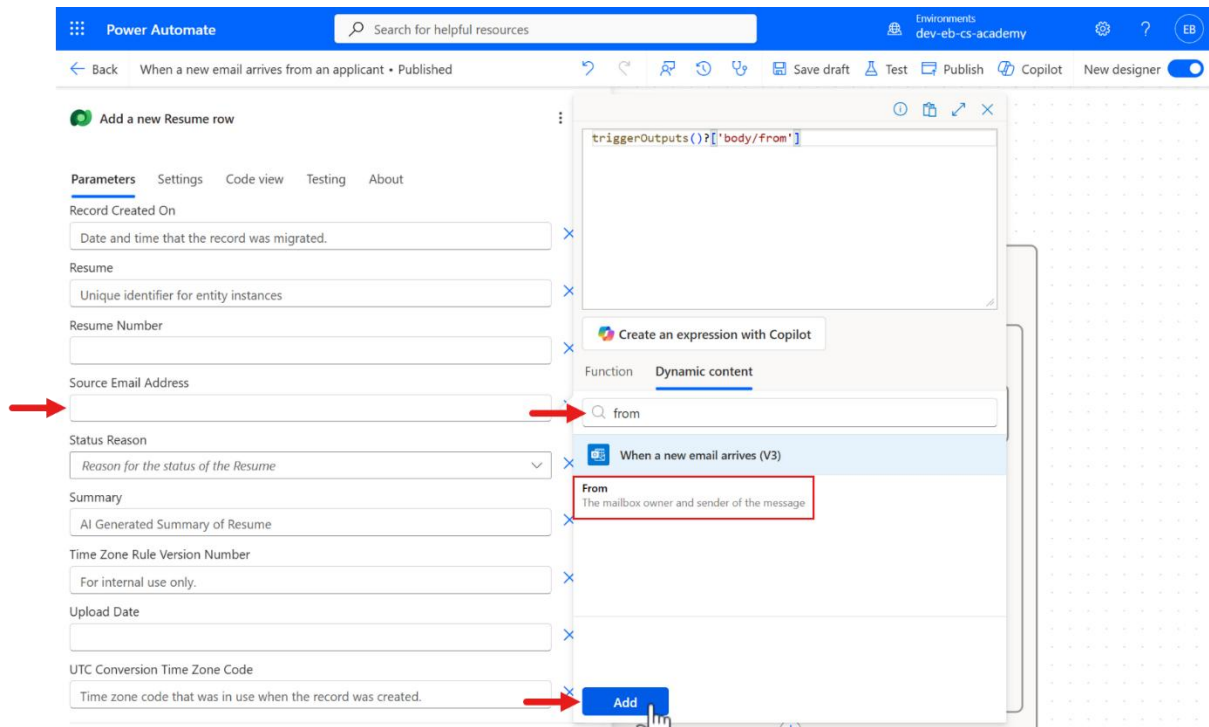

30. For the **Upload Date** field, select the **fx icon** to the right. In the **Function tab**, enter the following expression that uses the `utcNow()` function.

`utcNow()`

To learn more about the `utcNow` function, expand the following additional learning block.

🧐 What is the `utcNow()` function?

- The `utcnow()` function in Power Automate returns the current date and time in Coordinated Universal Time (UTC) in an ISO 8601 format, like: 2025-09-23T04:32:14Z


🦋 Example

- Expression: - `concat('Report generated on ', utcnow())`
- Output is: - Report generated on 2025-09-23T04:32:14Z


💡 Key Points

- **No arguments (input parameters) required:** it always gives the current UTC timestamp.
 - **Use cases**
 - Adding timestamps to logs or file names
 - Comparing current time with other dates


- Scheduling or time-based conditions

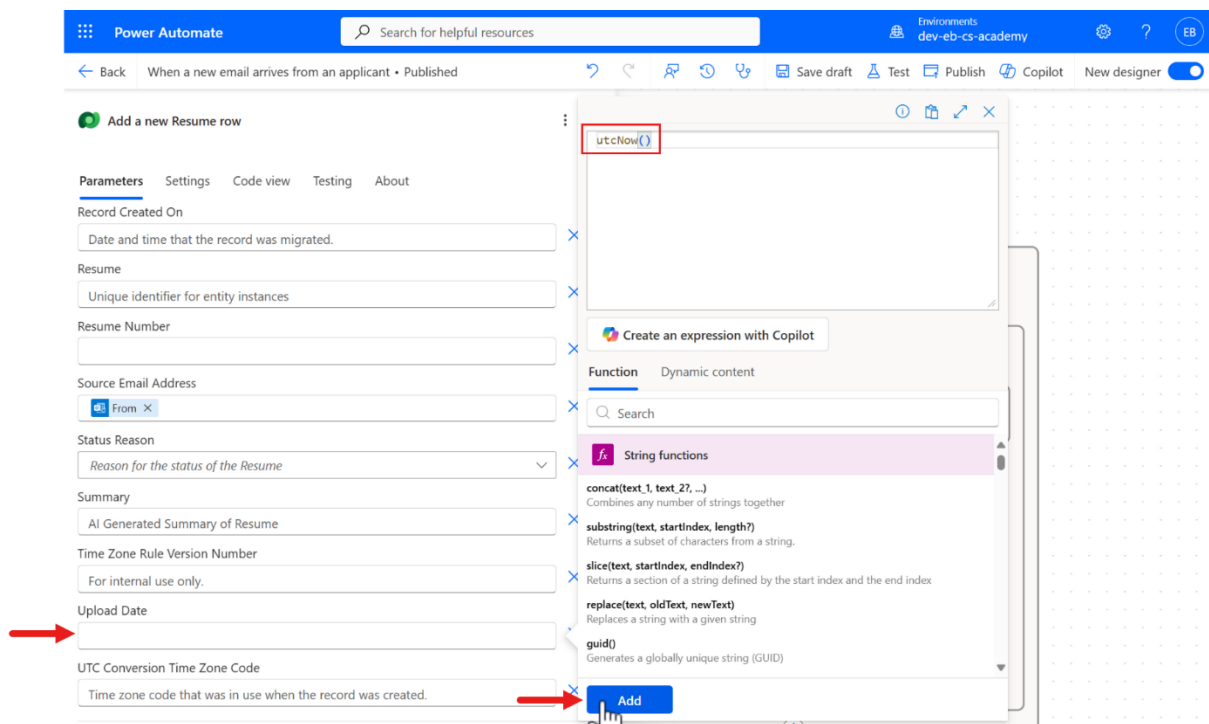

31. We've now completed configuring the **Add a new Resume row** action so let's exit from the panel by collapsing it.

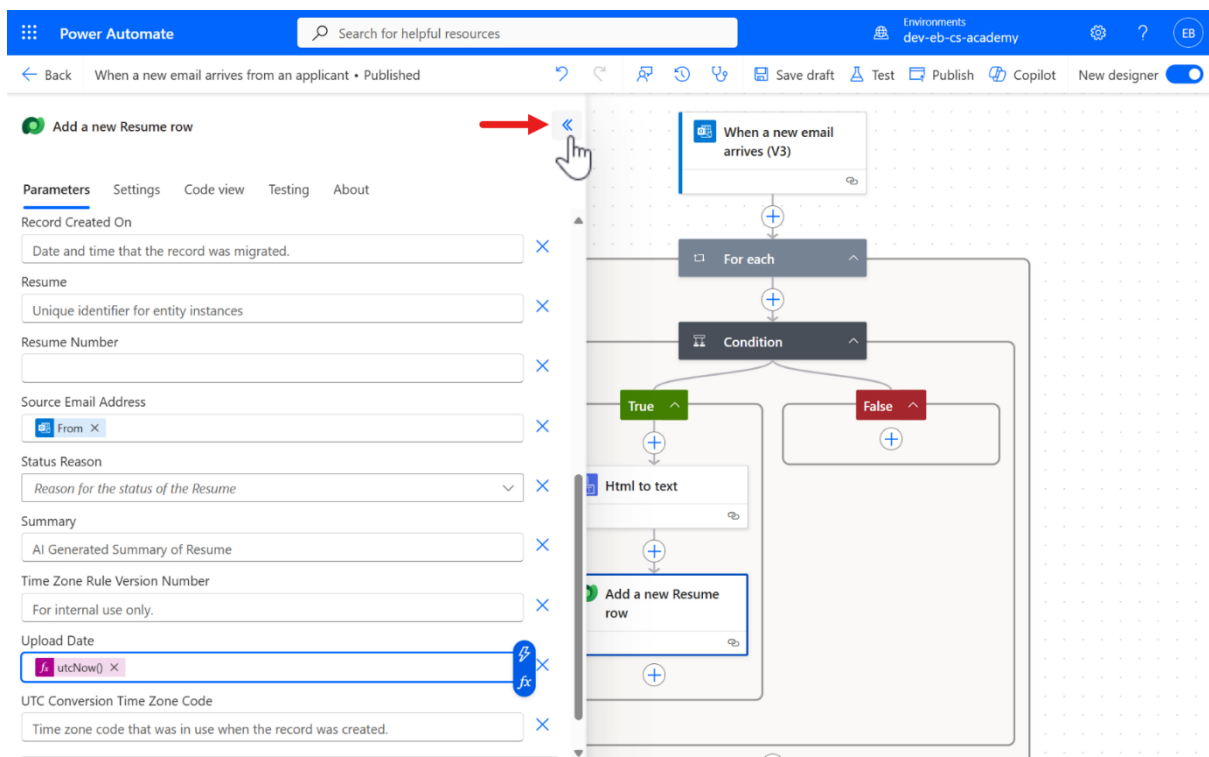


32. We'll add a new action by selecting the **+** icon underneath the **Add a new Resume row** action which will load the panel to add actions. Search for **Dataverse Upload**. Select the **Upload a file or an image** action.

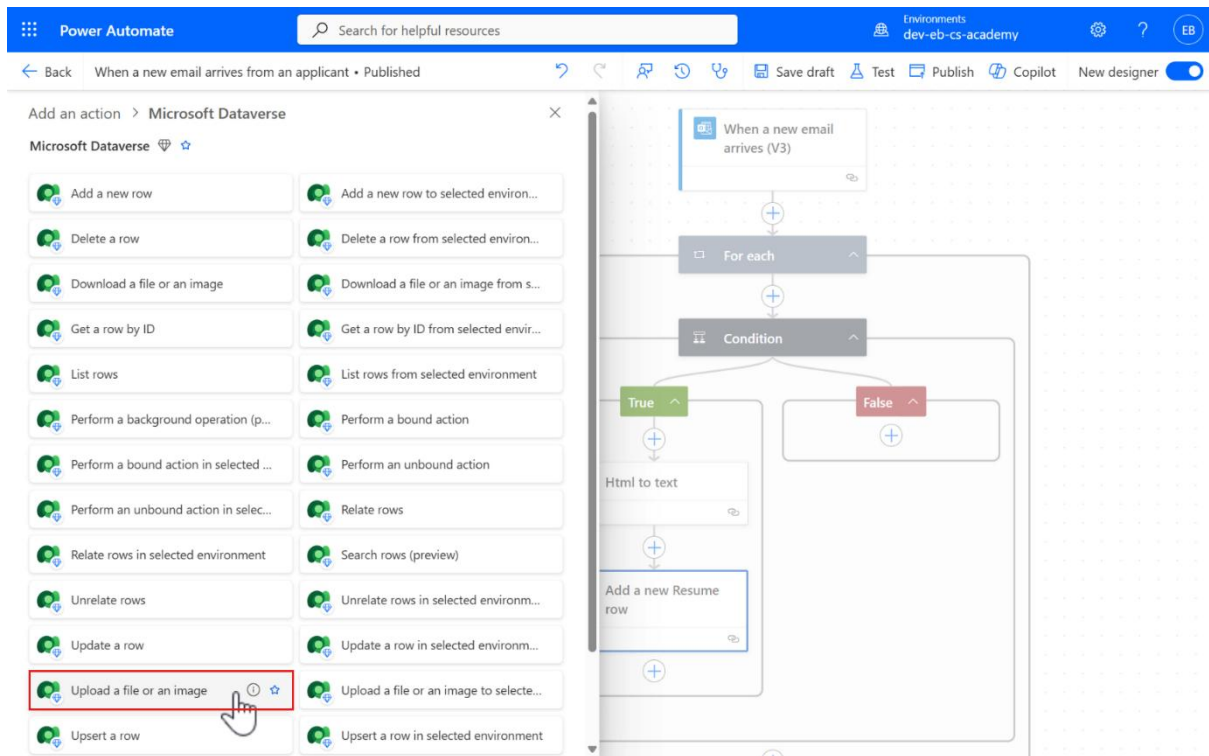

33. Rename the action by pasting the following as the name,


Upload Resume File

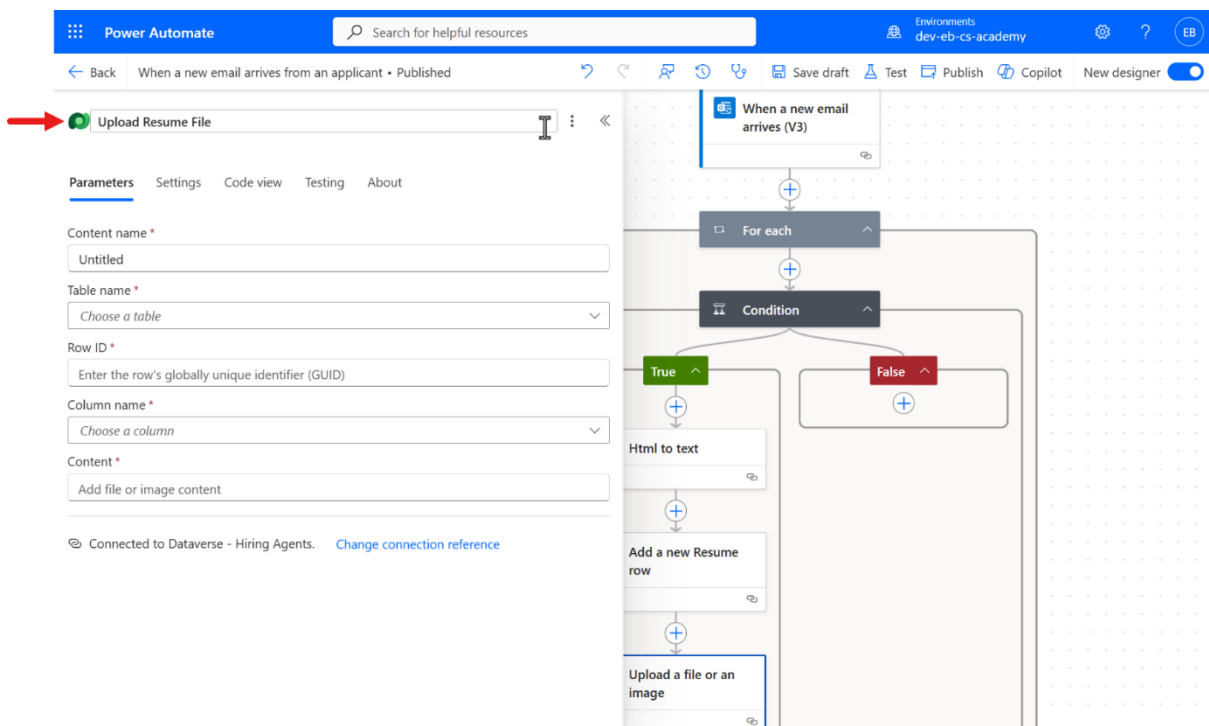


34. Select the **Content name** field next and select the **fx icon** to the right.

In the **Function** tab, enter the following expression that uses the item () function. This gets the name property of the current item (the attachment file).

item()?['name']

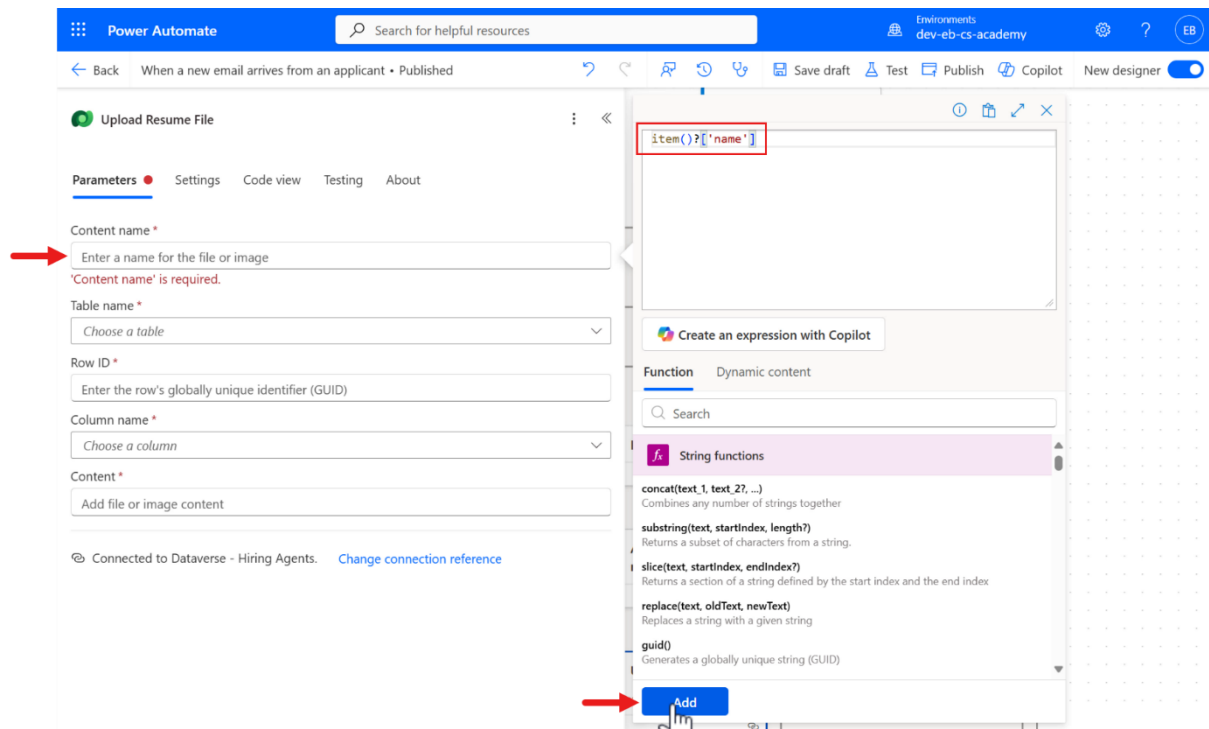


35. For the **Table name** parameter, search for resumes and select the **Resumes** table.

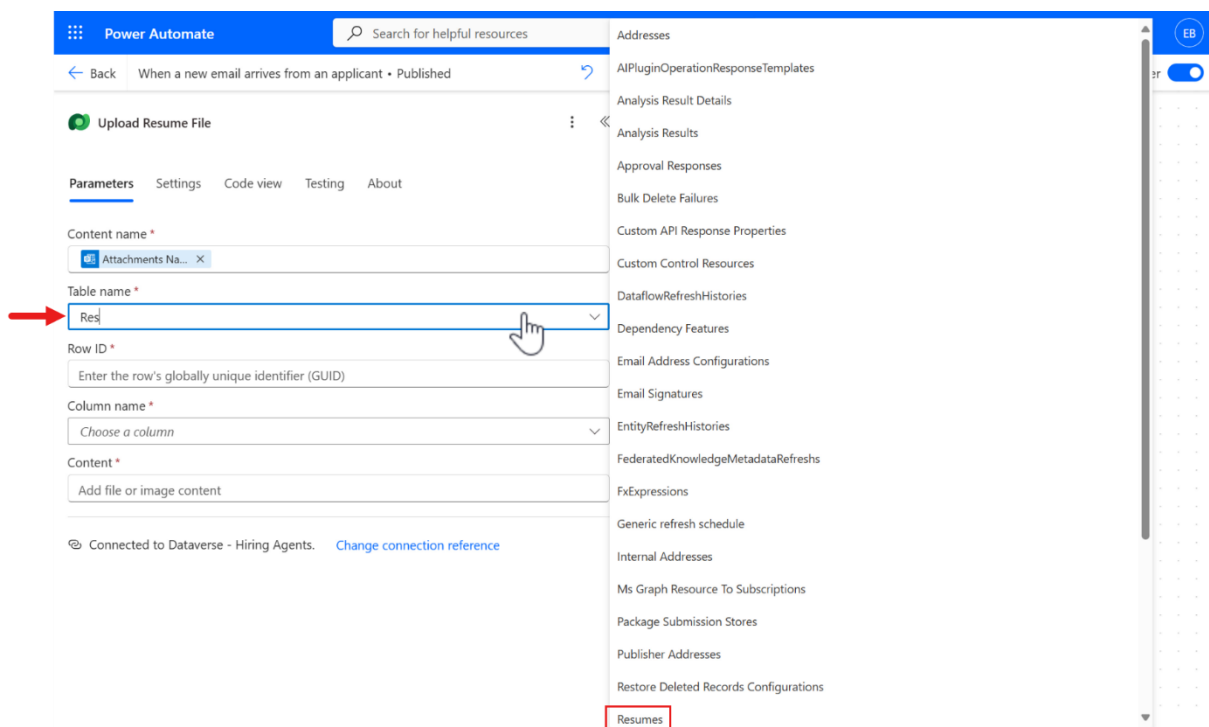


36. Select the **Row ID** field next and select the **lightning bolt icon** to the right.

Search for ID and select the **Resume** parameter from the *Add a new row* Dataverse action as this contains the ID value of the row to upload the PDF file to.

Select **Add**.

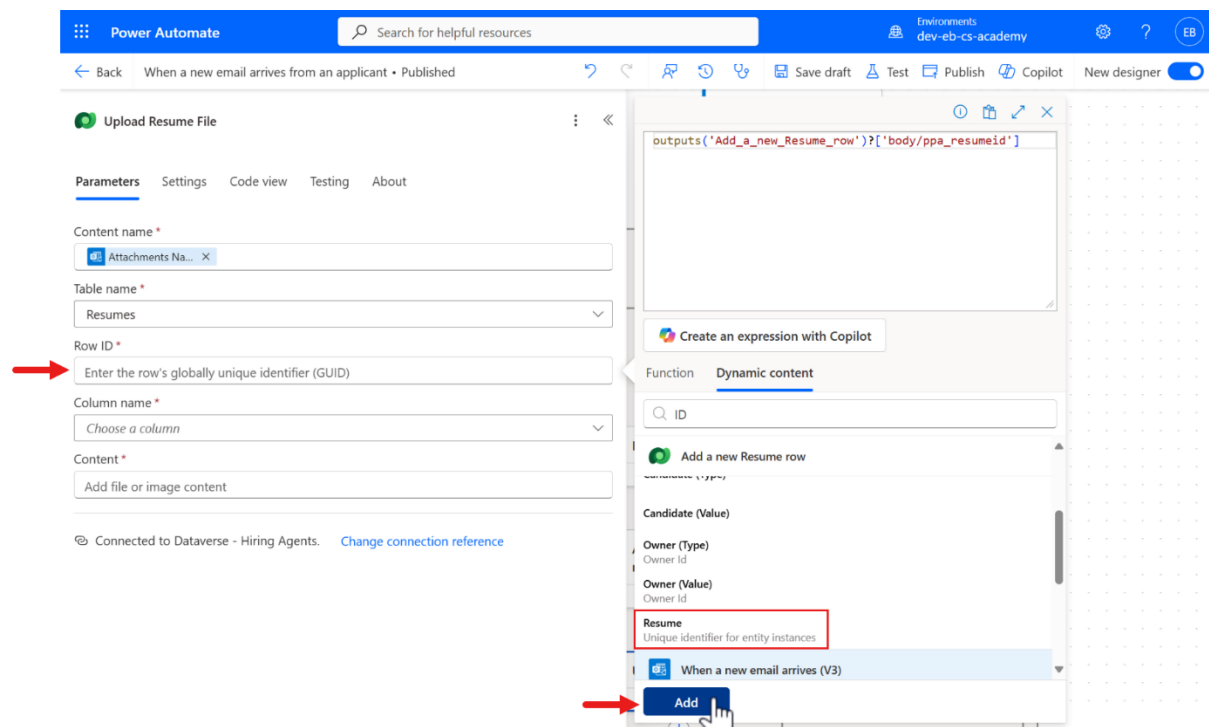

37. Select the **Column name** field and select the **Resume PDF** option.

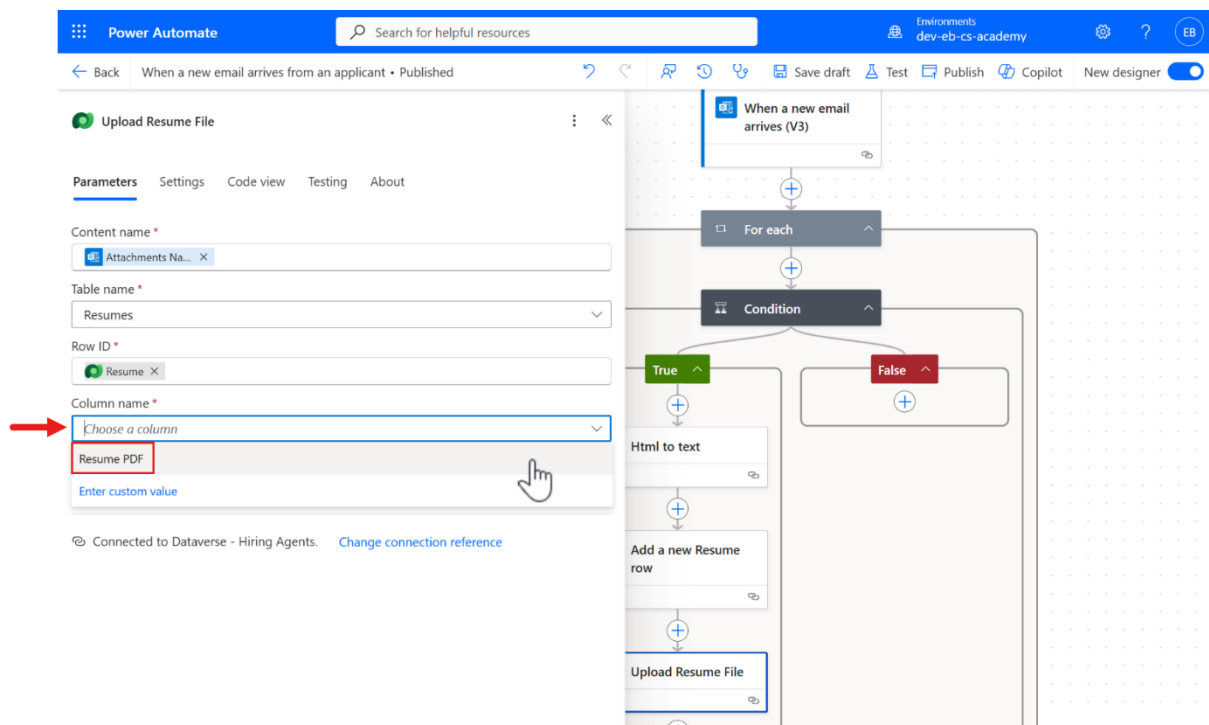


38. Select the **Content** field and select the **fx icon** to the right.


In the **Function** tab, enter the following expression that uses the item () function. This gets the **contentBytes** property of the current item (the attachment file). **contentBytes** refers to the raw binary data of a file or attachment, encoded as a Base64 string.

item()['contentBytes']


39. We've completed configuring this action so let's exit from the action by selecting the two angle brackets («) pointing to the left to collapse the panel.

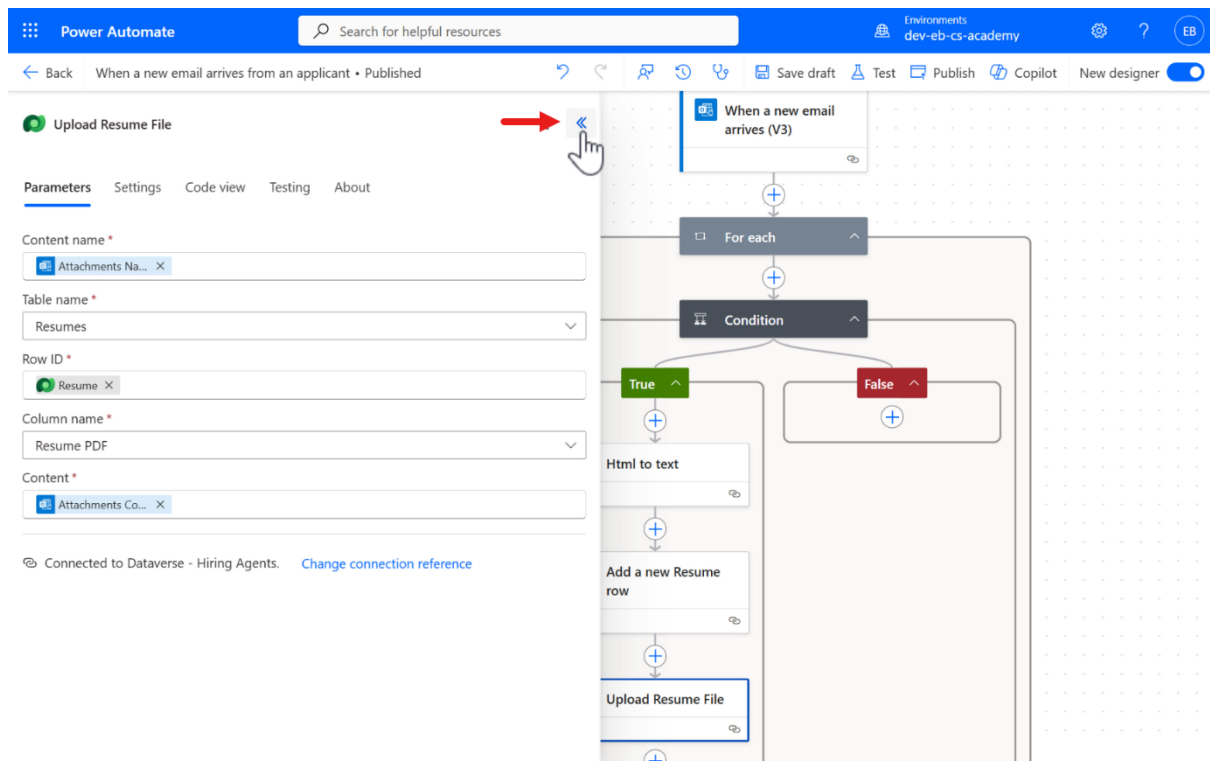


40. Next, select the **Sends a prompt to the specified copilot for processing**, then drag and drop this action to be below the **Upload Resume File** action in the *True* path of the condition.

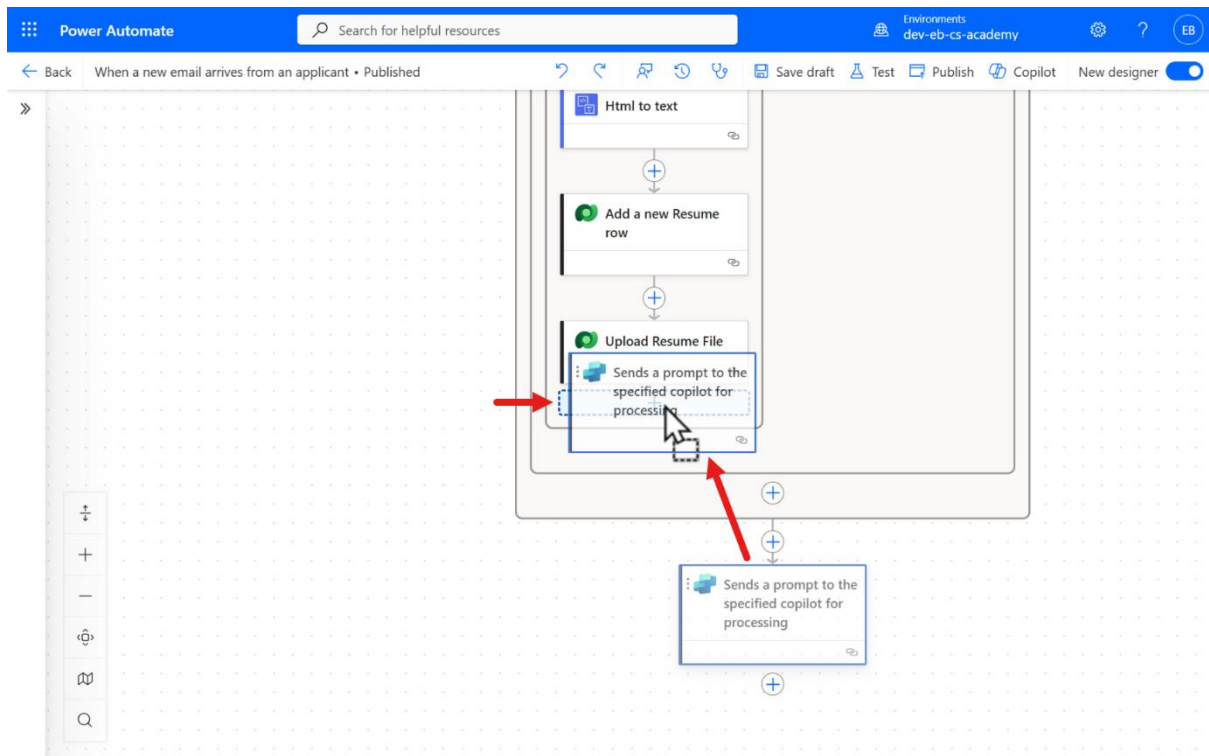

41. Select the **Sends a prompt to the specified copilot for processing** to configure it.

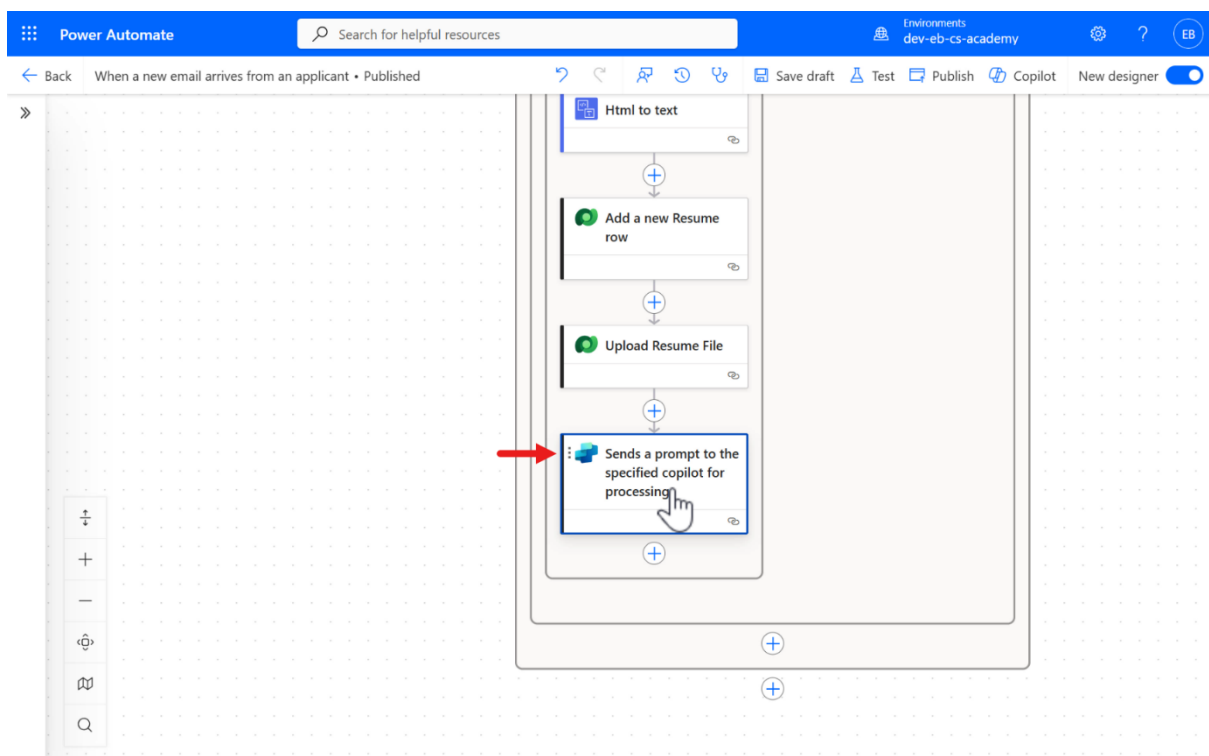


42. In the **Body/message** field, select all of the field content and clear/delete it.

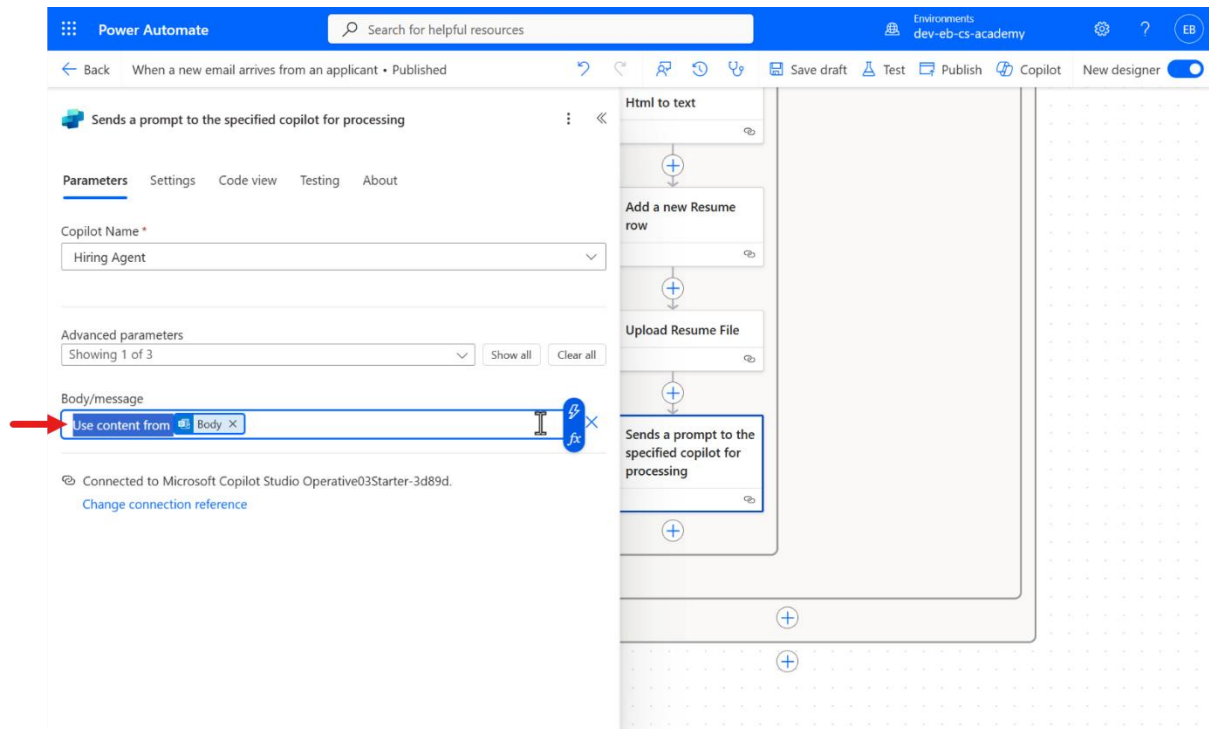

43. Copy and paste the following text into the **Body/message** field and highlight the RESUME ID PLACEHOLDER.


Send [Resumeld (text)] = "RESUME ID PLACEHOLDER" and [ResumeTitle (text_1)] = "RESUME TITLE PLACEHOLDER" and [ResumeNumber (text_2)] = "RESUME NUMBER PLACEHOLDER" to the Tool "Notify Teams Applicant channel" in the child agent "Application Intake Agent"

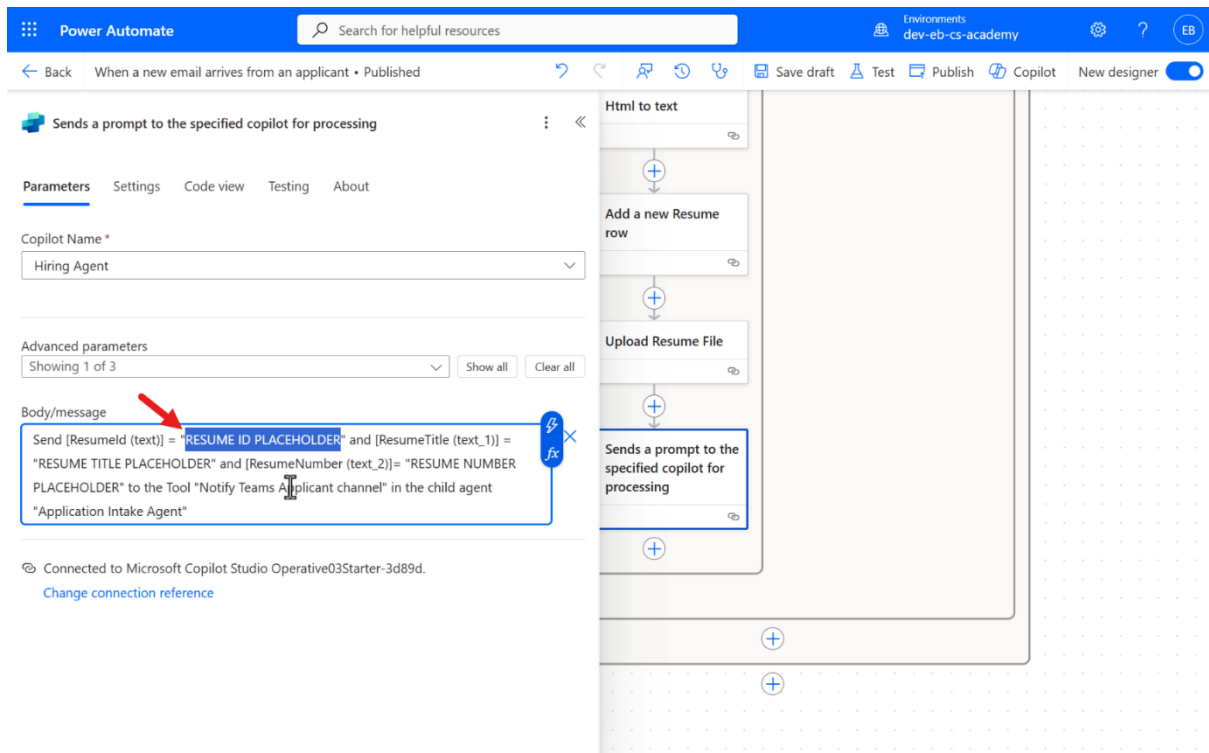

44. Select the **lightning bolt icon** to the right.

Search for resume and select the **Resume** parameter from the *Add a new row Dataverse* action as this contains the ID value of the Resume row created.


Select **Add**.

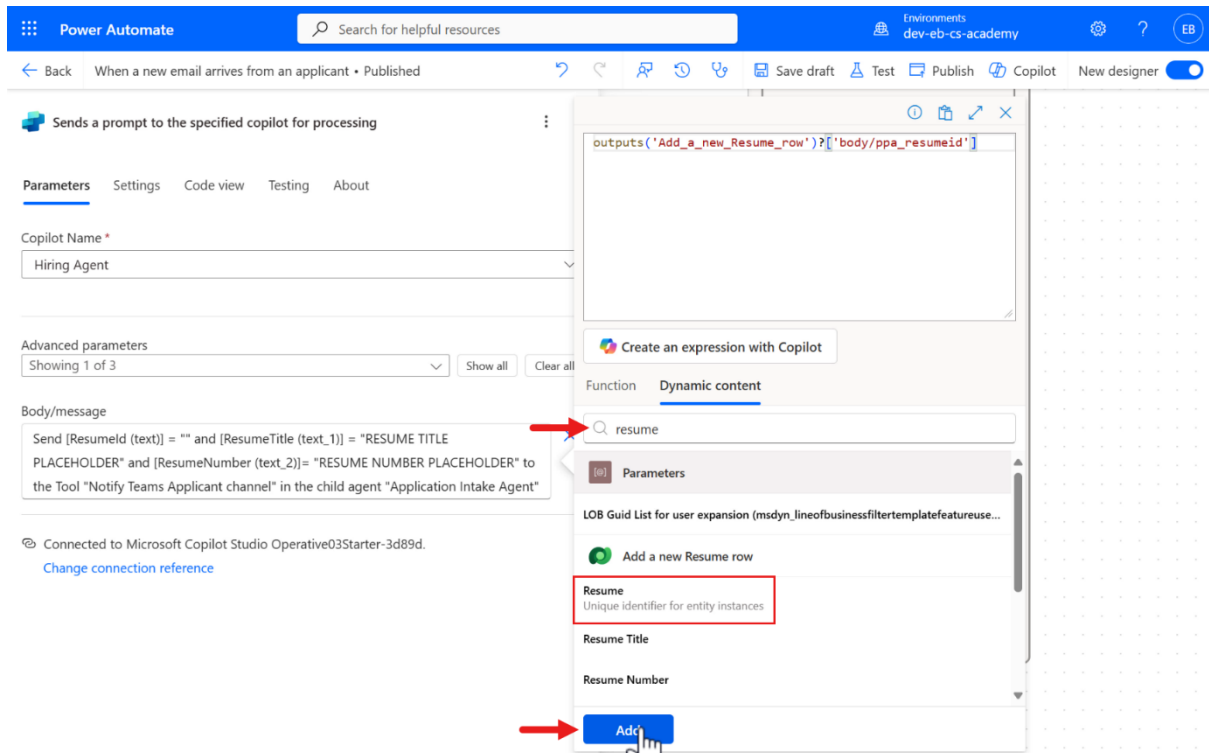

45. Highlight the RESUME TITLE PLACEHOLDER. Select the **lightning bolt icon** to the right.

Search for title and select the **Resume Title** parameter from the *Add a new row Dataverse* action as this contains the resume title value of the Resume row created.


Select **Add**.

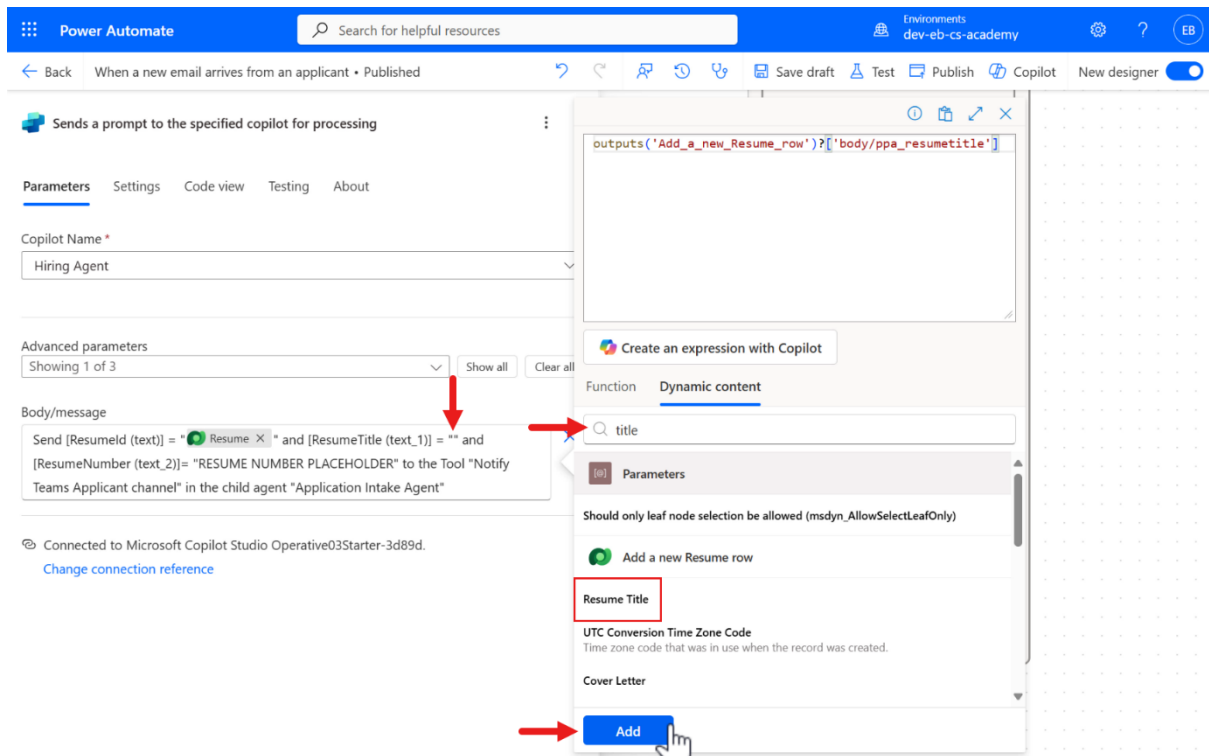


46. Highlight the RESUME NUMBER PLACEHOLDER. Select the **lightning bolt icon** to the right.

Search for resume number and select the **Resume Number** parameter from the *Add a new row Dataverse* action as this contains the Resume Number value of the Resume row created.


Select **Add**.

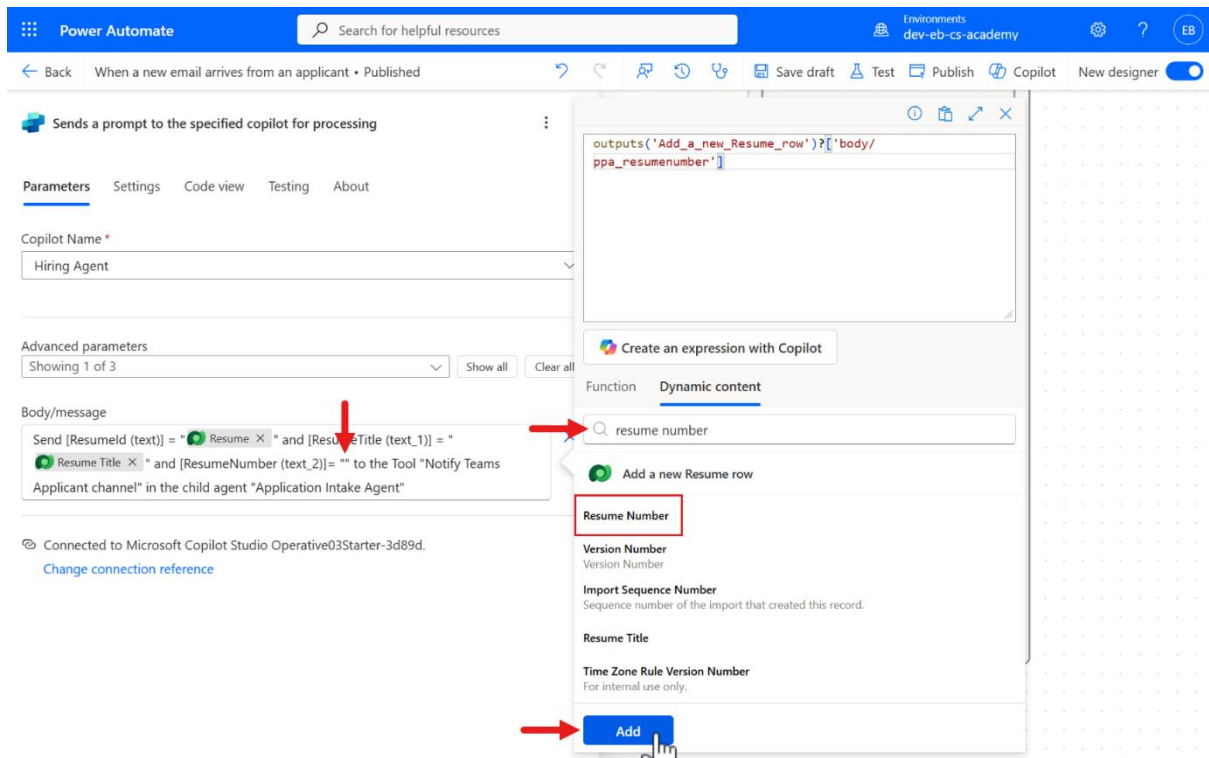

47. We've completed configuring this action and our agent flow 🙌 You're doing great! Now let's save our event trigger flow by selecting **Save**.

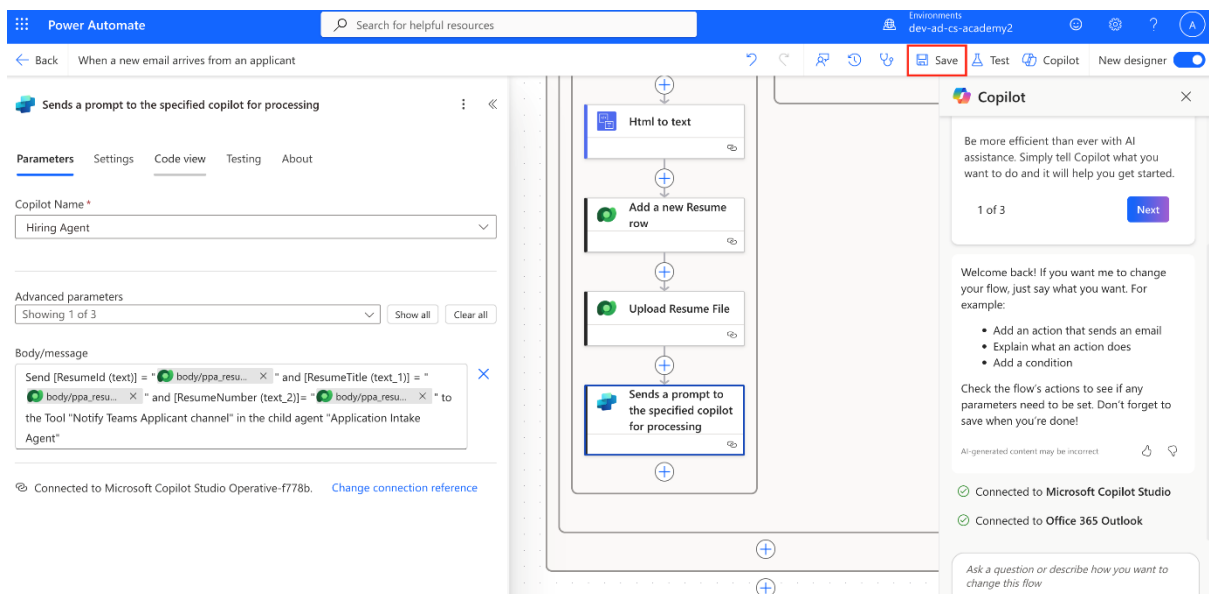

48. We now need to edit the details of the agent flow, select **Back**.

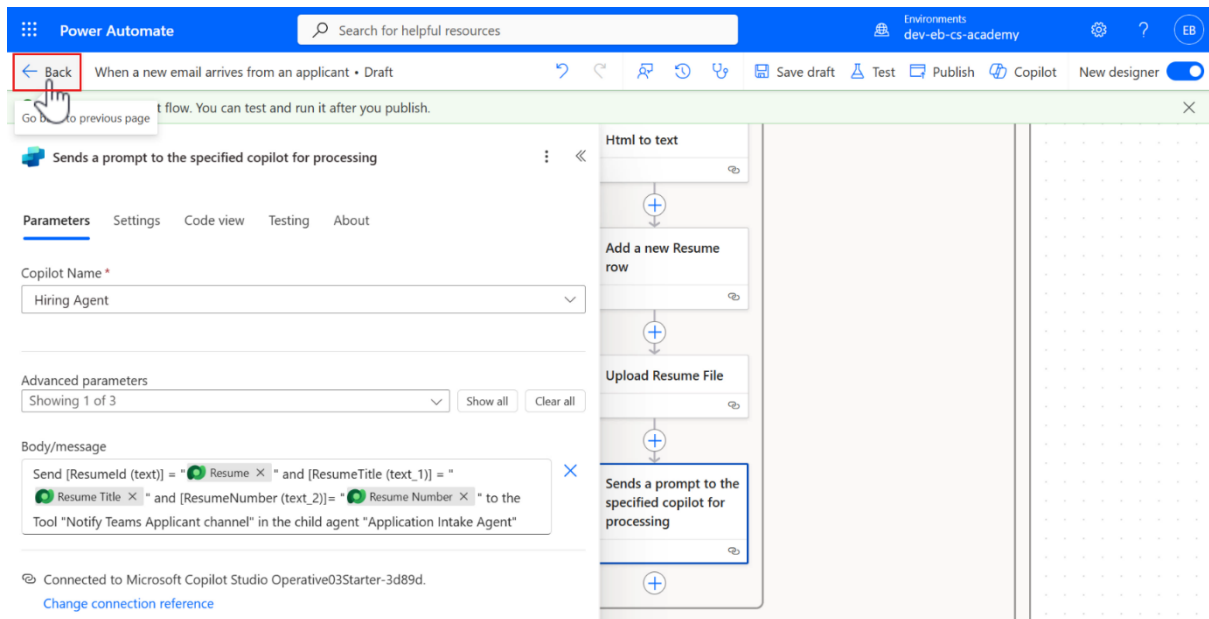


49. Select **Edit** in the **Details** section and update the **Plan** to the **Copilot Studio** option.


NOTE

Converting the plan to Copilot Studio allows you to manage the event trigger flow in Copilot Studio and consume Copilot Studio capacity instead of Power Automate billing.


Select **Save**.

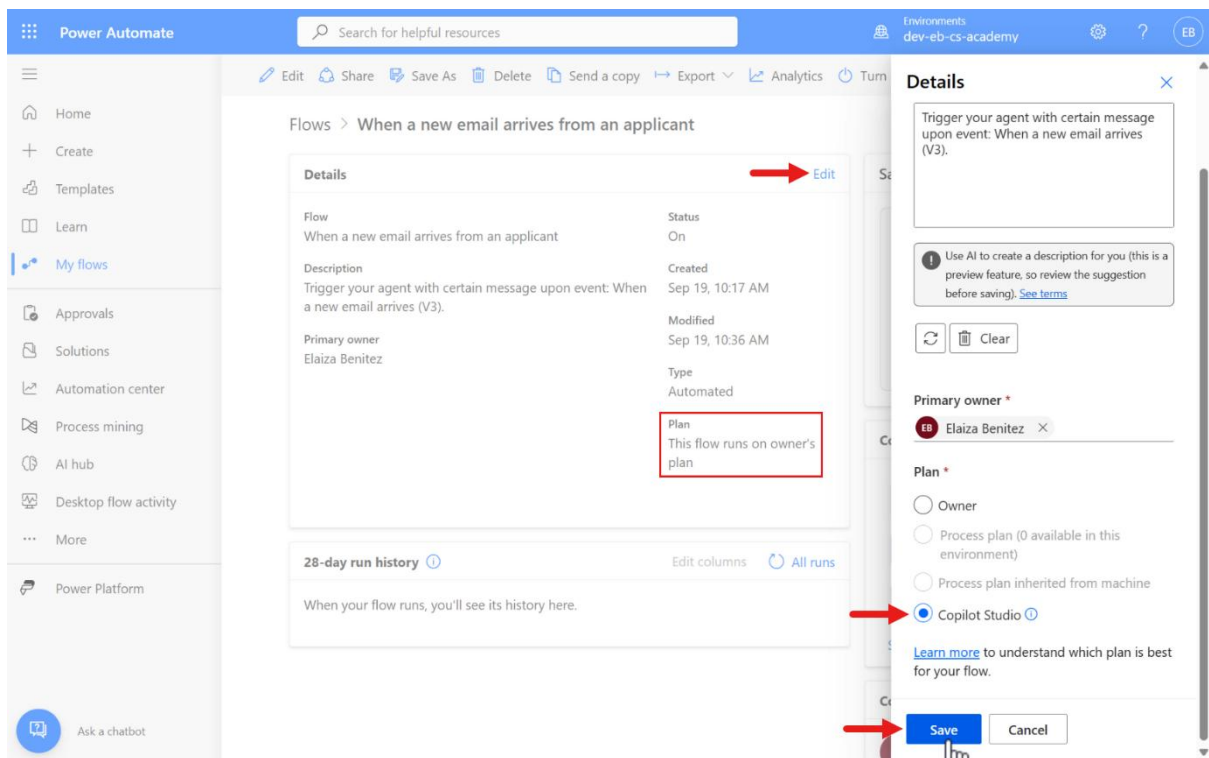


50. A modal will appear to ask you to confirm to switch to Copilot Studio plan. Select **Confirm**.

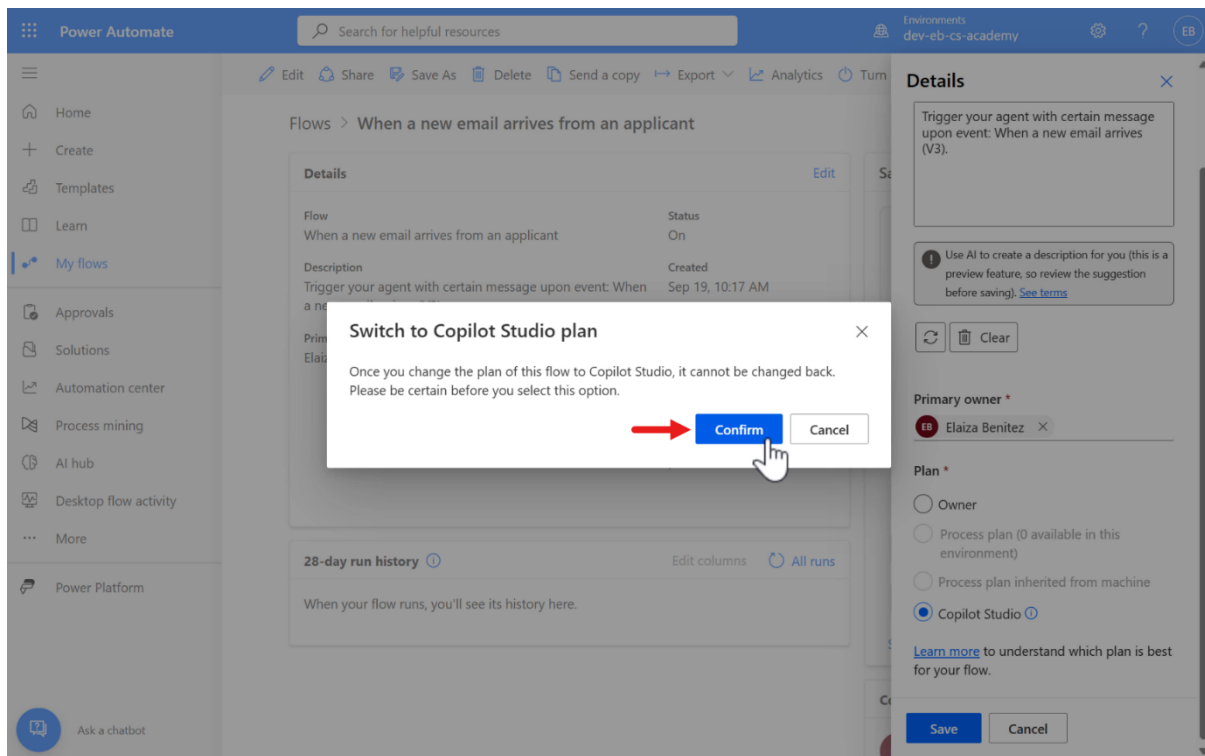


51. The plan is now updated to **Copilot Studio**. Select **Edit** as we need to publish the event trigger flow for our agent.

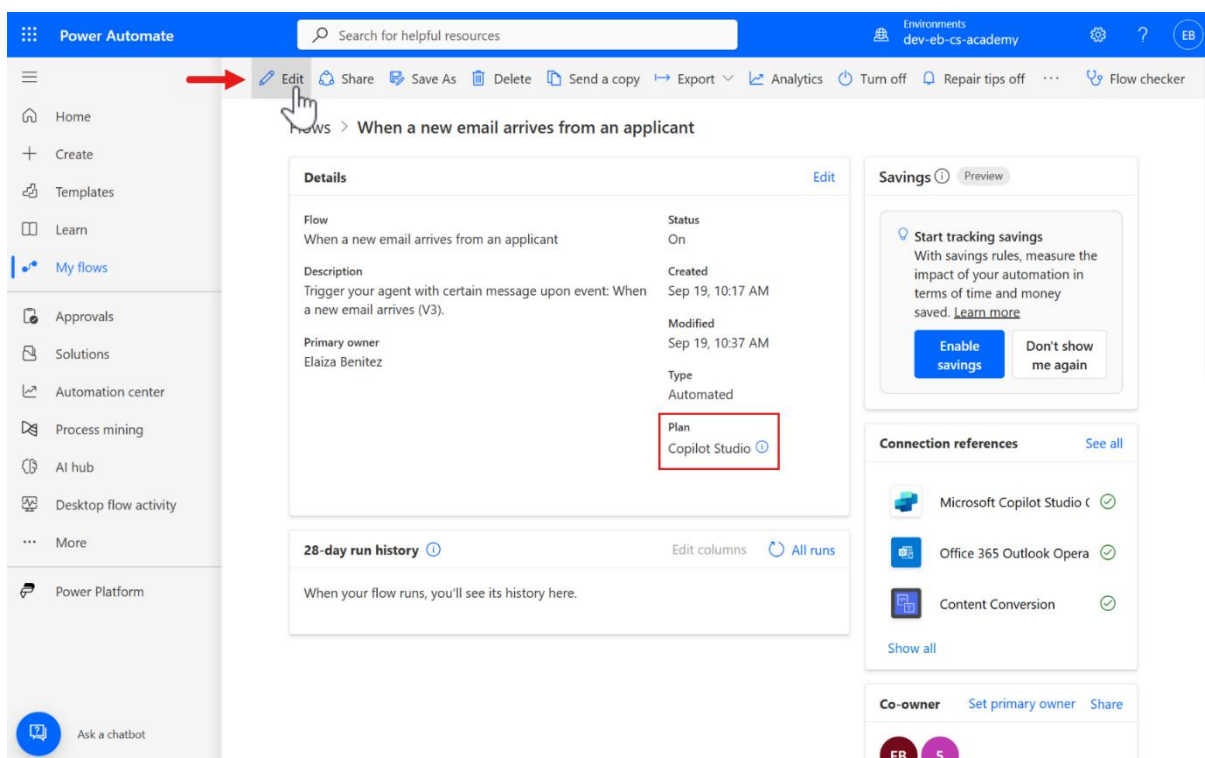

52. Select **Publish**.

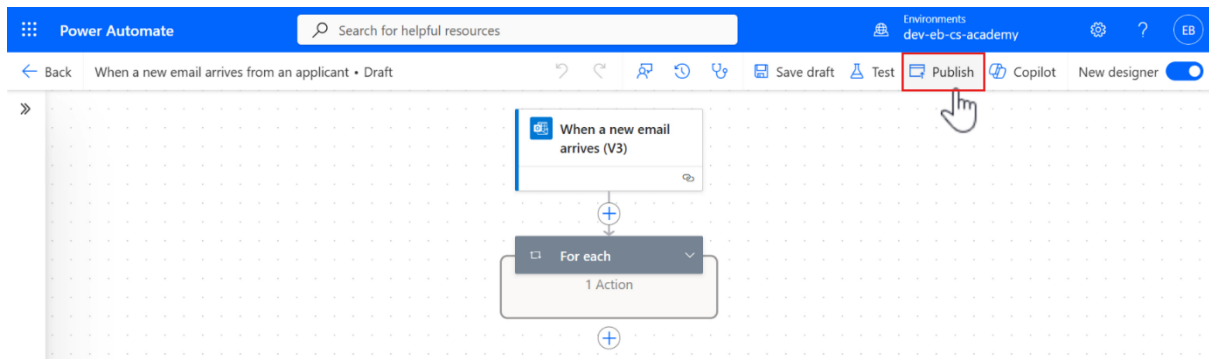

Hooray! The event trigger flow is now Published 😊

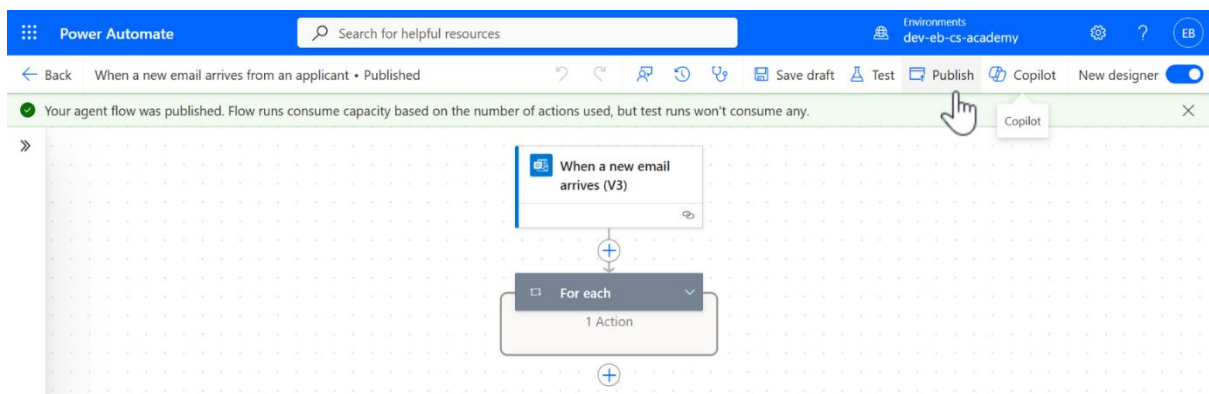


Let's proceed in creating a new agent flow that will be invoked by the child **Intake Application Agent**.

🧪 Lab 4.2 - Notify a Teams channel using an adaptive card


We're now going to create a new agent flow for the child **Intake Application Agent** that uses the values passed by the event trigger, to post an adaptive card to a Teams channel. This adaptive card will alert the HR recruitment team about the PDF that was automatically uploaded so that they can review it.

Let's begin!


1. In the **Hiring Agent** select the **Agents** tab and select the **Application Intake Agent**

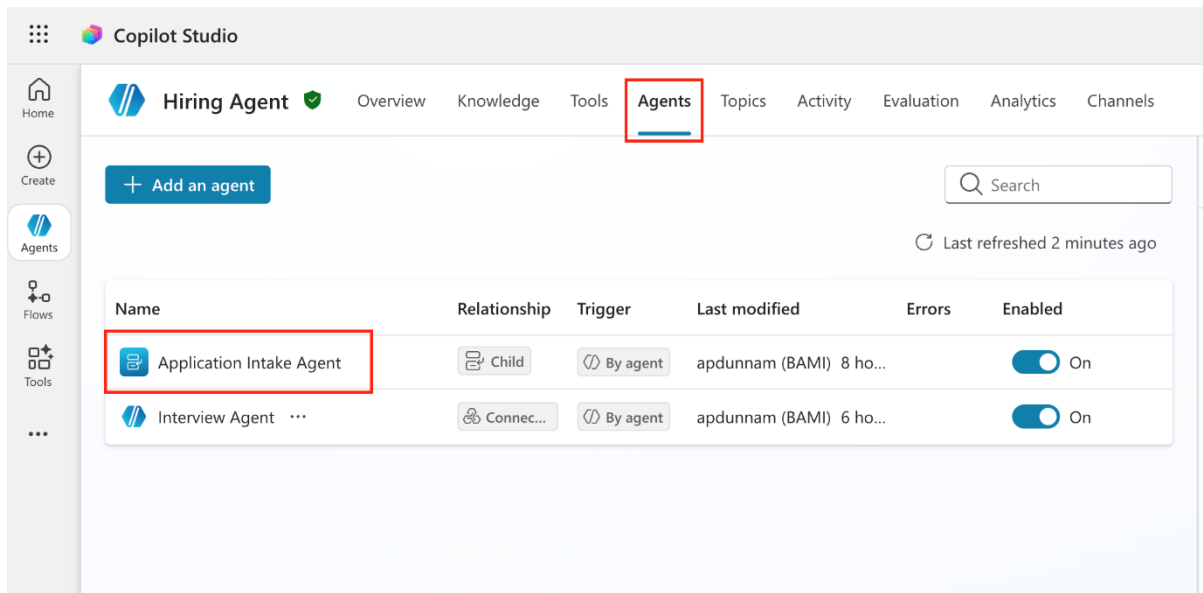


2. Scroll down to **Tools** and select **+ Add**.

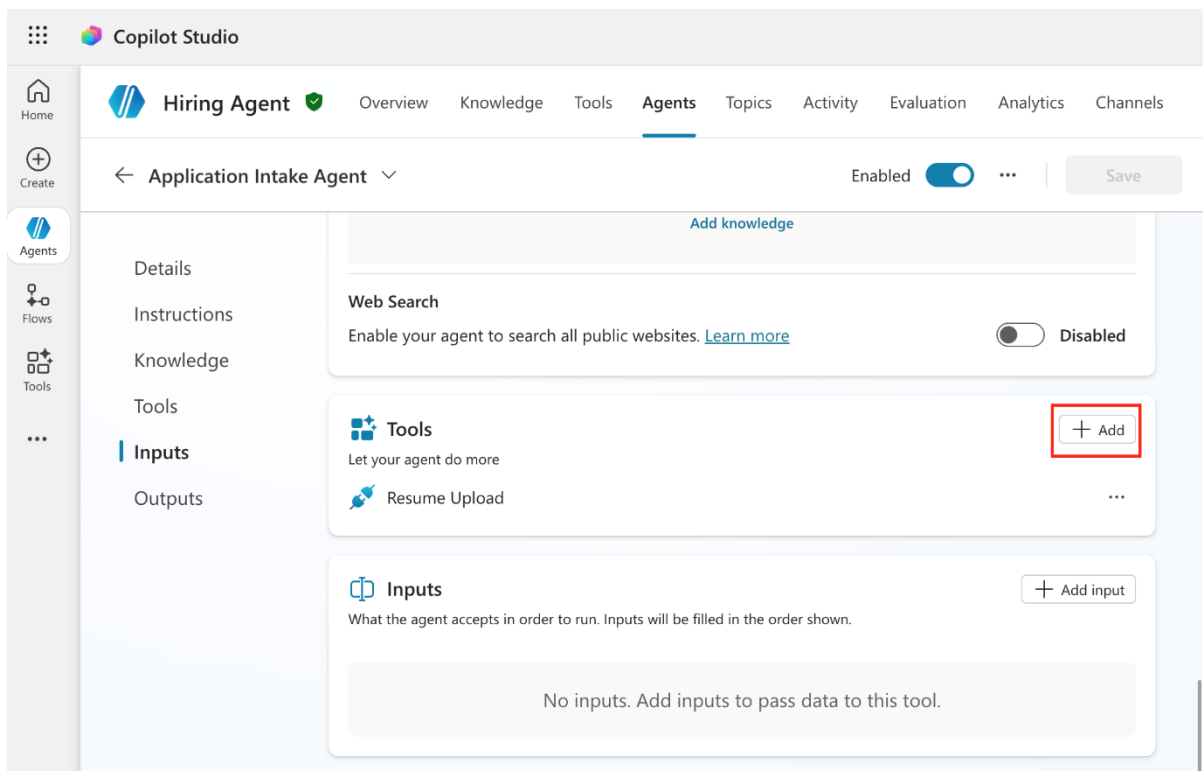


3. The **Add tool** modal will appear. Select **+ New tool**.

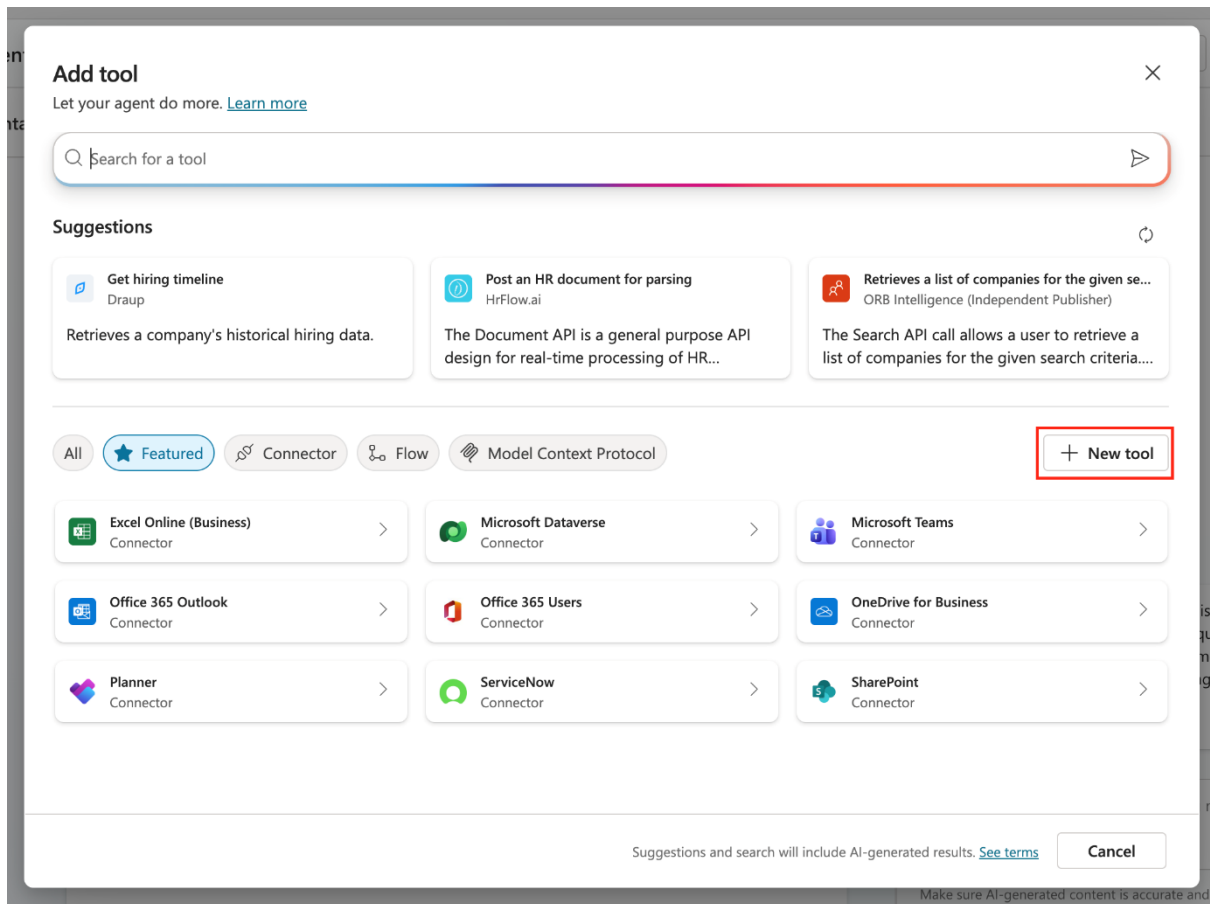


4. Select **Agent flow**.

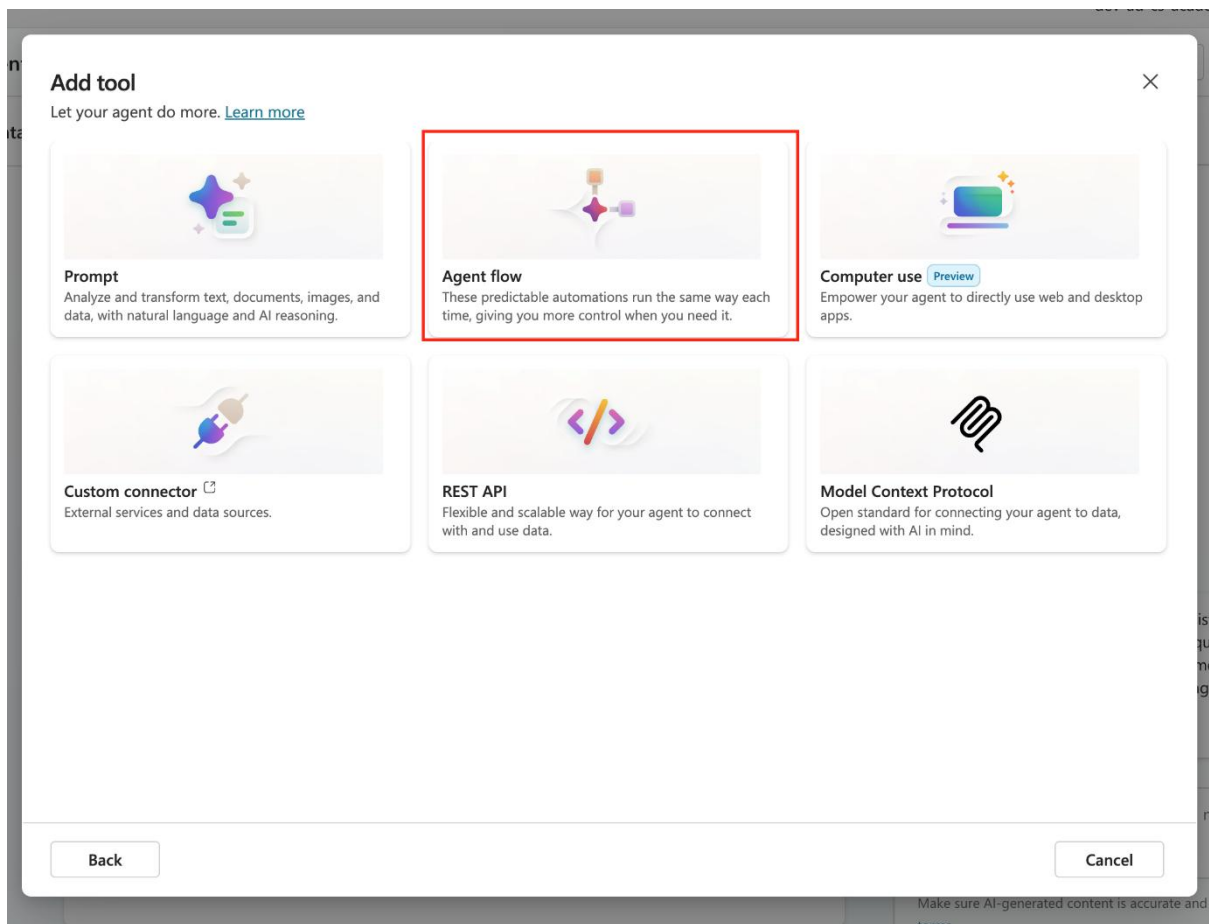

- The **agent flow designer** will next load. In the **When an agent calls the flow** trigger, select **+ Add an input**.

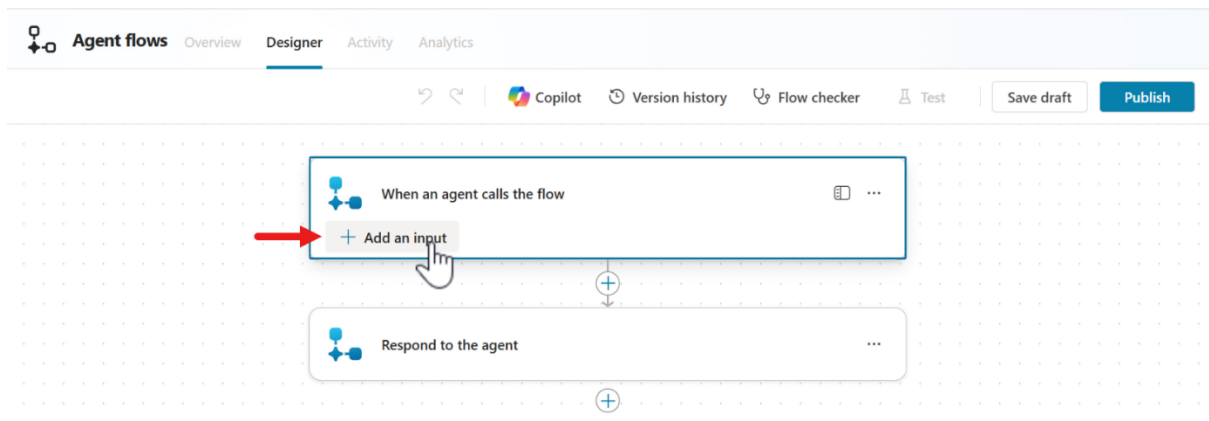


- Select **Text** as the type of user input.

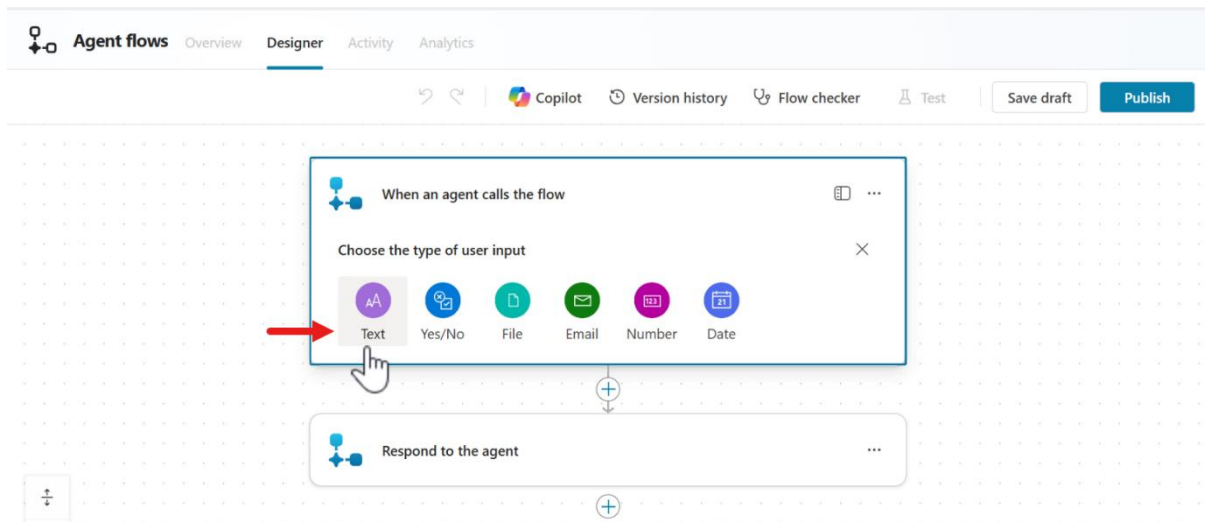


7. In the input text field, copy and paste the following for the input parameter name.

Resumeld

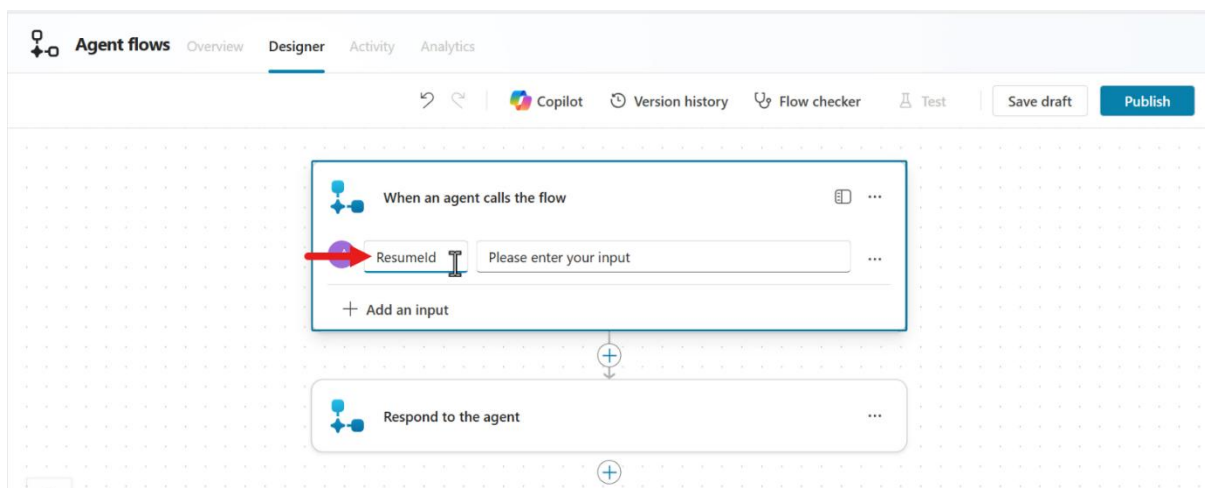


8. Repeat the same steps to add a second text input. Copy and paste the following for the input parameter name.

ResumeTitle

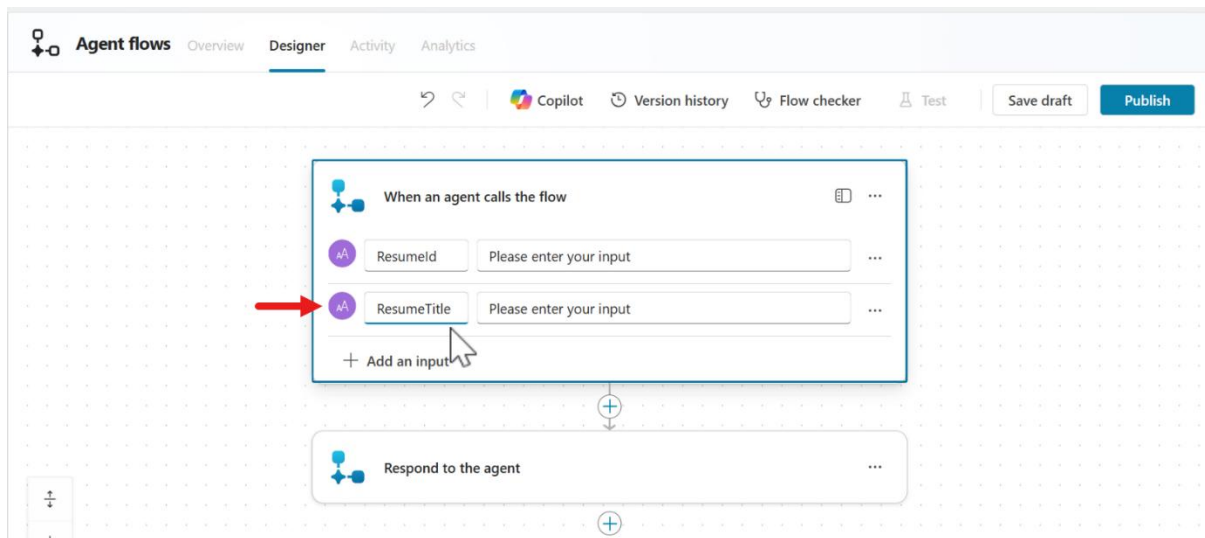


- Repeat the same steps to add a third text input. Copy and paste the following for the input parameter name.

ResumeNumber

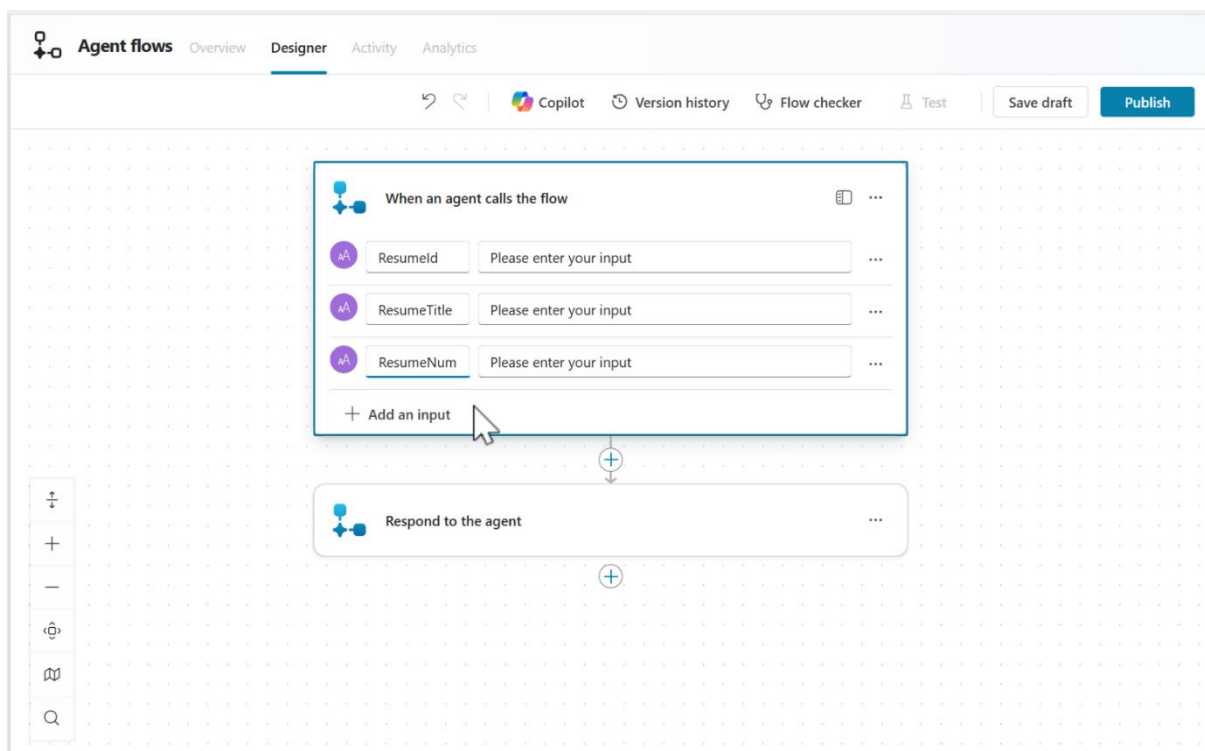


- Remember how in [Recruit](#) we added an adaptive card within a Topic for our agent? This time round, we're going to add an adaptive card in an agent flow. We're now going to add another action to our agent flow that will post an adaptive card to a Teams channel.


Select the **+** icon below the trigger.

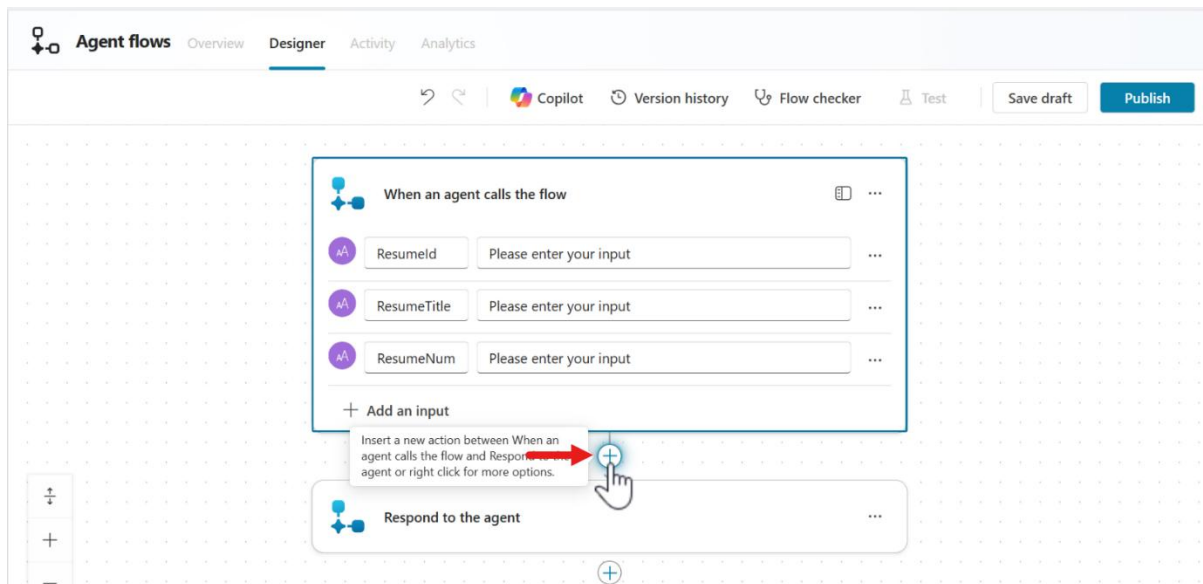


11. Search for **Microsoft Teams** post and select the **Post card in a chat or channel** action.

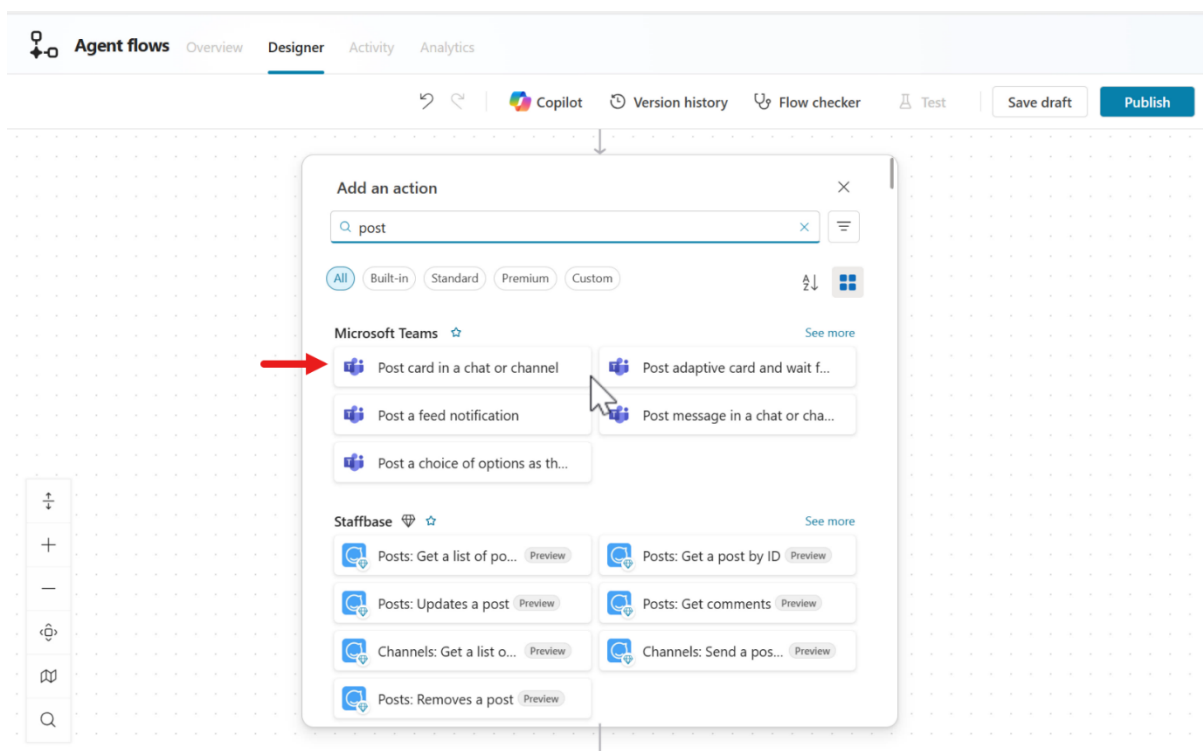

12. A connection reference to Microsoft Teams needs to be created with your signed in user account. Select **Sign in**.

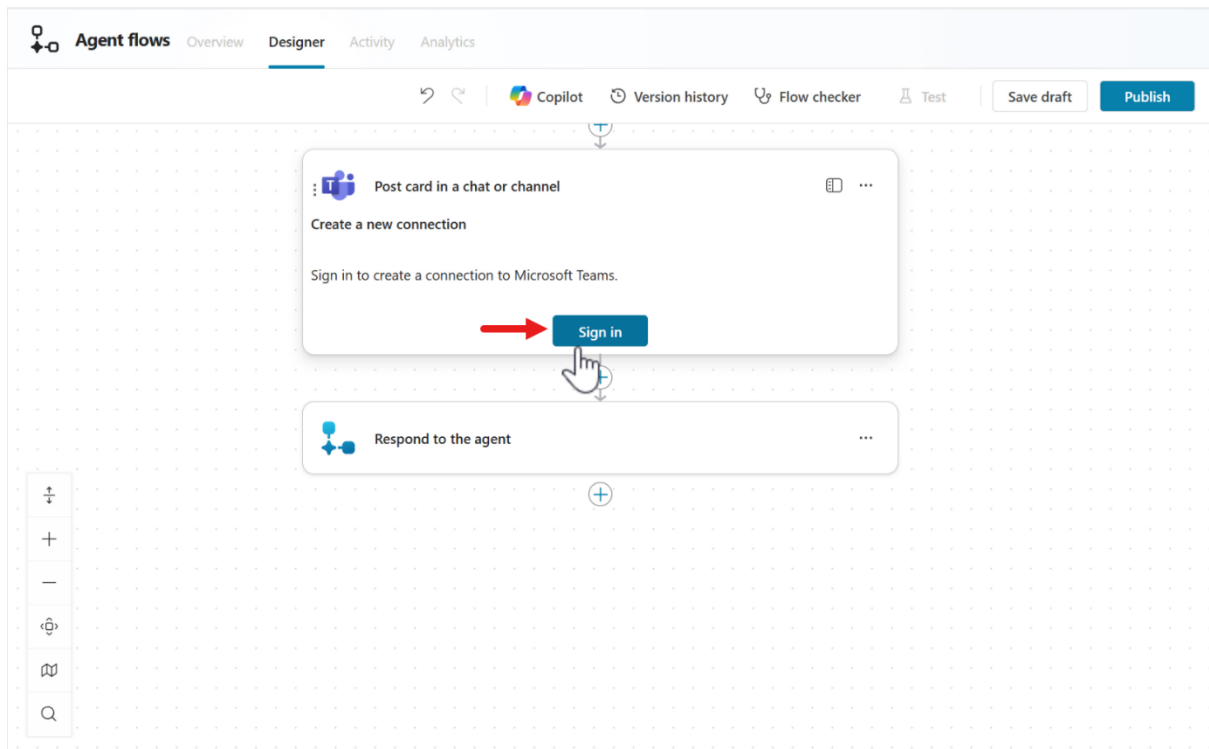

13. Select your user account and then select **Allow access**.

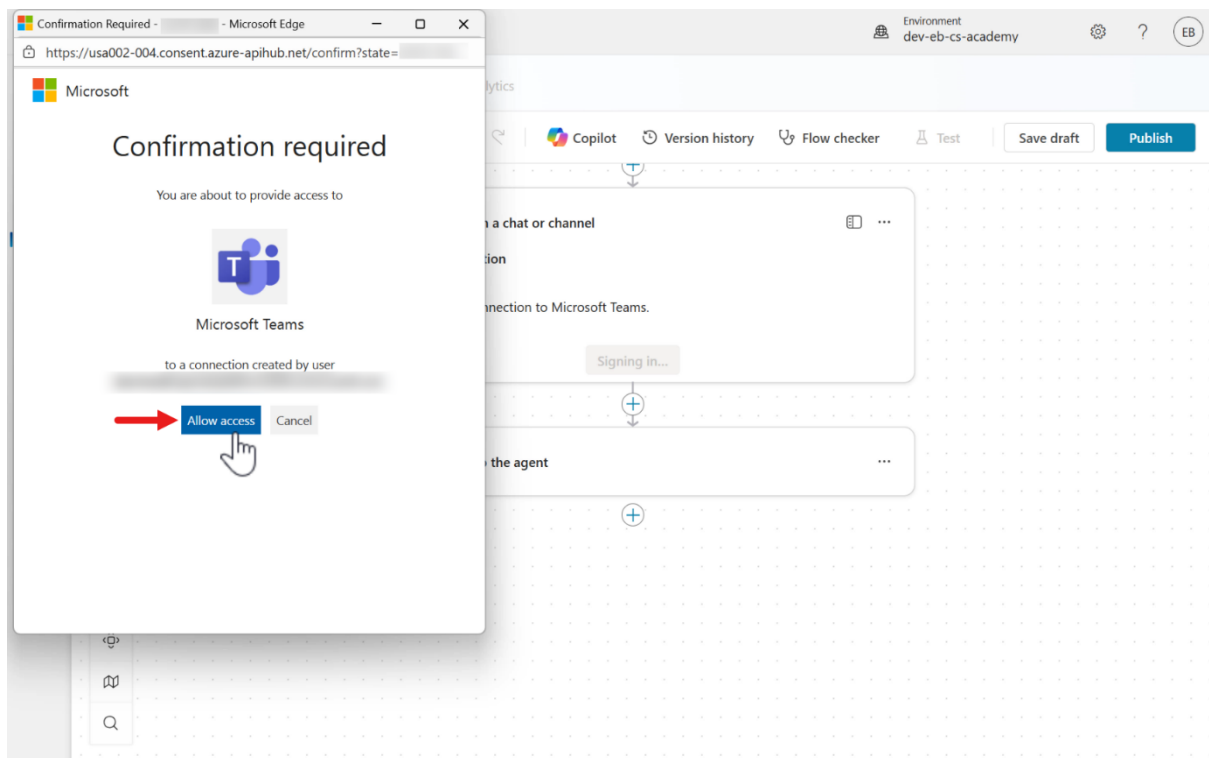


14. Configure according to the following input parameters:


Parameter	How to Set	Details
Post as	Dropdown	Select the Flow bot option
Post in	Dropdown	Select the Channel option
Team	Dropdown	Select a team that's available in your environment that you have access to for the purpose of completing this lab exercise
Channel	Dropdown	Select a channel that's available in your environment that you have access to for the purpose of completing this lab exercise

15.

16. Next, we'll configure the **Adaptive Card** field. Select the **Adaptive Card** field.

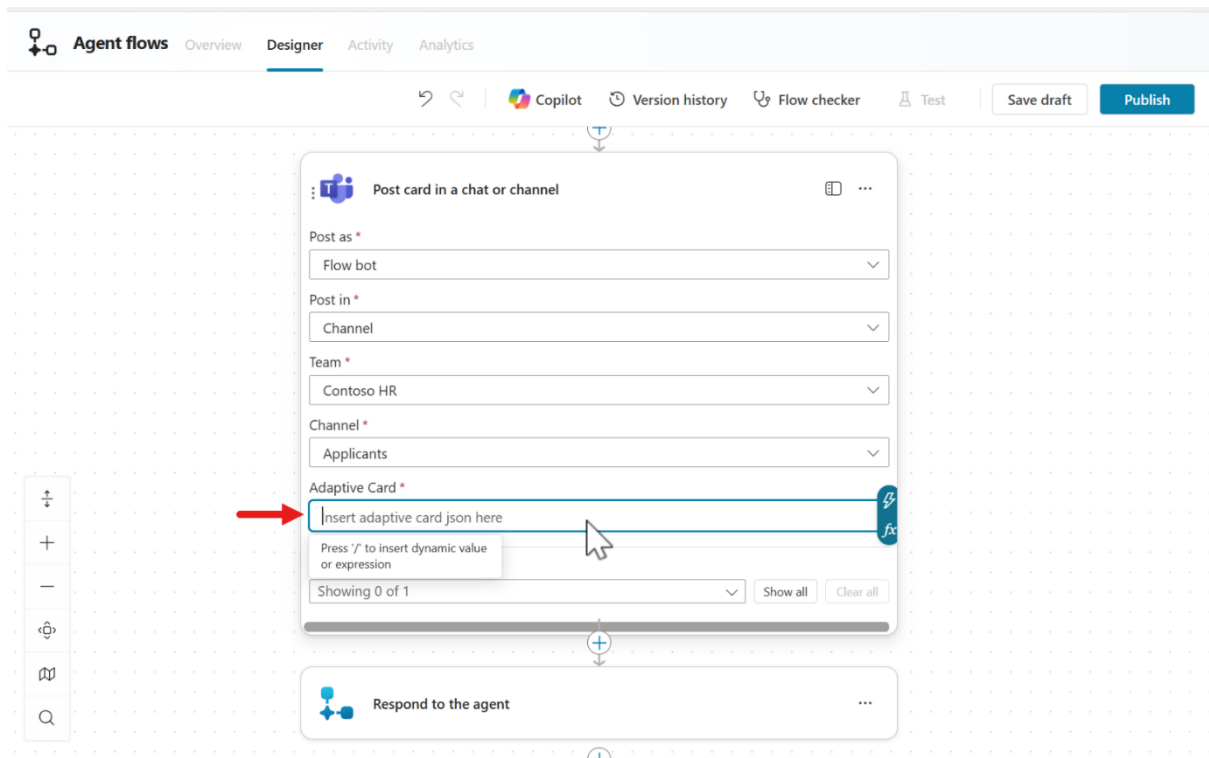


17. Open the [Resume Table Updated JSON file](#), copy its entire contents, and paste them into the Adaptive Card field.

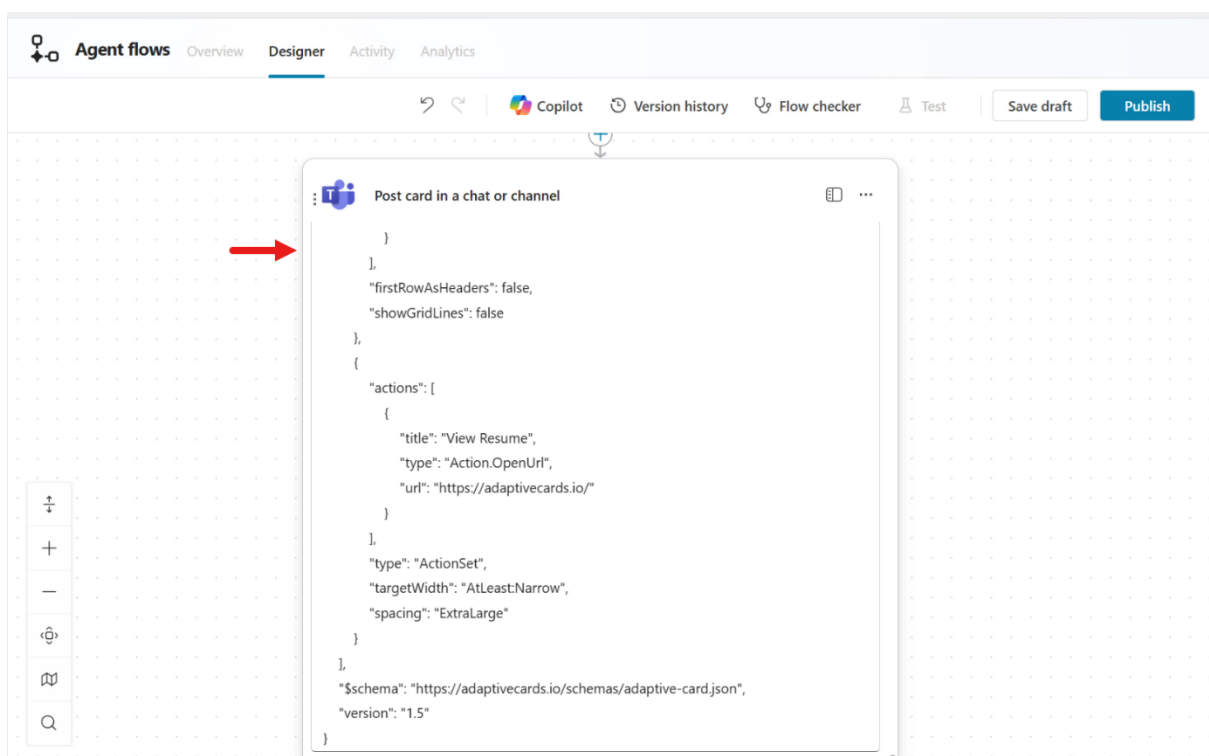


18. Similar to what we did in [Recruit](#), we're going to replace existing values in the JSON payload with actual values or dynamic content.

First, let's update the URL for the url property within the selectAction property. This URL will be replaced with the URL of the Resumes system view in the **Hiring Hub** model-driven app. This will allow the Recruiter to select the action and be directed to the Resumes system view in the model-driven app.

Highlight the current URL value and delete it.

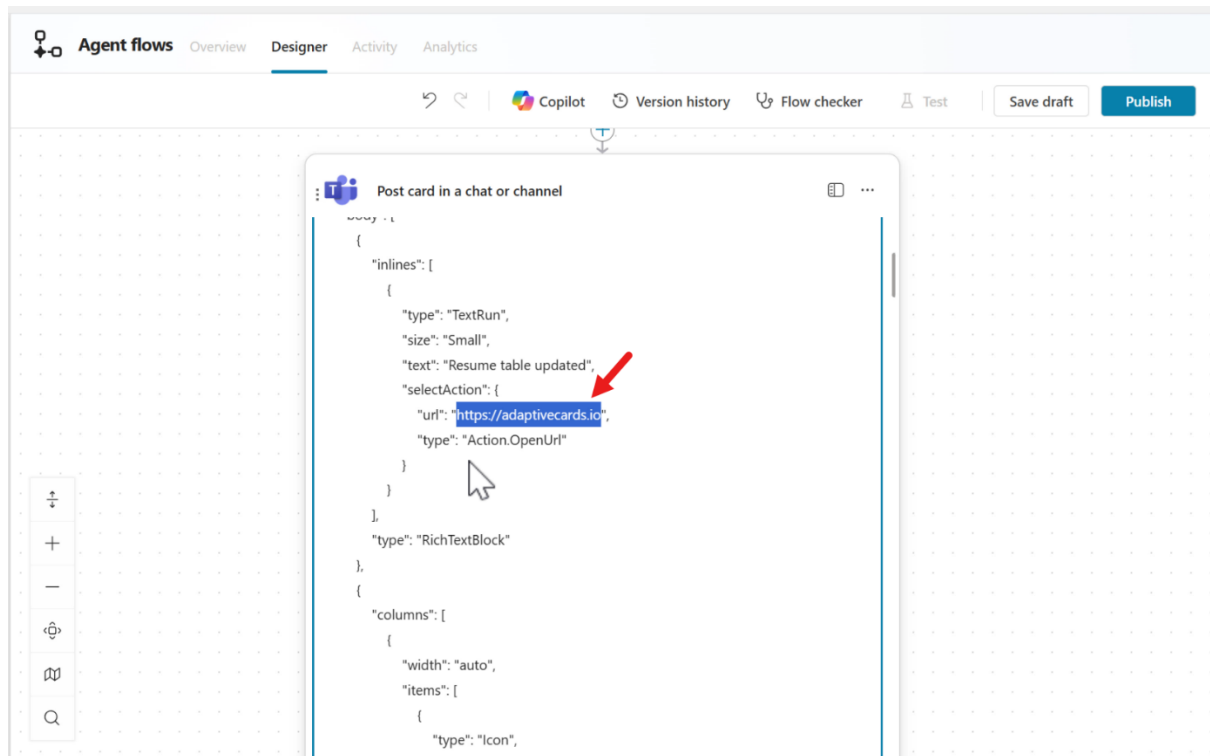


19. In the **Hiring Hub** model-driven app, navigate to the **Resumes** system view using the left hand side menu and copy the URL. Then navigate back to the agent flow, and paste the copied URL into the **url** property of the within the selectAction property.

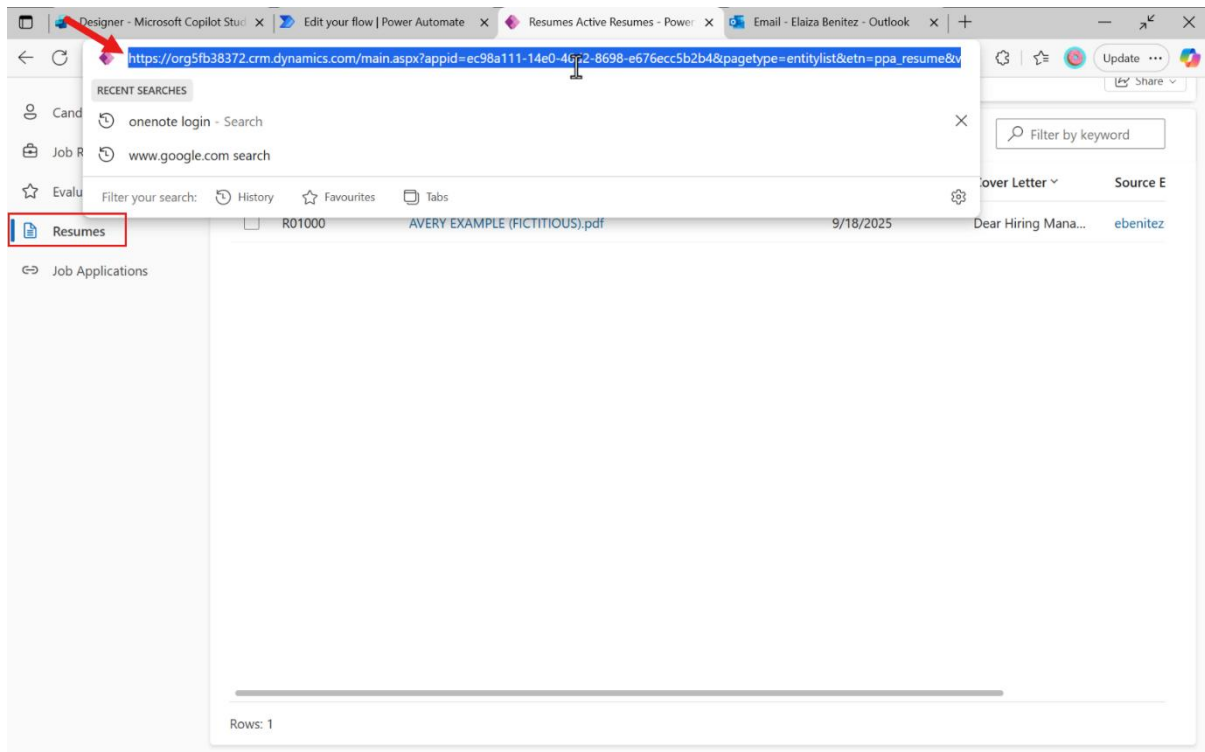

20. You should see the following where highlighted in Yellow is your environment details of the **Hiring Hub** model-driven app.


Parameter	Value	Explanation
Organization URI	GUID	The Dataverse/Dynamics 365 environment organization URL
appid	GUID	To open a specific model-driven app, the query parameter of either appid or appname is used. In this case, the appid is used
viewid	GUID	The query parameter which is the id of the view

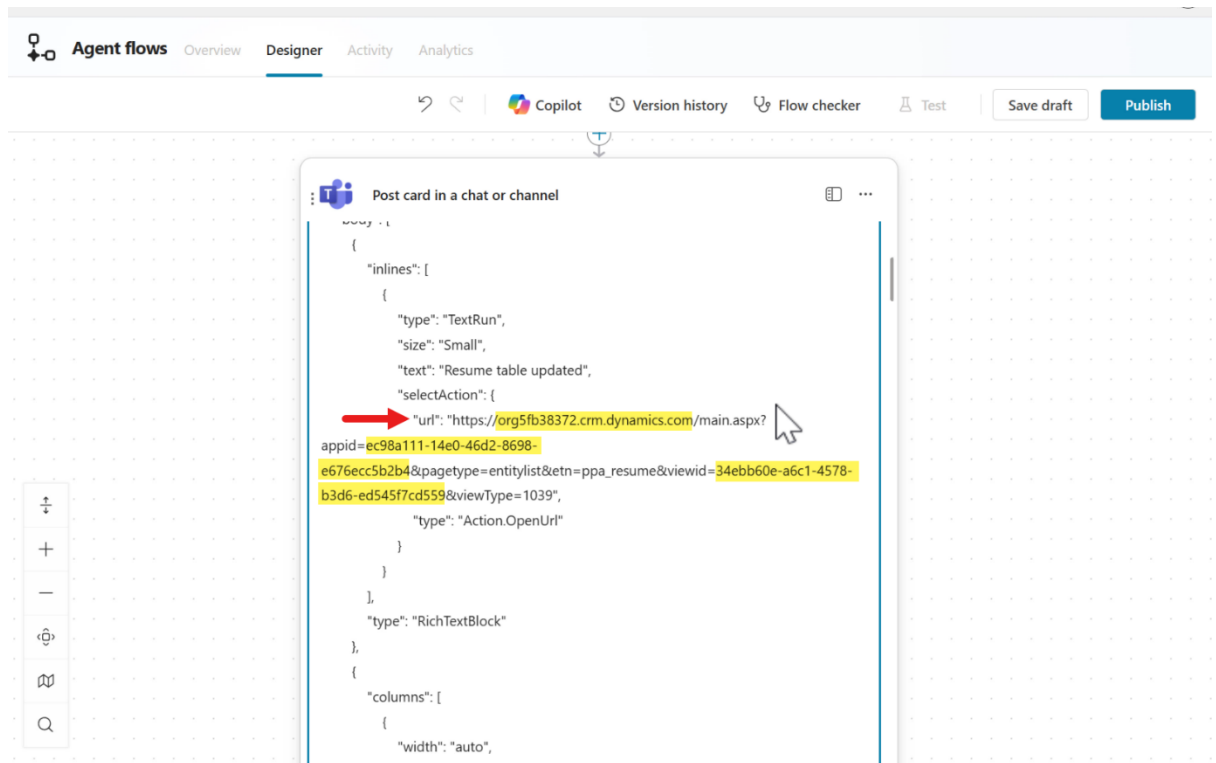


21.

22. Next, we'll add dynamic content values for several properties. Let's start with the text that will display the Resume Number reference of the row that was created by the event trigger autonomously.

Select the **panel** icon to load the action panel.

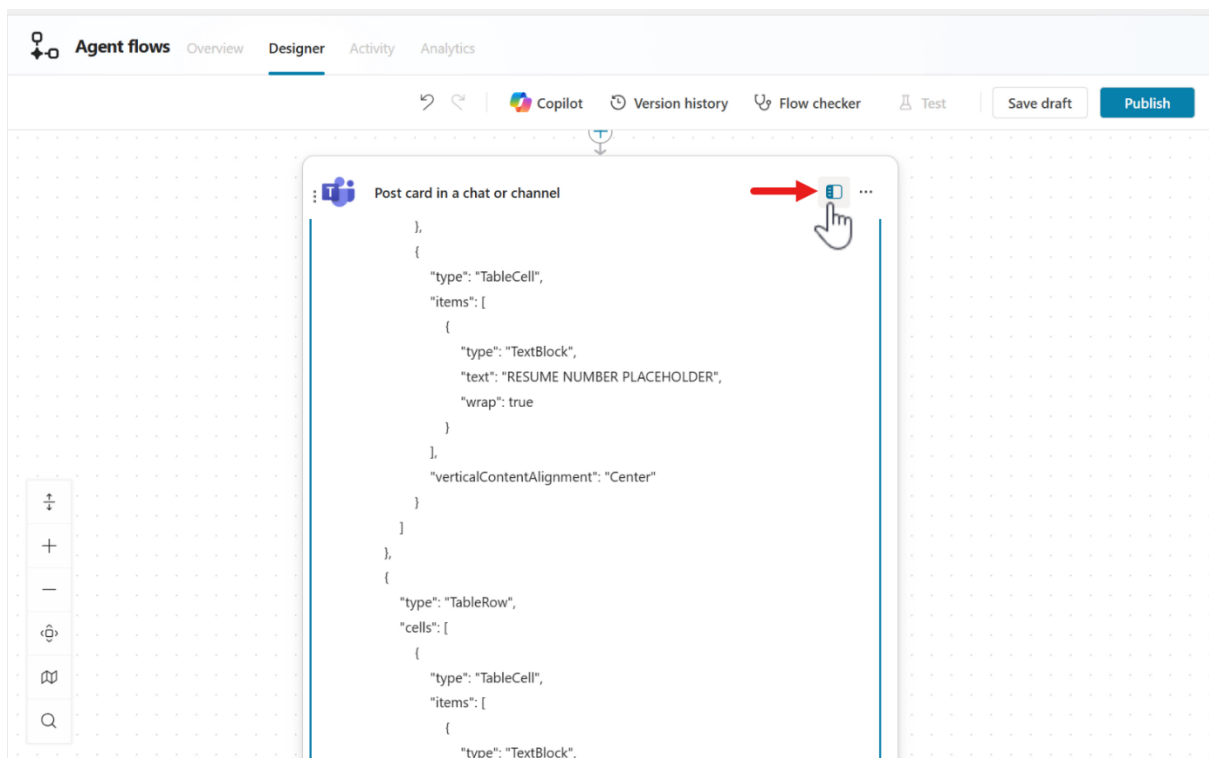


23. Scroll down to the line where you see the text property for RESUME NUMBER PLACEHOLDER. Highlight the placeholder value and delete it.

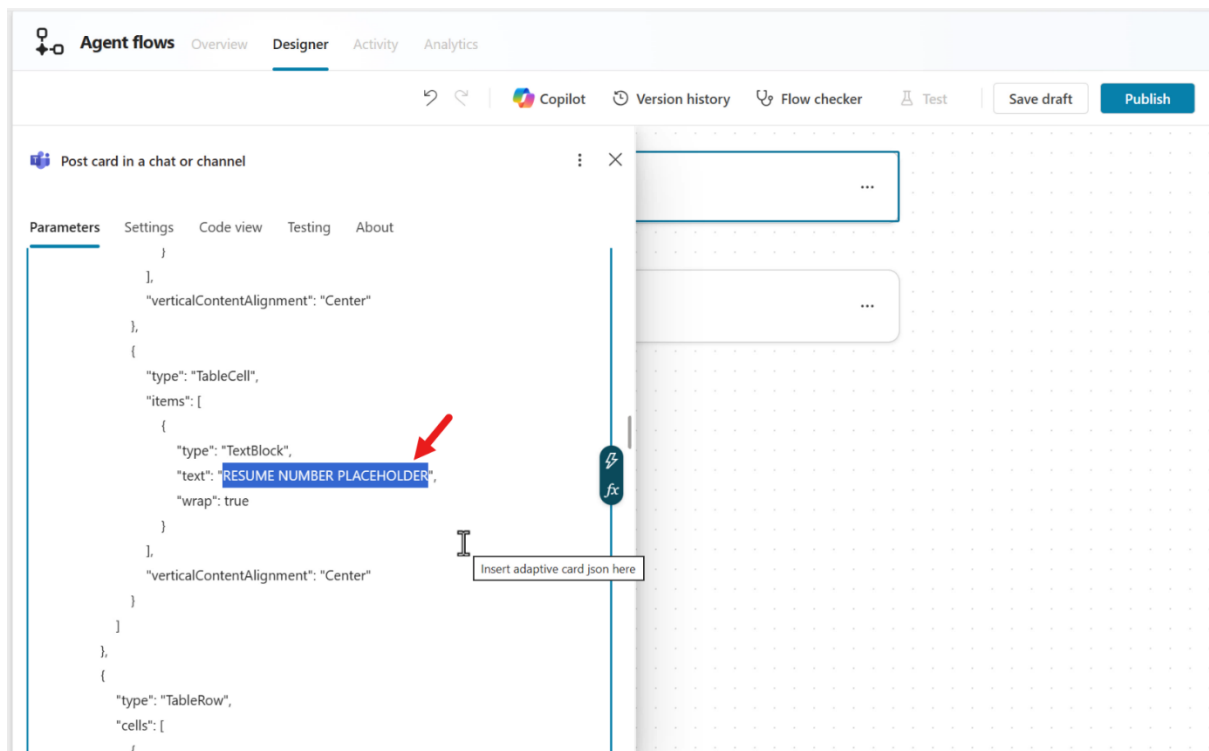


24. Click in-between the double quotation marks and select the **lightning bolt icon** or **fx icon** to the right.


In the **Dynamic Content** tab select the **ResumeNumber** parameter and select **Add**.

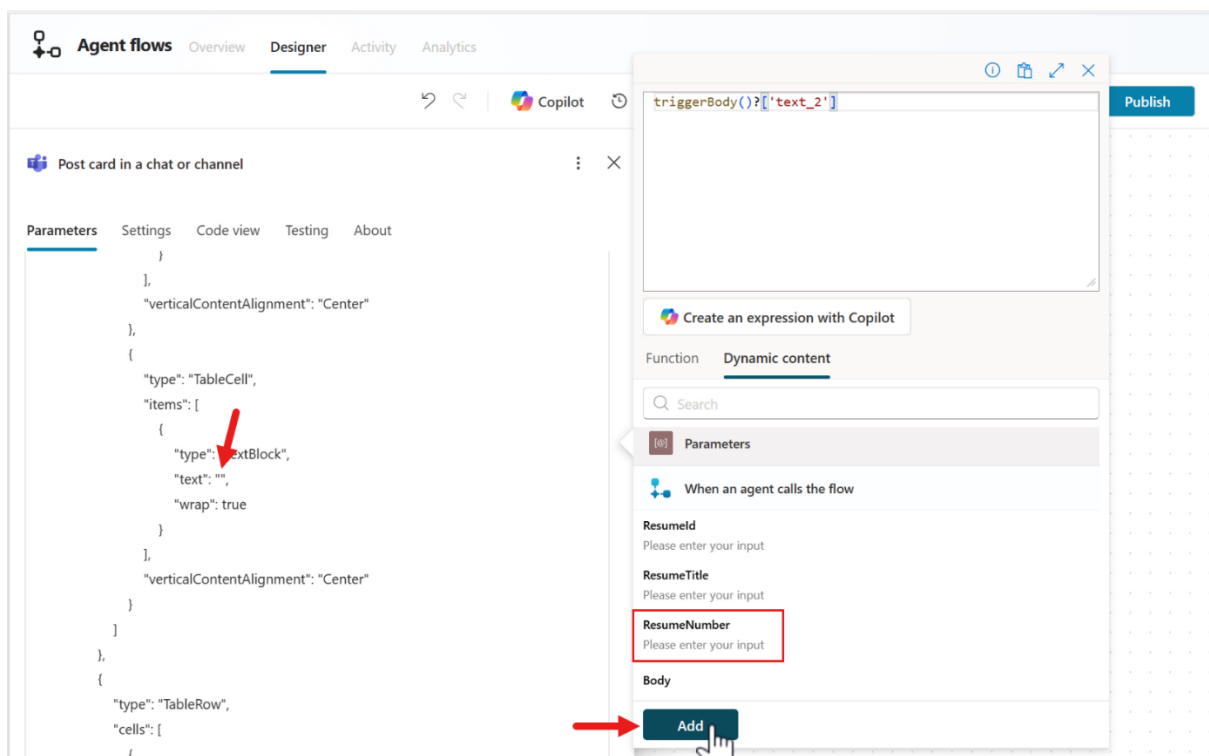

25. The **ResumeNumber** parameter will now be added as dynamic content to the text property.

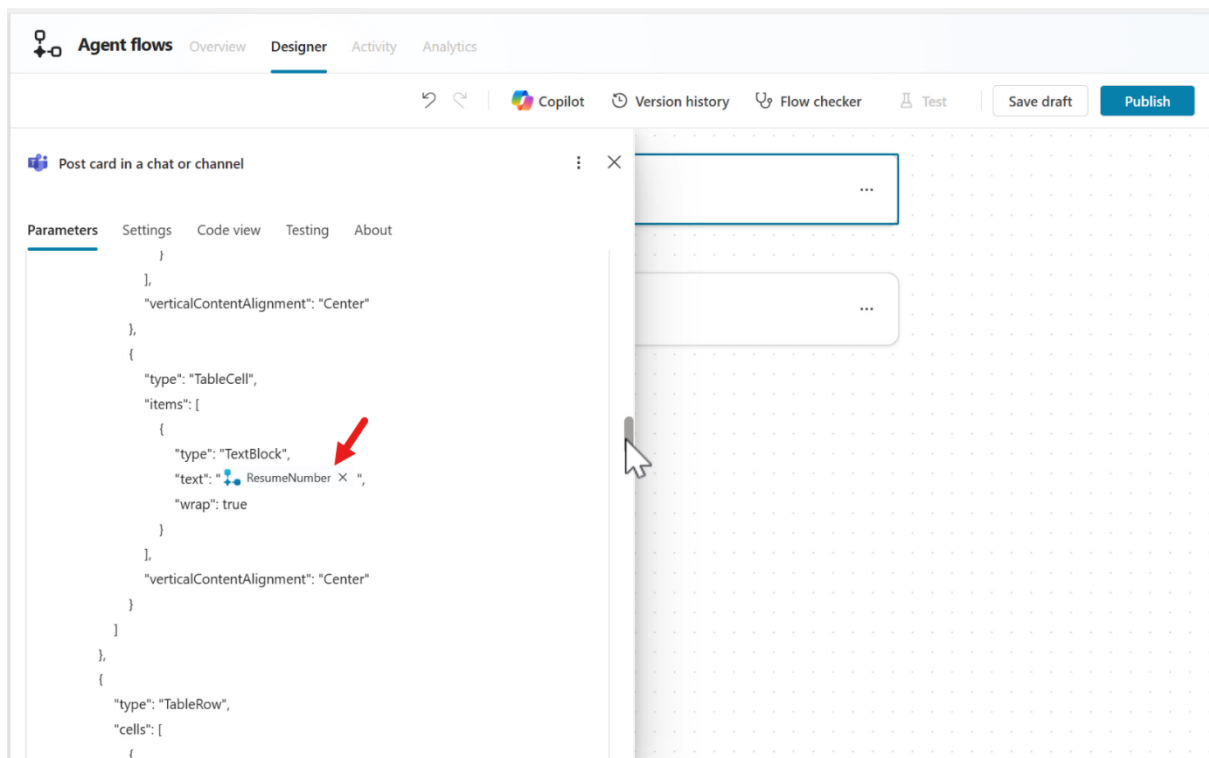


26. We'll repeat the same steps for the RESUME NAME PLACEHOLDER. Scroll down to the line where you see the text property for RESUME NAME PLACEHOLDER. Highlight the placeholder value and delete it.

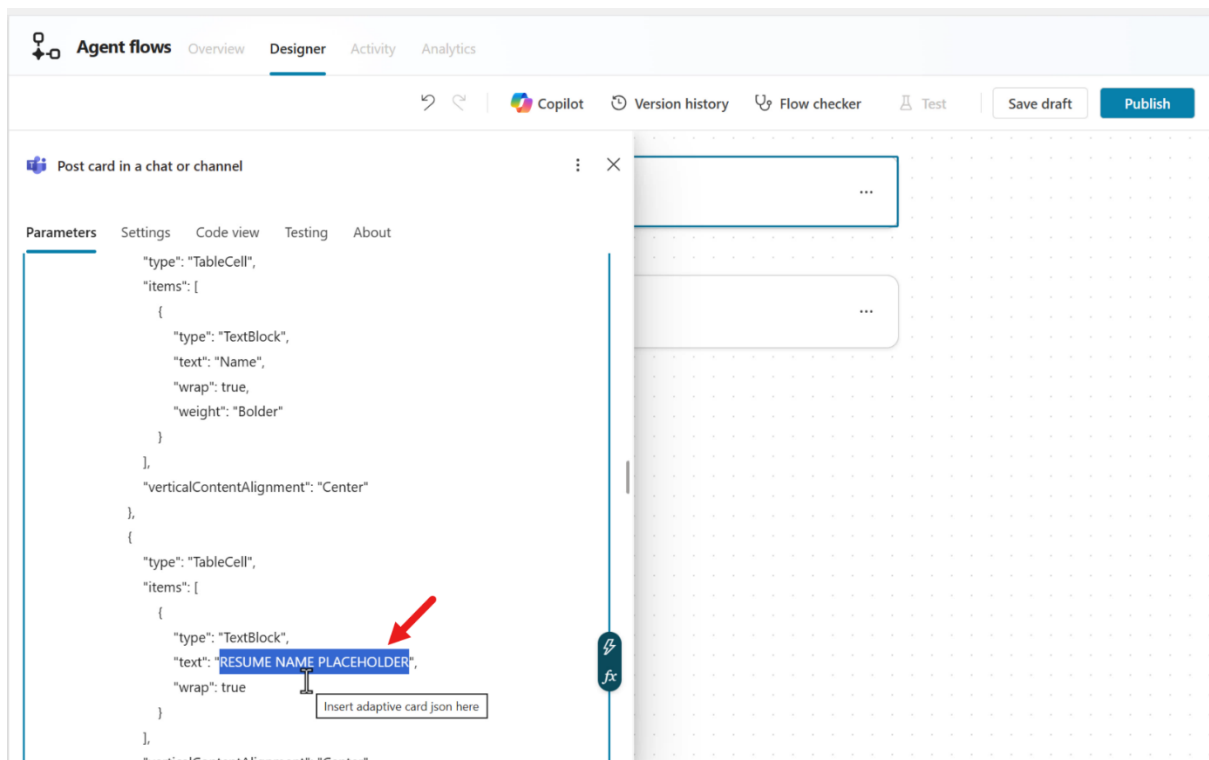


27. Click in-between the double quotation marks and select the **lightning bolt icon** or **fx icon** to the right.


In the **Dynamic Content** tab select the **ResumeTitle** parameter and select **Add**.

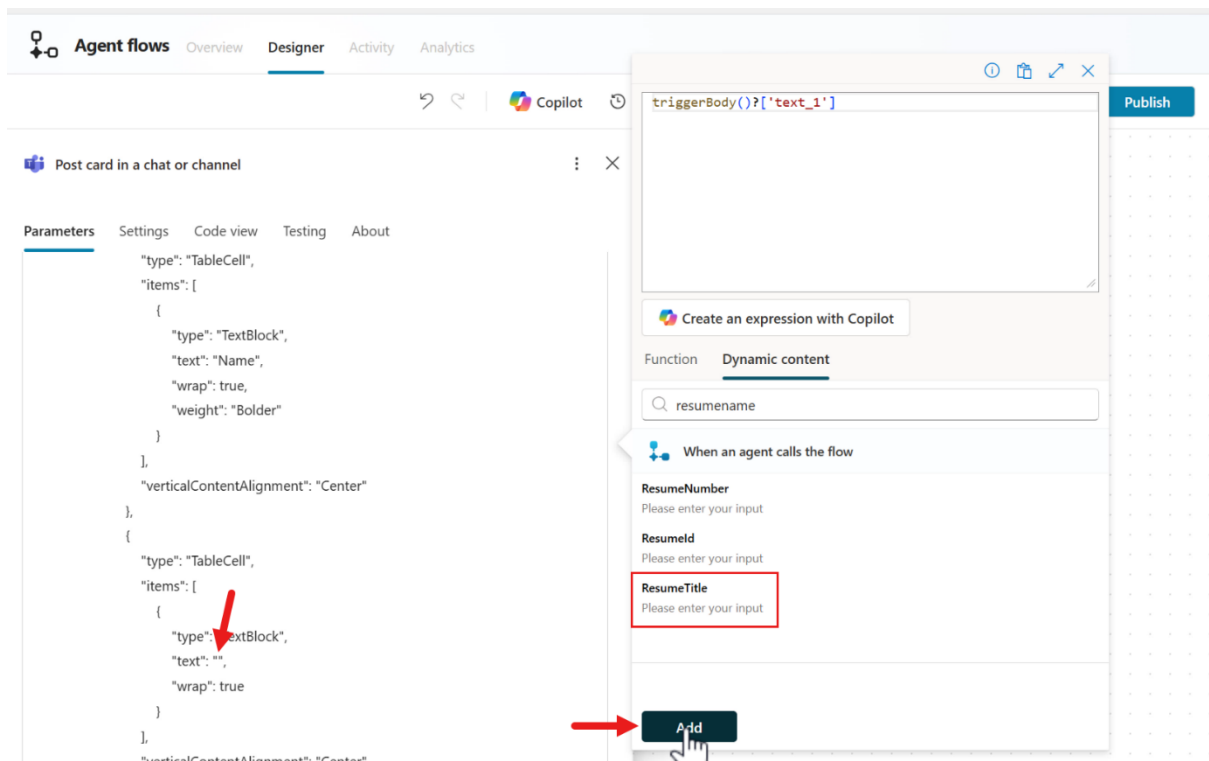


28. The **ResumeTitle** parameter will now be added as dynamic content to the text property.

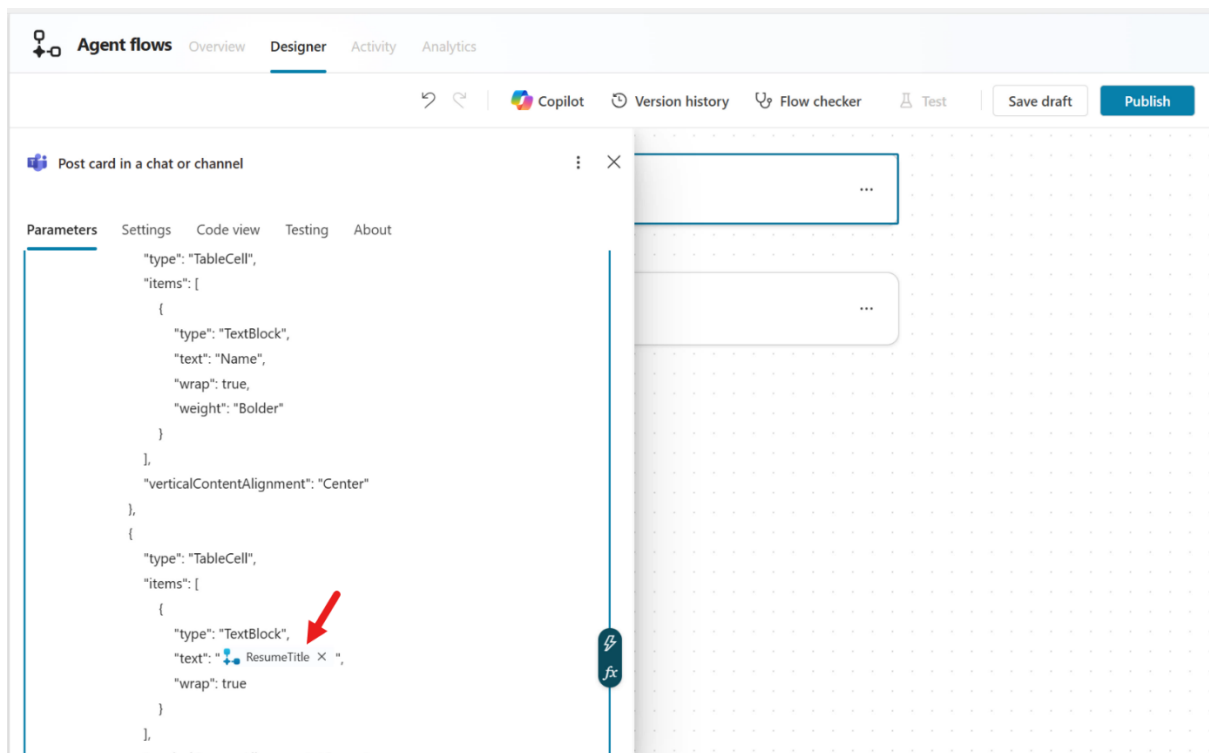

29. We'll repeat the same steps for the **Due Date** value that represents when a recruiter should review the resume by. Scroll down to the line where you see the text property for May 21, 2023.

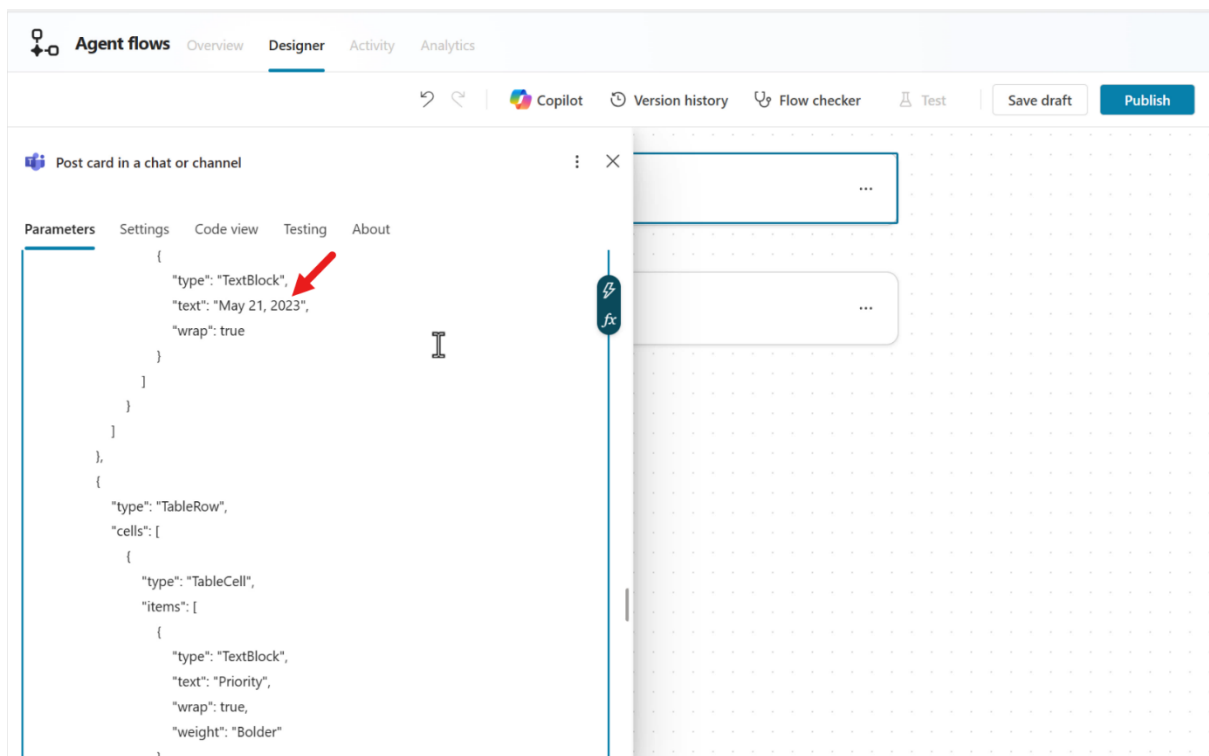

30. Delete this date placeholder value and click in-between the double quotation marks.

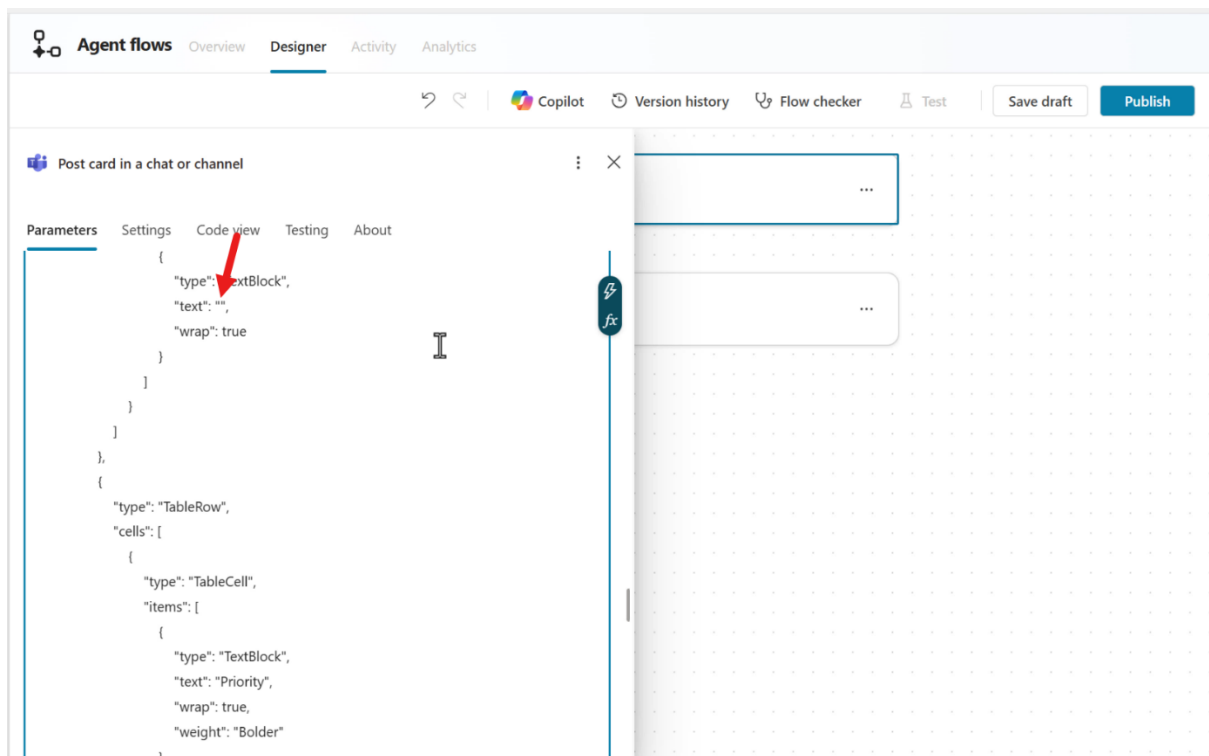


31. Select the **lightning bolt icon** or **fx icon** to the right and in the **Function** tab, enter the following expression and select **Add**.

```
addDays(utcNow(), 3, 'MMM dd, yyyy')
```


This expression utilizes two functions.

Function	Explanation
addDays	Adds a specified number of days to a given date and returns the resulting date in string format
utcNow	Returns the current date and time in Coordinated Universal Time (UTC) format as a string.


For the utcNow value, we are formatting the date to be month and date, followed by the year.

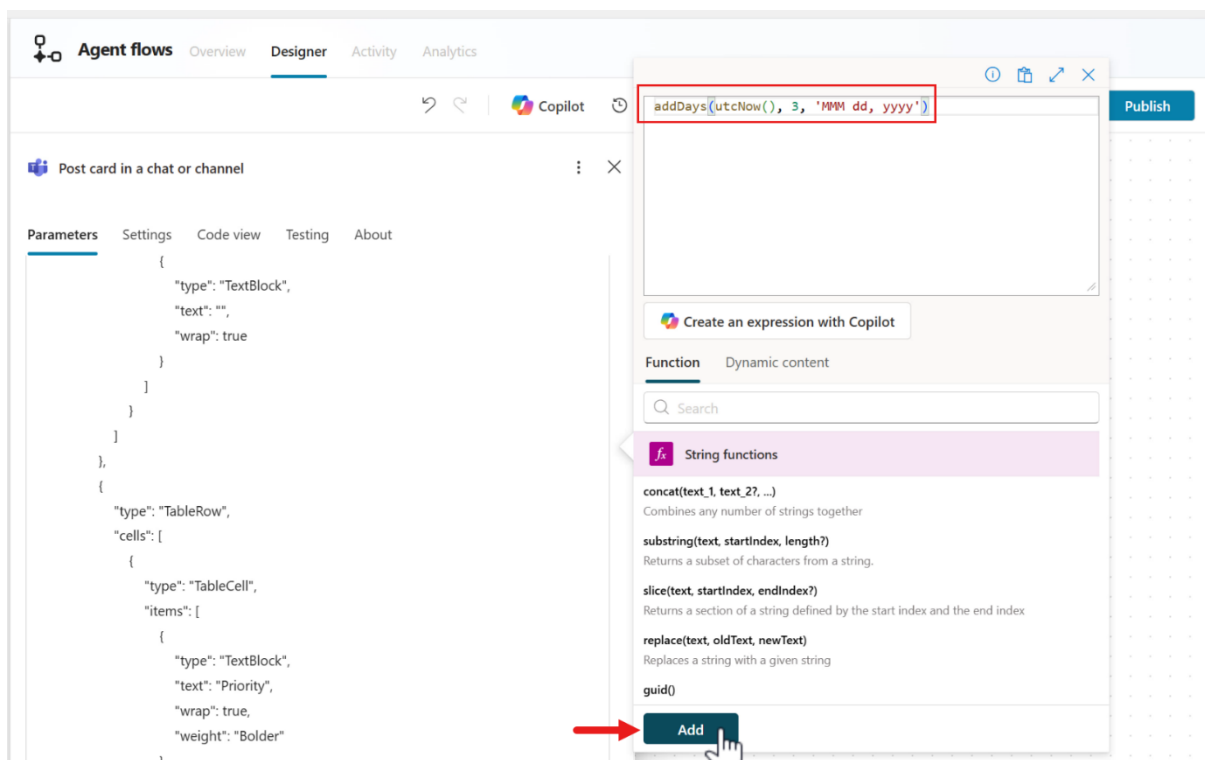

The expression will now be added to the text property.

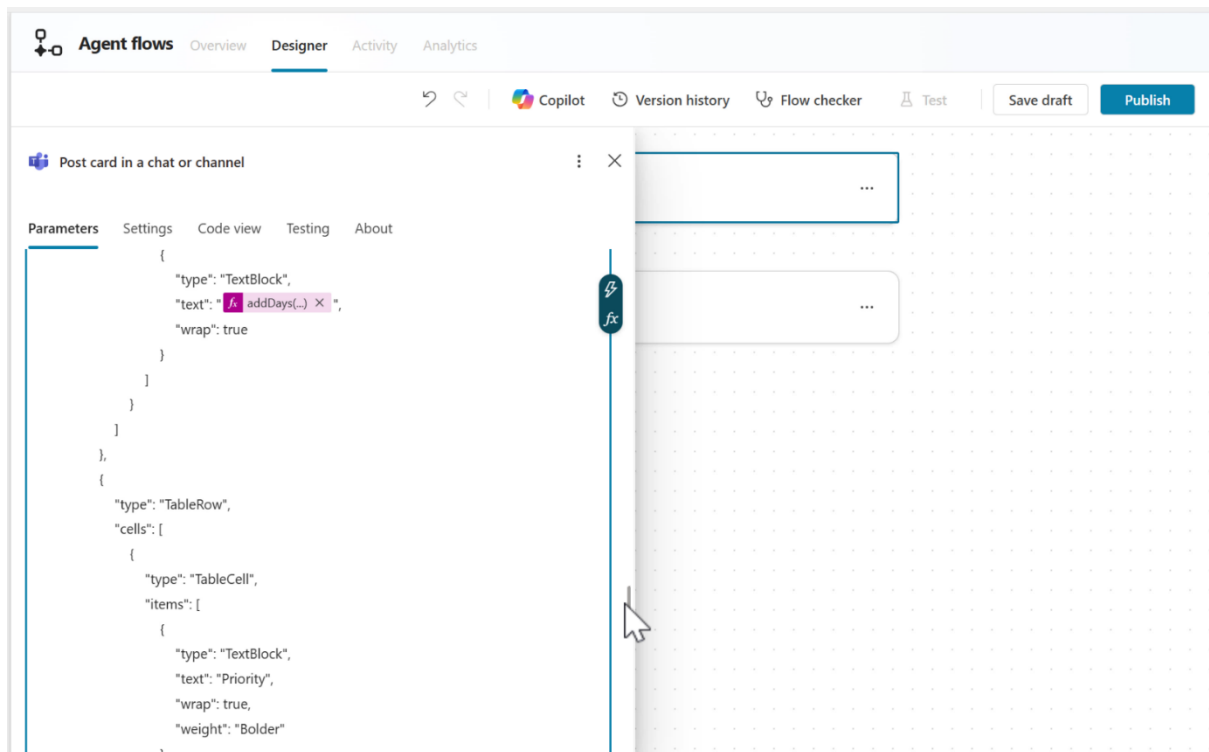


32. Lastly, we'll update the URL for the url property within the actions array property at the bottom of the JSON payload. This current placeholder URL will be replaced with the URL of the Resume row in the **Hiring Hub** model-driven app. This will allow the Recruiter to select the Action.OpenURL action of the adaptive card and be directed to the Resume in the model-driven app.

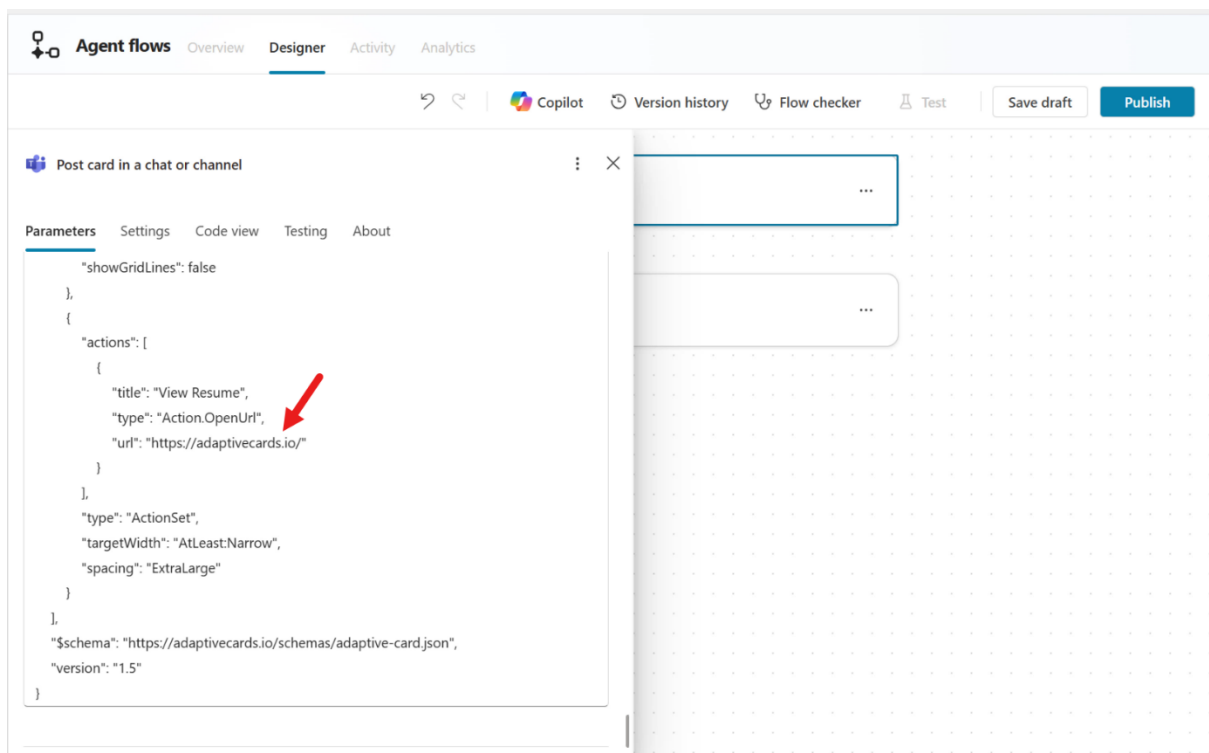


33. In the **Hiring Hub** model-driven app, open a row in the **Resumes** system view using the left hand side menu. The resume row will load as a form in the model-driven app.


Copy the URL for the Resume row.

1.

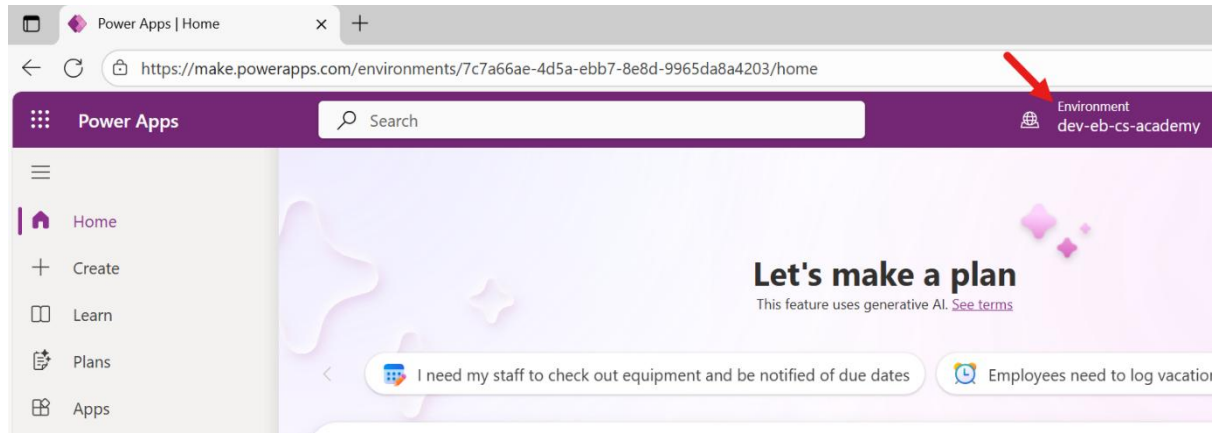


2.

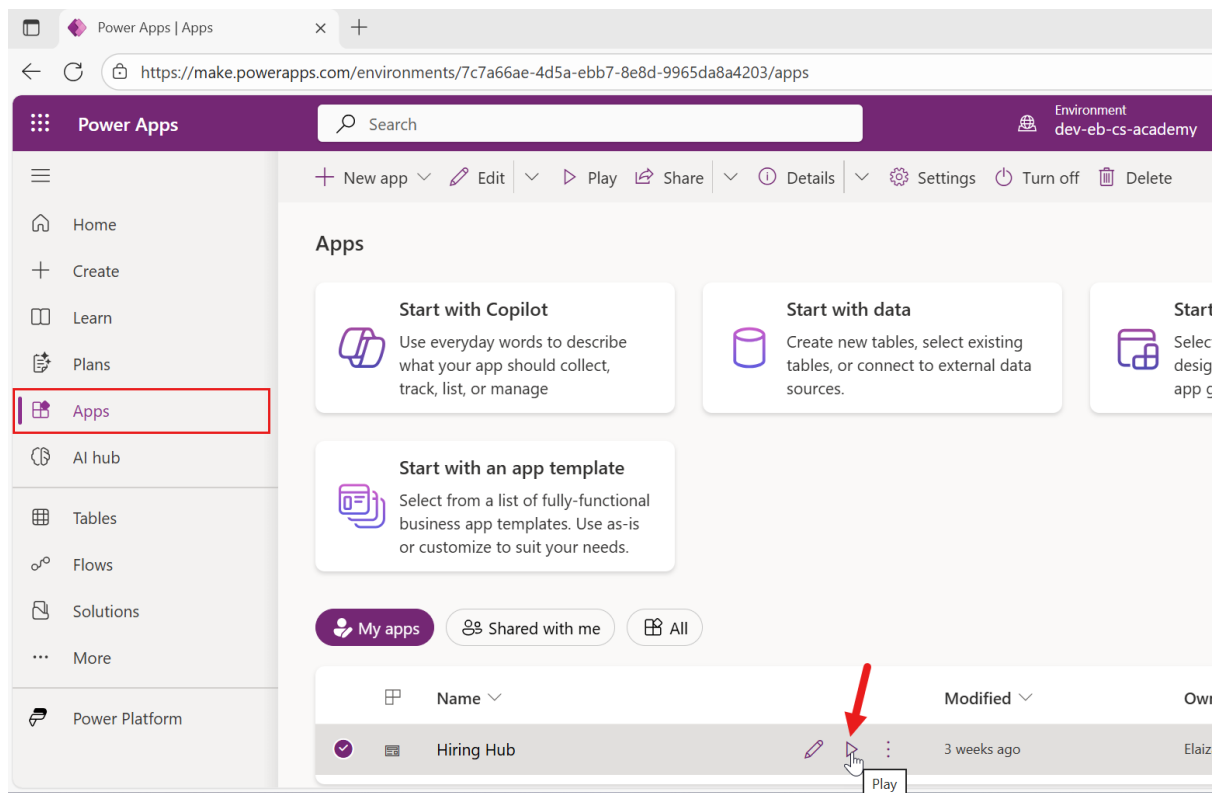


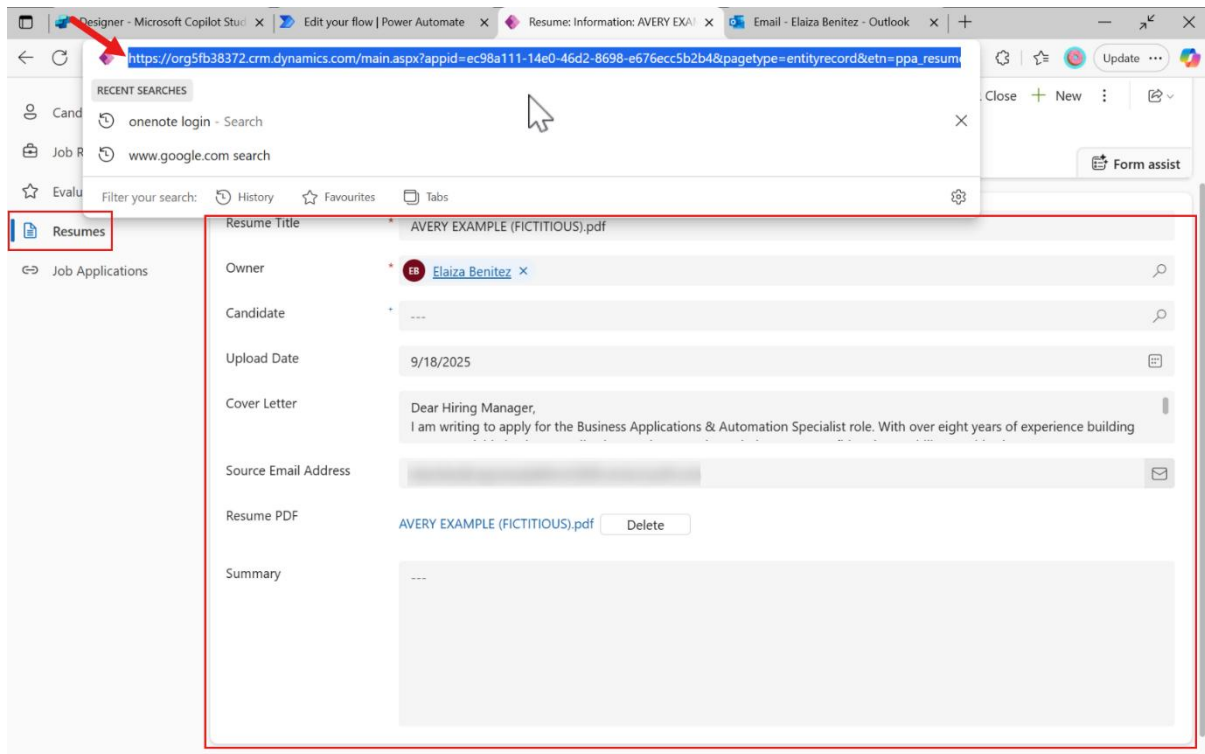


34. Then navigate back to the agent flow, highlight the current placeholder URL value and delete it.

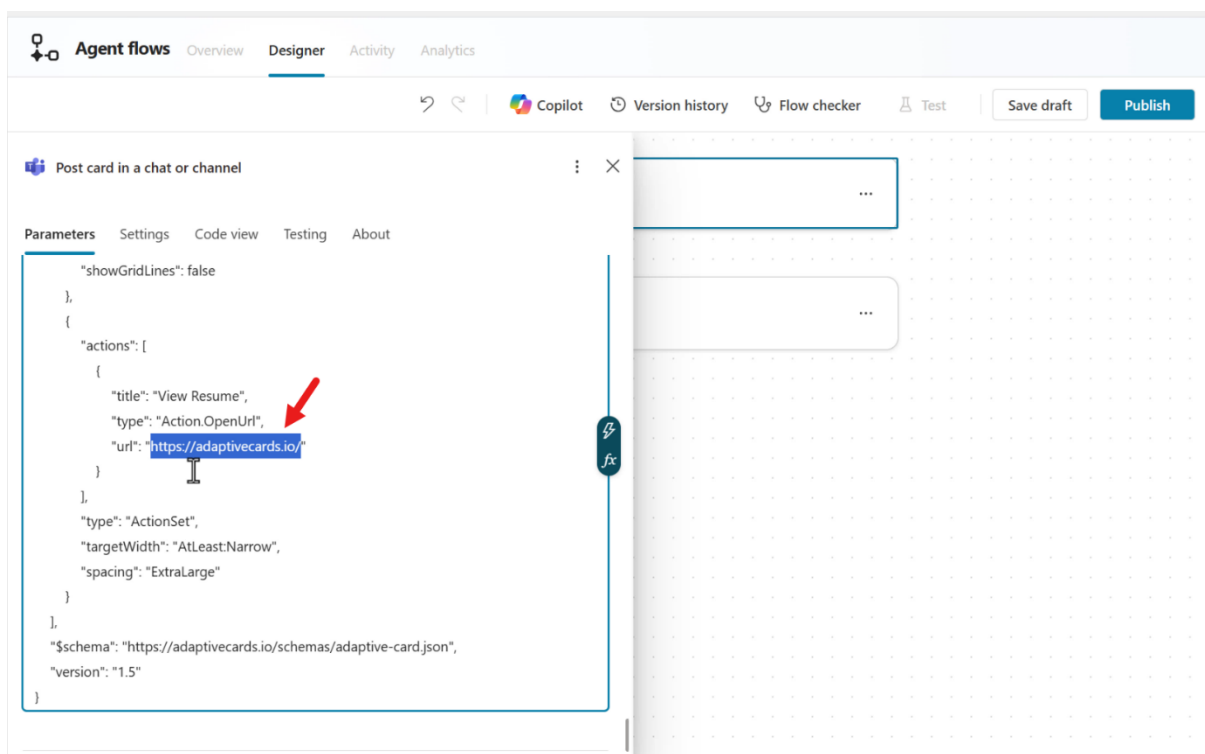

35. Then paste the copied URL into the **url** property of the within the url property.

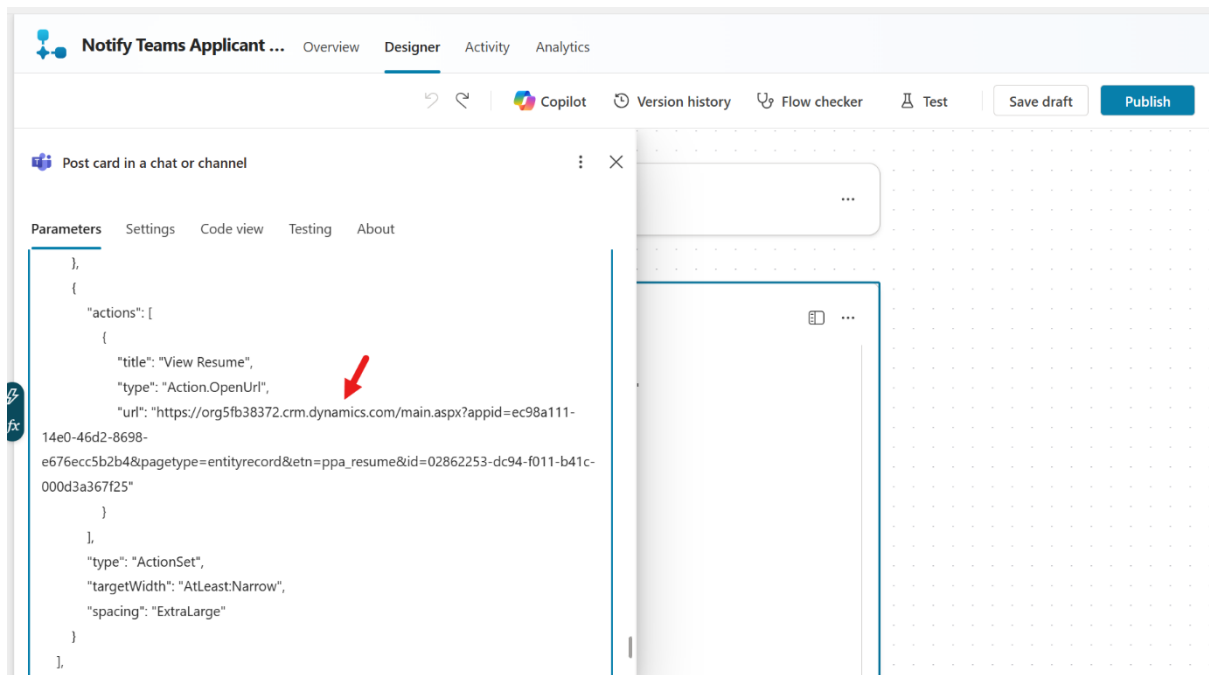


36. You should see the following. Delete the GUID id value at the end. We'll replace this dynamic content - the **Resumeld** parameter.

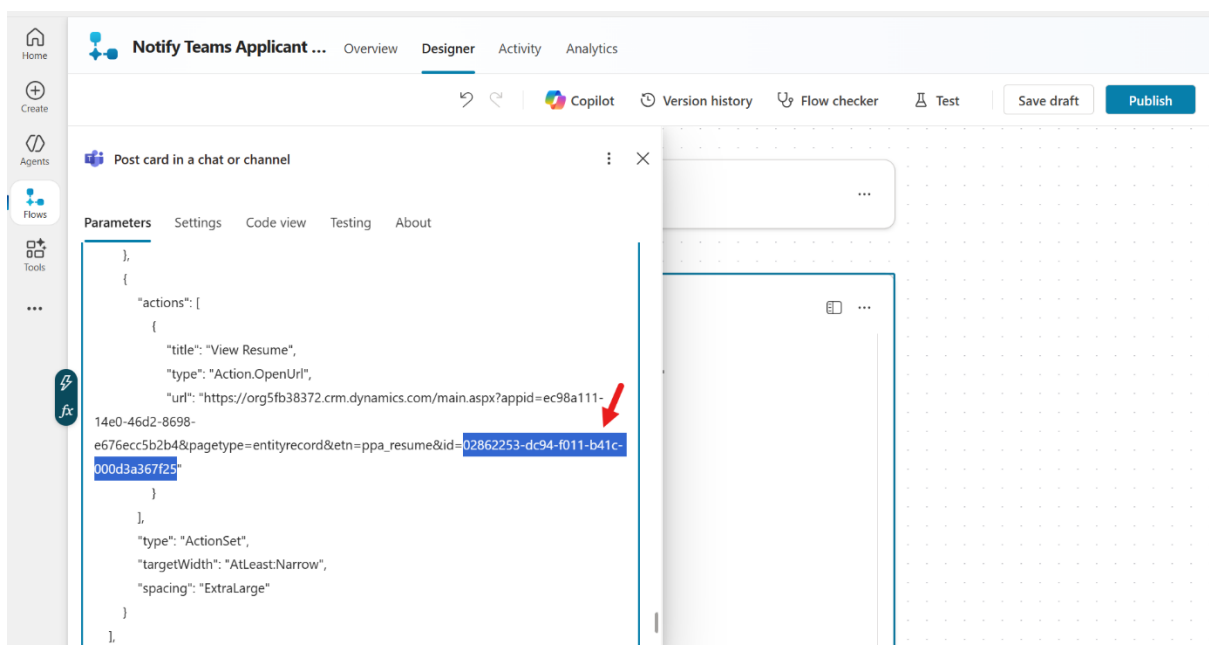


37. Select the **lightning bolt icon** or **fx icon** to the right.

In the **Dynamic Content** tab select the **Resumeld** parameter and select **Add..**

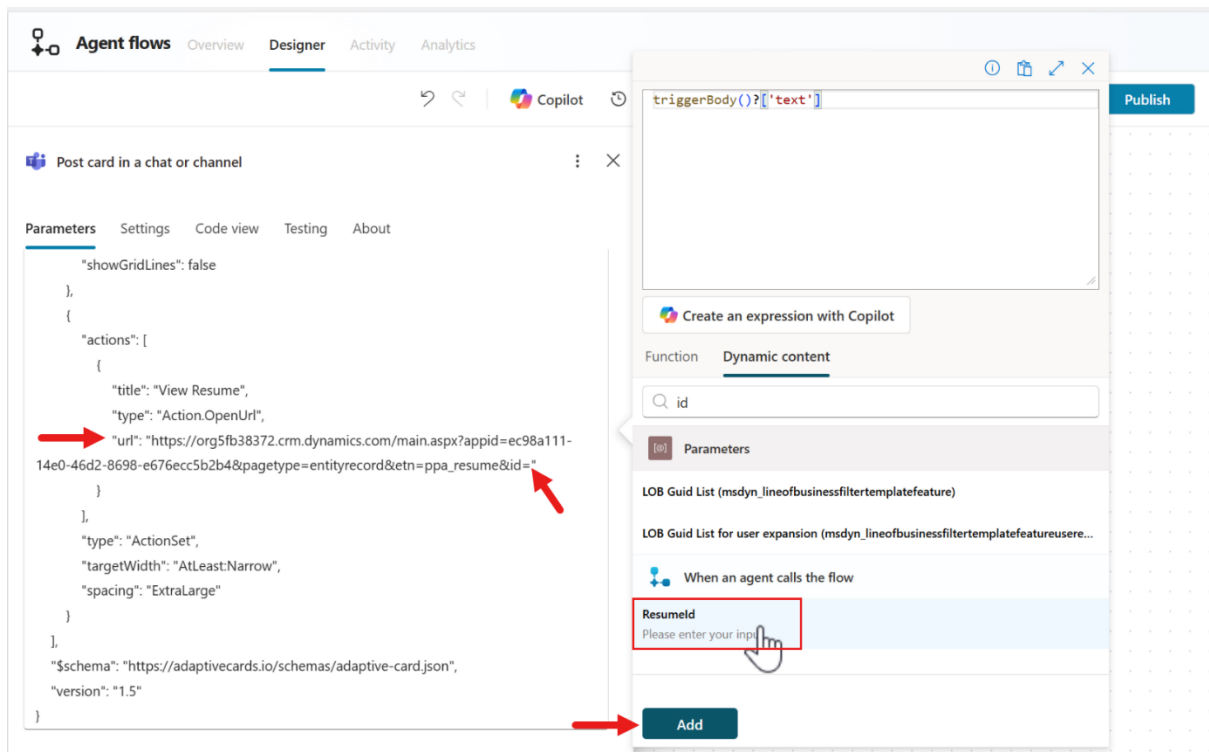


38. The **Resumeld** will be added as dynamic content. The following highlighted in Yellow is your environment details of the **Hiring Hub** model-driven app.

Parameter	Value	Explanation
Organization URI	GUID	The Dataverse/Dynamics 365 environment organization URL
appid	GUID	To open a specific model-driven app, the query parameter of either appid or appname is used. In this case, the appid is used
id	GUID	The query parameter which is the id of the Resume row

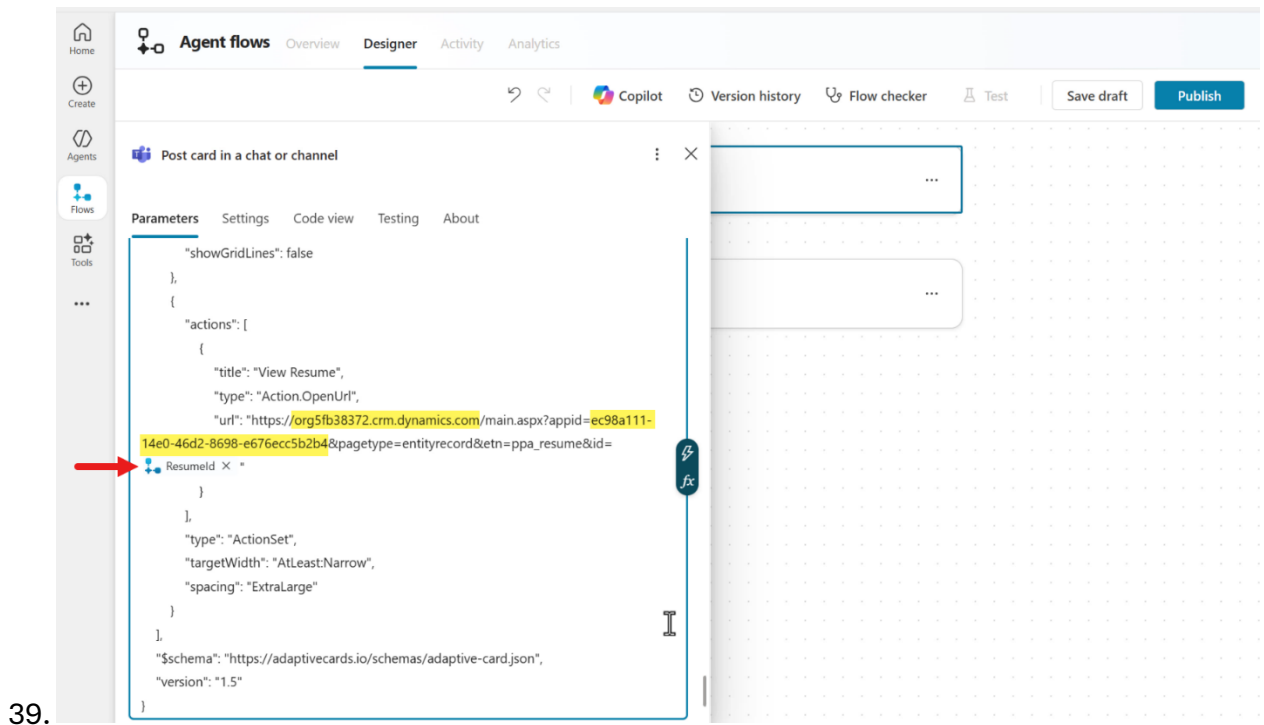


40. We've completed configuring the **Post card in a chat or channel** action 🙌 Exit from the action configuration panel by selecting the **x** icon.

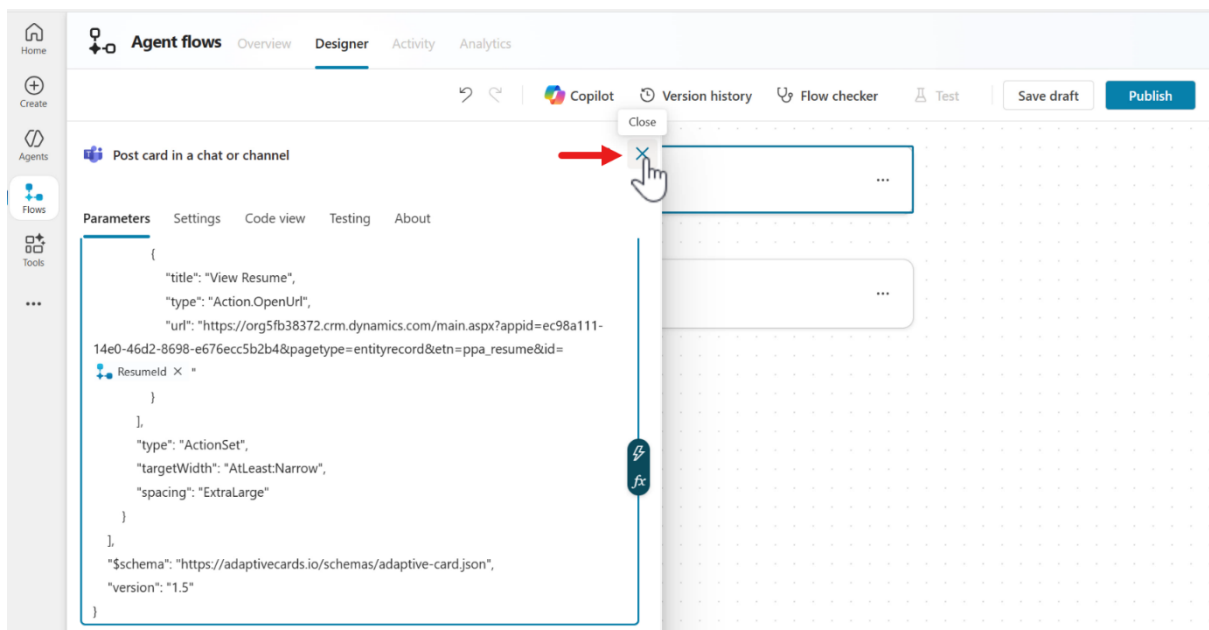


41. Finally, we'll configure the last action, **Respond to the agent** by sending a text back to the agent to end the processing.


In the **Respond to the agent** action, select **+Add an output**.

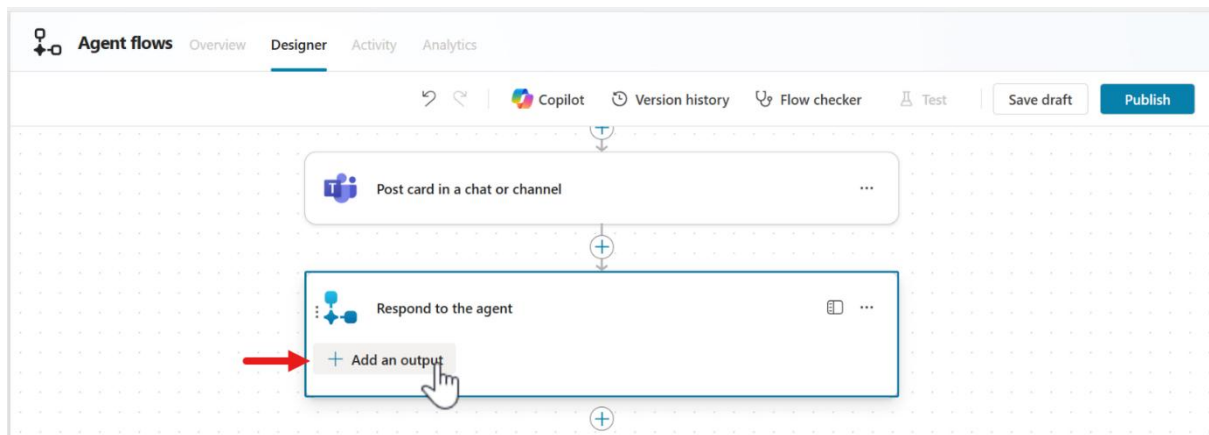

42. Select **Text** as the type of output.

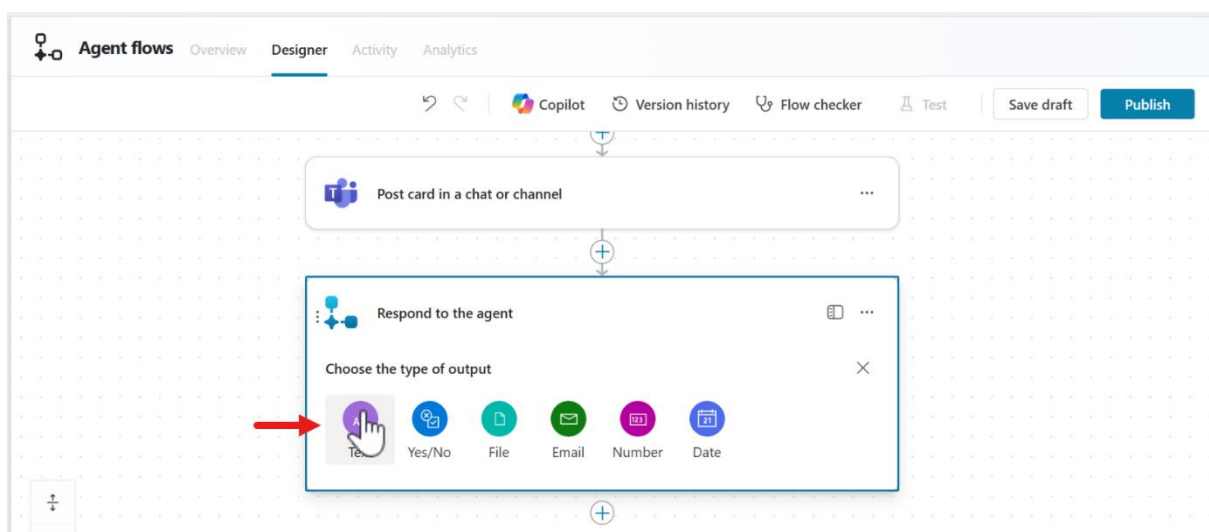


43. Enter the following as the name of the output: **EndConversation**

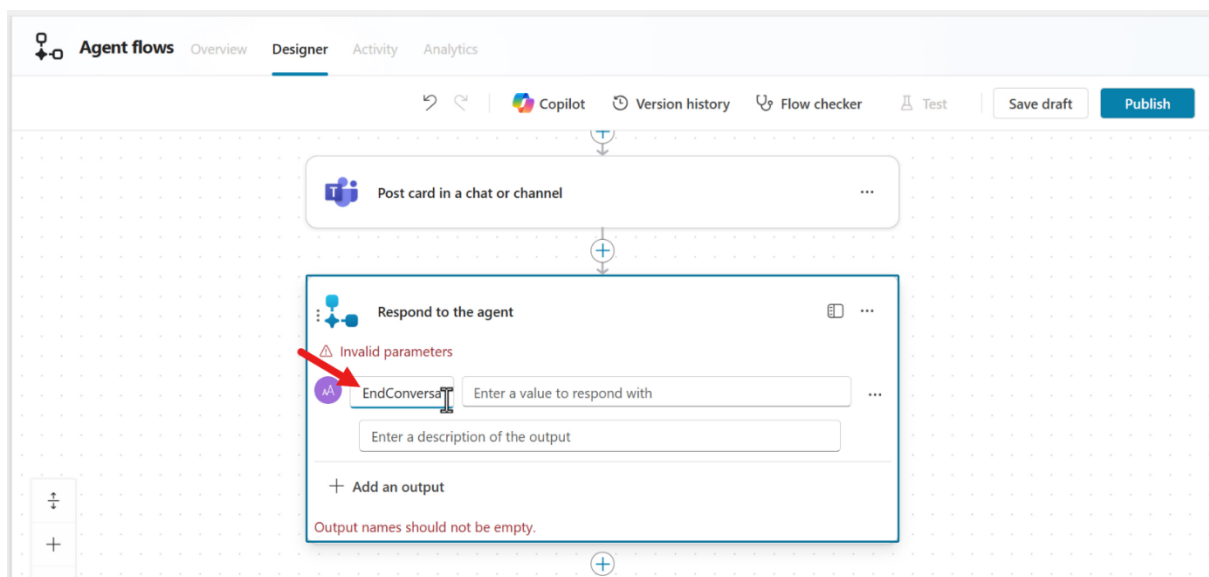


44. Enter the following as the value for the output.

Finished

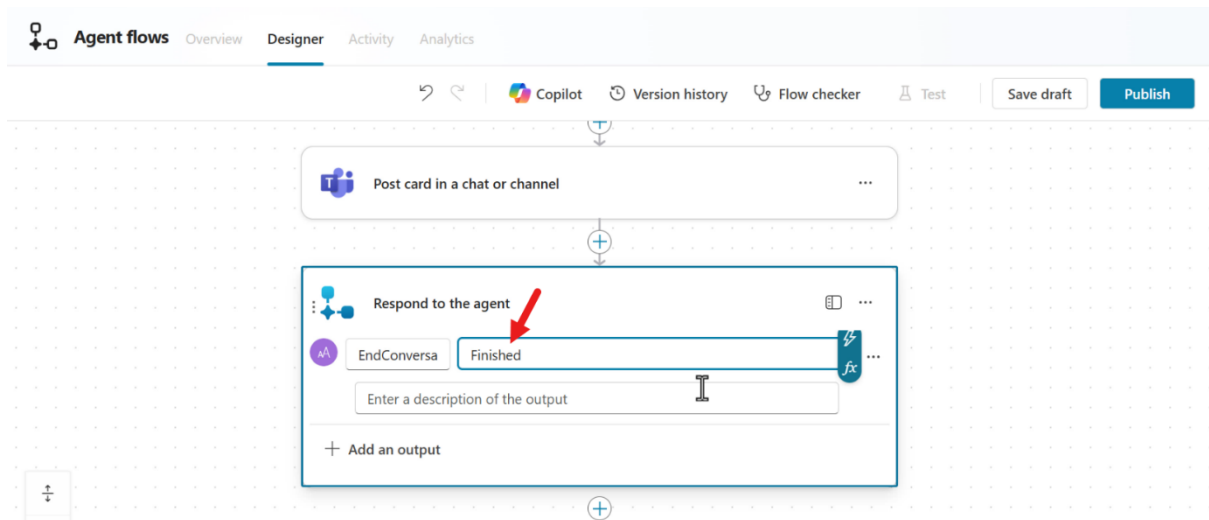

45. We've now completed configuring the agent flow. Select **Save draft** to save the agent flow. A confirmation message will appear once saved.

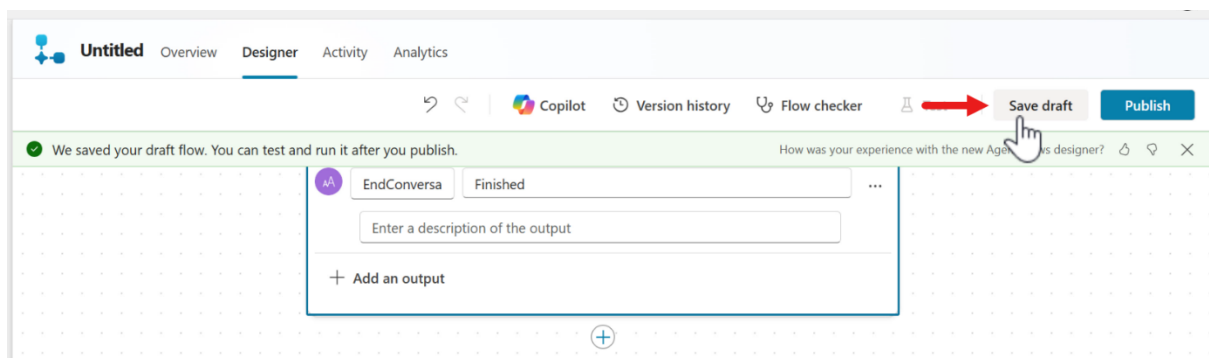


46. Before publishing the agent flow, we need to update the details for the agent flow. Select the **Overview** tab and select **Edit**.

In the flow name field, enter the following.


Notify Teams Applicant channel

Afterwards, select the **Refresh** icon to update the description of the agent flow using AI.


Then select **Save** to save the updated details for the agent flow.

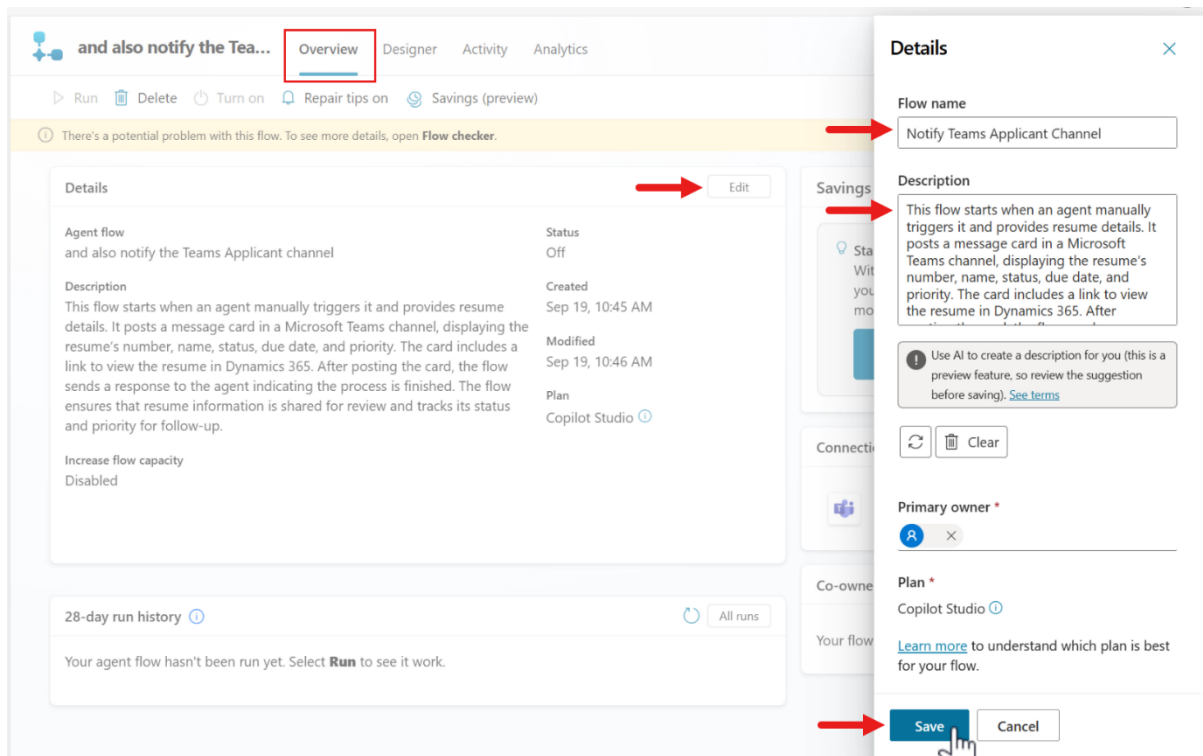

47. Navigate back to the **Designer** tab and select **Publish** to publish the agent flow. A confirmation message will appear once saved.

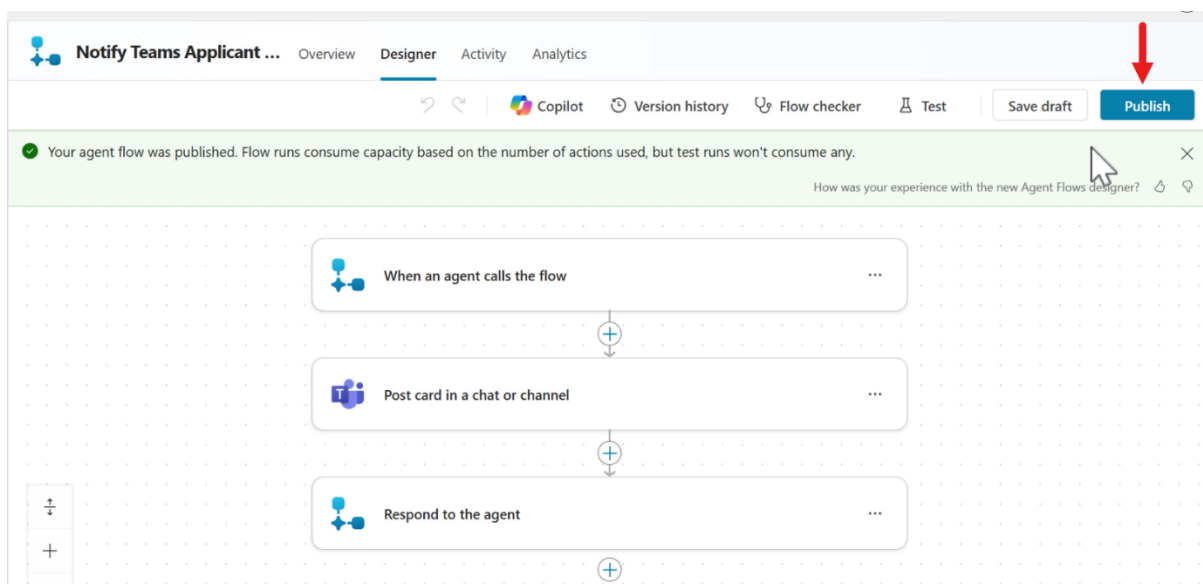


48. The agent flow now needs to be added as a tool in the **Application Intake Agent**. Navigate back to the **Hiring Agent** and select the **Agents** tab, then select the **Application Intake Agent**.

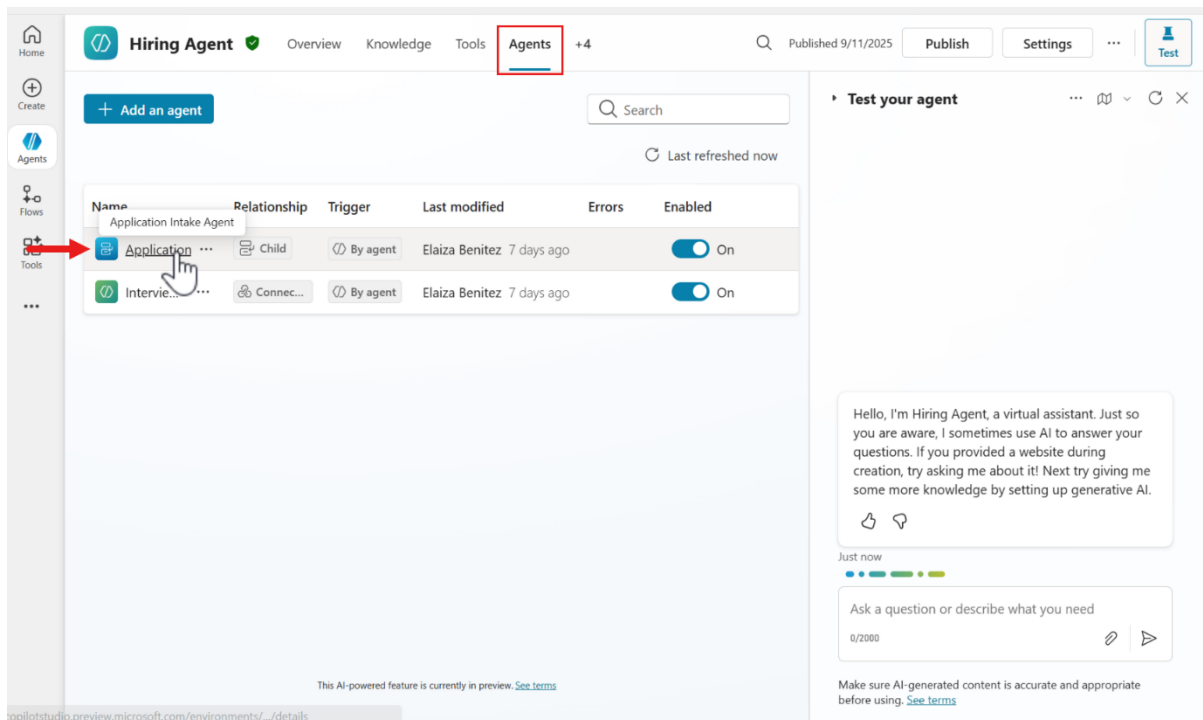


49. In the **Details** section of the agent, we'll update the **Description** field. Copy the following and paste and the end of the description text.


and also notifies the Teams Applicant channel

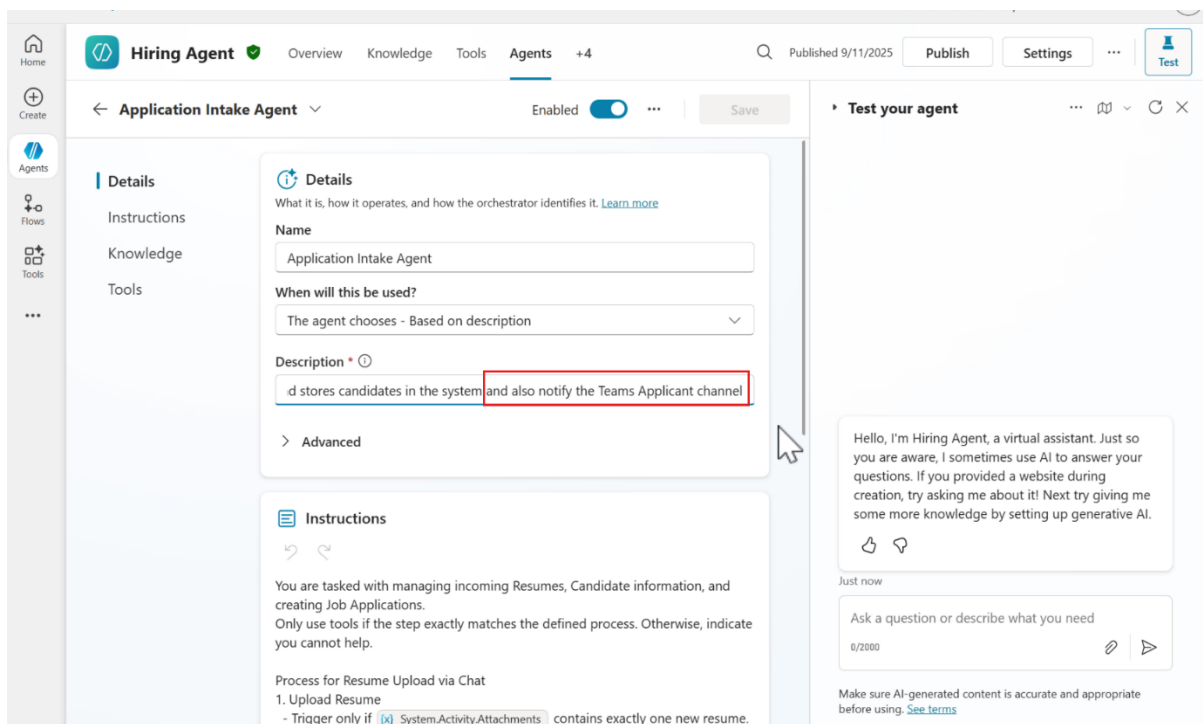


50. Next, we'll add the agent flow as a tool. Scroll down to the **tools** section and select **+ Add**.

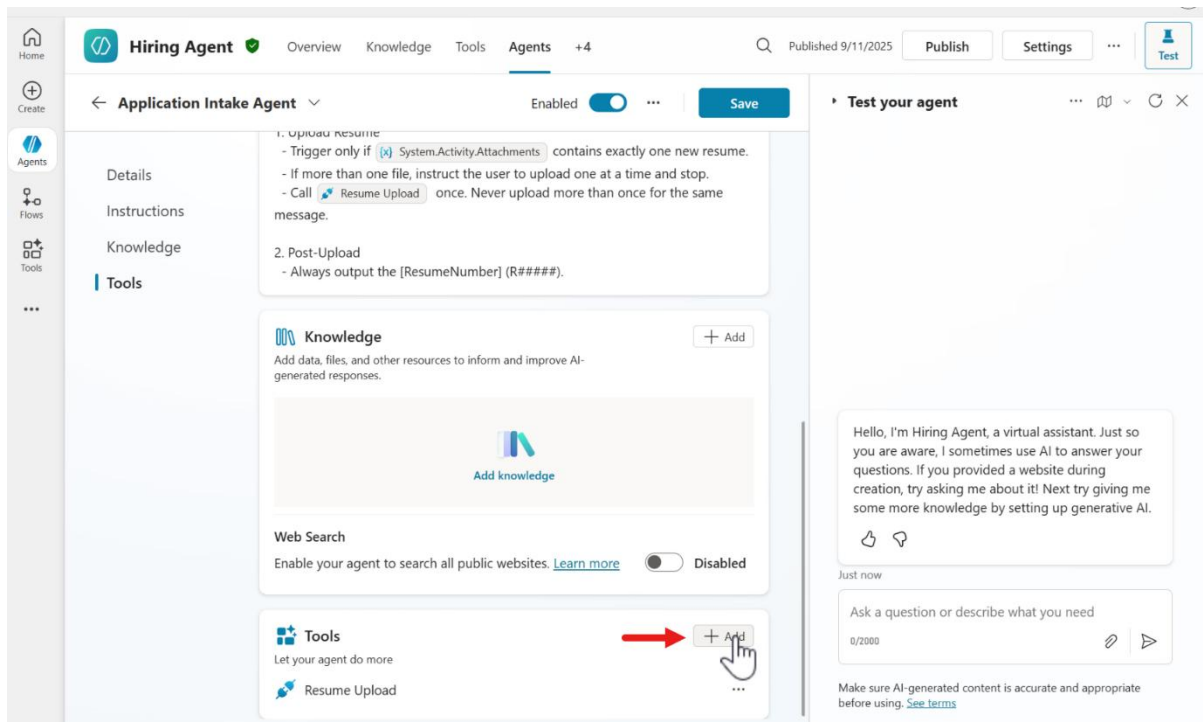


51. Select the **Flow** tab and choose the agent flow created earlier, **Notify Teams Applicant Channel**.

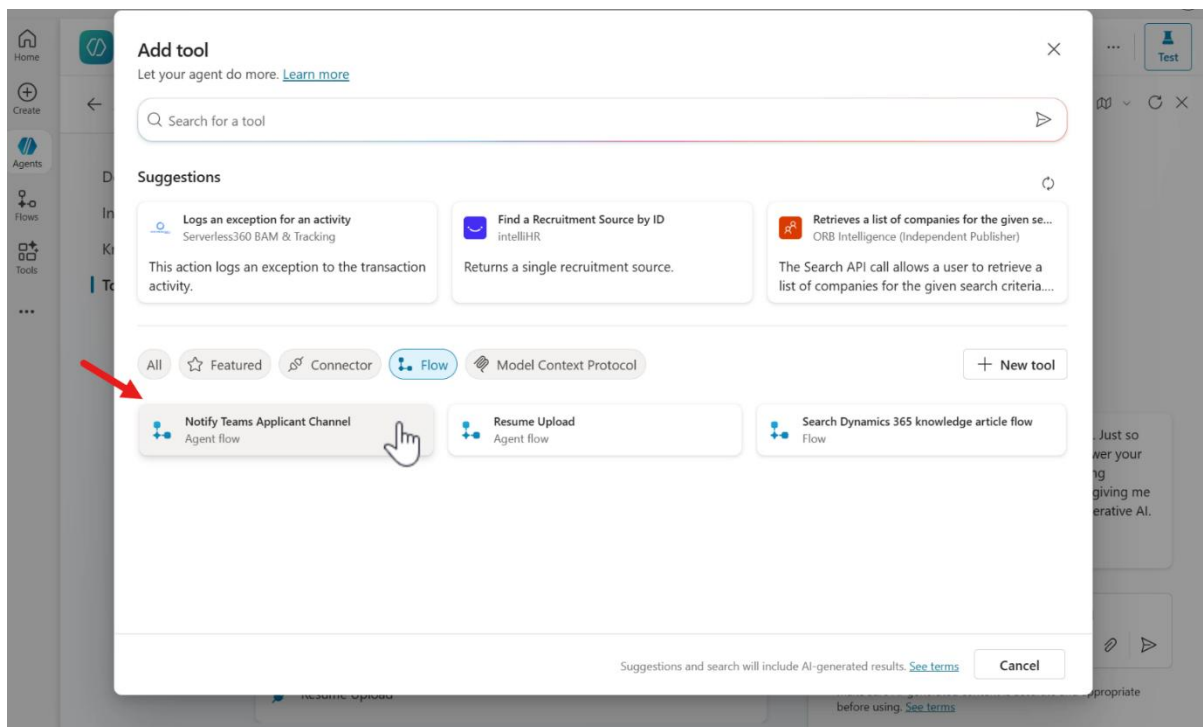


52. Select **Add and configure** next.

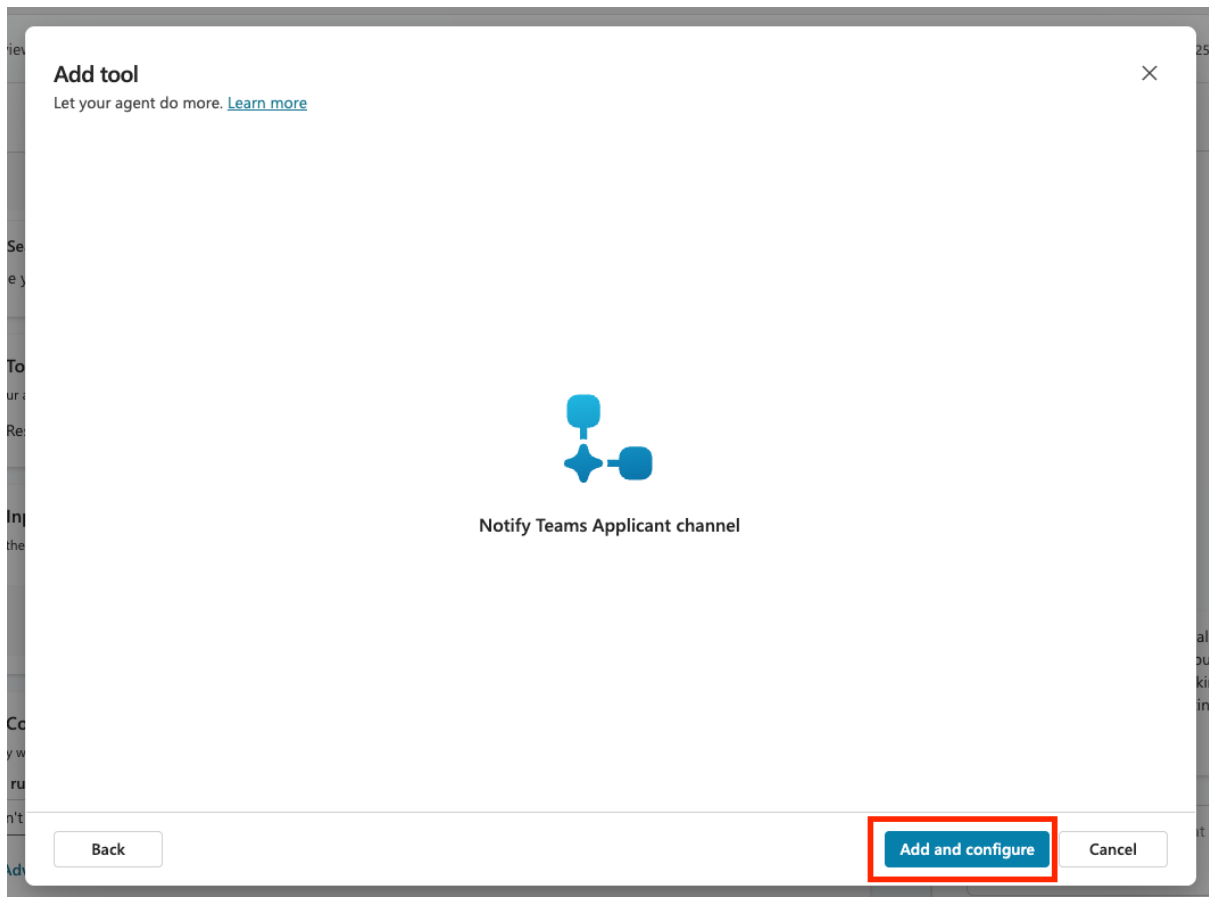


53. In the **Inputs** section, the three inputs we configured earlier in the agent flow are visible. By default, the **Fill using** configuration is set to **Dynamically fill with AI**. We'll keep this setting as-is as the prompt from the event trigger (in the last action, **Sends a prompt to the specified copilot for processing** - this is steps 38 - 44 of **Lab 4.1 - Automate uploading resumes to Dataverse received by email**) will contain the parameter values that AI will extract.

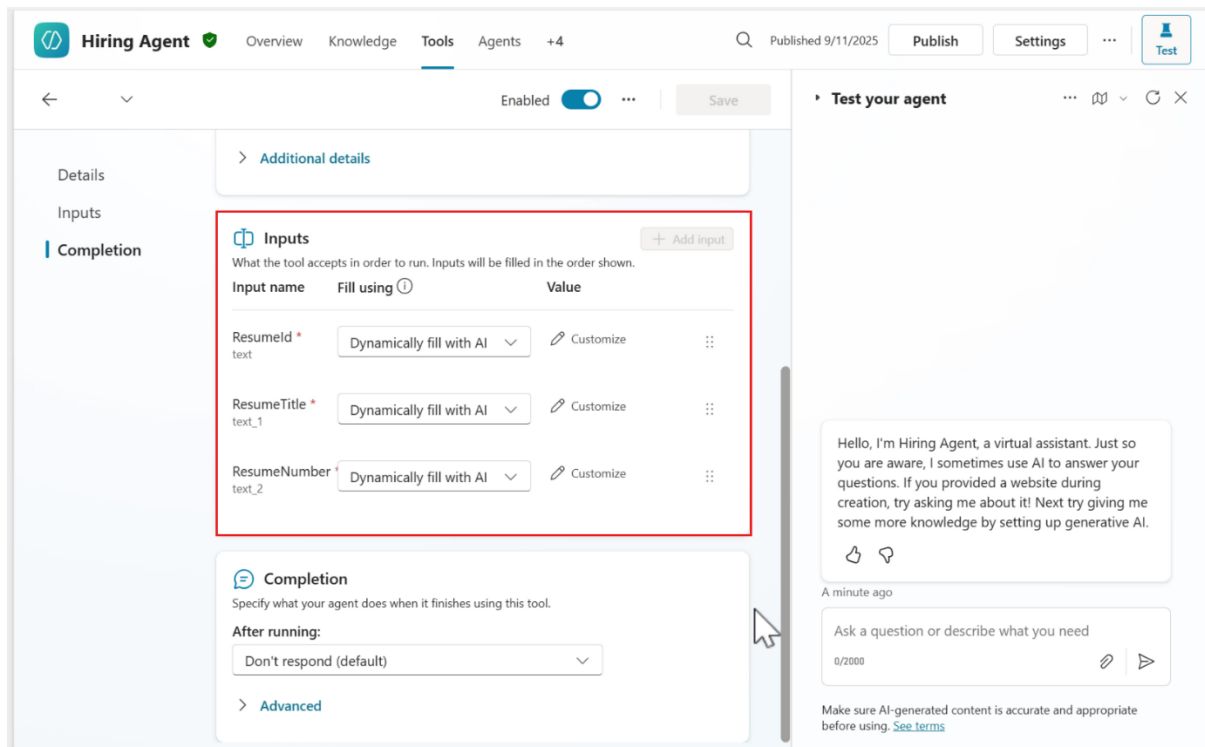

54. Now that the tool has been added to the **Application Intake Agent**, the instructions of the agent needs to be updated. Select the **back arrow** icon to return to the list of agents.

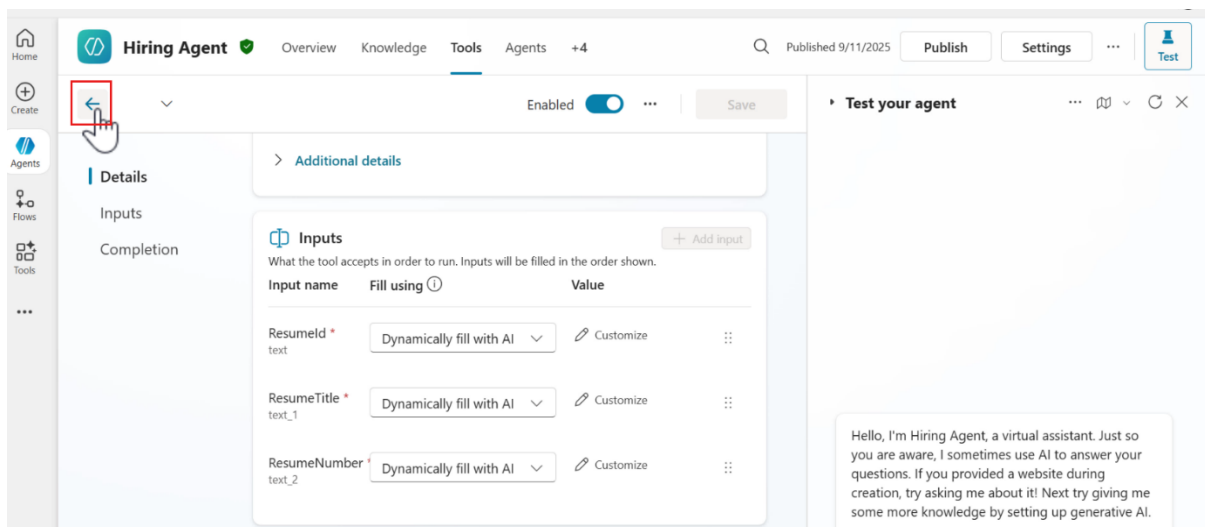

55. Select the **Application Intake Agent** in the **Agents** tab of the **Hiring Agent**.

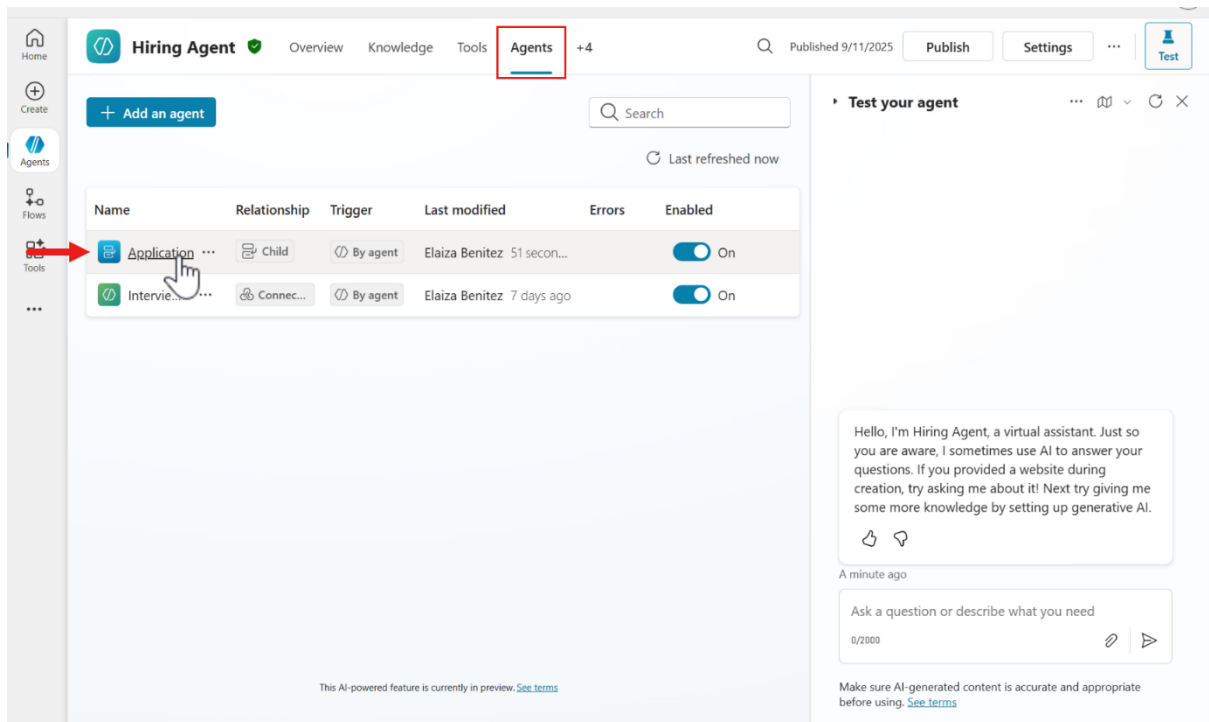

56. In the **Instructions** field, enter a new line after 2.Post-Upload instructions. Copy and paste the following instructions.

57. Process for Resume Upload via Email

1. When you receive a message, ****Send [ResumeId (text)] = "1680265f-5793-f011-b41b-7c1e525be9f7" and [ResumeTitle (text_1)] = "TAYLOR TESTPERSON (FICTITIOUS).pdf" and [ResumeNumber (text_2)]= "R01026" to the Tool "Notify Teams Applicant channel" in the child agent "Application Intake Agent", call [AGENT FLOW PLACEHOLDER]**

Hiring Agent Overview Knowledge Tools Agents +4 Published 9/11/2025 Publish Settings Test

← Application Intake Agent Enabled Save

Details Instructions Knowledge Tools

Instructions

any... indicate you cannot help.

Process for Resume Upload via Chat

1. Upload Resume
 - Trigger only if `[x] System.Activity.Attachments` contains exactly one new resume.
 - If more than one file, instruct the user to upload one at a time and stop.
 - Call `Resume Upload` once. Never upload more than once for the same message.
2. Post-Upload
 - Always output the `[ResumeNumber]` (R####).

Process for Resume Upload via Email

1. When you receive a message, **Send `[Resumeld (text)] = "1680265f-5793-f011-b41b-7c1e525be9f7"` and `[ResumeTitle (text_1)] = "TAYLOR TESTPERSON (FICTITIOUS).pdf"` and `[ResumeNumber (text_2)] = "R01026"` to the Tool "Notify Teams Applicant channel" in the child agent "Application Intake Agent", call `[AGENT FLOW PLACEHOLDER]`

Knowledge Add data, files, and other resources to inform and improve AI-generated responses. + Add

Test your agent

Hello, I'm Hiring Agent, a virtual assistant. Just so you are aware, I sometimes use AI to answer your questions. If you provided a website during creation, try asking me about it! Next try giving me some more knowledge by setting up generative AI.

2 minutes ago

Ask a question or describe what you need

0/2000

Make sure AI-generated content is accurate and appropriate before using. [See terms](#)

58. Highlight the [AGENT FLOW PLACEHOLDER] text.

Hiring Agent Overview Knowledge Tools Agents +4 Published 9/11/2025 Publish Settings Test

← Application Intake Agent Enabled Save

Details Instructions Knowledge Tools

Instructions

any... indicate you cannot help.

Process for Resume Upload via Chat

1. Upload Resume
 - Trigger only if `[x] System.Activity.Attachments` contains exactly one new resume.
 - If more than one file, instruct the user to upload one at a time and stop.
 - Call `Resume Upload` once. Never upload more than once for the same message.
2. Post-Upload
 - Always output the `[ResumeNumber]` (R####).

Process for Resume Upload via Email

1. When you receive a message, **Send `[Resumeld (text)] = "1680265f-5793-f011-b41b-7c1e525be9f7"` and `[ResumeTitle (text_1)] = "TAYLOR TESTPERSON (FICTITIOUS).pdf"` and `[ResumeNumber (text_2)] = "R01026"` to the Tool "Notify Teams Applicant channel" in the child agent "Application Intake Agent", call `[AGENT FLOW PLACEHOLDER]`

Knowledge Add data, files, and other resources to inform and improve AI-generated responses. + Add

Test your agent

Hello, I'm Hiring Agent, a virtual assistant. Just so you are aware, I sometimes use AI to answer your questions. If you provided a website during creation, try asking me about it! Next try giving me some more knowledge by setting up generative AI.


2 minutes ago

Ask a question or describe what you need

0/2000


Make sure AI-generated content is accurate and appropriate before using. [See terms](#)

59. Enter the forward slash character, /, and select the **Notify Teams Applicant Channel** tool.

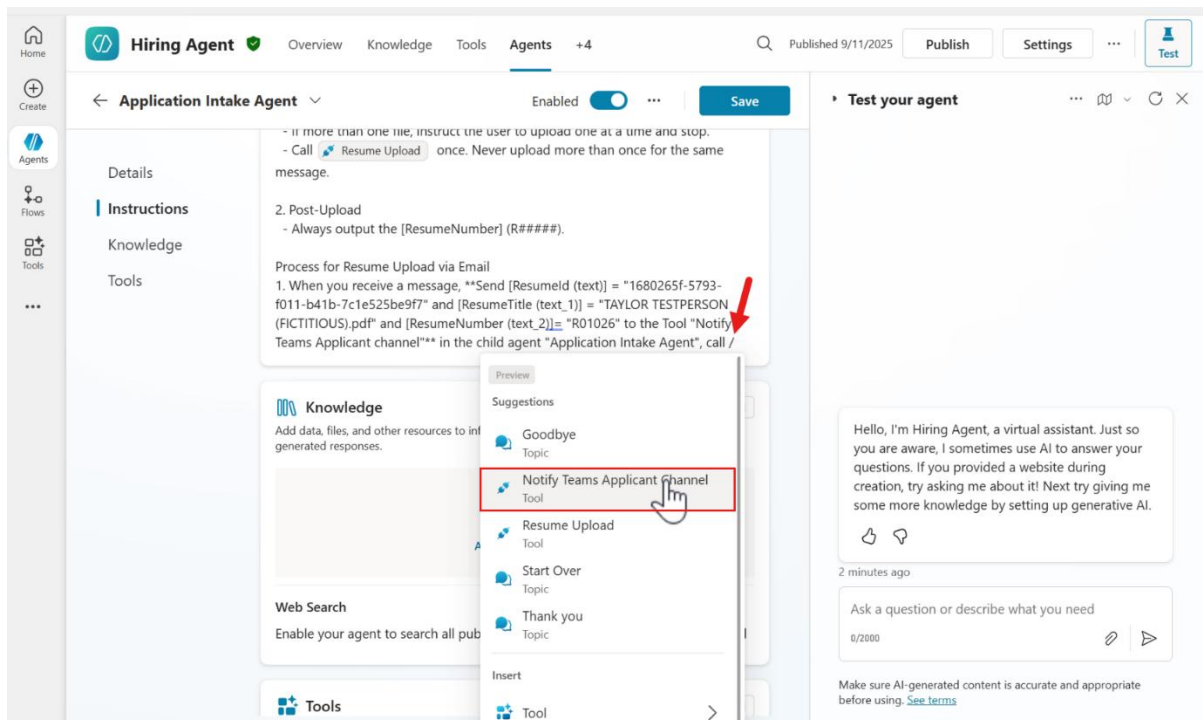


60. The agent flow will now be invoked by the **Application Intake Agent** as per the instructions, after the last action (**Sends a prompt to the specified copilot for processing**) in the event trigger sends the prompt that contains the parameter values back to the agent.


Select **Save** to save the updated instructions for the **Application Intake Agent**.

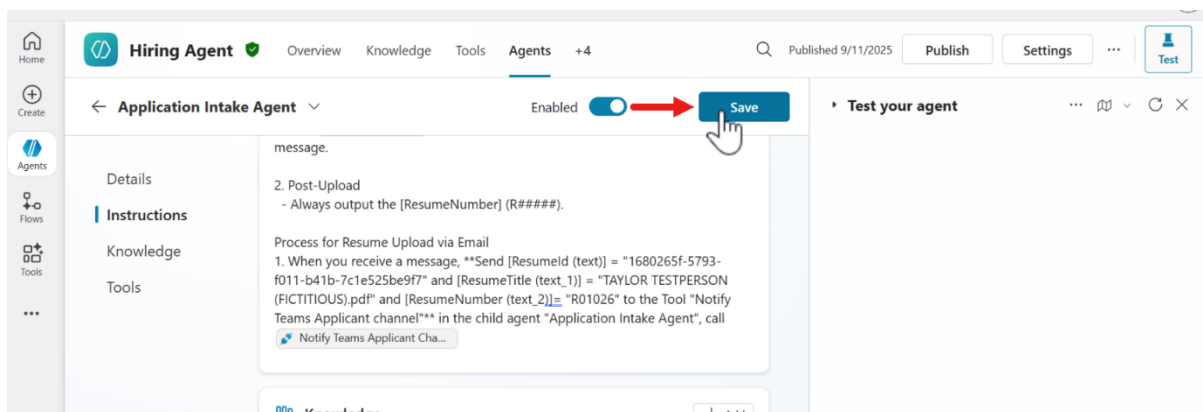


61. The instructions will now be updated once the agent has been saved.

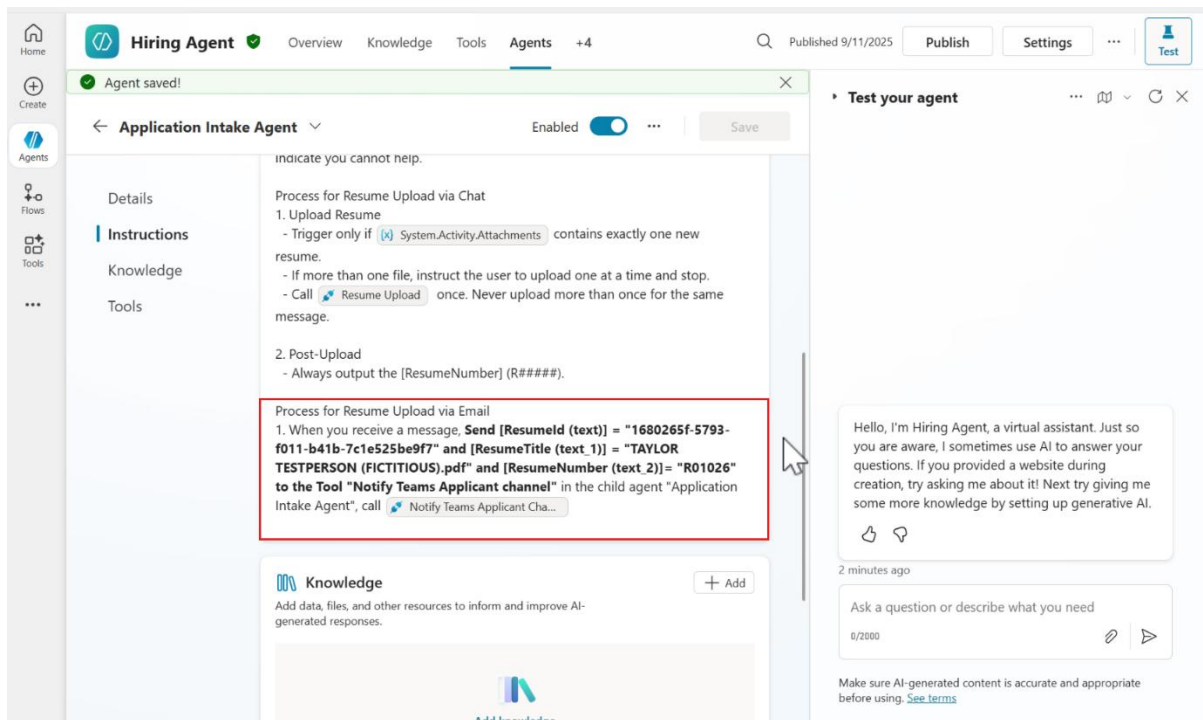

62. We now need to **Publish** the **Hiring Agent**. Select **Publish** on the upper right, and in the *Publish this agent modal* that appears select **Publish**.

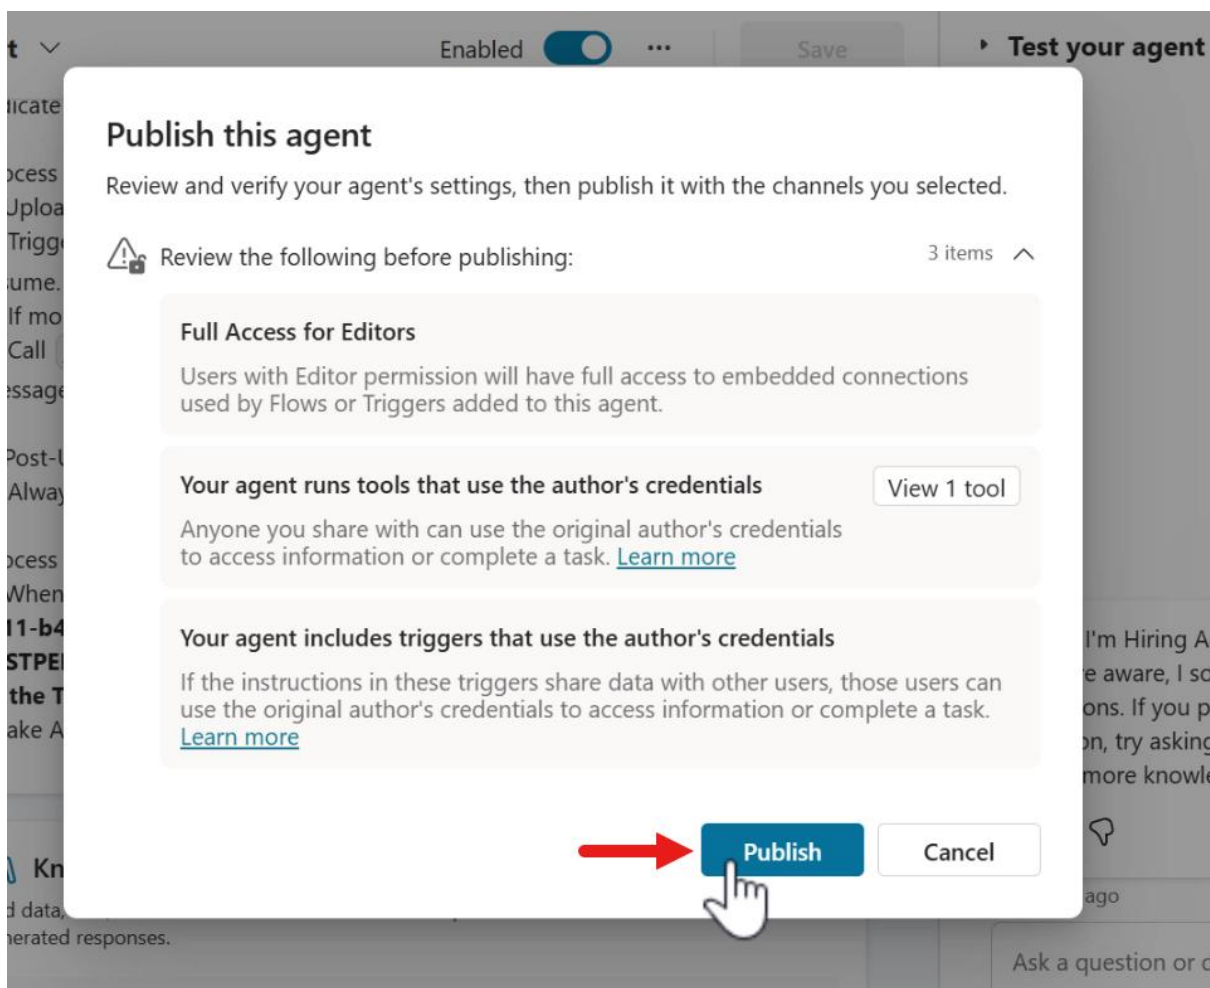

63. Once published, a confirmation message will appear that the agent has been published.

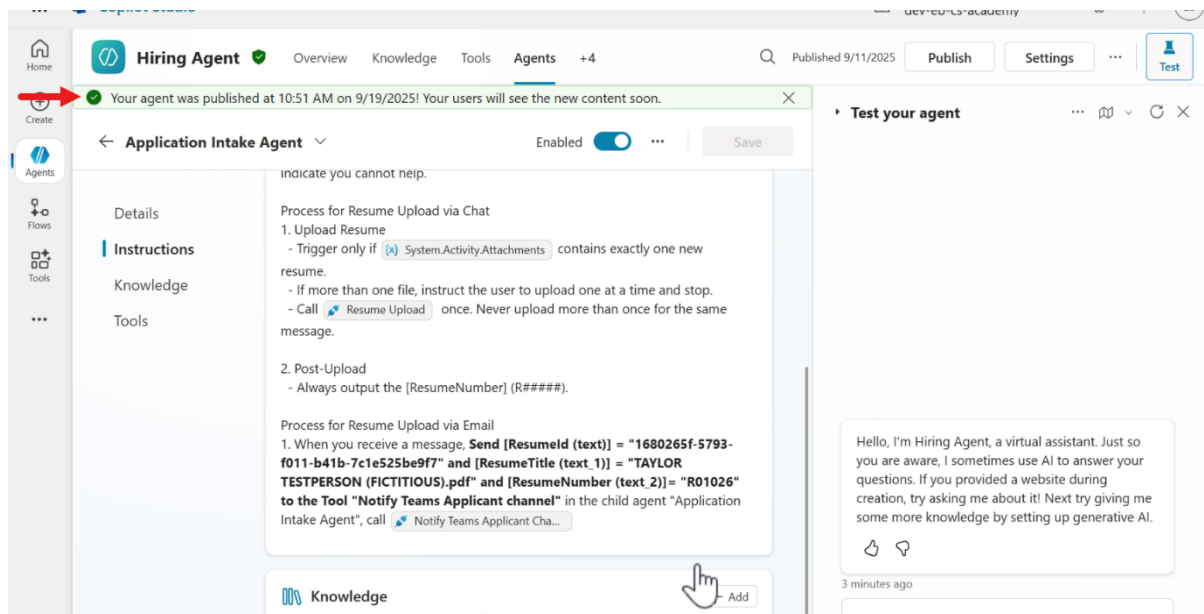

We can now test the agent!

Lab 4.3 - Test event trigger

1. To execute the event trigger, an email needs to be sent with a Resume pdf file. In Outlook, compose a new email message.

Email Component	Details
To recipient	Use your signed in user account as the value
File attachment	Upload the TAYLOR TESTPERSON (FICTITIOUS) file
Subject	Job Application
Body	Copy and paste the following below as the body of the email

2. Dear Hiring Manager,
- 3.
4. I am writing to express my interest in the Senior Power Platform Engineer position at your organization. With over nine years of experience delivering secure and

scalable solutions on Microsoft cloud platforms, I am confident in my ability to contribute effectively to your team.

5.

6. In my most recent role as Lead Power Platform Engineer, I developed an automated resume-intake pipeline, reducing manual triage and improving searchability. I have delivered HR case management applications, introduced solution-aware flows, and implemented PR checks to enhance deployment lead times. My expertise includes Power Apps, Power Automate, Power Pages, Dataverse, and a range of Microsoft 365 services, as well as integration with Graph/REST APIs and Azure Functions.

7.

8. Previously, I developed Teams approvals with adaptive cards, cutting approval times to the same day, and created robust error-handling frameworks. My background also includes migrating legacy workflows to Power Automate and building self-service portals adopted by hundreds of employees.

9.

10. I hold a B.Sc. in Computer Science and am certified as a Power Platform Developer (PL-400) and Solution Architect (PL-600). I am also passionate about mentoring and have volunteered with local maker groups.

11.

12. Please find my CV attached for your consideration. I would welcome the opportunity to discuss how my skills and experience align with your needs.

13.


14. Thank you for your time and consideration.

15.


16. Kind regards,

17. Taylor Testperson


18. **Send** the email once composed.

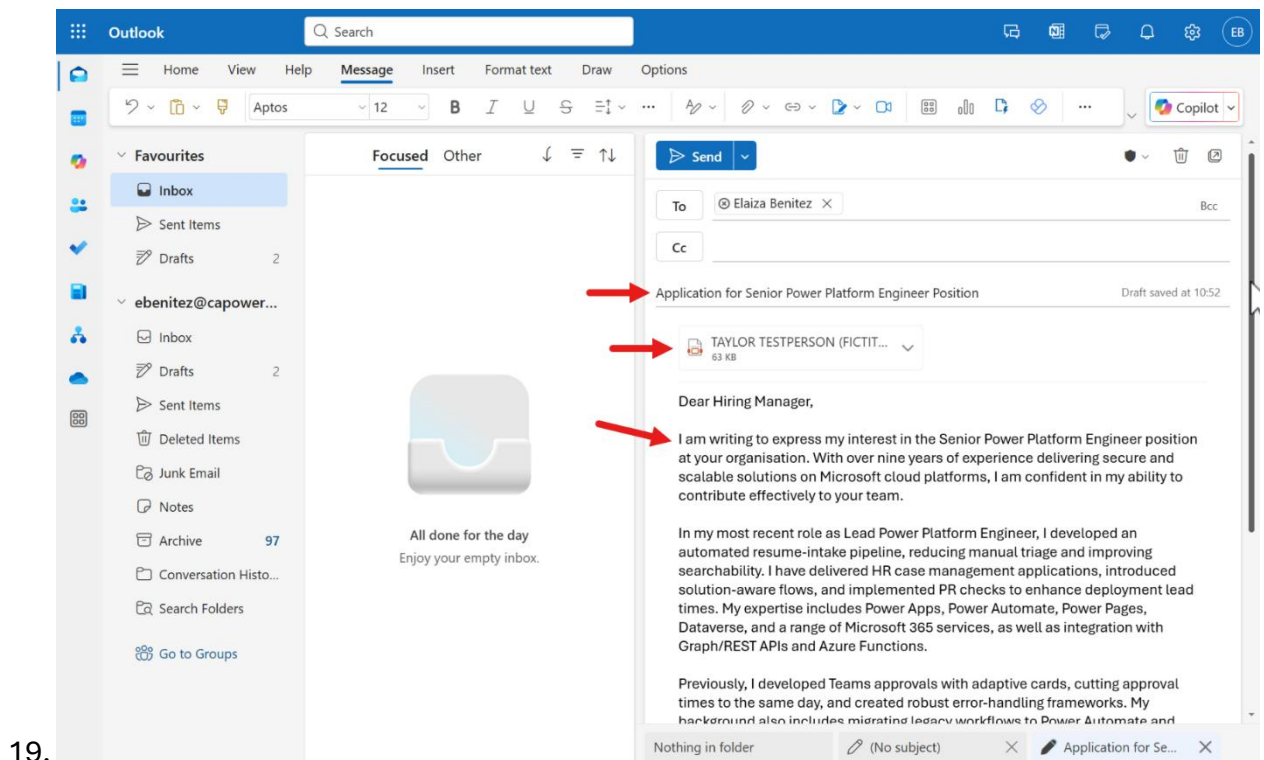


20. In the [Power Automate maker portal](#) for the event trigger flow, select the **Refresh** icon to view the flow run that succeeded for the sent email.

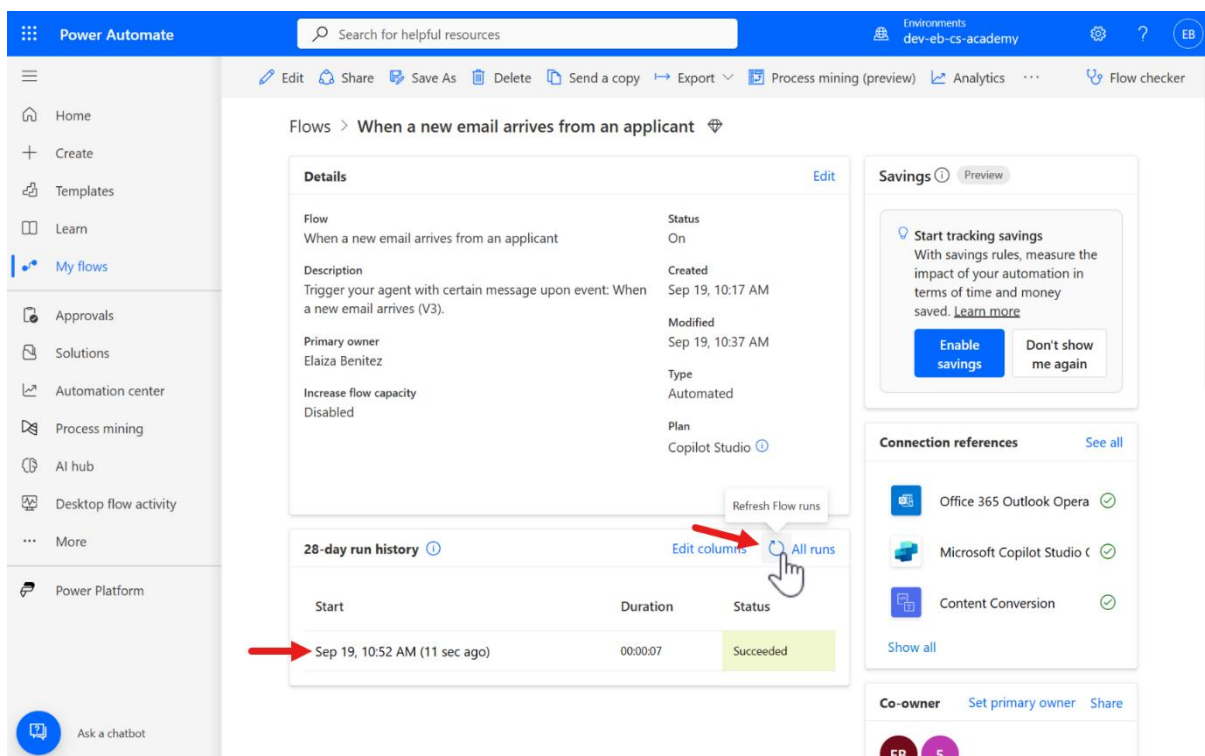

21. Back in Copilot Studio in the **Hiring Agent** select the **Activity** tab.

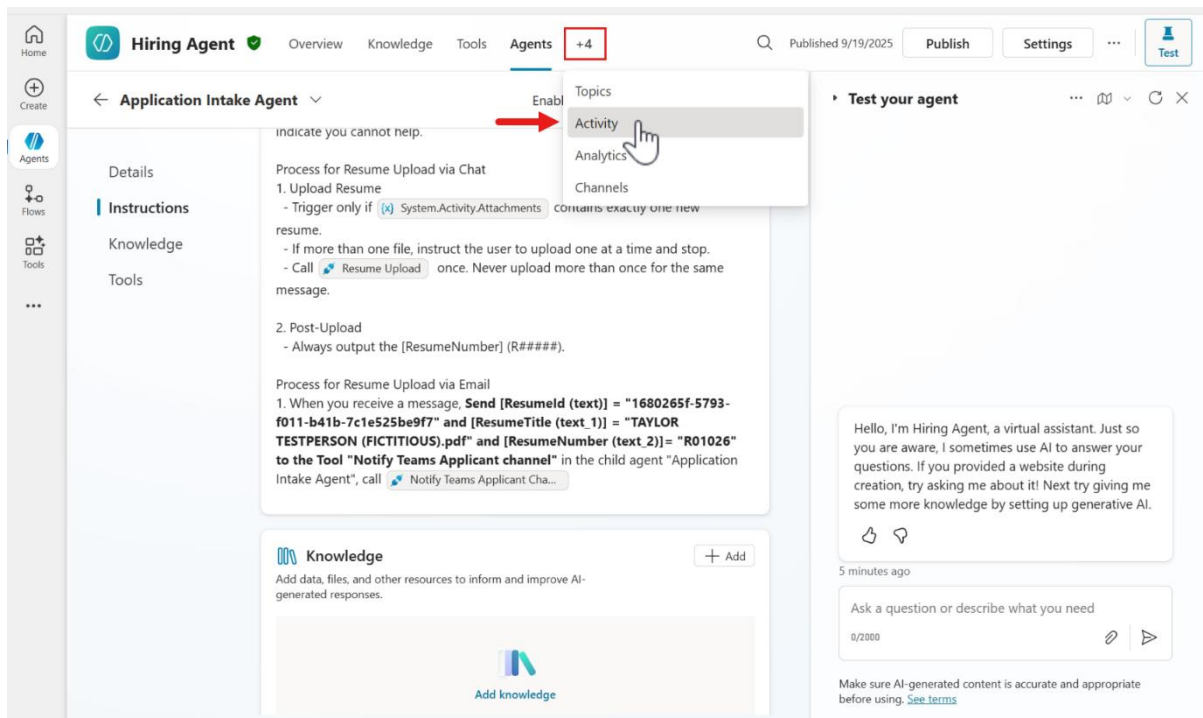


22. The **Activity** tab will load which will display all the activities of the **Hiring Agent**. There will be an activity with the name value of **Automated** that has a status of **Complete**. This activity represents the event trigger and the agent flow that was invoked.

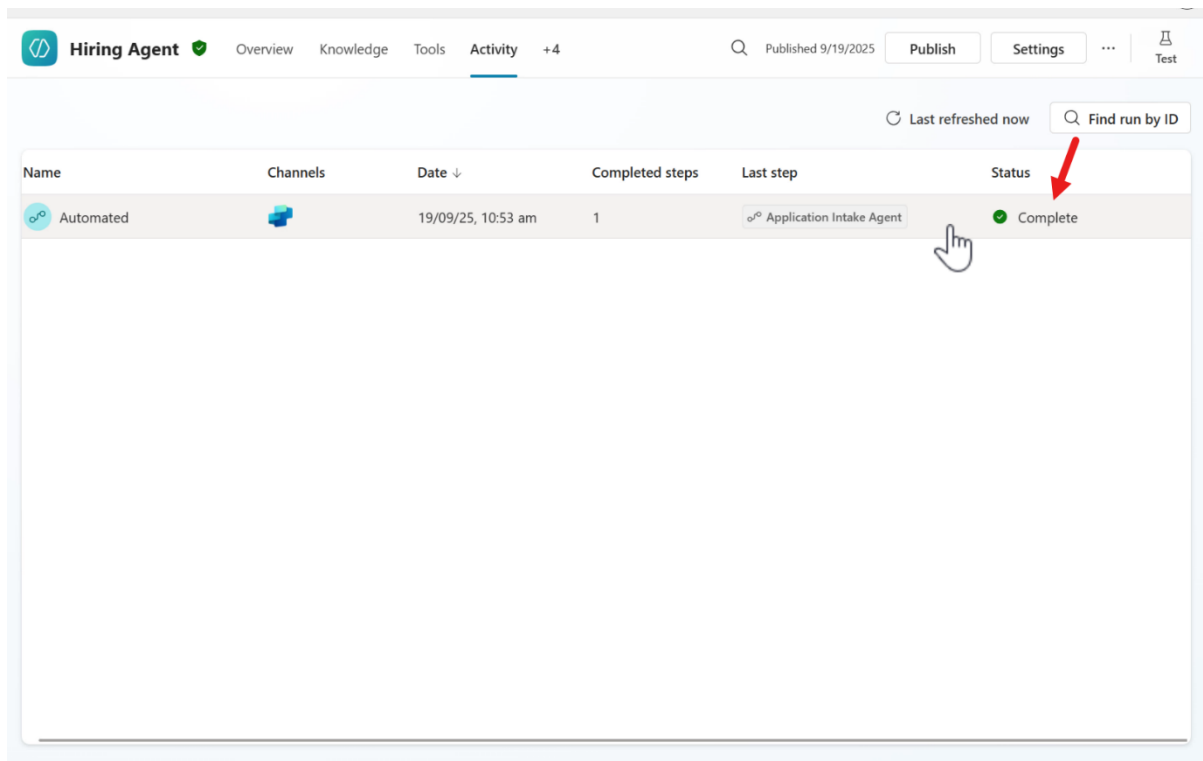


23. Select the activity, and select the event trigger in the activity map. On the right hand side panel, notice how the input parameters in the prompt contain the


Resume Id, Resume Title and Resume Number parameter values from the **Dataverse** row that was created. This was from the dynamic content values configured earlier in steps 38 - 44 of **Lab 4.1 - Automate uploading resumes to Dataverse received by email**.

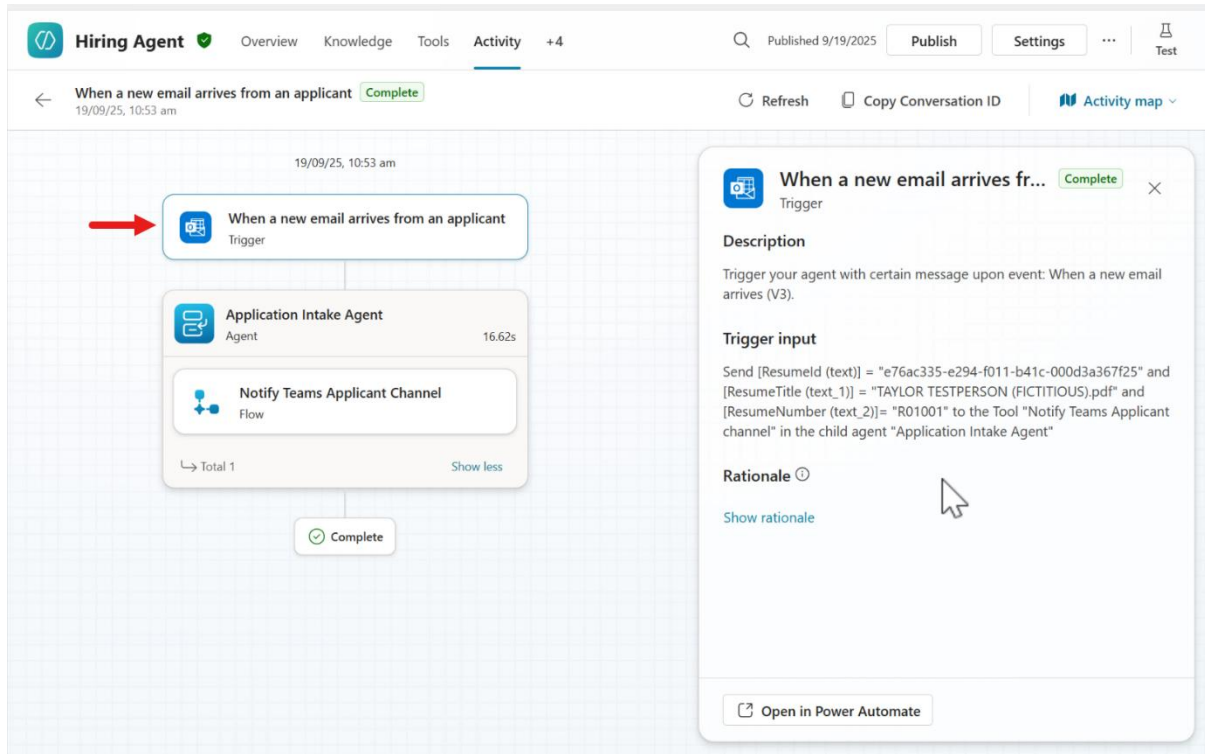


24. Navigate back to the **Hiring Hub** model-driven app and in the **Resumes system view**, select **Refresh** to refresh the view. The newly created row for the resume that was sent by email will now be listed as it was created through the event trigger.

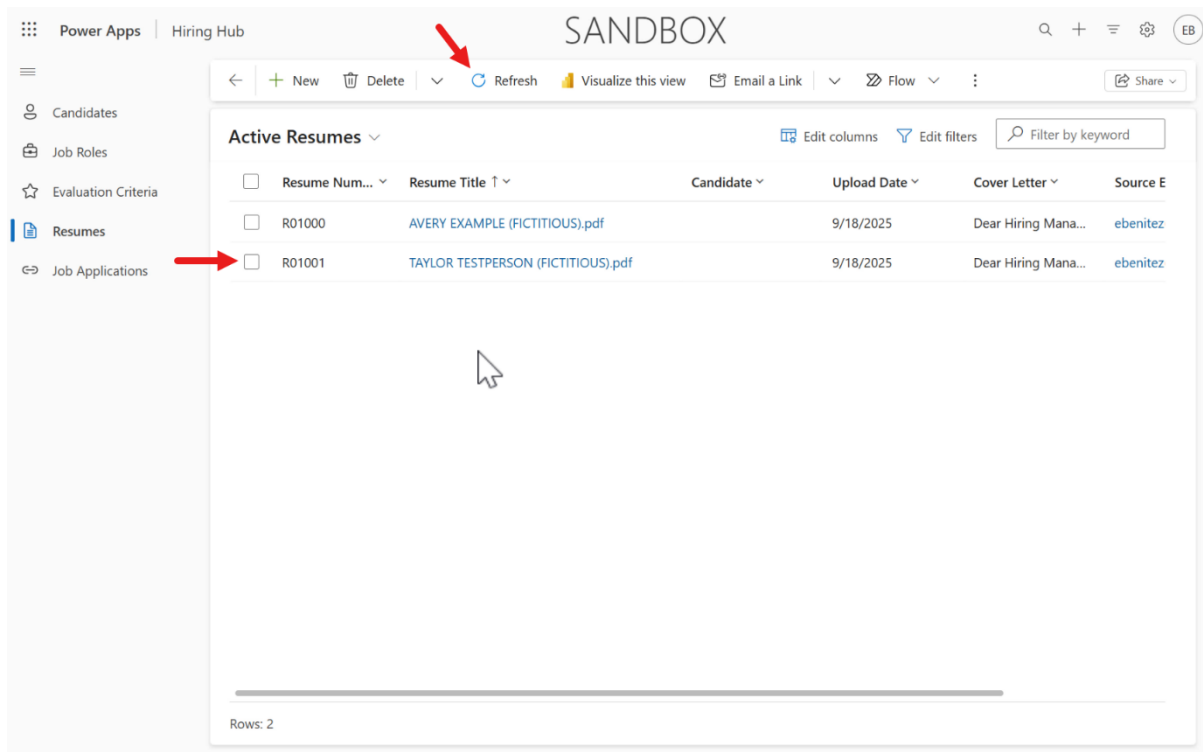


25. Navigate back to Copilot Studio and select the **Notify Teams Applicant Channel** agent flow within the **Application Intake Agent** in the activity map. On the right hand side panel, notice how the inputs have values from the Dataverse row. This was from the prompt sent by the last action (**Sends a prompt to the specified copilot for processing**) in the event trigger that contains the parameter values from the newly created Dataverse row. This is how we can pass parameter values from event triggers to agent flows.

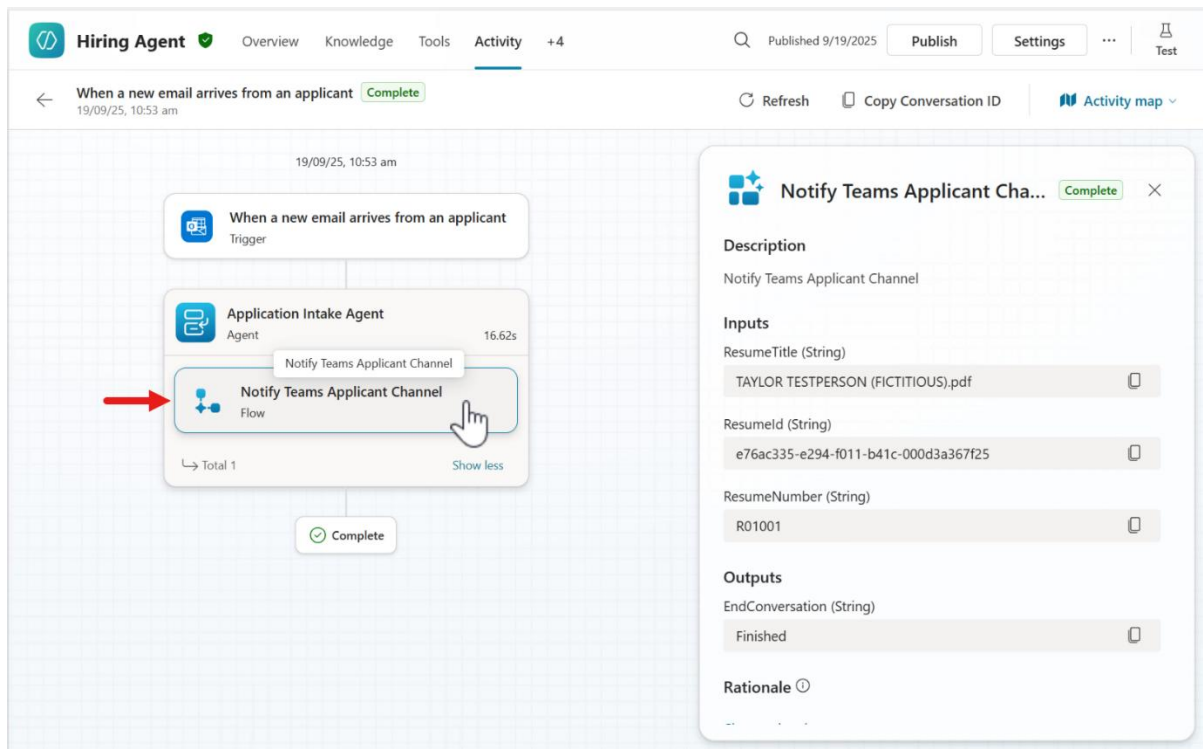


26. Finally, let's take a look at the adaptive card posted to the channel in **Microsoft Teams**. In the channel, we'll see the adaptive card that displays the information about the newly created Resume row in Dataverse. Hover over the hyperlink at the start of the adaptive card, notice how the URL is the Resumes system view URL that we configured earlier in the JSON (steps 15 - 19 of **Lab 4.2 - Notify a Teams channel using an adaptive card**) payload of the adaptive card.

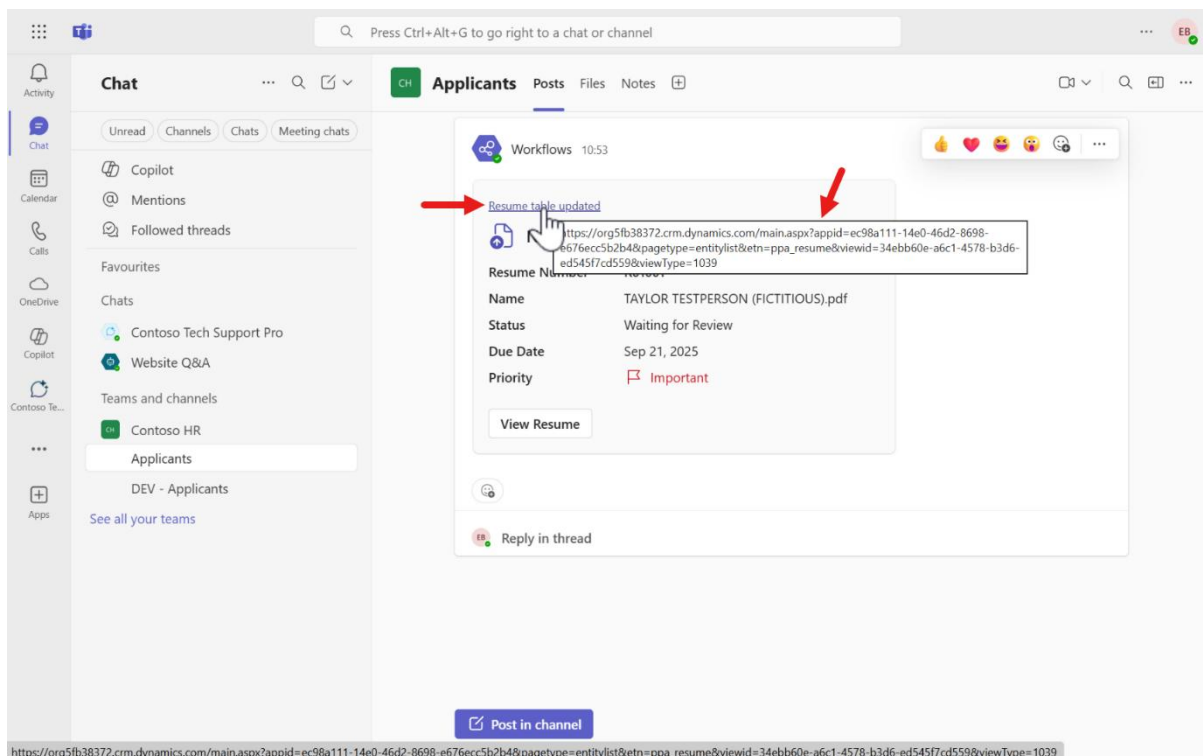

27. Select the hyperlink, and you'll be directed to the Resumes system view in the **Hiring Hub** model-driven app on your browser.

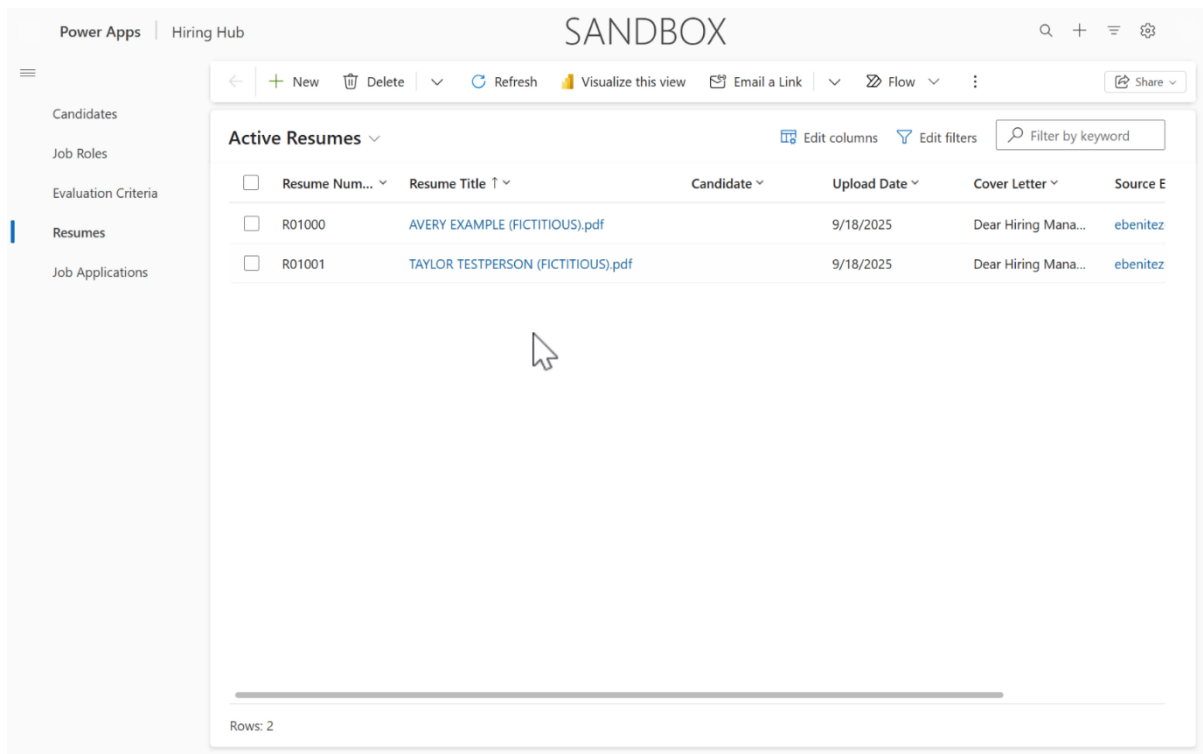

28. Navigate back to the adaptive card posted to the channel in Microsoft Teams. This time, hover over **View Resume** which is the Action.OpenURL action of the adaptive card. Notice how the URL is the Resumes row that we configured earlier in the JSON (steps 30 - 36 of **Lab 4.2 - Notify a Teams channel using an adaptive card**) payload of the adaptive card.

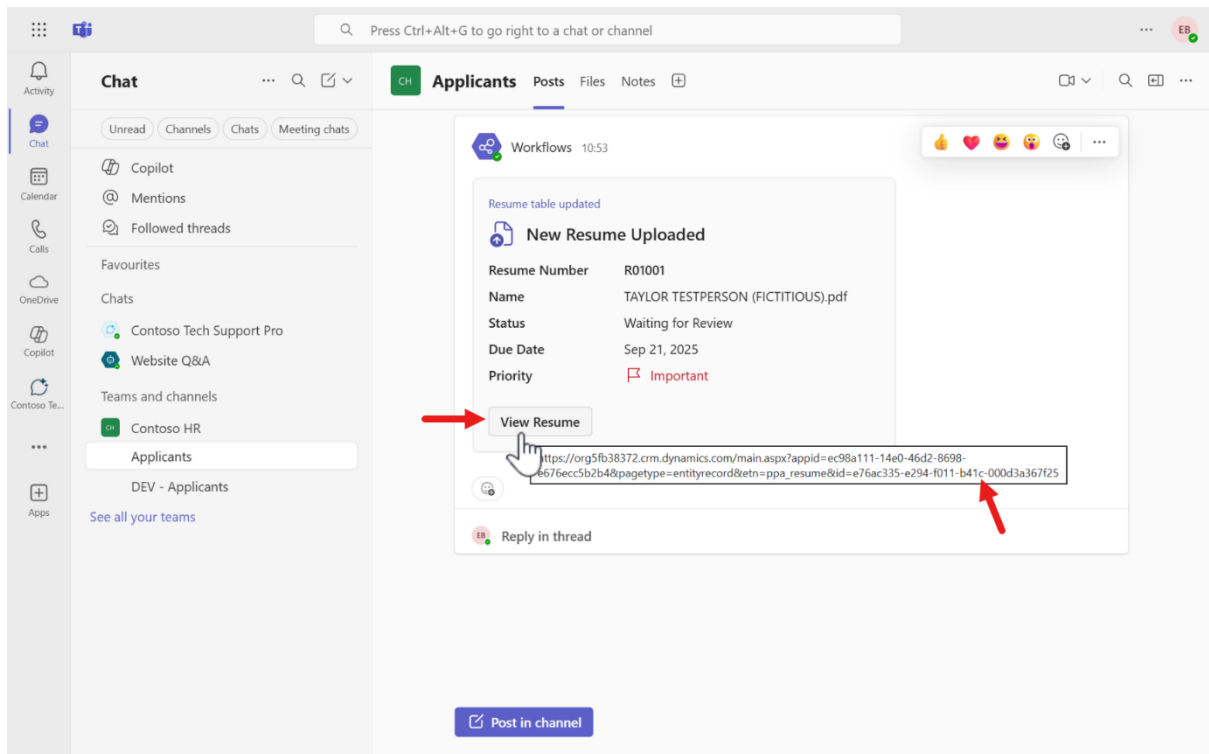

29. Select the action, and you'll be directed to the Resume row form in the **Hiring Hub** model-driven app on your browser.

