


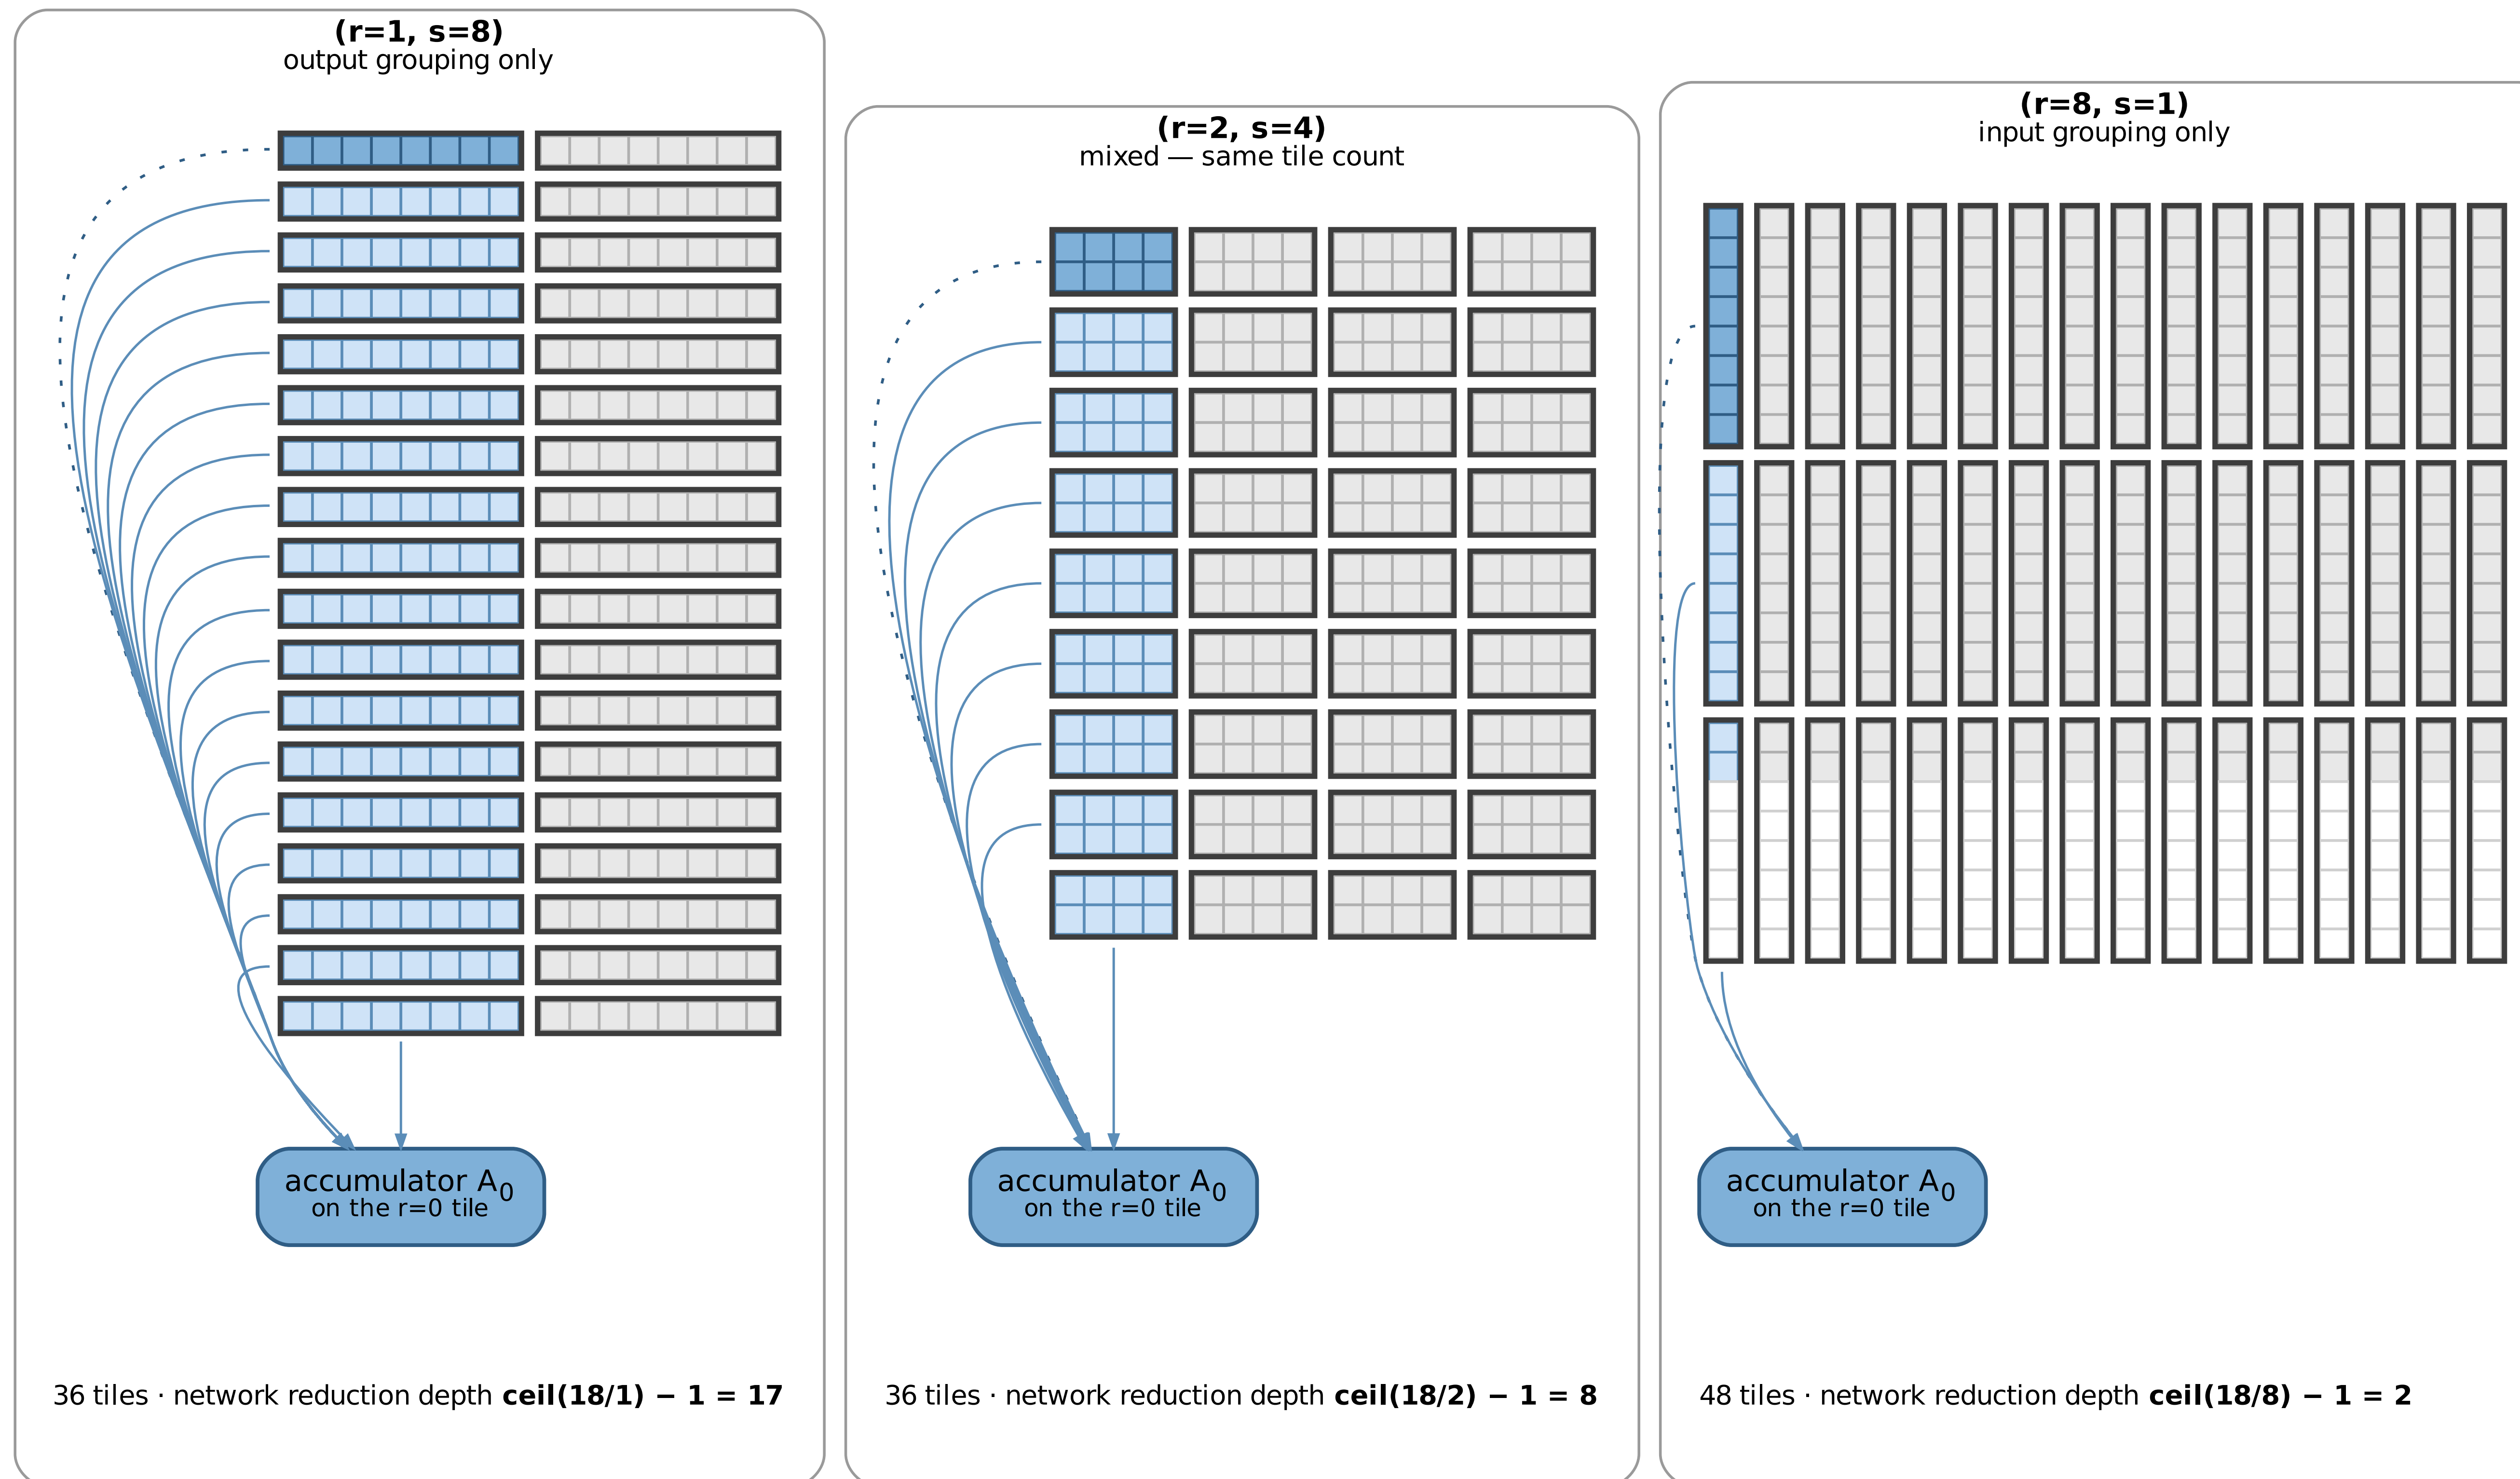

ResNet-50 stage-3 conv2 ($3 \times 3 \times 256 \rightarrow 256$), $\text{XB}=128$, $N_{\text{bits}}=8 \Rightarrow \text{grid} = R_{\text{xb}}=\mathbf{18}$ (input axis, $k^2 C_{\text{in}}$) $\times C_{\text{xb}}=\mathbf{16}$ (output axis, $C_{\text{out}} N_{\text{bits}}$) = 288 crossbars, packed $\mathbf{c=8}$ crossbars/tile in all three.

Same grid, same density — only where the tile boundary falls. Blue = the tiles whose partial sums converge on one accumulator group; dark blue = the r=0 tile, which **hosts** that accumulator and so sends nothing over the network; hollow cells = allocated but unused (fragmentation).