

### 1.2.1 : EDA: Advanced Feature Extraction.

In [5]:

```
import warnings
warnings.filterwarnings("ignore")
import numpy as np
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
from subprocess import check_output
%matplotlib inline
import plotly.offline as py
py.init_notebook_mode(connected=True)
import plotly.graph_objs as go
import plotly.tools as tls
import os
import gc

import re
from nltk.corpus import stopwords
import distance
from nltk.stem import PorterStemmer
from bs4 import BeautifulSoup
import re
from nltk.corpus import stopwords
# This package is used for finding longest common subsequence between two string
S
# you can write your own dp code for this
import distance
from nltk.stem import PorterStemmer
from bs4 import BeautifulSoup
from fuzzywuzzy import fuzz
from sklearn.manifold import TSNE
# Import the Required lib packages for WORD-Cloud generation
# https://stackoverflow.com/questions/45625434/how-to-install-wordcloud-in-pytho
n3-6
from wordcloud import WordCloud, STOPWORDS
from os import path
from PIL import Image
```

In [6]:

```
#https://stackoverflow.com/questions/12468179/unicodedecodeerror-utf8-codec-cant
-decode-byte-0x9c
if os.path.isfile('df_fe_without_preprocessing_train.csv'):
    df = pd.read_csv("df_fe_without_preprocessing_train.csv",encoding='latin-1')
    df = df.fillna('')
    df.head()
else:
    print("get df_fe_without_preprocessing_train.csv from drive or run the previ
```

In [7]:

df.head(2)

Out[7]:

	id	qid1	qid2	question1	question2	is_duplicate	freq_qid1	freq_qid2	q1len	q2len	q
0	0	1	2	What is the step by step guide to invest in sh...	What is the step by step guide to invest in sh...	0	1	1	66	57	
1	1	3	4	What is the story of Kohinoor (Koh-i-Noor) Dia...	What would happen if the Indian government sto...	0	4	1	51	88	

### 3.4 Preprocessing of Text

- Preprocessing:
  - Removing html tags
  - Removing Punctuations
  - Performing stemming
  - Removing Stopwords
  - Expanding contractions etc.

In [8]:

```
# To get the results in 4 decemal points
SAFE_DIV = 0.0001

STOP_WORDS = stopwords.words("english")

def preprocess(x):
    x = str(x).lower()
    x = x.replace(",000,000", "m").replace(",000", "k").replace("'", "").replace(
        '"', "")\
        .replace("won't", "will not").replace("cannot", "can
not").replace("can't", "can not")\
        .replace("n't", " not").replace("what's", "what is").
replace("it's", "it is")\
        .replace("'ve", " have").replace("i'm", "i am").repla
ce("'re", " are")\
        .replace("he's", "he is").replace("she's", "she is").
replace("'s", " own")\
        .replace("%", " percent ").replace("₹", " rupee ").re
place("$", " dollar ")\
        .replace("€", " euro ").replace("'ll", " will")
    x = re.sub(r"([0-9]+)000000", r"\1m", x)
    x = re.sub(r"([0-9]+)000", r"\1k", x)

    porter = PorterStemmer()
    pattern = re.compile('\W')

    if type(x) == type(''):
        x = re.sub(pattern, ' ', x)

    if type(x) == type(''):
        x = porter.stem(x)
        example1 = BeautifulSoup(x)
        x = example1.get_text()

    return x
```

- Function to Compute and get the features : With 2 parameters of Question 1 and Question 2

## 3.5 Advanced Feature Extraction (NLP and Fuzzy Features)

## Definition:

- **Token**: You get a token by splitting sentence a space
- **Stop\_Word** : stop words as per NLTK.
- **Word** : A token that is not a stop\_word

## Features:

- **cwc\_min** : Ratio of common\_word\_count to min length of word count of Q1 and Q2  

$$\text{cwc\_min} = \text{common\_word\_count} / (\min(\text{len}(\text{q1\_words}), \text{len}(\text{q2\_words})))$$
- **cwc\_max** : Ratio of common\_word\_count to max length of word count of Q1 and Q2  

$$\text{cwc\_max} = \text{common\_word\_count} / (\max(\text{len}(\text{q1\_words}), \text{len}(\text{q2\_words})))$$
- **csc\_min** : Ratio of common\_stop\_count to min length of stop count of Q1 and Q2  

$$\text{csc\_min} = \text{common\_stop\_count} / (\min(\text{len}(\text{q1\_stops}), \text{len}(\text{q2\_stops})))$$
- **csc\_max** : Ratio of common\_stop\_count to max length of stop count of Q1 and Q2  

$$\text{csc\_max} = \text{common\_stop\_count} / (\max(\text{len}(\text{q1\_stops}), \text{len}(\text{q2\_stops})))$$
- **ctc\_min** : Ratio of common\_token\_count to min length of token count of Q1 and Q2  

$$\text{ctc\_min} = \text{common\_token\_count} / (\min(\text{len}(\text{q1\_tokens}), \text{len}(\text{q2\_tokens})))$$
- **ctc\_max** : Ratio of common\_token\_count to max length of token count of Q1 and Q2  

$$\text{ctc\_max} = \text{common\_token\_count} / (\max(\text{len}(\text{q1\_tokens}), \text{len}(\text{q2\_tokens})))$$
- **last\_word\_eq** : Check if First word of both questions is equal or not  

$$\text{last\_word\_eq} = \text{int}(\text{q1\_tokens}[-1] == \text{q2\_tokens}[-1])$$
- **first\_word\_eq** : Check if First word of both questions is equal or not  

$$\text{first\_word\_eq} = \text{int}(\text{q1\_tokens}[0] == \text{q2\_tokens}[0])$$
- **abs\_len\_diff** : Abs. length difference  

$$\text{abs\_len\_diff} = \text{abs}(\text{len}(\text{q1\_tokens}) - \text{len}(\text{q2\_tokens}))$$
- **mean\_len** : Average Token Length of both Questions  

$$\text{mean\_len} = (\text{len}(\text{q1\_tokens}) + \text{len}(\text{q2\_tokens})) / 2$$
- **fuzz\_ratio** : <https://github.com/seatgeek/fuzzywuzzy#usage>  
 [\(https://github.com/seatgeek/fuzzywuzzy#usage\)](https://github.com/seatgeek/fuzzywuzzy#usage) <http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/> [\(http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/\)](http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/)
- **fuzz\_partial\_ratio** : <https://github.com/seatgeek/fuzzywuzzy#usage>  
 [\(https://github.com/seatgeek/fuzzywuzzy#usage\)](https://github.com/seatgeek/fuzzywuzzy#usage) <http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/> [\(http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/\)](http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/)
- **token\_sort\_ratio** : <https://github.com/seatgeek/fuzzywuzzy#usage>  
 [\(https://github.com/seatgeek/fuzzywuzzy#usage\)](https://github.com/seatgeek/fuzzywuzzy#usage) <http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/> [\(http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/\)](http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/)

- **token\_set\_ratio** : <https://github.com/seatgeek/fuzzywuzzy#usage>  
(<https://github.com/seatgeek/fuzzywuzzy#usage>) <http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/> (<http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/>)
- **longest\_substr\_ratio** : Ratio of length longest common substring to min length of token count of Q1 and Q2  
$$\text{longest\_substr\_ratio} = \text{len}(\text{longest common substring}) / (\min(\text{len}(q1\_tokens), \text{len}(q2\_tokens)))$$

In [11]:

```
def get_token_features(q1, q2):
    token_features = [0.0]*10

    # Converting the Sentence into Tokens:
    q1_tokens = q1.split()
    q2_tokens = q2.split()

    if len(q1_tokens) == 0 or len(q2_tokens) == 0:
        return token_features
    # Get the non-stopwords in Questions
    q1_words = set([word for word in q1_tokens if word not in STOP_WORDS])
    q2_words = set([word for word in q2_tokens if word not in STOP_WORDS])

    #Get the stopwords in Questions
    q1_stops = set([word for word in q1_tokens if word in STOP_WORDS])
    q2_stops = set([word for word in q2_tokens if word in STOP_WORDS])

    # Get the common non-stopwords from Question pair
    common_word_count = len(q1_words.intersection(q2_words))

    # Get the common stopwords from Question pair
    common_stop_count = len(q1_stops.intersection(q2_stops))

    # Get the common Tokens from Question pair
    common_token_count = len(set(q1_tokens).intersection(set(q2_tokens)))

    token_features[0] = common_word_count / (min(len(q1_words), len(q2_words)) +
SAFE_DIV)
    token_features[1] = common_word_count / (max(len(q1_words), len(q2_words)) +
SAFE_DIV)
    token_features[2] = common_stop_count / (min(len(q1_stops), len(q2_stops)) +
SAFE_DIV)
    token_features[3] = common_stop_count / (max(len(q1_stops), len(q2_stops)) +
SAFE_DIV)
    token_features[4] = common_token_count / (min(len(q1_tokens), len(q2_tokens
)) + SAFE_DIV)
    token_features[5] = common_token_count / (max(len(q1_tokens), len(q2_tokens
)) + SAFE_DIV)

    # Last word of both question is same or not
    token_features[6] = int(q1_tokens[-1] == q2_tokens[-1])

    # First word of both question is same or not
    token_features[7] = int(q1_tokens[0] == q2_tokens[0])

    token_features[8] = abs(len(q1_tokens) - len(q2_tokens))

    #Average Token Length of both Questions
    token_features[9] = (len(q1_tokens) + len(q2_tokens))/2
    return token_features

# get the Longest Common sub string

def get_longest_substr_ratio(a, b):
    strs = list(distance.lcs substrings(a, b))
    if len(strs) == 0:
        return 0
    else:
```

```

        return len(strs[0]) / (min(len(a), len(b)) + 1)

def extract_features(df):
    # preprocessing each question
    df["question1"] = df["question1"].fillna("").apply(preprocess)
    df["question2"] = df["question2"].fillna("").apply(preprocess)

    print("token features...")

    # Merging Features with dataset

    token_features = df.apply(lambda x: get_token_features(x["question1"], x["question2"]), axis=1)

    df["cwc_min"] = list(map(lambda x: x[0], token_features))
    df["cwc_max"] = list(map(lambda x: x[1], token_features))
    df["csc_min"] = list(map(lambda x: x[2], token_features))
    df["csc_max"] = list(map(lambda x: x[3], token_features))
    df["ctc_min"] = list(map(lambda x: x[4], token_features))
    df["ctc_max"] = list(map(lambda x: x[5], token_features))
    df["last_word_eq"] = list(map(lambda x: x[6], token_features))
    df["first_word_eq"] = list(map(lambda x: x[7], token_features))
    df["abs_len_diff"] = list(map(lambda x: x[8], token_features))
    df["mean_len"] = list(map(lambda x: x[9], token_features))

    #Computing Fuzzy Features and Merging with Dataset

    # do read this blog: http://chairnerd.seatgeek.com/fuzzywuzzy-fuzzy-string-matching-in-python/
    # https://stackoverflow.com/questions/31806695/when-to-use-which-fuzz-function-to-compare-2-strings
    # https://github.com/seatgeek/fuzzywuzzy
    print("fuzzy features..")

    df["token_set_ratio"] = df.apply(lambda x: fuzz.token_set_ratio(x["question1"], x["question2"]), axis=1)
    # The token sort approach involves tokenizing the string in question, sorting the tokens alphabetically, and
    # then joining them back into a string We then compare the transformed strings with a simple ratio().
    df["token_sort_ratio"] = df.apply(lambda x: fuzz.token_sort_ratio(x["question1"], x["question2"]), axis=1)
    df["fuzz_ratio"] = df.apply(lambda x: fuzz.QRatio(x["question1"], x["question2"]), axis=1)
    df["fuzz_partial_ratio"] = df.apply(lambda x: fuzz.partial_ratio(x["question1"], x["question2"]), axis=1)
    df["longest_substr_ratio"] = df.apply(lambda x: get_longest_substr_ratio(x["question1"], x["question2"]), axis=1)
    return df

```

In [12]:

```

if os.path.isfile('nlp_features_train.csv'):
    df = pd.read_csv("nlp_features_train.csv",encoding='latin-1')
    df.fillna('')
else:
    print("Extracting features for train:")
    df = pd.read_csv("train.csv")
    df = extract_features(df)
    df.to_csv("nlp_features_train.csv", index=False)
df.head(2)

```

Out[12]:

	id	qid1	qid2	question1	question2	is_duplicate	cwc_min	cwc_max	csc_min	csc_max
0	0	1	2	what is the step by step guide to invest in sh...	what is the step by step guide to invest in sh...	0	0.999980	0.833319	0.999983	0.999983
1	1	3	4	what is the story of kohinoor koh i noor dia...	what would happen if the indian government sto...	0	0.799984	0.399996	0.749981	0.599981

2 rows × 21 columns

### 3.5.1 Analysis of extracted features

#### 3.5.1.1 Plotting Word clouds

- Creating Word Cloud of Duplicates and Non-Duplicates Question pairs
- We can observe the most frequent occurring words



In [13]:

```
df_duplicate = df[df['is_duplicate'] == 1]
dfp_nonduplicate = df[df['is_duplicate'] == 0]

# Converting 2d array of q1 and q2 and flatten the array: like {{1,2},{3,4}} to {1,2,3,4}
p = np.dstack([df_duplicate["question1"], df_duplicate["question2"]]).flatten()
n = np.dstack([dfp_nonduplicate["question1"], dfp_nonduplicate["question2"]]).flatten()

print ("Number of data points in class 1 (duplicate pairs) :",len(p))
print ("Number of data points in class 0 (non duplicate pairs) :",len(n))

#Saving the np array into a text file
np.savetxt('train_p.txt', p, delimiter=' ', fmt='%s')
np.savetxt('train_n.txt', n, delimiter=' ', fmt='%s')
```

Number of data points in class 1 (duplicate pairs) : 298526  
 Number of data points in class 0 (non duplicate pairs) : 510054

In [14]:

```
# reading the text files and removing the Stop Words:
d = path.dirname('.')

textp_w = open(path.join(d, 'train_p.txt')).read()
textn_w = open(path.join(d, 'train_n.txt')).read()
stopwords = set(STOPWORDS)
stopwords.add("said")
stopwords.add("br")
stopwords.add(" ")
stopwords.remove("not")

stopwords.remove("no")
#stopwords.remove("good")
#stopwords.remove("love")
stopwords.remove("like")
#stopwords.remove("best")
#stopwords.remove("!")
print ("Total number of words in duplicate pair questions :",len(textp_w))
print ("Total number of words in non duplicate pair questions :",len(textn_w))
```

Total number of words in duplicate pair questions : 16109886  
 Total number of words in non duplicate pair questions : 33193130

**Word Clouds generated from duplicate pair question's text**

```
wc = WordCloud(background_color="white", max_words=len(textp_w), stopwords=stopw
ords)
wc.generate(textp_w)
print ("Word Cloud for Duplicate Question pairs")
plt.imshow(wc, interpolation='bilinear')
plt.axis("off")
plt.show()
```


[illegible]

```
wc = WordCloud(background_color="white", max_words=len(textn_w), stopwords=stopwo
rds)
# generate word cloud
wc.generate(textn_w)
print ("Word Cloud for non-Duplicate Question pairs:")
plt.imshow(wc, interpolation='bilinear')
plt.axis("off")
plt.show()
```

## 10/31

In [17]:

```
n = df.shape[0]
sns.pairplot(df[['ctc_min', 'cwc_min', 'csc_min', 'token_sort_ratio', 'is_duplicate']][0:n], hue='is_duplicate', vars=['ctc_min', 'cwc_min', 'csc_min', 'token_s
ort_ratio'])
plt.show()
```

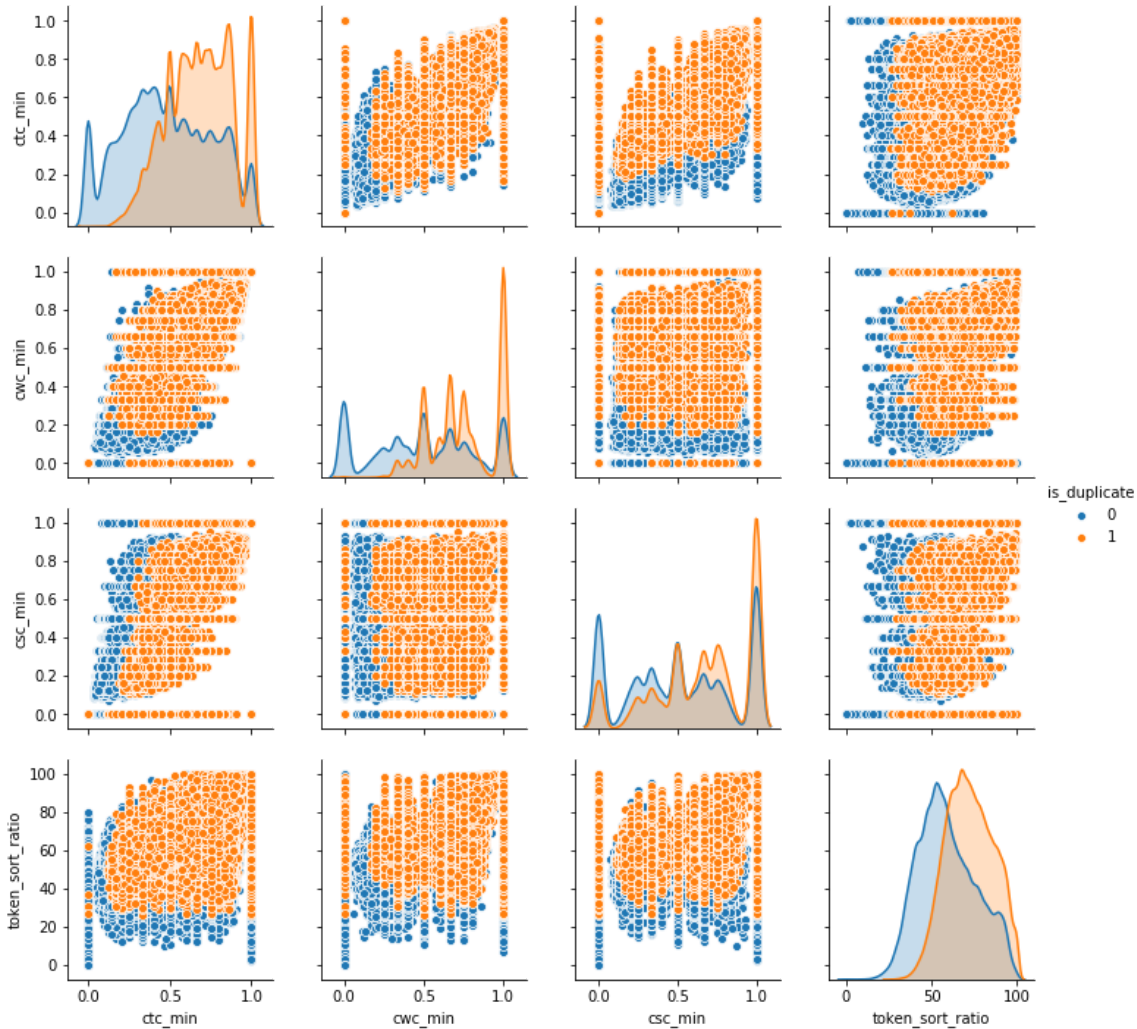


In [18]:

```
# Distribution of the token_sort_ratio
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'token_sort_ratio', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['token_sort_ratio'][0:] , label = "1"
, color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['token_sort_ratio'][0:] , label = "0"
, color = 'blue' )
plt.show()
```

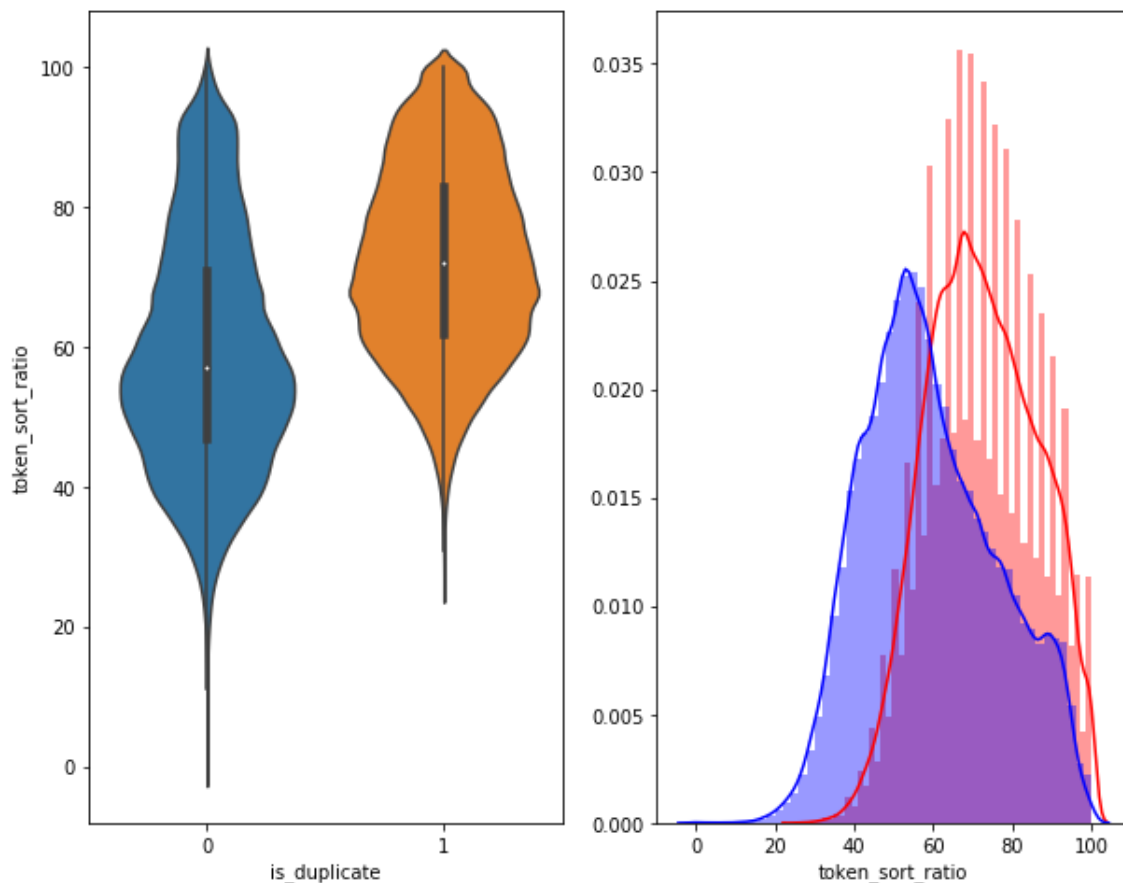


In [19]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'fuzz_ratio', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['fuzz_ratio'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['fuzz_ratio'][0:] , label = "0" , color = 'blue' )
plt.show()
```

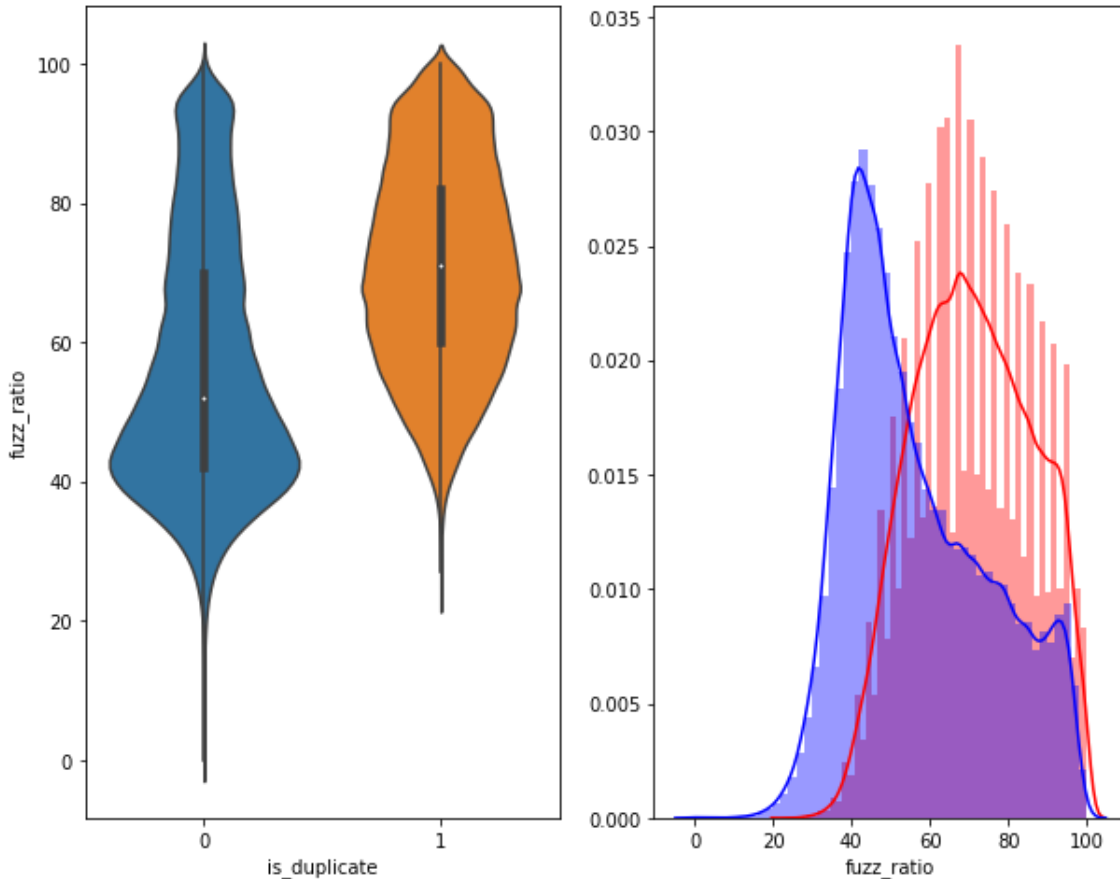

### 3.5.2 Visualization

In [0]:

```
# Using TSNE for Dimentionalty reduction for 15 Features(Generated after cleanin
g the data) to 3 dimention

from sklearn.preprocessing import MinMaxScaler

dfp_subsampled = df[0:5000]
X = MinMaxScaler().fit_transform(dfp_subsampled[['cwc_min', 'cwc_max', 'csc_min'
, 'csc_max', 'ctc_min', 'ctc_max', 'last_word_eq', 'first_word_eq', 'abs_len
_diff', 'mean_len', 'token_set_ratio', 'token_sort_ratio', 'fuzz_ratio',
'fuzz_partial_ratio', 'longest_substr_ratio']])
y = dfp_subsampled['is_duplicate'].values
```


In [0]:

```
tsne2d = TSNE(  
    n_components=2,  
    init='random', # pca  
    random_state=101,  
    method='barnes_hut',  
    n_iter=1000,  
    verbose=2,  
    angle=0.5  
) .fit_transform(X)
```

```
[t-SNE] Computing 91 nearest neighbors...
[t-SNE] Indexed 5000 samples in 0.011s...
[t-SNE] Computed neighbors for 5000 samples in 0.912s...
[t-SNE] Computed conditional probabilities for sample 1000 / 5000
[t-SNE] Computed conditional probabilities for sample 2000 / 5000
[t-SNE] Computed conditional probabilities for sample 3000 / 5000
[t-SNE] Computed conditional probabilities for sample 4000 / 5000
[t-SNE] Computed conditional probabilities for sample 5000 / 5000
[t-SNE] Mean sigma: 0.116557
[t-SNE] Computed conditional probabilities in 0.433s
[t-SNE] Iteration 50: error = 80.9244080, gradient norm = 0.0428133
(50 iterations in 13.099s)
[t-SNE] Iteration 100: error = 70.3858795, gradient norm = 0.0100968
(50 iterations in 9.067s)
[t-SNE] Iteration 150: error = 68.6138382, gradient norm = 0.0058392
(50 iterations in 9.602s)
[t-SNE] Iteration 200: error = 67.7700119, gradient norm = 0.0036596
(50 iterations in 9.121s)
[t-SNE] Iteration 250: error = 67.2725067, gradient norm = 0.0034962
(50 iterations in 11.305s)
[t-SNE] KL divergence after 250 iterations with early exaggeration:
67.272507
[t-SNE] Iteration 300: error = 1.7737305, gradient norm = 0.0011918
(50 iterations in 8.289s)
[t-SNE] Iteration 350: error = 1.3720417, gradient norm = 0.0004822
(50 iterations in 10.526s)
[t-SNE] Iteration 400: error = 1.2039998, gradient norm = 0.0002768
(50 iterations in 9.600s)
[t-SNE] Iteration 450: error = 1.1133438, gradient norm = 0.0001881
(50 iterations in 11.827s)
[t-SNE] Iteration 500: error = 1.0579143, gradient norm = 0.0001434
(50 iterations in 8.941s)
[t-SNE] Iteration 550: error = 1.0221983, gradient norm = 0.0001164
(50 iterations in 11.092s)
[t-SNE] Iteration 600: error = 0.9987167, gradient norm = 0.0001039
(50 iterations in 11.467s)
[t-SNE] Iteration 650: error = 0.9831534, gradient norm = 0.0000938
(50 iterations in 11.799s)
[t-SNE] Iteration 700: error = 0.9722011, gradient norm = 0.0000858
(50 iterations in 12.028s)
[t-SNE] Iteration 750: error = 0.9643636, gradient norm = 0.0000799
(50 iterations in 12.120s)
[t-SNE] Iteration 800: error = 0.9584482, gradient norm = 0.0000785
(50 iterations in 11.867s)
[t-SNE] Iteration 850: error = 0.9538348, gradient norm = 0.0000739
(50 iterations in 11.461s)
[t-SNE] Iteration 900: error = 0.9496906, gradient norm = 0.0000712
(50 iterations in 11.023s)
[t-SNE] Iteration 950: error = 0.9463405, gradient norm = 0.0000673
(50 iterations in 11.755s)
[t-SNE] Iteration 1000: error = 0.9432716, gradient norm = 0.0000662
(50 iterations in 11.493s)
[t-SNE] Error after 1000 iterations: 0.943272
```

In [0]:

```
df = pd.DataFrame({'x':tsne2d[:,0], 'y':tsne2d[:,1] , 'label':y})  
  
# draw the plot in appropriate place in the grid  
sns.lmplot(data=df, x='x', y='y', hue='label', fit_reg=False, size=8,palette="Set1",markers=['s','o'])  
plt.title("perplexity : {} and max_iter : {}".format(30, 1000))  
plt.show()
```

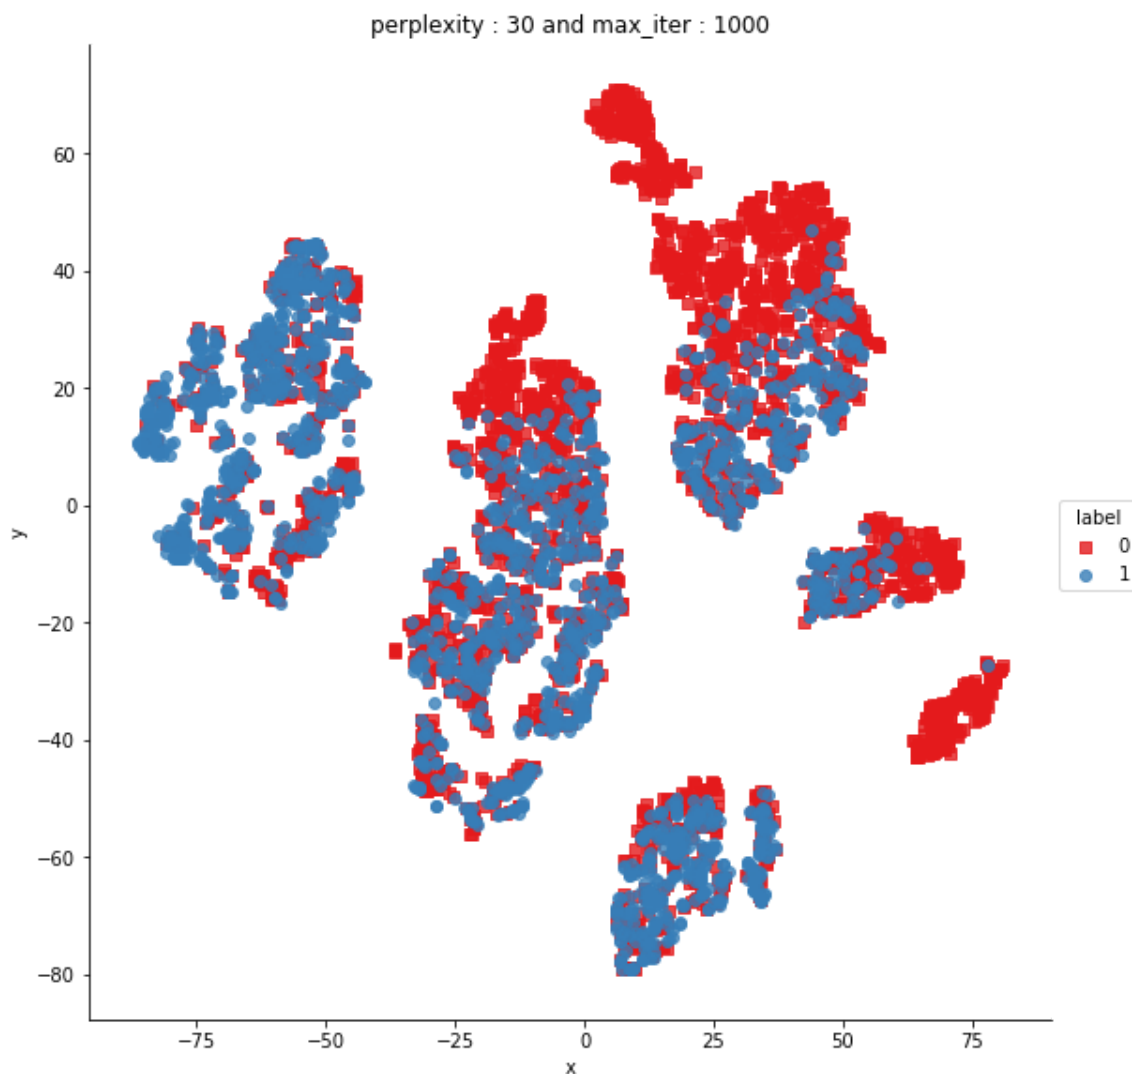



In [0]:

```
from sklearn.manifold import TSNE
tsne3d = TSNE(
    n_components=3,
    init='random', # pca
    random_state=101,
    method='barnes_hut',
    n_iter=1000,
    verbose=2,
    angle=0.5
).fit_transform(X)
```

```
[t-SNE] Computing 91 nearest neighbors...
[t-SNE] Indexed 5000 samples in 0.010s...
[t-SNE] Computed neighbors for 5000 samples in 0.935s...
[t-SNE] Computed conditional probabilities for sample 1000 / 5000
[t-SNE] Computed conditional probabilities for sample 2000 / 5000
[t-SNE] Computed conditional probabilities for sample 3000 / 5000
[t-SNE] Computed conditional probabilities for sample 4000 / 5000
[t-SNE] Computed conditional probabilities for sample 5000 / 5000
[t-SNE] Mean sigma: 0.116557
[t-SNE] Computed conditional probabilities in 0.363s
[t-SNE] Iteration 50: error = 77.7944183, gradient norm = 0.1014017
(50 iterations in 34.931s)
[t-SNE] Iteration 100: error = 69.2682266, gradient norm = 0.0248657
(50 iterations in 15.147s)
[t-SNE] Iteration 150: error = 67.7877655, gradient norm = 0.0150941
(50 iterations in 13.761s)
[t-SNE] Iteration 200: error = 67.1991119, gradient norm = 0.0126559
(50 iterations in 13.425s)
[t-SNE] Iteration 250: error = 66.8560715, gradient norm = 0.0074975
(50 iterations in 12.904s)
[t-SNE] KL divergence after 250 iterations with early exaggeration:
66.856071
[t-SNE] Iteration 300: error = 1.2356015, gradient norm = 0.0007033
(50 iterations in 13.302s)
[t-SNE] Iteration 350: error = 0.9948602, gradient norm = 0.0001997
(50 iterations in 18.898s)
[t-SNE] Iteration 400: error = 0.9168936, gradient norm = 0.0001430
(50 iterations in 13.397s)
[t-SNE] Iteration 450: error = 0.8863022, gradient norm = 0.0000975
(50 iterations in 16.379s)
[t-SNE] Iteration 500: error = 0.8681002, gradient norm = 0.0000854
(50 iterations in 17.791s)
[t-SNE] Iteration 550: error = 0.8564141, gradient norm = 0.0000694
(50 iterations in 17.060s)
[t-SNE] Iteration 600: error = 0.8470711, gradient norm = 0.0000640
(50 iterations in 15.454s)
[t-SNE] Iteration 650: error = 0.8389117, gradient norm = 0.0000561
(50 iterations in 17.562s)
[t-SNE] Iteration 700: error = 0.8325295, gradient norm = 0.0000529
(50 iterations in 13.443s)
[t-SNE] Iteration 750: error = 0.8268463, gradient norm = 0.0000528
(50 iterations in 17.981s)
[t-SNE] Iteration 800: error = 0.8219477, gradient norm = 0.0000477
(50 iterations in 17.448s)
[t-SNE] Iteration 850: error = 0.8180174, gradient norm = 0.0000490
(50 iterations in 18.376s)
[t-SNE] Iteration 900: error = 0.8150476, gradient norm = 0.0000456
(50 iterations in 17.778s)
[t-SNE] Iteration 950: error = 0.8122067, gradient norm = 0.0000472
(50 iterations in 16.983s)
[t-SNE] Iteration 1000: error = 0.8095787, gradient norm = 0.0000489
(50 iterations in 18.581s)
[t-SNE] Error after 1000 iterations: 0.809579
```

In [0]:

```
tracel = go.Scatter3d(  
    x=tsne3d[:,0],  
    y=tsne3d[:,1],  
    z=tsne3d[:,2],  
    mode='markers',  
    marker=dict(  
        sizemode='diameter',  
        color = y,  
        colorscale = 'Portland',  
        colorbar = dict(title = 'duplicate'),  
        line=dict(color='rgb(255, 255, 255)'),  
        opacity=0.75  
    )  
)  
  
data=[tracel]  
layout=dict(height=800, width=800, title='3d embedding with engineered features')  
fig=dict(data=data, layout=layout)  
py.iplot(fig, filename='3DBubble')
```



## Assignment

EDA


Fuzz partial ration

In [20]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'fuzz_partial_ratio', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['fuzz_partial_ratio'][0:] , label =
"1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['fuzz_partial_ratio'][0:] , label =
"0" , color = 'blue' )
plt.show()
```

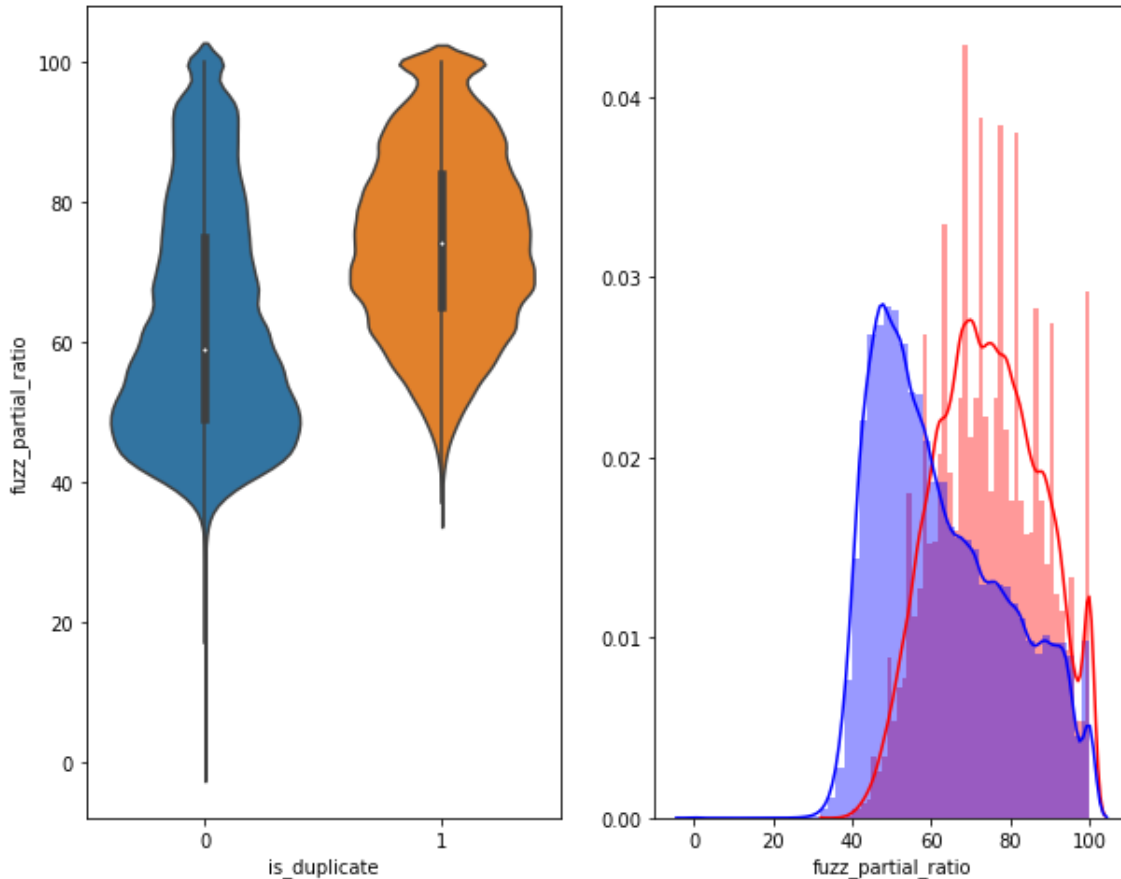

Fuzz\_partial\_ratio as an independent feature is not useful for classification


**longest\_substr\_ratio**

In [35]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'longest_substr_ratio', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['longest_substr_ratio'][0:] , label =
"1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['longest_substr_ratio'][0:] , label =
"0" , color = 'blue' )
plt.show()
```

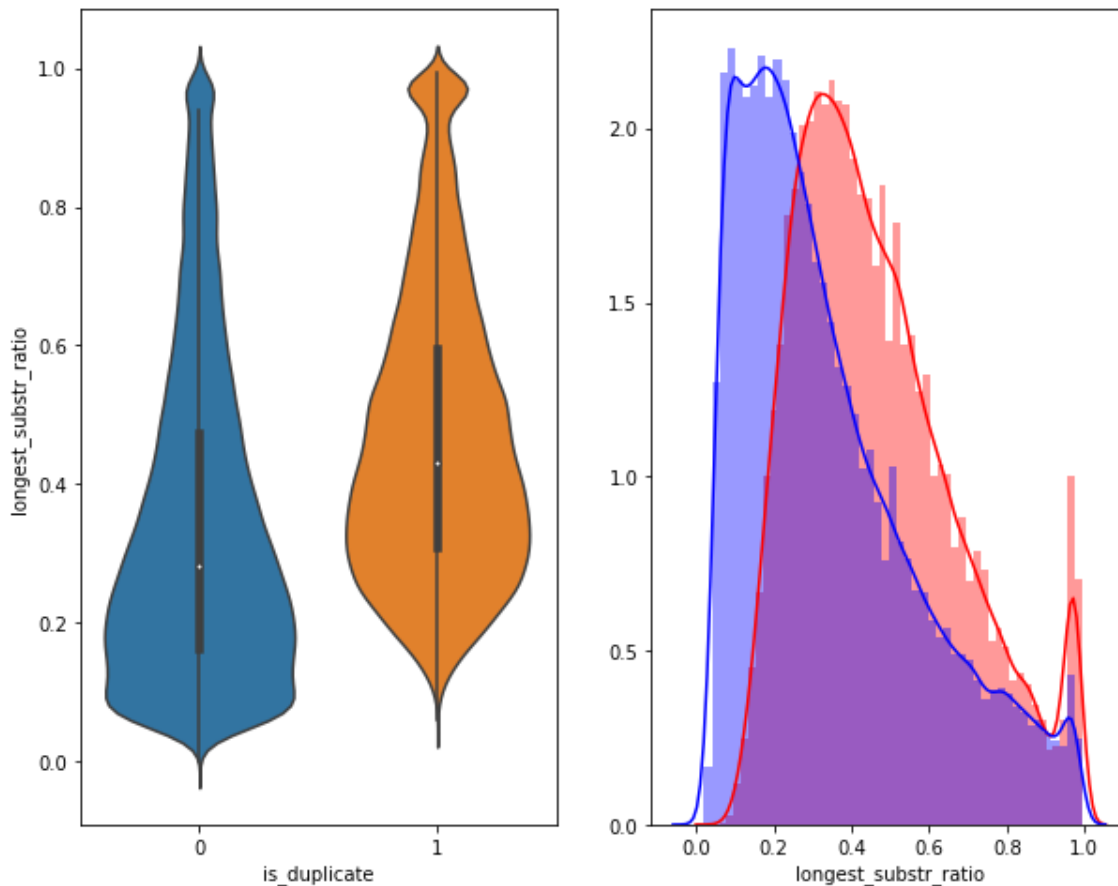

longest\_substr\_ratio as an independent feature is not useful for classification


**ctc\_min**

In [26]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'ctc_min', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['ctc_min'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['ctc_min'][0:] , label = "0" , color = 'blue' )
plt.show()
```

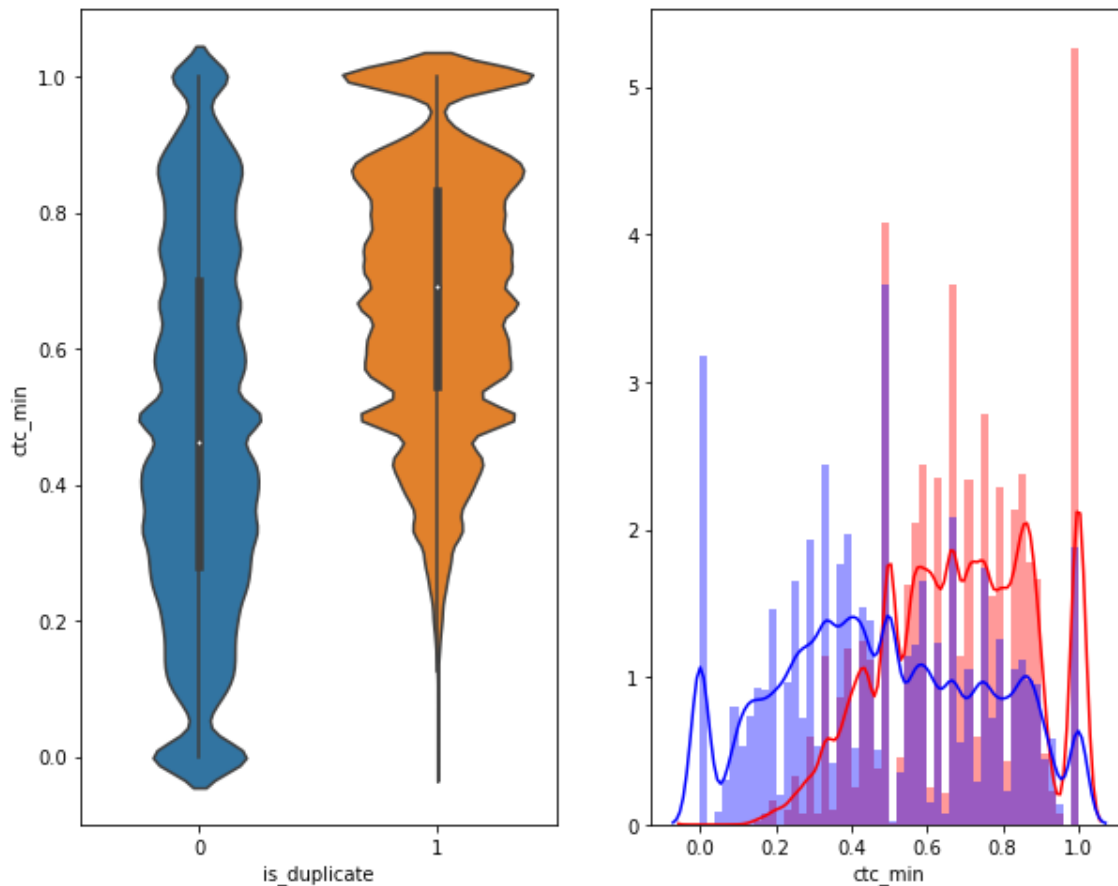

ctc\_min as an independent feature is not useful for classification. There is severe overlap


**ctc\_max**

In [28]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'ctc_max', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['ctc_max'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['ctc_max'][0:] , label = "0" , color = 'blue' )
plt.show()
```

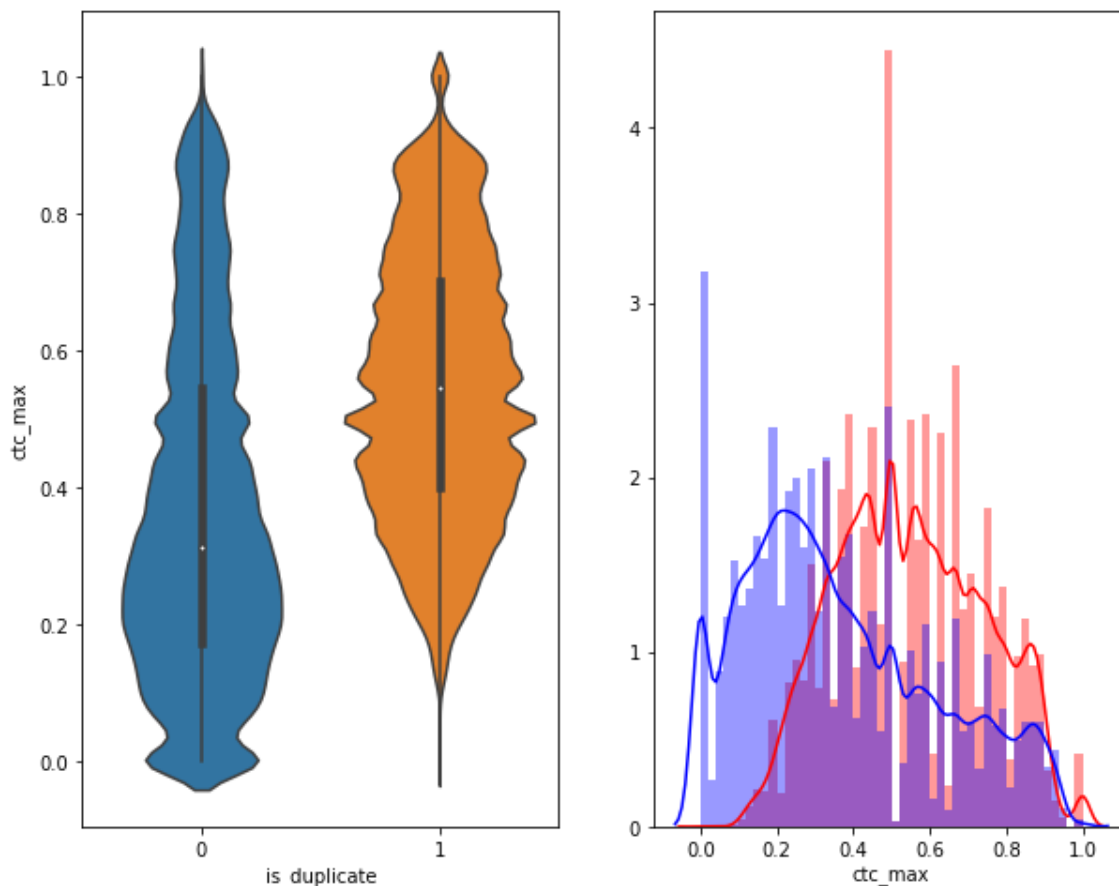

ctc\_max as an independent feature is not useful for classification

**csc\_min**




In [36]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'csc_min', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['csc_min'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['csc_min'][0:] , label = "0" , color = 'blue' )
plt.show()
```

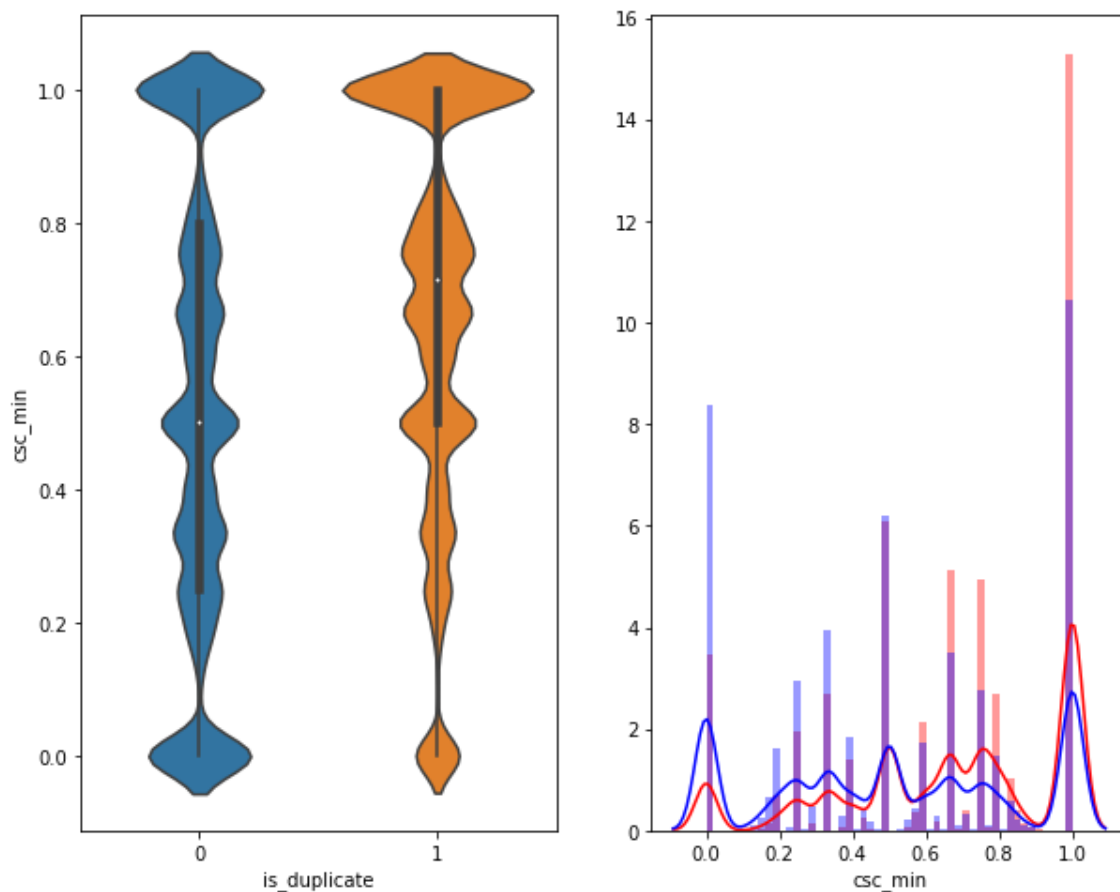

csc\_min as an independent feature is not useful for classification


**csc\_max**

In [37]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'csc_max', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['csc_max'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['csc_max'][0:] , label = "0" , color = 'blue' )
plt.show()
```

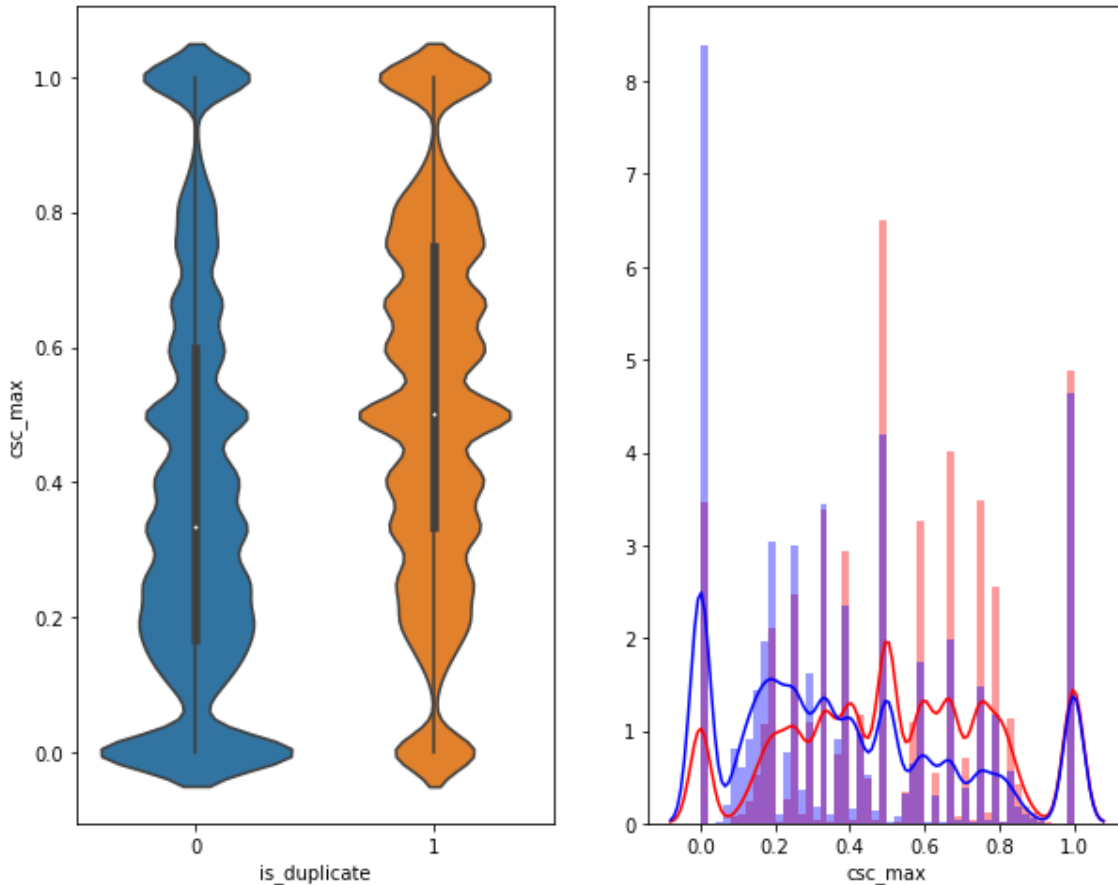

csc\_max as an independent feature is not useful for classification


**abs\_len\_diff**

In [34]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'abs_len_diff', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['abs_len_diff'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['abs_len_diff'][0:] , label = "0" , color = 'blue' )
plt.show()
```

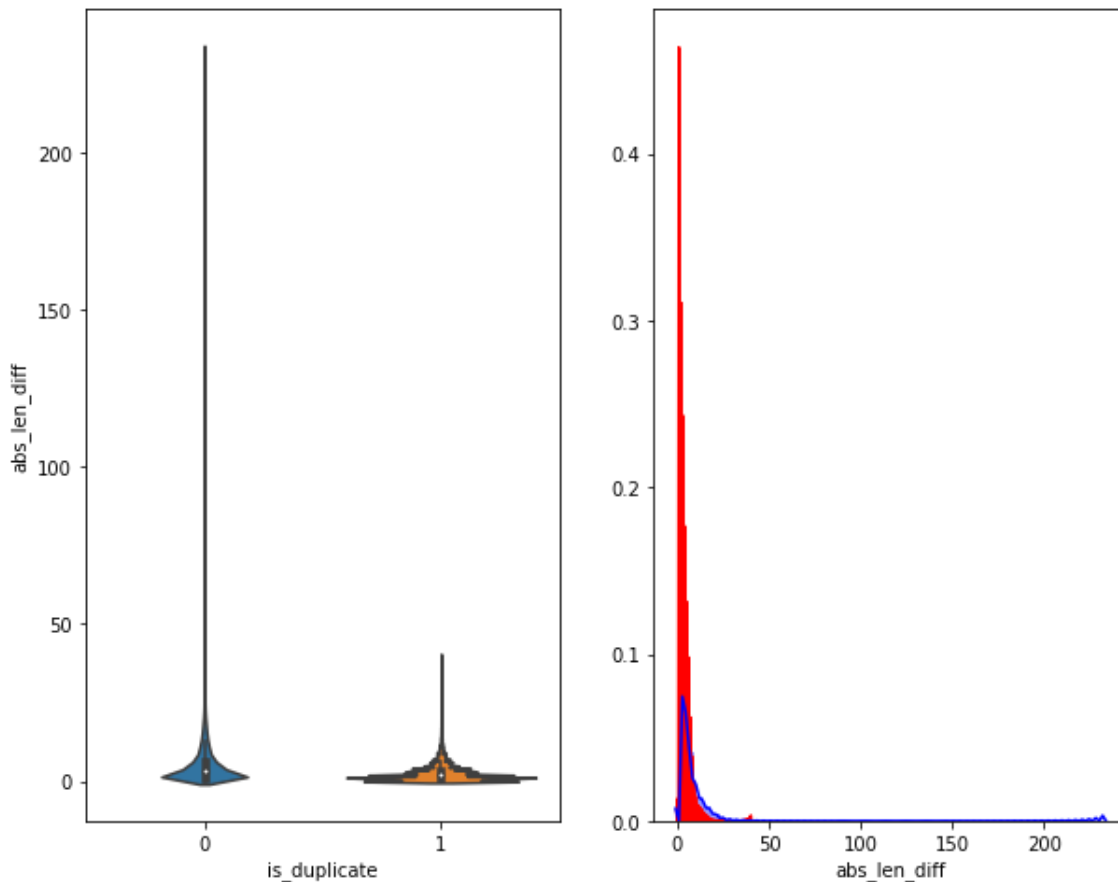

abs\_len\_diff as an independent feature is not useful for classification


## mean\_len

In [30]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'mean_len', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['mean_len'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['mean_len'][0:] , label = "0" , color = 'blue' )
plt.show()
```

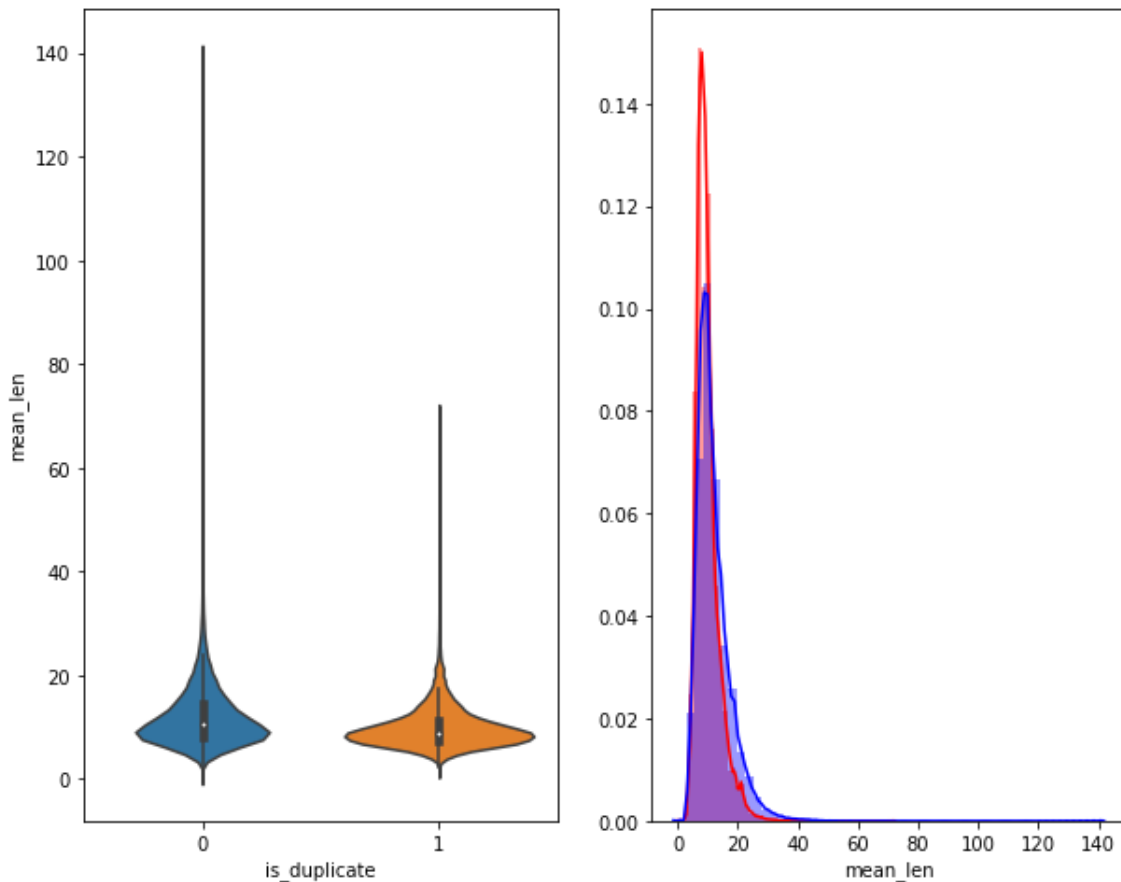

mean\_len as an independent feature is not useful for classification


**last\_word\_eq**

In [31]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'last_word_eq', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['last_word_eq'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['last_word_eq'][0:] , label = "0" , color = 'blue' )
plt.show()
```

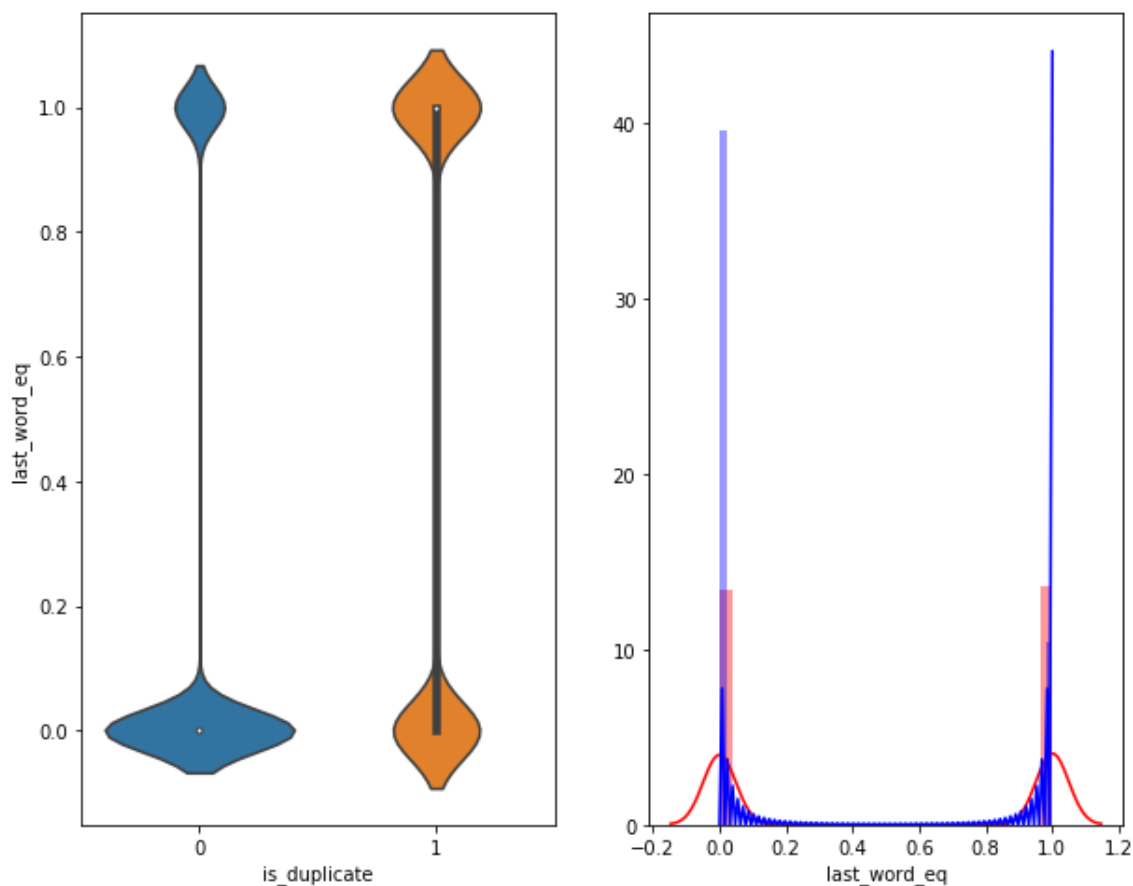

last\_word\_eq as an independent feature is not useful for classification


**cwc\_max**

In [32]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'cwc_max', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['cwc_max'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['cwc_max'][0:] , label = "0" , color = 'blue' )
plt.show()
```

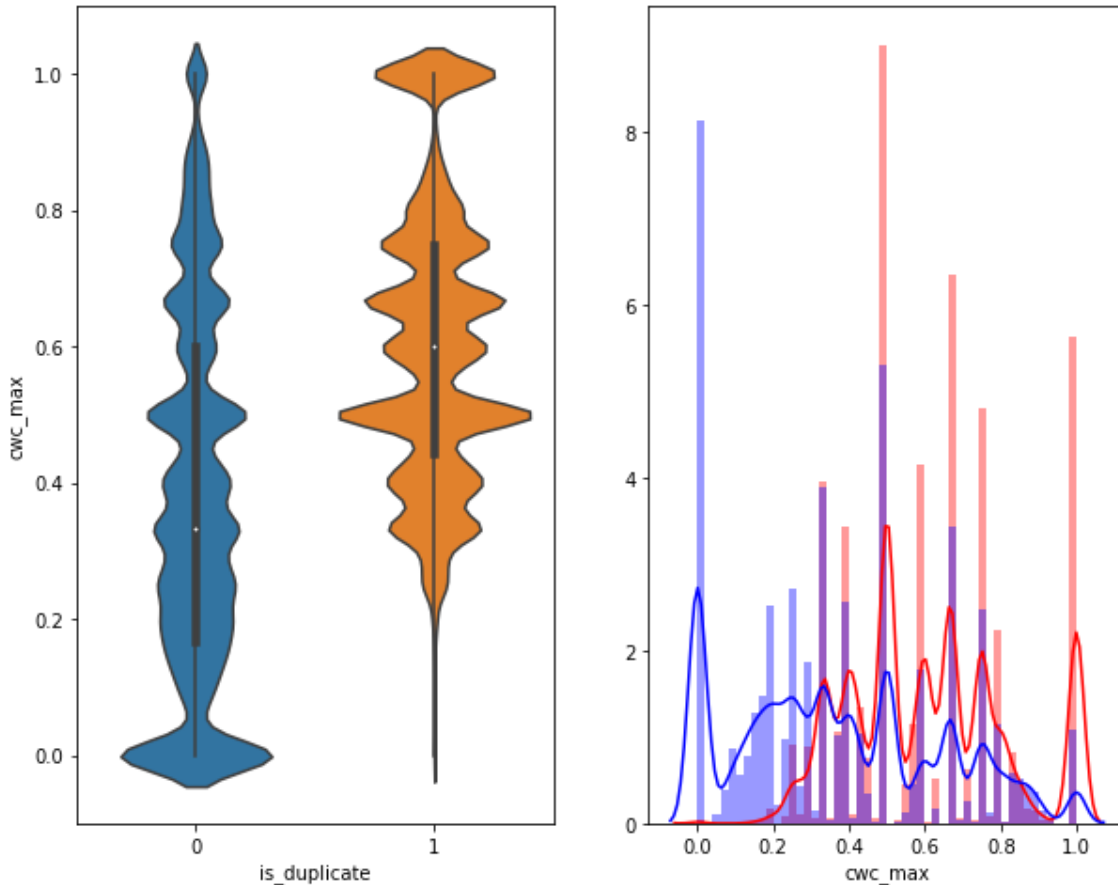

cwc\_max as an independent feature is not useful for classification


**cwc\_min**

In [33]:

```
plt.figure(figsize=(10, 8))

plt.subplot(1,2,1)
sns.violinplot(x = 'is_duplicate', y = 'cwc_min', data = df[0:] , )

plt.subplot(1,2,2)
sns.distplot(df[df['is_duplicate'] == 1.0]['cwc_min'][0:] , label = "1", color = 'red')
sns.distplot(df[df['is_duplicate'] == 0.0]['cwc_min'][0:] , label = "0" , color = 'blue' )
plt.show()
```

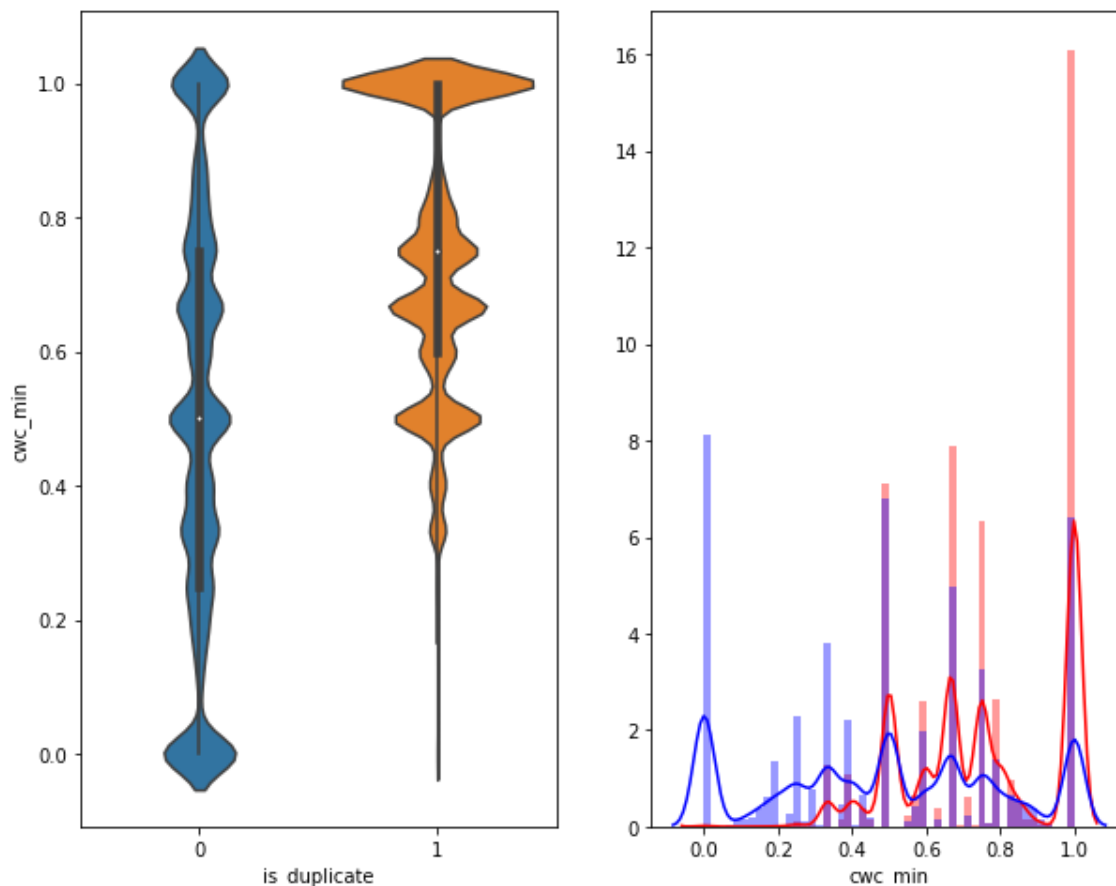

cwc\_min as an independent feature is not useful for classification. There is severe overlap