

Git Github



git

≠




GitHub

버전관리

Git 호스팅 사이트
말 그대로 깃의 허브

버전 관리란?

버전 관리 시스템은 파일 변화를 시간에 따라 기록했다가 나중에 특정 시점의 버전을 다시 꺼내올 수 있는 시스템이다.

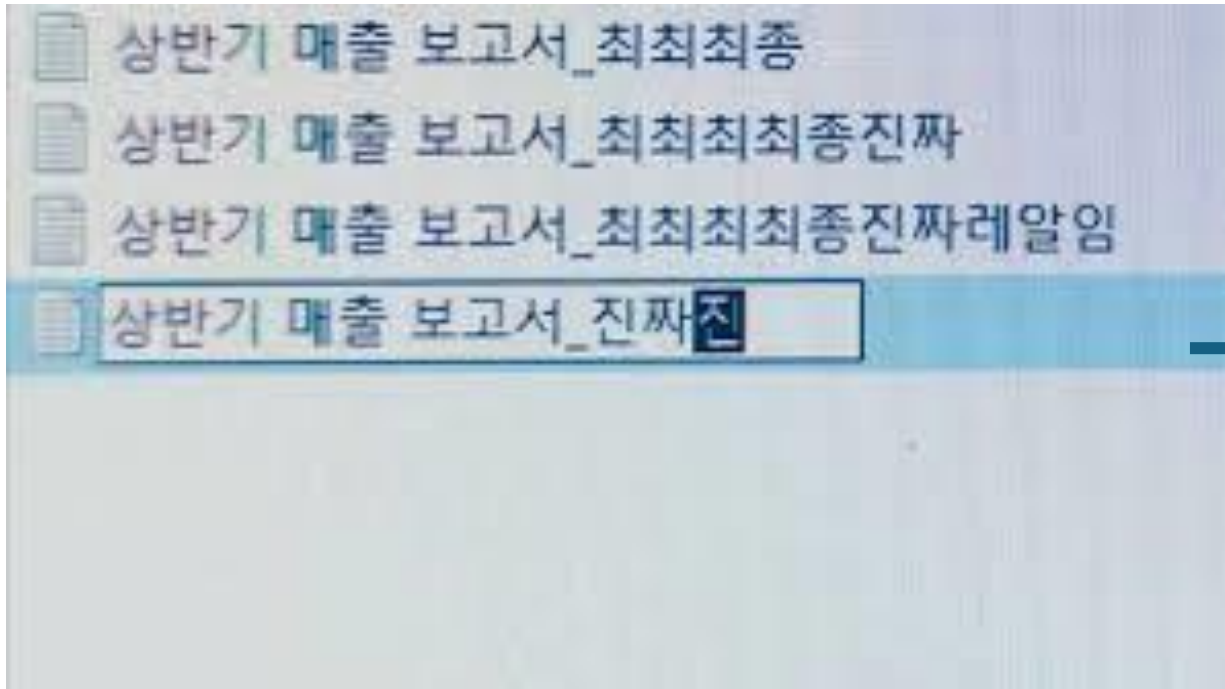

보고서 (v1, v2, v3...)

세 가지 상태

Git을 공부하기 위해 반드시 짚고 넘어가야 할 부분이다.

Git은 파일을 *Modified*, *Staged*, *Committed* 이렇게 세 가지 상태로 관리한다.


* *Modified*는 수정한 파일을 아직 로컬 데이터베이스에 커밋하지 않은 것을 말한다.


* *Staged*란 현재 수정한 파일을 곧 커밋할 것이라고 표시한 상태를 의미한다.

* *Committed*란 데이터가 로컬 데이터베이스에 안전하게 저장됐다는 것을 의미한다.


이 세 가지 상태는 Git 프로젝트의 세 가지 단계와 연결돼 있다. Git 디렉토리, 워킹 트리, Staging Area 이렇게 세 가지 단계를 이해하고 넘어가자.

순서: Modified → Staged → Committed

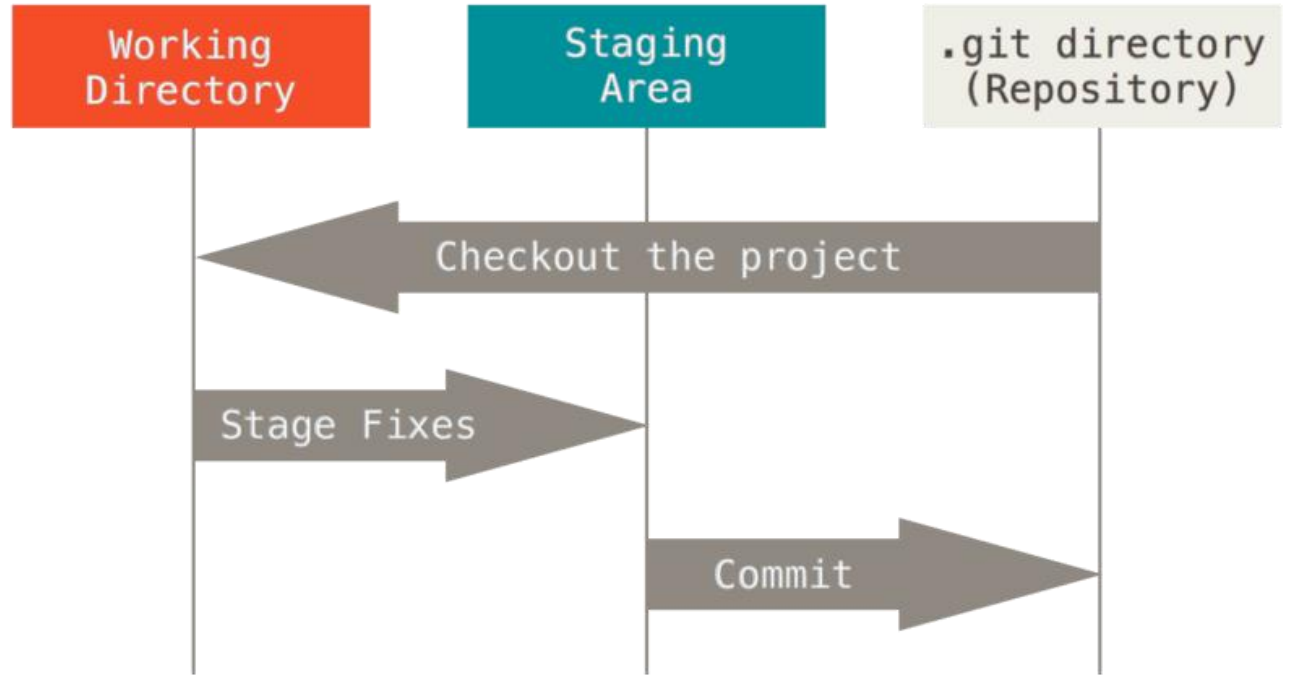


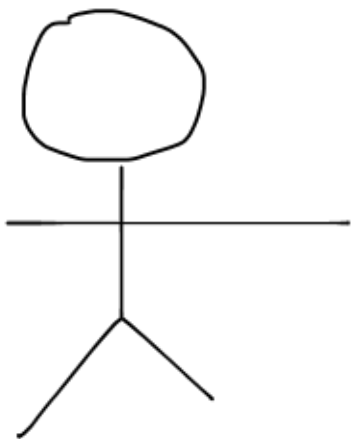

그림을 그린다
(Modified)

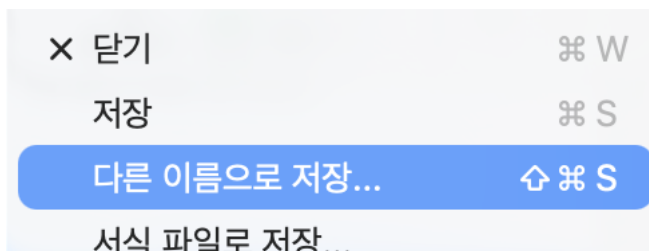

저장 할 예정
(Staged)

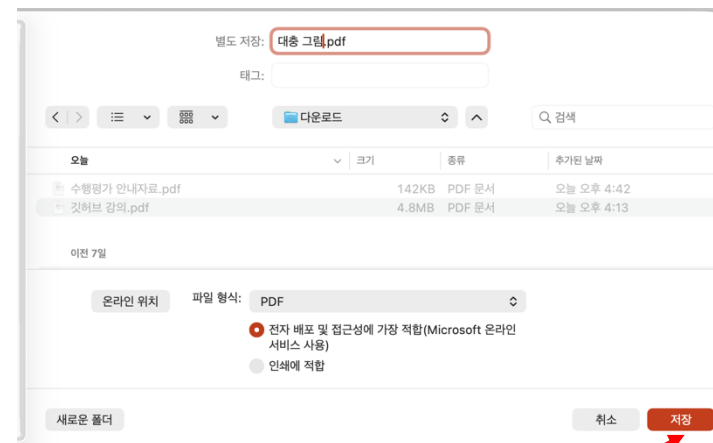


실제로 저장
(Committed)

세 가지 상태

Git으로 하는 일은 기본적으로 아래와 같다.
워킹 트리에서 파일을 수정한다.

Staging Area에 파일을 Stage 해서 커밋할 스냅샷을 만든다. 모든 파일을 추가할 수도 있고 선택하여 추가할 수도 있다.

Staging Area에 있는 파일들을 커밋해서 Git 디렉토리에 영구적인 스냅샷으로 저장한다.

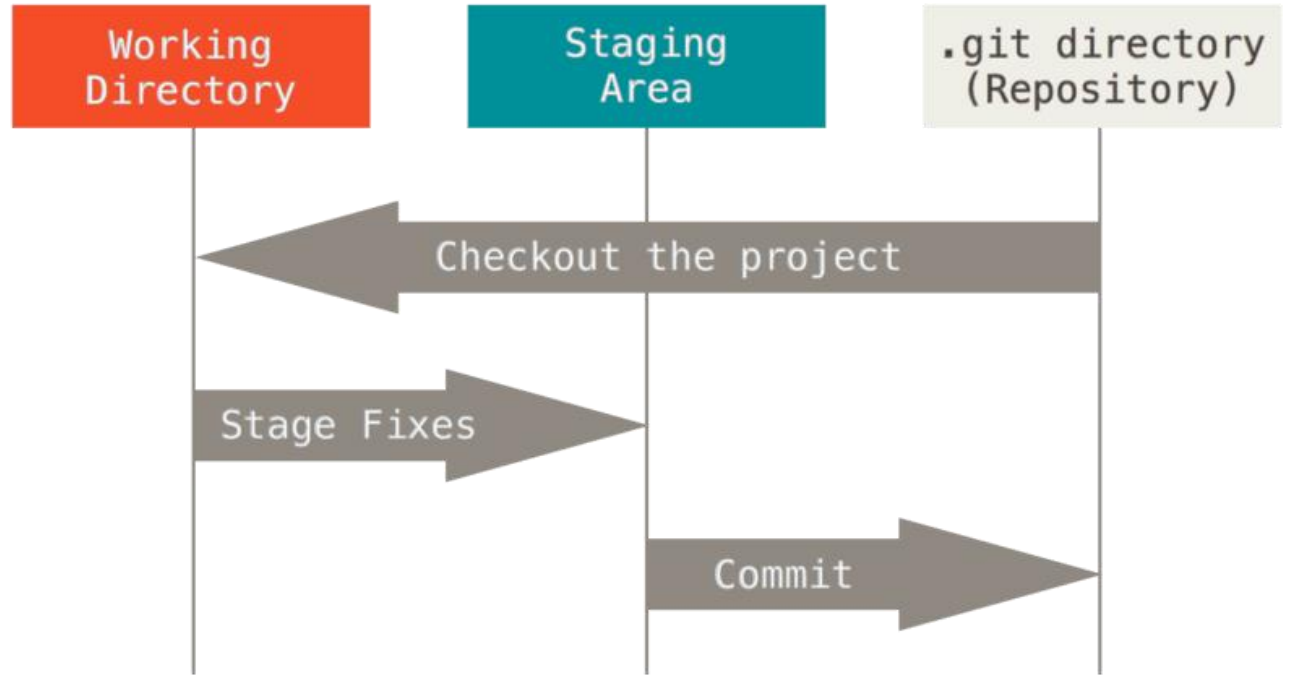


Modified부터 Push까지

Add 실행 시 Local에서 사라짐

Commit 실행 시 Staging에서 사라짐

Push 실행 시 사라지지 않음. 원격 저장소를 동기화 한다고 생각

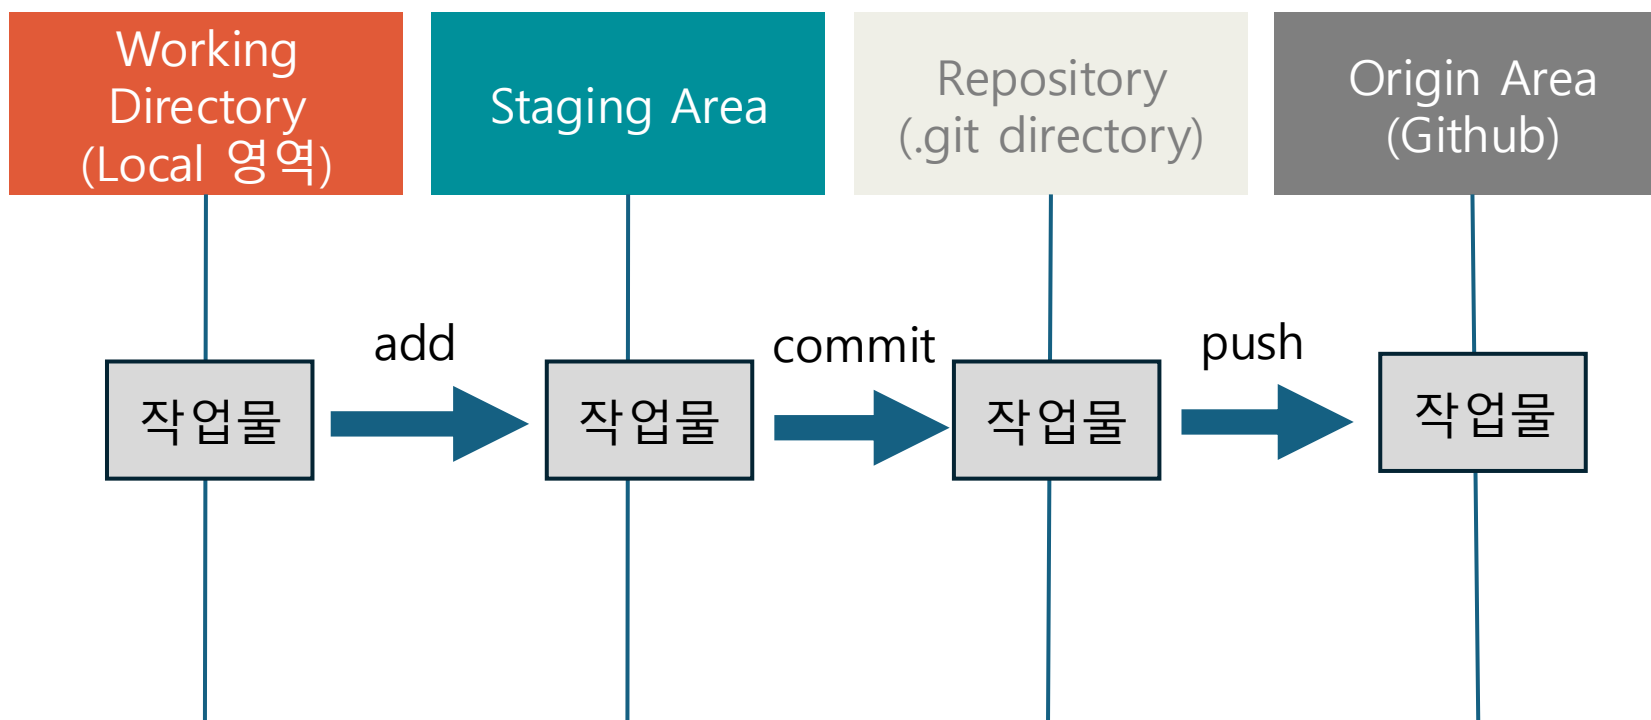

Modified부터 Push까지

add: 저장 할 목록 추가
commit: 저장
push: 공유

Git 시작하기

`git init`

명령어를 통해 저장소를 초기화 해준다.

`git remote add origin "repository_address"`

로컬 저장소와 원격 저장소를 연결

`git add file_name`

변경한 파일을 Staging Area에 스테이징한다.

***origin?**

Github(원격저장소)의 명칭

Git 시작하기


`git commit -m "commit message"`
스태이징한 파일을 **Commit**해 저장소에 저장한다.

`git push origin branch_name`
Commit된 내용을 원격 저장소(Github)에 반영

`git pull origin branch_name`
원격 저장소의 내용을 로컬로 불러오기

실습

1. github.com 접속

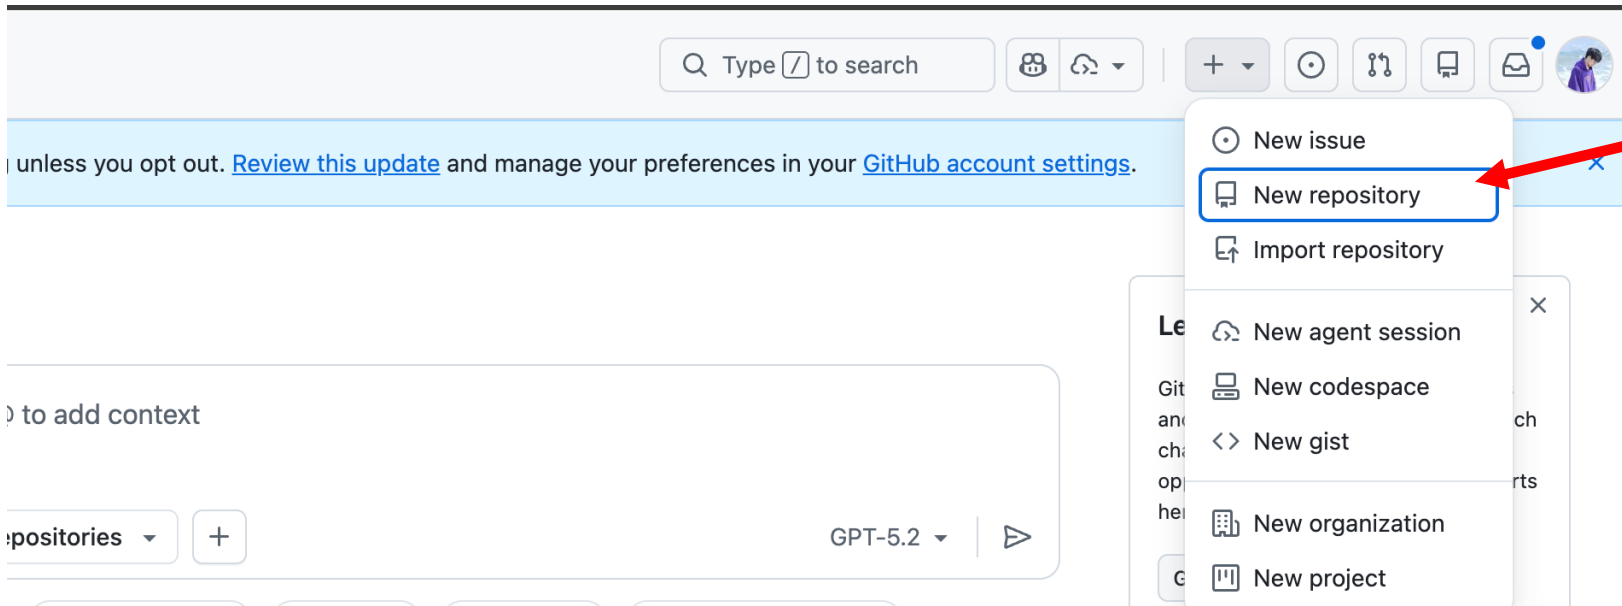


2. New repository 선택

실습

Required fields are marked with an asterisk (*).

1 General

Owner *



Repository name *

repo-name

✔ repo-name is available.

Great repository names are short and memorable. How about [literate-octo-spork?](#)

Description

repo-description

16 / 350 characters

0 / 30000 characters

1. 이름과 설명 작성

2. Create repository 클릭

Create repository

실습

...or create a new repository on the command line

```
echo "# repo-name" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/jdw09/repo-name.git
git push -u origin main
```



복사하기 후 터미널에서 실행

* 명령어 설명

Git init → 저장소 초기화

Git remote add origin →
원격 저장소 연결

```
yuniinuy@daewons-MacBook-Pro repo-name % echo "# repo-name" >> README.md
git init
git add README.md
git commit -m "first commit"
git branch -M main
git remote add origin https://github.com/jdw09/repo-name.git
git push -u origin main
```

실습

...print the results using either explicit iteration data for all model training unless you opt for [distributed training](#) and manage your preferences in your [GitHub settings](#).

 **repo-name** Private

 Watch 0

 Fork 0

 Star 0

 main

 1 Branch

 0 Tags

 Add file



 Code

 **jdwo9** first commit

a2ed0f1 · now

 1 Commit

 README.md

first commit

now

 README



repo-name

About

repo-description

-  Readme
-  Activity
-  0 stars
-  0 watching
-  0 forks

Releases

No releases published

[Create a new release](#)

Packages

No packages published

[Publish your first package](#)

기본 설정 끝!


실습

Working
Directory
(Local 영역)

Staging Area

Repository
(.git directory)


Origin Area
(Github)

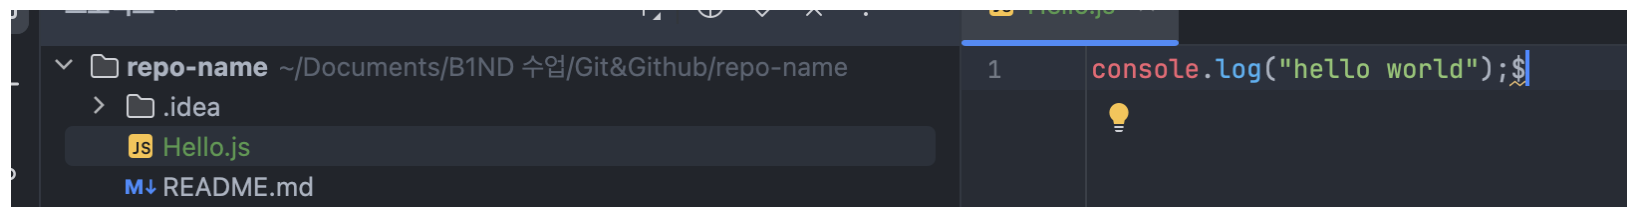

파일 작성하기
(Modified)

```
git add Hello.js
```

`git add Hello.js`로 Hello.js를 스테이징하기 (Staging)

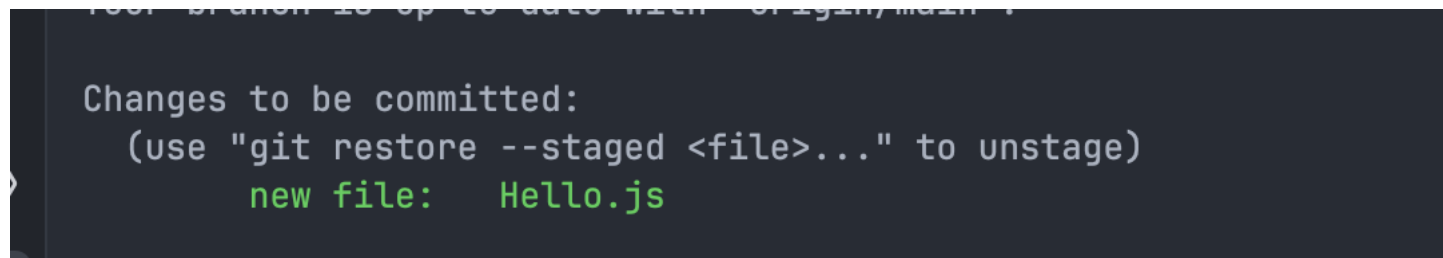

`git status`로 Hello.js가
스테이징 된 모습을 볼 수 있음

실습

Working
Directory
(Local 영역)

Staging Area

Repository
(.git directory)

Origin Area
(Github)

```
yuniinuy@daewons-MacBook-Pro repo-name % git commit -m "Your Commit Message"
[main 01396ea] Your Commit Message
1 file changed, 1 insertion(+)
create mode 100644 Hello.js
```

`git commit -m "Message"` 로
커밋하기(Commit)

```
create mode 100644 hello.js

yuniinuy@daewons-MacBook-Pro repo-name % git log
commit 01396ea9d9c67aa039a7227c9781aeaa58d1f1f7 (HEAD -> main)
Author: jdw09 <razion0304@naver.com>
Date: Sat Apr 11 14:34:26 2026 +0900

    Your Commit Message
```

`git log`로 커밋된 내용을 확인 가능

실습

Working
Directory
(Local 영역)

Staging Area

Repository
(.git directory)


Origin Area
(Github)

```
yuniinuy@daewons-MacBook-Pro repo-name % git push origin main
Enumerating objects: 4, done.
Counting objects: 100% (4/4), done.
Delta compression using up to 10 threads
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 307 bytes | 307.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/jdw09/repo-name.git
a2ed0f1..01396ea main -> main
```

```
git push origin main
```

원격 저장소의 메인 브랜치로 보내기
(Push)

실습

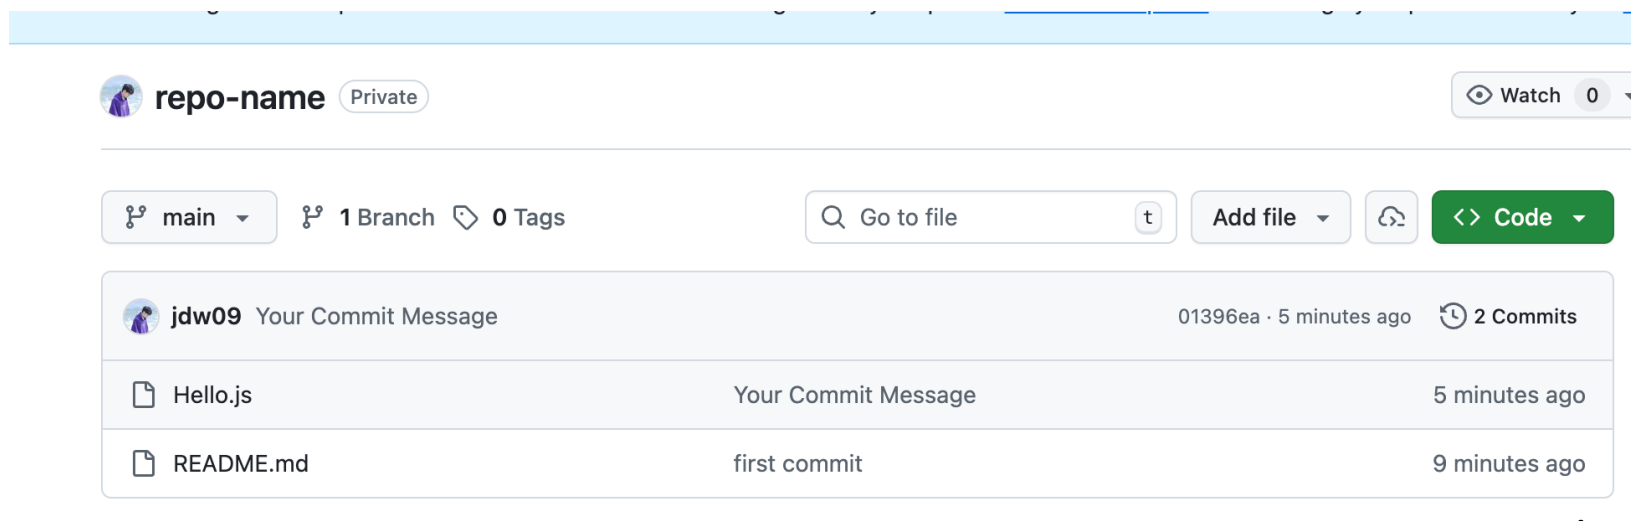

The screenshot shows a GitHub repository interface. At the top, the repository name 'repo-name' is displayed with a 'Private' label and a 'Watch' button showing 0 watchers. Below this, the 'main' branch is selected, with '1 Branch' and '0 Tags' indicated. A search bar 'Go to file' and buttons for 'Add file' and 'Code' are present. The commit history table shows two commits: one by 'jdww09' with message 'Your Commit Message' (SHA: 01396ea, 5 minutes ago) and another 'first commit' (9 minutes ago). The file 'Hello.js' is listed as part of the first commit.

File	Commit Message	Time
Hello.js	Your Commit Message	5 minutes ago
README.md	first commit	9 minutes ago

Hello.js가
원격 저장소에 반영된 모습

이슈

이슈 == 해결해야 하는 문제

이슈

기능 추가 해주세요..
버그 수정 해주세요..
왜 이렇게 만들었나요..
내가 이거 개발 할거다



이슈를 파세요

이슈

The screenshot shows the GitHub interface for the repository 'Team-B1ND / dodamdodam-web'. The 'Issues' tab is highlighted with a red box in the top navigation bar. The repository page displays a file tree on the left, a central area with a message about branch protection, and a right sidebar with repository statistics and links.

Repository: dodamdodam-web (Public)

Navigation: Code, **Issues 2**, Pull requests 1, Agents, Actions, Projects, Security and quality, Insights, Settings

Branches: main (2 Branches), 0 Tags

Files and Commits:

File	Commit Message	Time
public	feat: readme	last month
src	feat: ban student filtering	last week
.gitignore	fix: close modal after editing password	last month
README.md	fix: line br remove	last month
eslint.config.js	feat: 프로젝트 초기화	2 months ago
index.html	fix: 파비콘 및 타이틀 수정	2 months ago
local.dodam-dev.b1nd.com-key.pem	feat: 프로젝트 초기화	2 months ago
local.dodam-dev.b1nd.com.pem	feat: 프로젝트 초기화	2 months ago
package.json	feat: extract-excel	last week
pnpm-lock.yaml	feat: extract-excel	last week
tsconfig.app.json	feat: add svgr	2 months ago
tsconfig.json	feat: 프로젝트 초기화	2 months ago
tsconfig.node.json	feat: 프로젝트 초기화	2 months ago
vercel.json	feat: vercel config	2 months ago

About: 도담도담 모놀리식 웹 페이지, dodam.b1nd.com

Releases: No releases published, [Create a new release](#)

Deployments: 105, Preview 1 hour ago, Production last week, [+103 deployments](#)

Packages: No packages published, [Publish your first package](#)

Contributors: 6

이슈

☐ Open 2 Closed 52

Author ▾ Labels ▾ Projects ▾ Milestones ▾ Assignees ▾ Types ▾ ≡↓ Newest ▾

☐  [Feature] 시정표 추가 페이지 필요 priority: medium size: S type: feature

Feature #85 · daedyu opened 2 weeks ago

☐  [Feature] 어드민 페이지에서 유저 역할 지급 기능 추가 type: feature

Feature #84 · Cartridge9 opened 2 weeks ago 🔗 1

[Give feedback](#)

이슈

 **Create new issue**

Add a title *

Add a description

WritePreview

H B I [bulleted list] [numbered list] [link] [code] [quote] [table] [image] [undo]

Type your description here...

 Paste, drop, or click to add files  Write with Copilot

☐ Create more

Assignees 

No one - [Assign yourself](#)

Labels 

No labels


Projects 

No projects

Milestone 

No milestone

브랜치

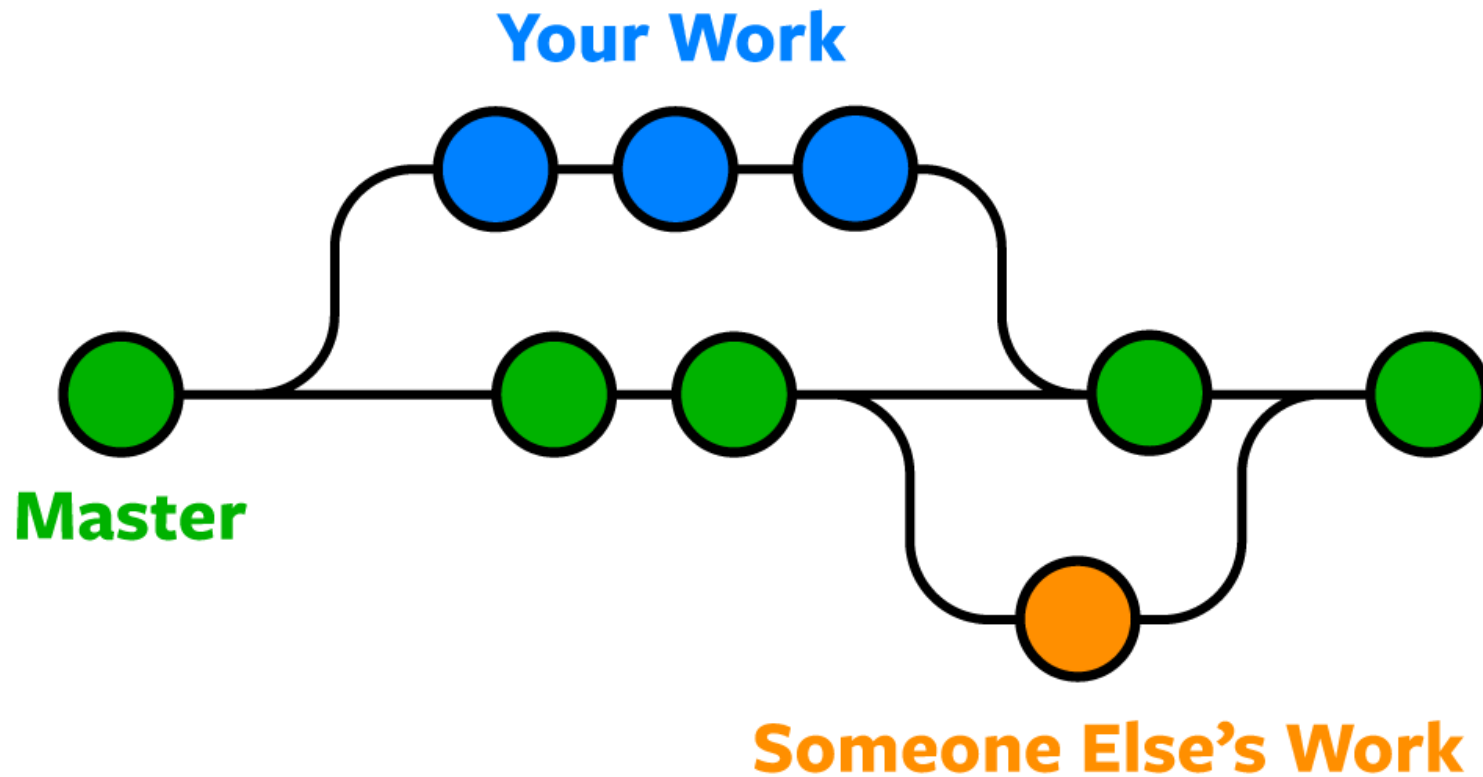

내꺼는 내꺼대로
니꺼는 니꺼대로

브랜치

브랜치가 없다면?




PR




브랜치끼리 합치는거
Pull-Request

실습

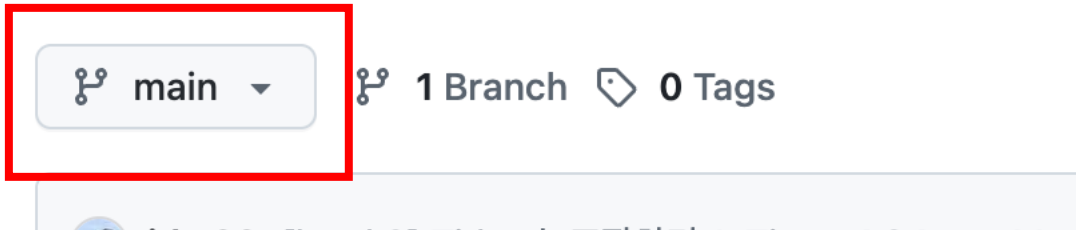

실습

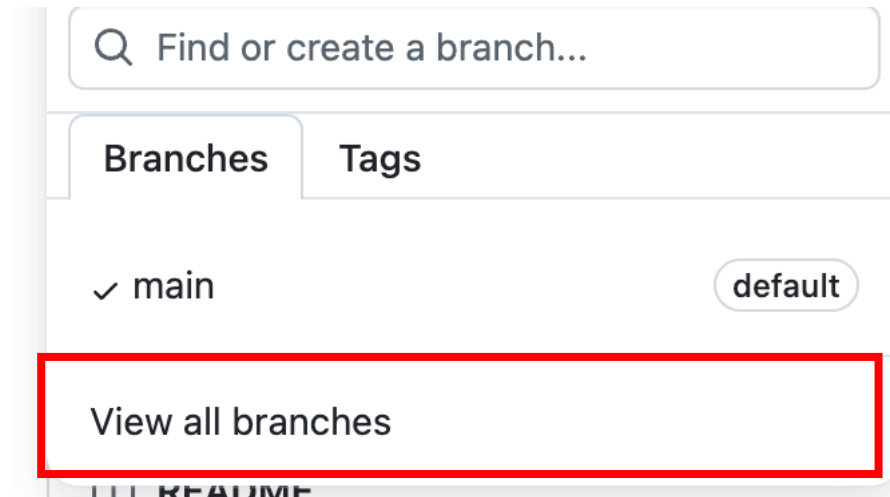

실습

Branches

[New branch](#)

Overview Yours Active Stale All

Q Search branches...

Default

Branch	Updated	Check status	Behind	Ahead	Pull request
main 	 last week			Default	 ...

실습

Create a branch

New branch name

Source

main

Cancel

Create new branch

실습

브랜치 변경하기

```
git checkout -b [branch-name]
```

```
git fetch
```

```
git checkout [branch-name]
```

실습


develop 9 Branches 0 Tags

Go to file T Add file <> Code

This branch is 2 commits ahead of and 2 commits behind main .

Contribute

실습

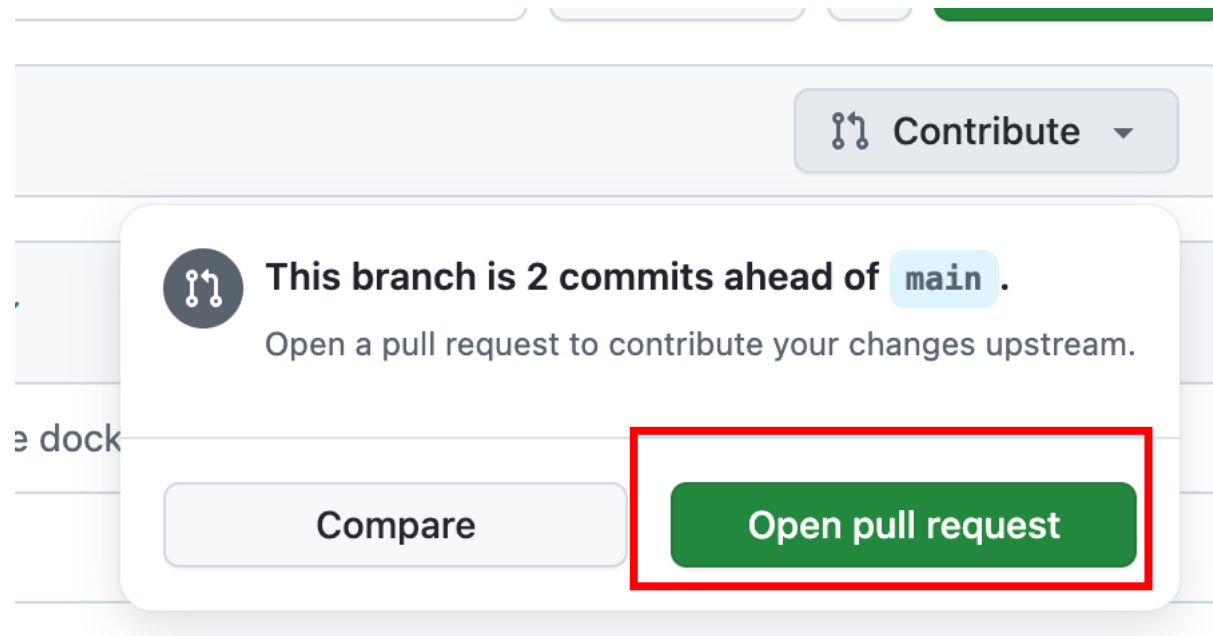

실습

Open a pull request

Create a new pull request by comparing changes across two branches. If you need to, you can also [compare across forks](#). [Learn more about diff comparisons here](#).

base: main

compare: develop

✓ Able to merge. These branches can be automatically merged.



Add a title *

Develop

Add a description

Write

Preview



Add your description here...

 Markdown is supported

 Paste, drop, or click to add files

Create pull request

Reviewers

 Copilot

Suggestions

 yungxhi

 mingious02

At least 2 approving reviews are required to merge this pull request.

Assignees

No one—[assign yourself](#)

Labels

None yet

Projects

None yet

Milestone

No milestone

실습

merge: develop #117

 Open

[jdw09](#) wants to merge 16 commits into [main](#) from [develop](#) 


 Conversation 1

 Commits 16

 Checks 1

 Files changed 9

실습

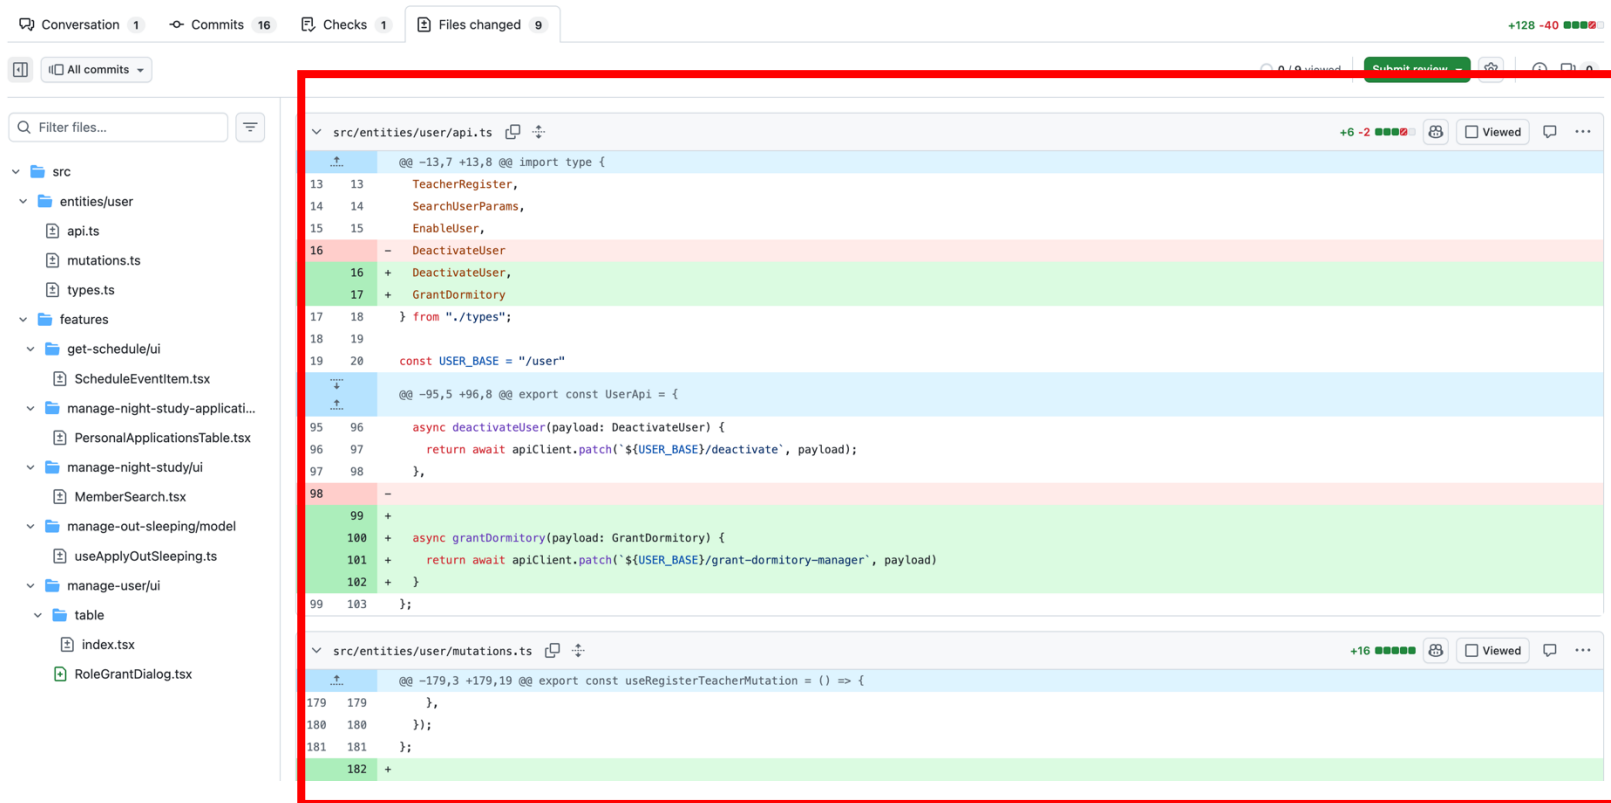

Conversation 1 Commits 16 Checks 1 Files changed 9 +128 -40

Filter files...

- src
 - entities/user
 - api.ts
 - mutations.ts
 - types.ts
 - features
 - get-schedule/ui
 - ScheduleEventItem.tsx
 - manage-night-study-applicati...
 - PersonalApplicationsTable.tsx
 - manage-night-study/ui
 - MemberSearch.tsx
 - manage-out-sleeping/model
 - useApplyOutSleeping.ts
 - manage-user/ui
 - table
 - index.tsx
 - RoleGrantDialog.tsx

src/entities/user/api.ts

```
@@ -13,7 +13,8 @@ import type {
13 13   TeacherRegister,
14 14   SearchUserParams,
15 15   EnableUser,
16 -   DeactivateUser,
16 +   DeactivateUser,
17 +   GrantDormitory,
17 18 } from "../types";
18 19
19 20 const USER_BASE = "/user"
@@ -95,5 +96,8 @@ export const UserApi = {
95 96   async deactivateUser(payload: DeactivateUser) {
96 97     return await apiClient.patch(`${USER_BASE}/deactivate`, payload);
97 98   },
98 -
99 +   async grantDormitory(payload: GrantDormitory) {
100 +     return await apiClient.patch(`${USER_BASE}/grant-dormitory-manager`, payload)
101 +   }
102 + }
99 103 };
```

src/entities/user/mutations.ts

```
@@ -179,3 +179,19 @@ export const useRegisterTeacherMutation = () => {
179 179   },
180 180   });
181 181 };
182 +
```

실습

0 / 9 viewed

Submit review

Finish your review

Write

Preview

H

B

I

≡

<>

↻

≡

≡

≡

@

↻

↶

Leave a comment

Paste, drop, or click to add files

☒ **Comment**
Submit general feedback without explicit approval.

☐ **Approve**
Submit feedback and approve merging these changes.

☐ **Request changes**
Submit feedback suggesting changes.

Cancel

Submit review

실습

**This branch was successfully deployed**[Show environments](#)
1 active deployment



**All checks have passed**
2 successful checks

**No conflicts with base branch**
Merging can be performed automatically.

Merge pull request

You can also merge this with the command line. [View command line instructions.](#)

Still in progress? [Convert to draft](#)

B1N:D