

1) Add "openai/gpt-oss-120b" to the existing list (Note: update popup.js)

Code Generator

Settings

Supported Language

Java

Browser Engine

Selenium

Select LLM Provider

Groq


Select Model

openai/gpt-oss-120b

Groq API Key

.....

2) Implement Playwright with TypeScript

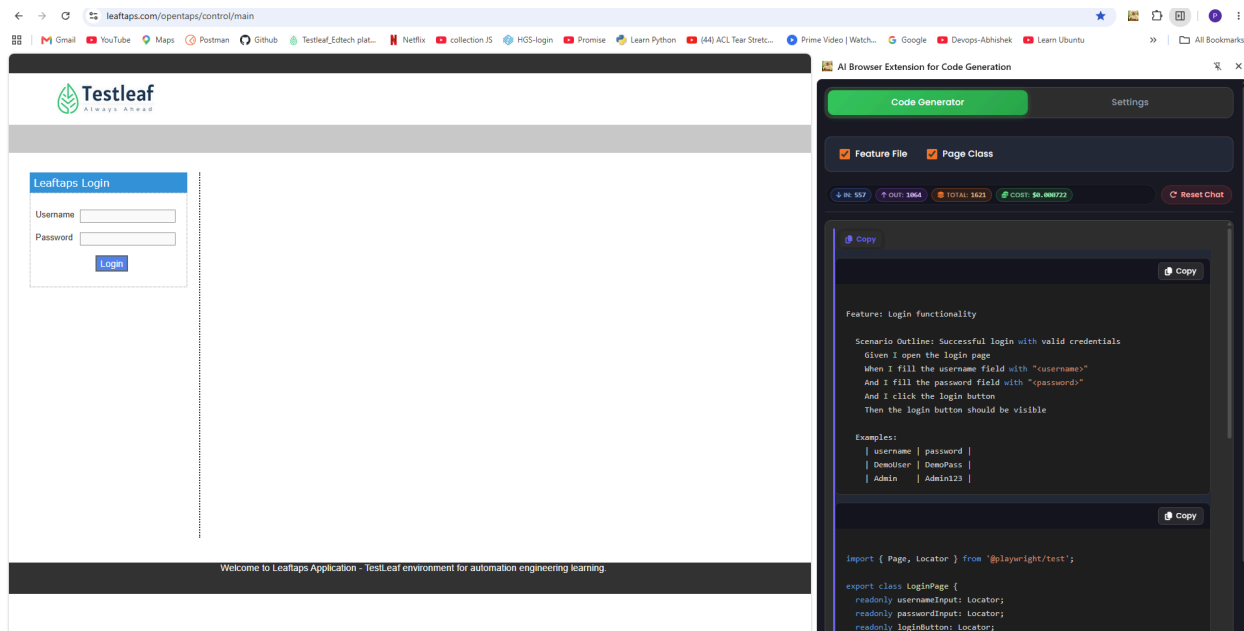

Feature: Login functionality

Scenario Outline: Successful login with valid credentials

Given I open the login page
When I fill the username field with "<username>"
And I fill the password field with "<password>"
And I click the login button
Then the login button should be visible

Examples:

username	password
DemoUser	DemoPass
Admin	Admin123

Page Class:

```
import { Page, Locator } from '@playwright/test';
```

```
export class LoginPage {
  readonly usernameInput: Locator;
  readonly passwordInput: Locator;
  readonly loginButton: Locator;
```

```
  constructor(private readonly page: Page) {
    this.usernameInput = page.locator('#username');
```

```
this.passwordInput = page.locator('#password');
this.loginButton = page.locator('input[type="submit"][value="Login"]');
}

async navigate(): Promise<void> {
  await this.page.goto('https://leaftaps.com/opentaps/control/main');
}

async fillUsername(username: string): Promise<void> {
  await this.usernameInput.fill(username);
}

async fillPassword(password: string): Promise<void> {
  await this.passwordInput.fill(password);
}

async clickLoginButton(): Promise<void> {
  await this.loginButton.click();
}

async isLoginButtonVisible(): Promise<boolean> {
  return await this.loginButton.isVisible();
}
}
```