




1. Pantallazo de la consola de AWS EC2 con la máquina en ejecución

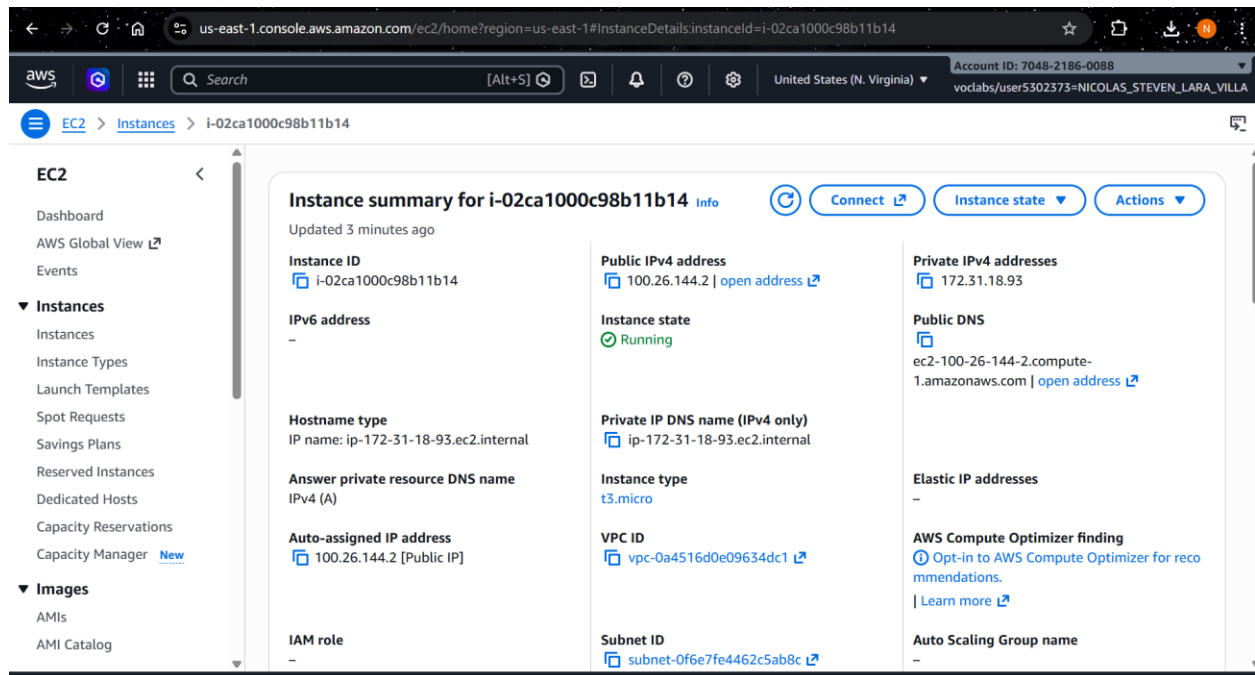

2. Pantallazo de la salida de sudo docker images con imagen etiquetada

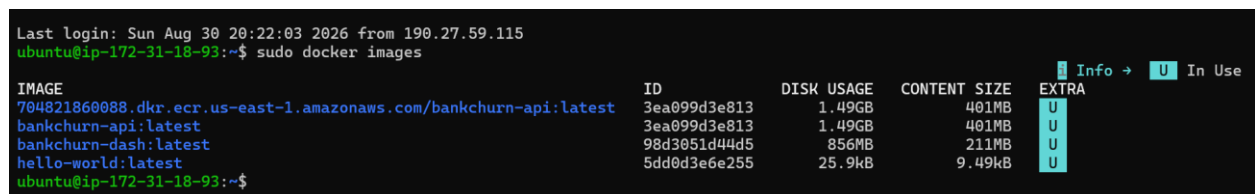

3. Pantallazo del logueo exitoso en AWS

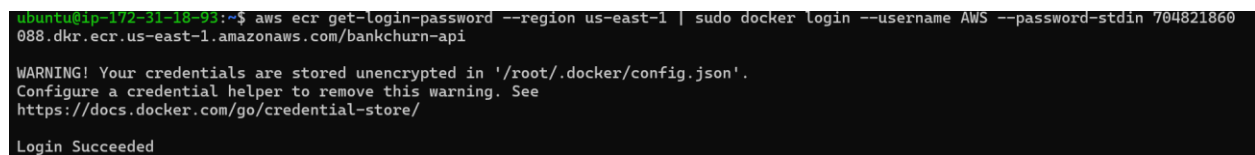

4. Pantallazo de la salida de sudo docker push repoURI

```
ubuntu@ip-172-31-18-93:~$ aws ecr get-login-password --region us-east-1 | sudo docker login --username AWS --password-stdin 704821860088.dkr.ecr.us-east-1.amazonaws.com/bankchurn-api && sudo docker push 704821860088.dkr.ecr.us-east-1.amazonaws.com/bankchurn-api

WARNING! Your credentials are stored unencrypted in '/root/.docker/config.json'.
Configure a credential helper to remove this warning. See
https://docs.docker.com/go/credential-store/


Login Succeeded
Using default tag: latest
The push refers to repository [704821860088.dkr.ecr.us-east-1.amazonaws.com/bankchurn-api]
cc639c51e4a1: Layer already exists
8b4d9f49730f: Layer already exists
fe9acfa05df8: Layer already exists
738d0bed03f2: Layer already exists
6310eb16bf42: Layer already exists
b79f58b3eb94: Layer already exists
46bd07469c79: Layer already exists
805b2f3498e9: Layer already exists
a8da74d2ca8b: Layer already exists
a3655ed54f9c: Layer already exists
db92713bb83b: Already exists
44136fa355b3: Already exists
a0d8783128af: Layer already exists
48579d87405c: Layer already exists
latest: digest: sha256:3ea099d3e813f13d4b551fac049ee4a0f7d98a01dd8e2a1eaff7452c50fa21e4 size: 856
ubuntu@ip-172-31-18-93:~$
```

5. Pantallazo de la consola de AWS ECR con la imagen creada


The screenshot shows the AWS ECR console interface. The breadcrumb navigation at the top reads: **Amazon ECR** > **Private registry** > **Repositories** > **bankchurn-api** > **sha256:3ea099d3e813f13d4b551fac049ee4a0f7d98a01dd8e2...**. The left sidebar contains navigation links for **Amazon Elastic Container Registry**, **Private registry** (with sub-links for Repositories, bankchurn-api, Features & Settings), **Public registry** (with sub-links for Repositories, Settings), **ECR public gallery**, **Amazon ECS**, **Amazon EKS**, and **Getting started**.

The main content area displays the details for the **bankchurn-api** repository. At the top, there are three summary cards: **Last recorded pull time** (August 30, 2026, 15:44:06 (UTC-05)), **Size (MB)** (401.35), and **Image status** (Active with a green checkmark). Below these is the **Scanning and vulnerabilities** section, which shows a **Status** of **Scan not found** with an information icon. The **Manifests** section includes a search bar labeled **Filter manifests** and a table with columns for **Image digest**, **Architecture**, and **OS**.

Image digest	Architecture	OS
sha256:06c9b1e4fbcfddb9a55b0b295aa11e2d0a83d93a0508055a7dd6754f5a52298a	amd64	linux
sha256:2719601b5344bb36ba737b3b0b26892b38b74bedaa6d793cfd40269f69801aac	unknown	unknown

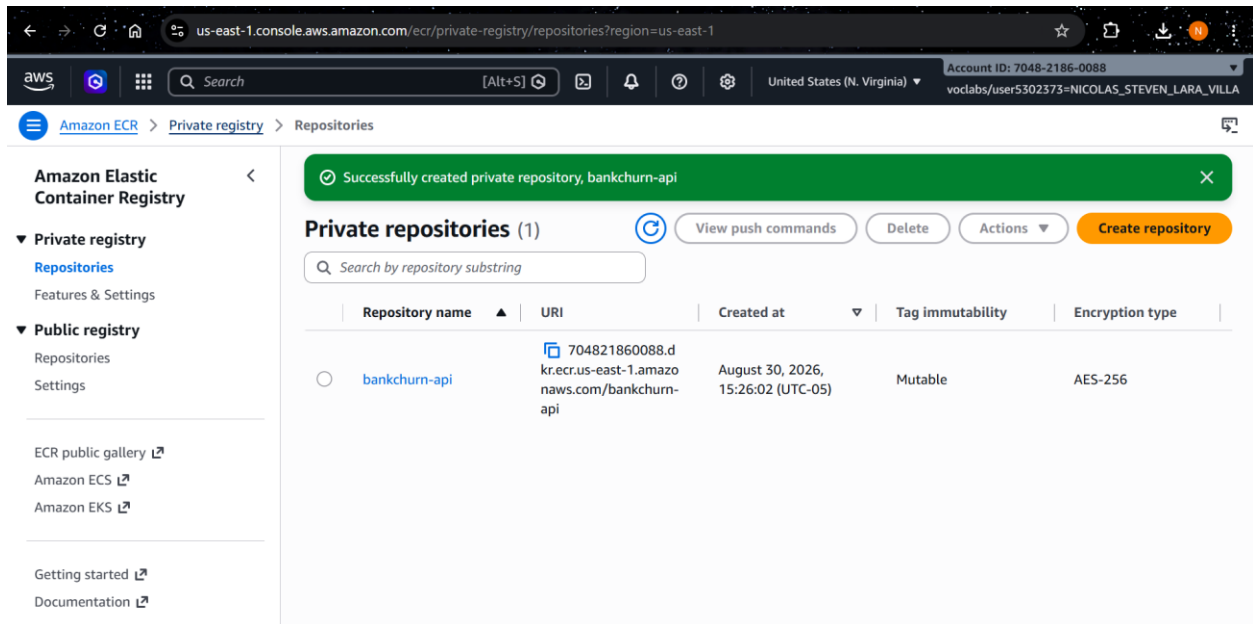

6. Pantallazo de la consola de AWS ECS con el Clúster creado

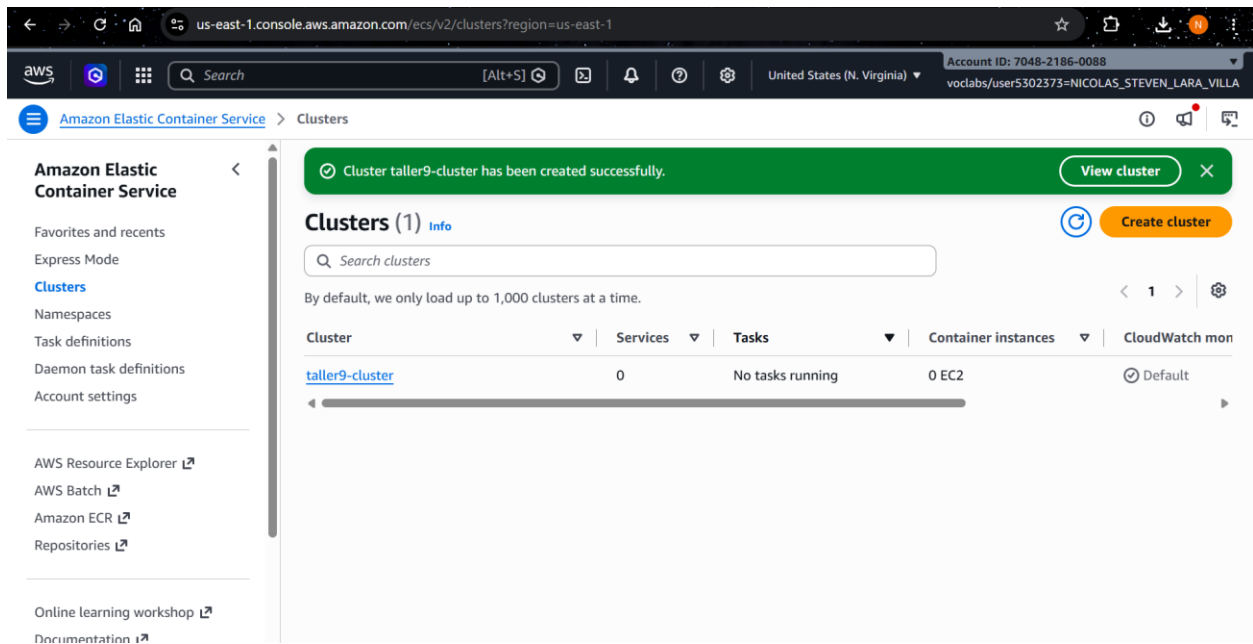

7. Pantallazo de la consola de AWS ECS con la Definición de tarea creada

us-east-1.console.aws.amazon.com/ecs/v2/task-definitions/taller9-taskdef/1/containers

Amazon Elastic Container Service

Task definition successfully created
taller9-taskdef:1 has been successfully created. You can use this task definition to deploy a service or run a task.

Notifications

taller9-taskdef:1

Overview

ARN: arn:aws:ecs:us-east-1:704821860088:task-definition/taller9-taskdef:1

Status: ACTIVE

Time created: August 30, 2026, 15:54 (UTC-5:00)

App environment: Fargate

Task role: LabRole

Task execution role: LabRole

Operating system/Architecture: Linux/X86_64

Network mode: awsvpc

Fault injection: Turned off

Containers

Task size

Task CPU: 1,024 units (1 vCPU)

Task CPU maximum allocation for containers

Task memory: 3,072 MiB (3 GiB)

Task memory maximum allocation for container memory reservation

Container: bankchurn-api

us-east-1.console.aws.amazon.com/ecs/v2/task-definitions/taller9-taskdef/1/containers

Amazon Elastic Container Service

Task definition successfully created
taller9-taskdef:1 has been successfully created. You can use this task definition to deploy a service or run a task.

Notifications

taller9-taskdef:1

Overview

ARN: arn:aws:ecs:us-east-1:704821860088:task-definition/taller9-taskdef:1

Status: ACTIVE

Time created: August 30, 2026, 15:54 (UTC-5:00)

App environment: Fargate

Task role: LabRole

Task execution role: LabRole

Operating system/Architecture: Linux/X86_64

Network mode: awsvpc

Fault injection: Turned off

Containers

Task size

Task CPU: 1,024 units (1 vCPU)

Task CPU maximum allocation for containers

Task memory: 3,072 MiB (3 GiB)

Task memory maximum allocation for container memory reservation

Container: bankchurn-api

Image: 704821860088.dkr.ecr.us-east-1.amazonaws.com/bankchurn-api:latest

Private registry: Turned off

Secrets Manager ARN or name: -

CPU: 0

Memory hard/soft limit: -/-

GPU: -

Neuron device: -


Environment and secrets

Environment variables (1)


Key	Type	Value
PORT	value	8001

Environment files (S3 ARN)

8. Pantallazo de la consola de AWS ECS con la tarea en ejecución

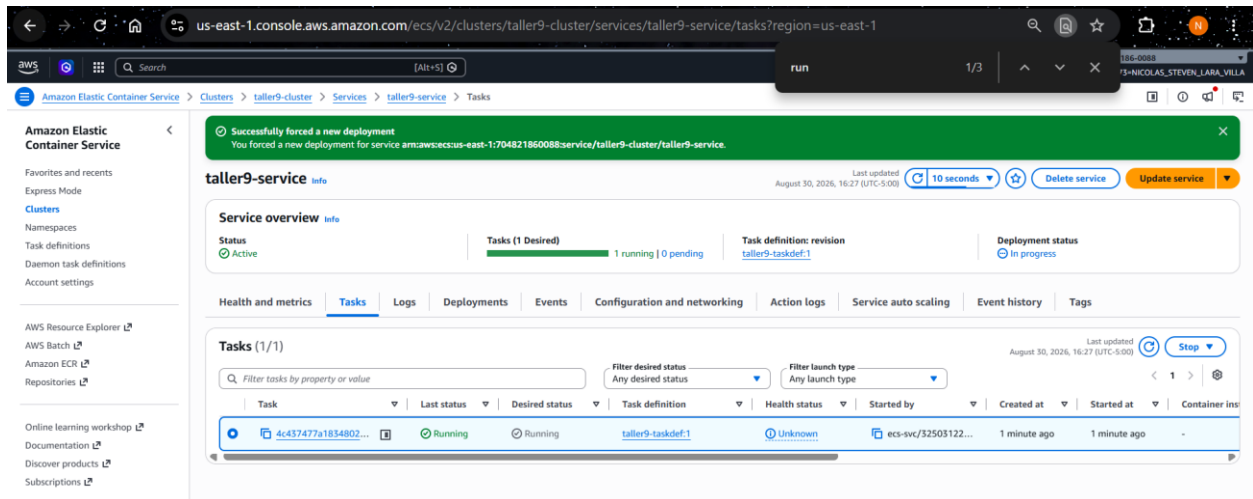


9. Pantallazo de la API en ejecución en IP del servicio ECS (contenedor)

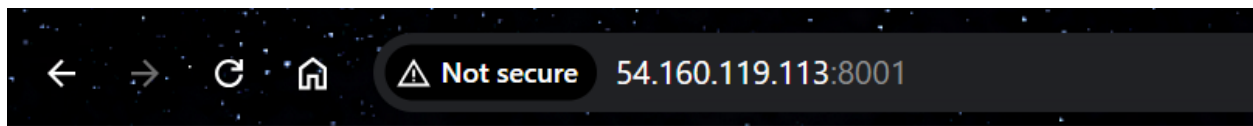


Welcome to the API

Check the docs: [here](#)

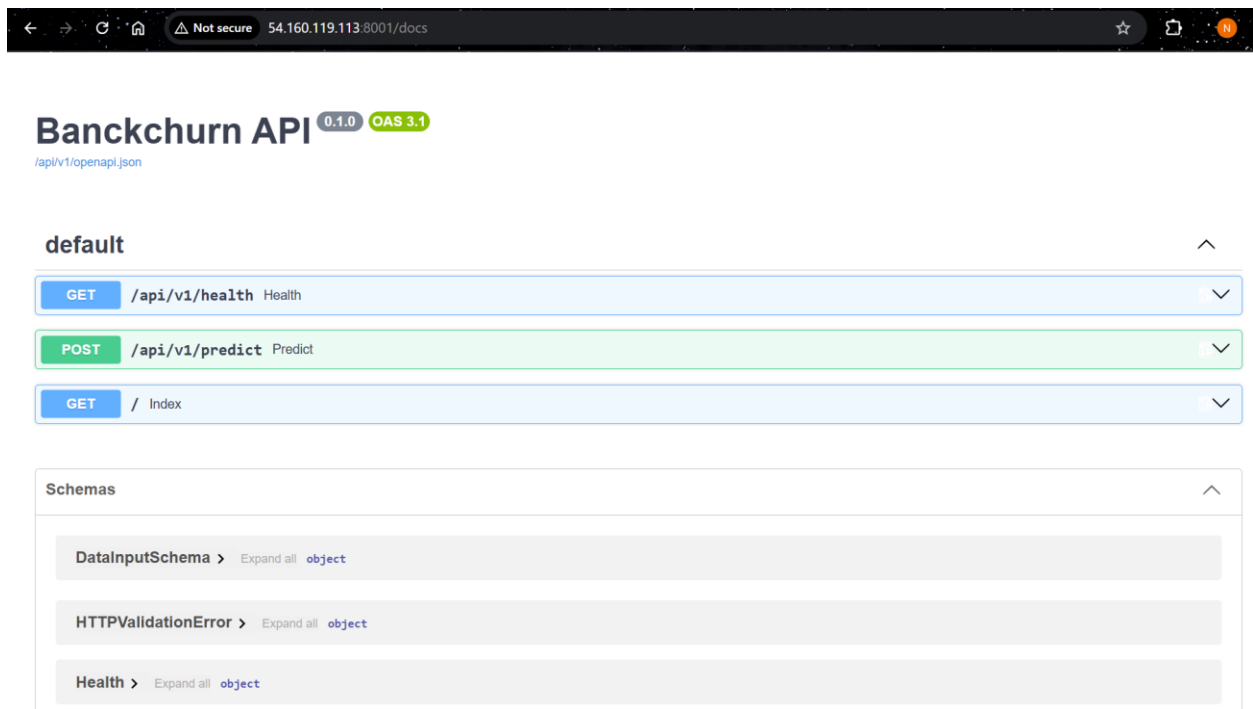

10. Pantallazo de la API actualizada con la nueva IP y el nombre del estudiante en el nombre de la API



Check the docs: [here](#)

Banckchurn API

0.1.0

OAS 3.1

/api/v1/openapi.json

default ^

GET	/api/v1/health	Health	⌵
POST	/api/v1/predict	Predict	⌵
GET	/	Index	⌵

Schemas ^

DataInputSchema	>	Expand all	object
HTTPValidationError	>	Expand all	object
Health	>	Expand all	object