

Software Engineering

Lecture 2: Software Development Processes & Methodologies

Prof. Nien-Lin Hsueh

Department of Information Engineering and Computer Science
Feng Chia University

Chapter 2: Roadmap & Core Curriculum

Part 1: Classic Paradigms & Agile Frameworks

- **2.1 Process & Process Models:** Core activities: specification, development, validation, evolution.
- **2.2 Plan-Driven Paradigms:** Waterfall model, stage gates, and V-Model verification vs. validation.
- **2.3 The Mechanics of Change:** Incremental delivery vs. iterative refinement, building the MVP.
- **2.4 The Agile Mindset:** The Agile Manifesto, 4 core values, 12 principles, and embracing change.
- **2.5 Agile Project Management:** Scrum sprints, ceremonies, roles, artifacts, and Kanban WIP limits.

Part 2: Technical Rigor, DevOps & AI Era

- **2.6 The Cost of Speed — Technical Debt:** Debt quadrant, compound interest, and refactoring strategies.
- **2.7 Technical Rigor — XP:** Extreme Programming, pair programming, TDD, and continuous feedback.
- **2.8 Systems & Culture — DevOps:** Breaking silos, CI/CD automated deployment pipelines, and observability.
- **2.9 The Modern Frontier — AI Spec-Driven:** AI spec loops, human-in-the-loop, recap quiz & references.

Focus Questions

- What is the fundamental difference between a **software process activity** and a **lifecycle model** (plan-driven vs. evolutionary)?
- How do **incremental delivery** and **iterative refinement** combine to build a **Minimum Viable Product (MVP)**?
- Why is **Agile** an overarching cultural mindset rather than a rigid framework, and how do **Scrum** and **Kanban** apply it?
- How do **XP engineering practices**, **DevOps pipelines**, and **AI spec-driven workflows** guarantee quality and eliminate **Technical Debt**?


2.1 Process and Process Models

"If a process is not predictable and repeatable, success is merely good luck."

— Watts S. Humphrey

”

Without a Process vs. With a Process Model

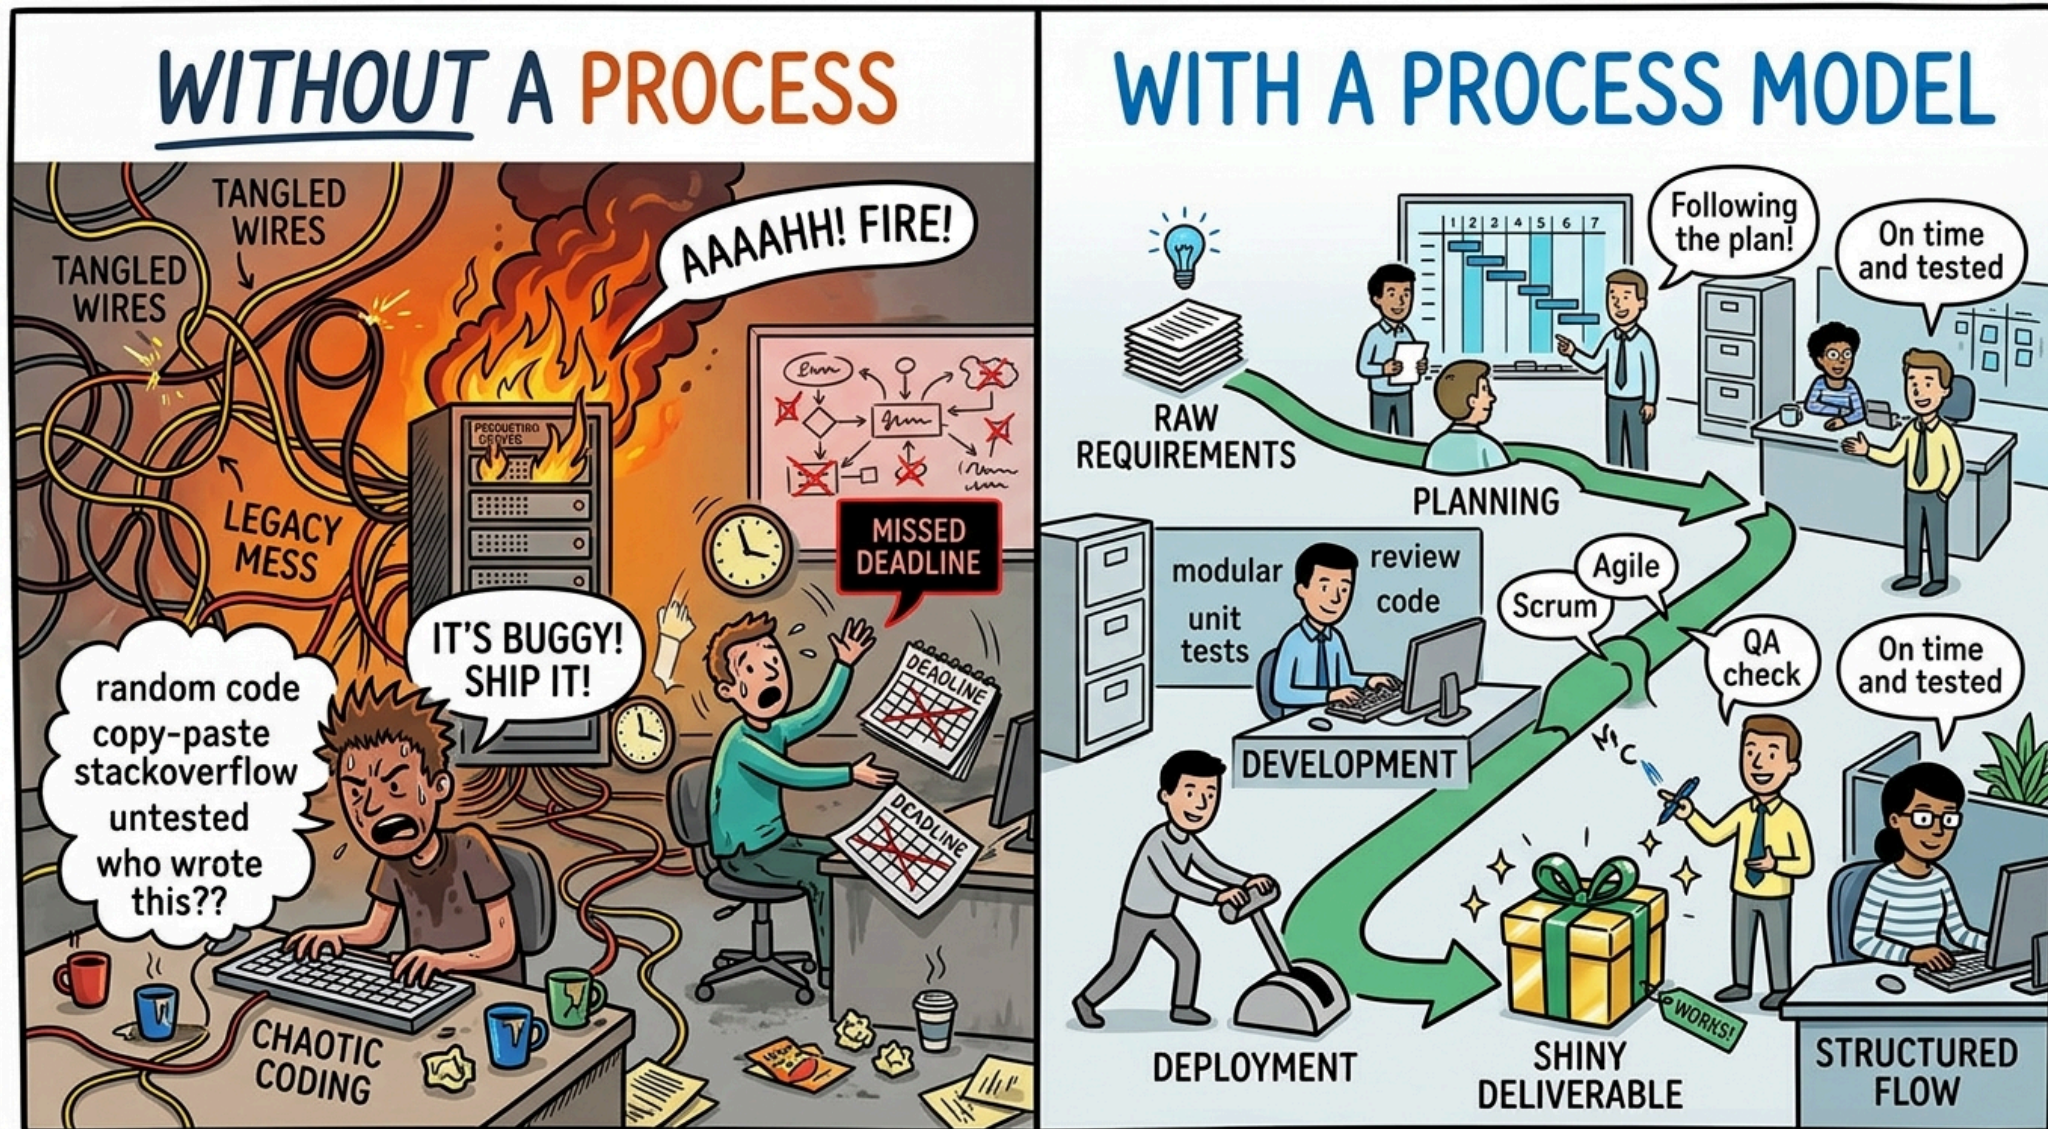

Software Development Process & Process Models

- **What is a Software Process? (The Concrete Reality):**

- A structured set of technical, collaborative, and managerial activities carried out to develop, deploy, and maintain software.
- *ISO/IEC 12207 Standard*: "A set of interrelated or interacting activities which transforms inputs into outputs."
- *Ian Sommerville*: "A structured set of activities required to develop a software system."

- **What is a Software Process Model? (The Strategic Blueprint):**

- A simplified, abstract representation or architectural framework of a software process.
- Defines the strategic sequencing of phases, transition criteria (entry/exit gates), roles, deliverables, and risk management policies (e.g., Waterfall, V-Model, Prototyping, Scrum).

- **The Core Distinction:**

- **Process** is *what teams actually do* in practice (time-agnostic activities).
- **Process Model** is the *theoretical blueprint or strategy* chosen to organize, sequence, and govern that work over time.

Universal Process Activities: The 4 Pillars of SDLC

Regardless of which process model you adopt, **all software processes** encompass four universal activities:

1. Software Specification (Requirements Engineering):

- Defining what the system should do, operational constraints, user stories, and acceptance criteria.

2. Software Design & Implementation:

- Architecting structural blueprints and writing executable program code.

3. Software Validation (Verification & Testing):

- Ensuring the software conforms to specifications and satisfies customer expectations.

4. Software Evolution (Maintenance & Operations):

- Modifying, refactoring, and scaling existing software in response to changing user needs.

 **Key Insight:** *Activities are time-agnostic actions. **Process models differ fundamentally in WHEN and HOW OFTEN these four activities take place!*** ”

Landscape of Popular Software Process Models

- **The Spectrum: From Predictive (Plan-Driven) to Adaptive (Continuous):**
 - **1. Plan-Driven / Sequential Models:**
 - *Waterfall & V-Model:* Comprehensive upfront planning, linear sequential phases, strict milestone gates, and verification traceability.
 - **2. Evolutionary / Risk-Driven Models:**
 - *Spiral Model & Prototyping:* Cyclic spirals guided by explicit risk assessment and rapid exploratory user mockups.
 - **3. Iterative & Incremental Models:**
 - *Incremental Delivery & Agile Methods:* Delivering self-contained functional vertical slices in short, adaptive feedback sprints.
 - **4. Continuous & Spec-Driven Paradigms:**
 - *DevOps & CI/CD Pipelines:* Merging development and operations via automated test, build, and deploy loops.
 - *Specification-Driven AI:* Leveraging LLM coding agents strictly governed by formal specifications and automated verification gates.

2.2 Plan-Driven Paradigms (Waterfall & V-Model)

"Plan the work, then work the plan."

Predictability, stage-gate discipline, and verification traceability. „

Plan-Driven Paradigms — Waterfall & the V-Model

Plan-driven software process models where development proceeds through distinct, structured stages, prioritizing formal upfront planning, stage-gate governance, and verification traceability.

”

- **Underlying Philosophy:**

- Borrowed from traditional engineering disciplines (civil, aerospace, manufacturing): complete comprehensive design *before* committing to construction to avoid catastrophic rework.

- **Core Plan-Driven Tenets:**

- **Predictability:** Fixed budgets, fixed timelines, and predefined delivery milestones.
- **Document-Centric Handoffs:** Detailed specifications serve as legally binding boundary contracts between specialized teams.
- **Formal Verification:** Work cannot proceed to the next stage until the current stage passes formal review gates.


The Waterfall Model: 5 Sequential Phases

- **Historical Background:**

- First described by **Winston W. Royce (1970)** in "*Managing the Development of Large Software Systems*".
- *Historical Irony:* Presented as a flawed process needing feedback loops!

- **The 5 Sequential Phases:**


1. Requirements Analysis & Definition
2. System & Software Design
3. Implementation & Unit Testing
4. Integration & System Testing
5. Operation & Maintenance

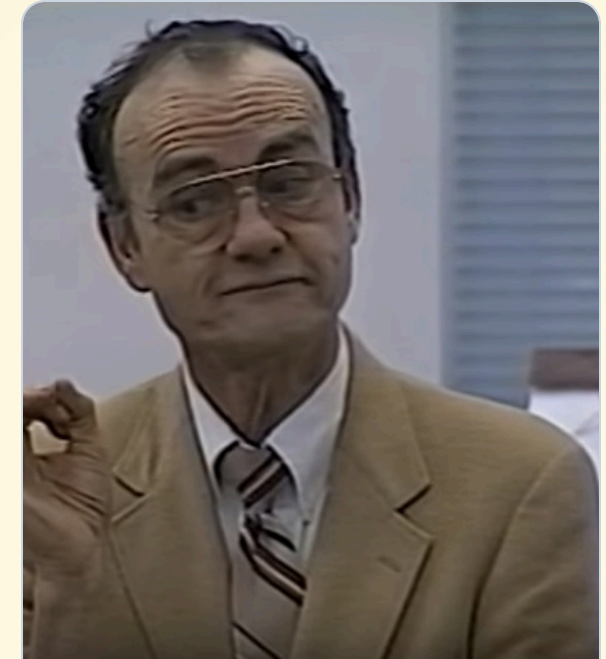

Winston W. Royce

Wikimedia Commons / Wikipedia

The Waterfall Software Lifecycle

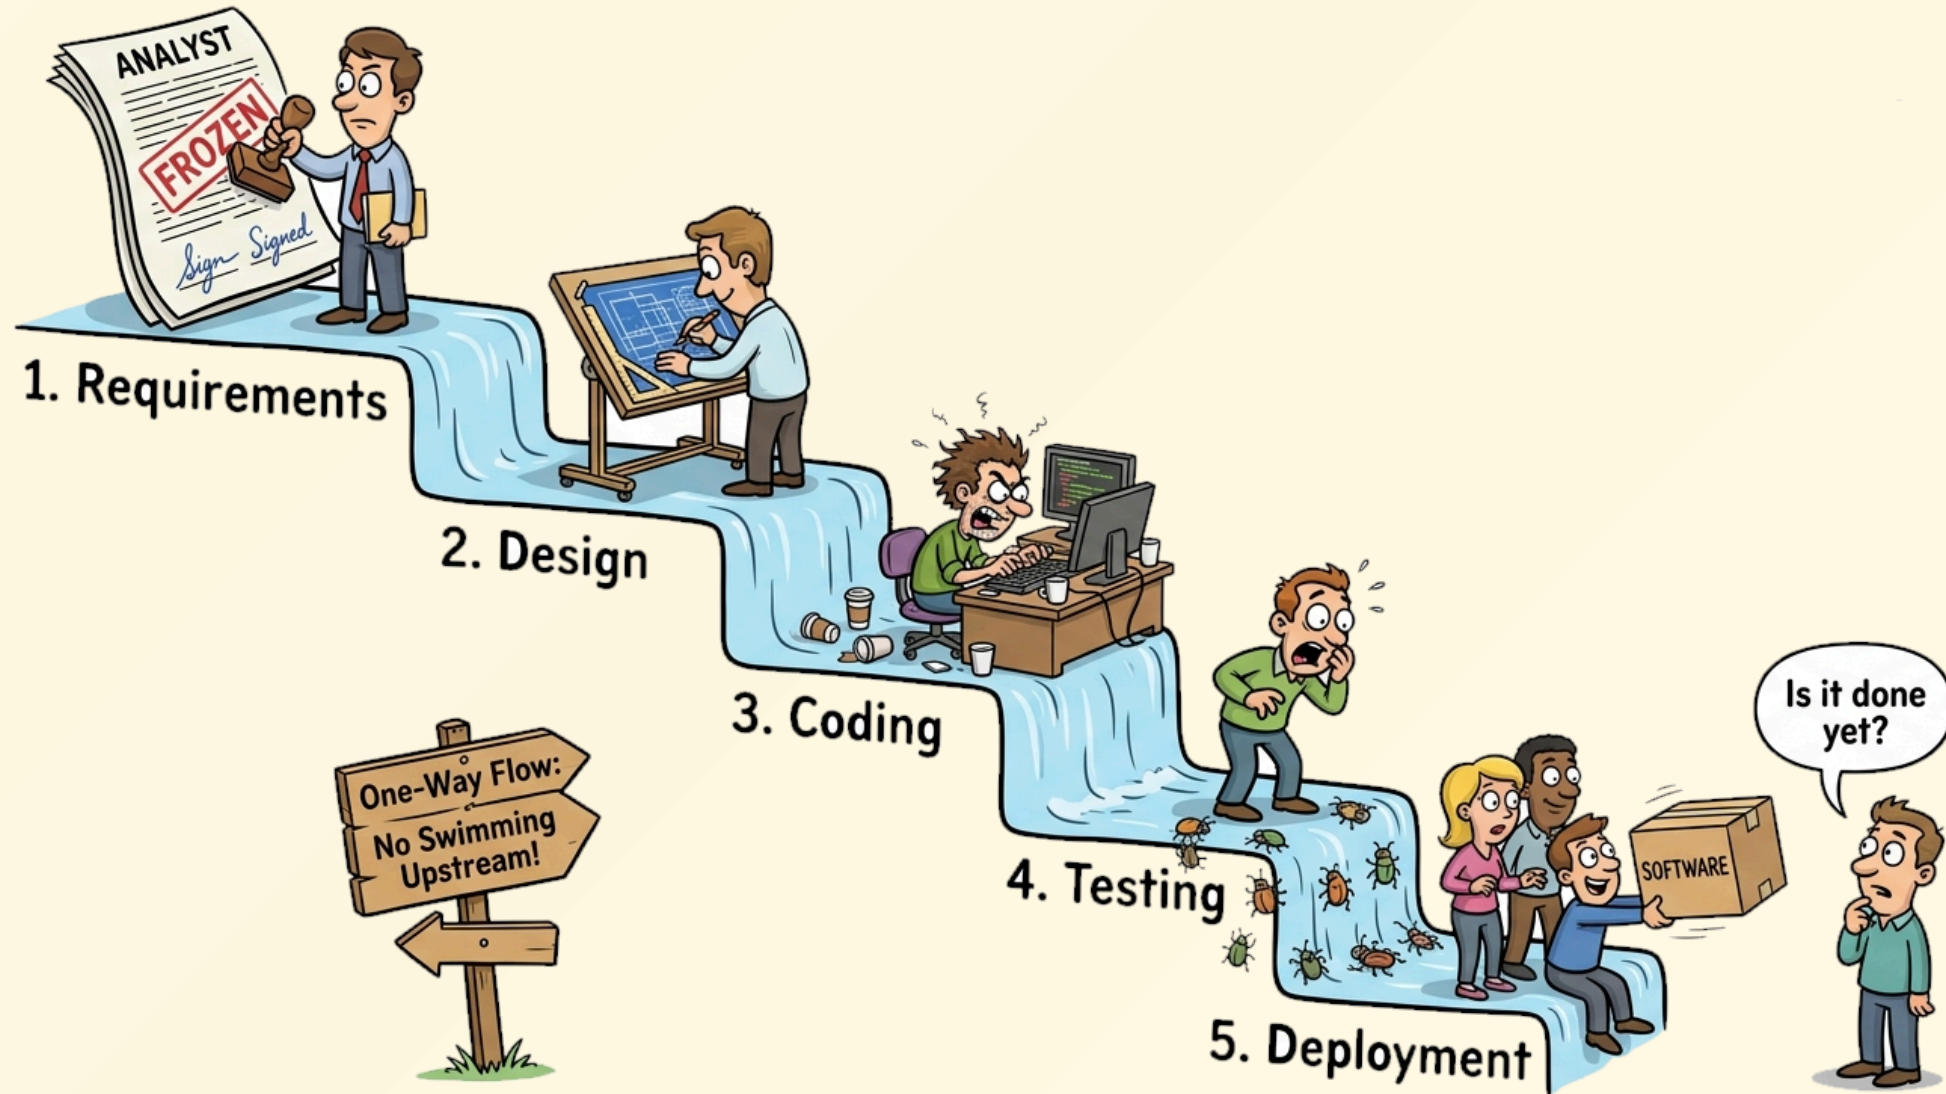

The Waterfall Model: Applicability and Limitations

- **Applicability (Ideal Scenarios):**

- **Stable & Well-Understood Requirements:** Specifications are thoroughly frozen upfront and will not change during development.
- **Safety-Critical & Regulated Domains:** Medical devices, aerospace avionics, and defense systems requiring formal verification and audit traceability.
- **Inflexible Hardware or Multi-Vendor Contracts:** Embedded hardware fabrication constraints or rigid legal stage-gate boundaries across vendors.

- **Limitations (Drawbacks & Risks):**

- **Inflexible to Change:** Accommodating requirement modifications once development has started is extraordinarily expensive and disruptive.
- **Late Risk & Defect Discovery:** System integration and testing occur near the end of the lifecycle; major architectural defects surface late.
- **Delayed Working Software:** End users and customers cannot see or evaluate executable software until the final phase, creating a large visibility gap.

Waterfall in Practice: Frequently Asked Questions (FAQ)

- **Q1: Are phases handed off strictly through documents?**
 - *Answer: **Yes.*** Classic Waterfall is plan-driven and document-centric. Formal artifacts (SRS, Architecture Specs, Test Plans) act as the binding contract and handoff mechanism between specialized phase teams (Analysts → Designers → Developers → Testers).
- **Q2: Can we really never go back to a previous phase?**
 - *Answer: **In theory, no; in practice, yes, but at great expense.*** When defects or oversights are discovered during testing, teams must backtrack. Revising signed specifications, architectures, and code causes severe delays ("backtracking tax").
- **Q3: When does the customer actually see working software?**
 - *Answer: **Only at the very end.*** Customers review documents and diagrams early on, but only interact with executable software in the final integration and testing phase, maximizing late-stage delivery risk.
- **Q4: Is the Waterfall model obsolete today?**
 - *Answer: **No.*** It remains the standard in safety-critical, regulated, and hardware-coupled domains (aerospace, defense, medical device firmware) where requirements are physically fixed and formal verification is legally mandated.

Concept Check Question 1 (CCQ 1)

What is the primary operational drawback of the traditional Waterfall model?

- **A.** It produces inadequate documentation for external auditing and compliance.
- **B.** It makes accommodating changing requirements extremely difficult and costly once underway.
- **C.** It eliminates the need for component and system testing during execution.
- **D.** It cannot be deployed across large-scale multi-site engineering organizations.



The V-Model: Proactive Verification and Validation

An extension of the Waterfall model that establishes a direct, symmetrical relationship between each development (specification) phase and its corresponding testing phase. „


- **Why an "Extension of Waterfall"?**

- It preserves the linear-sequential discipline, stage gates, and upfront documentation of Waterfall.
- *The Key Difference:* Instead of treating testing as a late afterthought, it bends the lifecycle upward into a "V" shape to enforce **early, proactive test planning**.

- **Dual-Track Engineering Philosophy:**

- **Left Arm (Decomposition & Design):** Requirements, System Architecture, Component Design.
- **Right Arm (Integration & Validation):** Unit Testing, Integration Testing, Acceptance Testing.
- **The Bottom Vertex:** Source code implementation (Coding).
- *Core Insight:* While writing specifications on the left, engineers simultaneously author the test suites executed on the right!

The Software V-Model Architecture

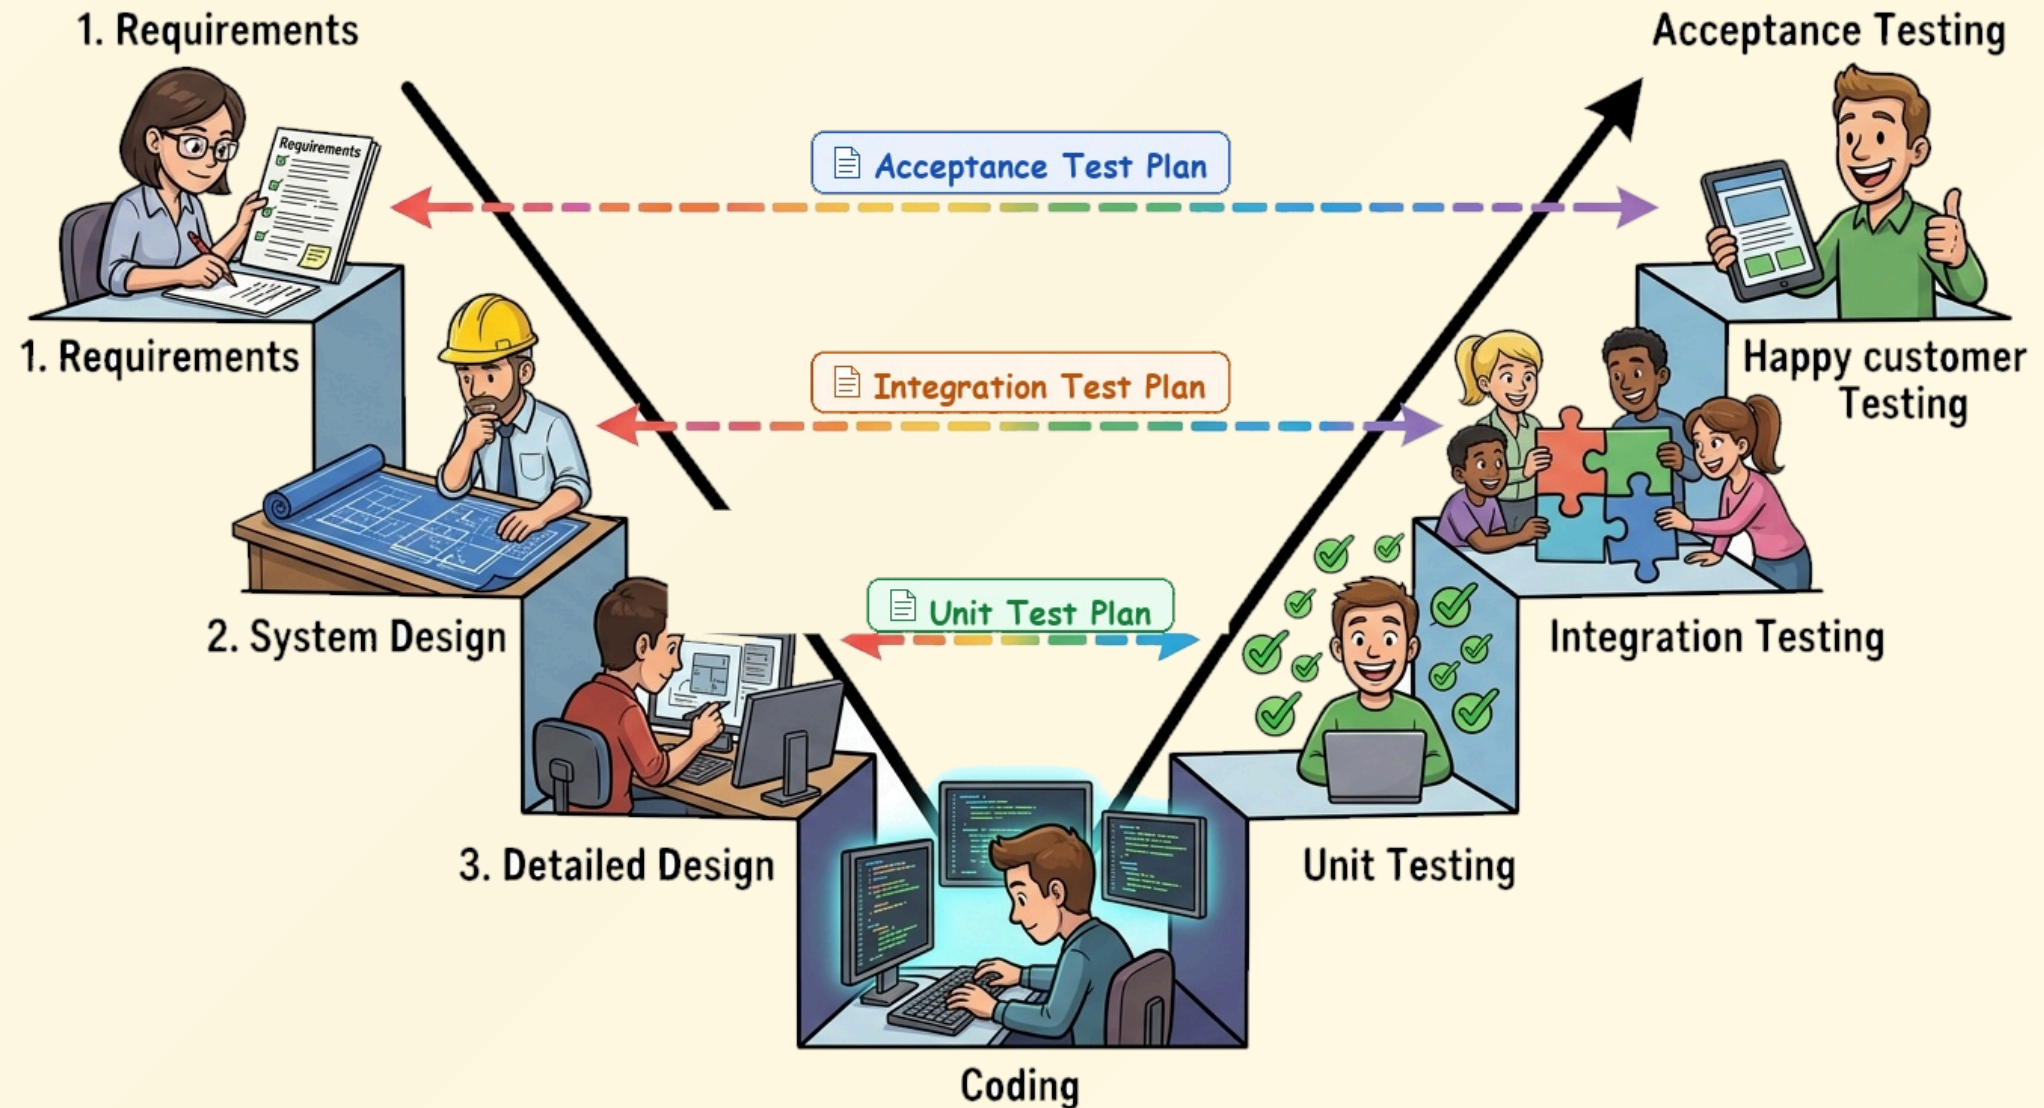

The V-Model Architecture: Traceability & Test Levels

- **The 3 Symmetrical Verification Pairs:**

1. **User Requirements $\longleftrightarrow$ Acceptance Testing:**

- *"Are we building the right system?"* Verifies that business workflows and end-user requirements are completely satisfied before release.

2. **System Architecture $\longleftrightarrow$ System Integration Testing:**

- *"Are subsystems communicating properly?"* Validates API contracts, network protocols, and database integrations against architectural design.

3. **Detailed Component Design $\longleftrightarrow$ Unit / Component Testing:**

- *"Are individual functions working correctly?"* Tests classes, algorithms, and boundary conditions against component specifications.

- **Horizontal Traceability:**

- Establishes a bidirectional requirement traceability matrix: every requirement maps to an acceptance test, eliminating unverified features.

The V-Model: Applicability and Limitations

- **Strengths (The Good):**

- **Proactive Defect Prevention:** Designing test cases during specification exposes ambiguities, contradictions, and omissions before writing code.
- **High Traceability & Auditability:** Explicit 1:1 mapping between design documents and test verification suites.
- **Disciplined Progress Tracking:** Simple to manage with well-defined deliverables at each level of the V.

- **Limitations (The Bad):**

- **Rigid & Intolerant to Change:** Like Waterfall, any requirement modification requires updating both the left-arm specification and the right-arm test suite ("cascading rework").
- **Delayed Executable Software:** No working prototype is produced during the left arm; integration occurs only when ascending the right arm.

- **Applicability (When to Use):**

- Safety-critical, mission-critical, or heavily regulated domains (automotive ISO 26262, aviation DO-178C, medical device FDA) requiring strict verification certification.

Concept Check Question 2 (CCQ 2)

What is the primary engineering advantage of the V-Model over the classic Waterfall model?

- **A.** It produces working software increments in short two-week sprint iterations.
- **B.** It enforces test planning and acceptance criteria design concurrently with early specification phases.
- **C.** It eliminates the need for detailed architecture design and interface contracts.
- **D.** It allows customers to dynamically modify requirements at zero cost during implementation.



Interactive Activity: Process Model Matchmaker (Pair Discussion)

Process Model Matchmaker (Pair Discussion):

- **System A (Pacemaker Firmware):** Safety-critical, strict FDA certification, zero runtime bug tolerance.
- **System B (Campus Food Delivery App):** Volatile user tastes, fierce startup rivals, fast pivot needed.
- **System C (National Tax Overhaul):** Non-negotiable tax statutes, fixed legal launch deadline.
- **Questions to Discuss with Your Partner:**
 - Which process model (Waterfall, V-Model, Agile/Scrum, or Spiral) fits each system best? Why?



2.3 The Mechanics of Change (Incremental & Iterative)

"Incremental delivery gives you pieces early; iterative development refines the whole over time. Together, they build a Minimum Viable Product."

”

The Mechanics of Change — Incremental & Iterative Development

*An engineering approach that decomposes a complex system into smaller, self-contained functional components delivered in successive stages (**increments**) while progressively refining and deepening capabilities through cyclic feedback (**iterations**).*

”

- **Historical Background & Motivation:**

- Emerged in the 1970s and 1980s (Mills, Basili, Boehm) in direct response to the rigidity, specification freezing, and late-stage defect discovery of the Waterfall model.
- Replaced "Big Bang" release cycles with **continuous, incremental value realization**.

- **Core Engineering Philosophy:**

- **Early Value Realization:** Deliver high-priority, usable subsets to users early rather than waiting for full completion.
- **Empirical Validation:** Validate architectural choices and business assumptions with executable software instead of paper specifications.
- **Feedback-Driven Adaptation:** Real-world user feedback from early increments directly steers subsequent design and development cycles.

Incremental Delivery: Functional Partitioning & Value Staging

- **Vertical Functional Slicing:**

- The system is divided into self-contained vertical slices delivered stage by stage.
- Each increment delivers 100% finished functionality for a specific subset of features (UI + Business Logic + Database persistence).


- **Staging High-Priority Value to Users:**

- **Increment 1:** User Registration, Login & Restaurant Menu Search.
- **Increment 2:** Shopping Cart & Online Checkout.
- **Increment 3:** Personalized Recommendation Engine & Analytics.

- **Operational Business Benefit:**

- The customer receives tangible, working business value early, rather than waiting years for a "Big Bang" complete release.

The Incremental Delivery Process

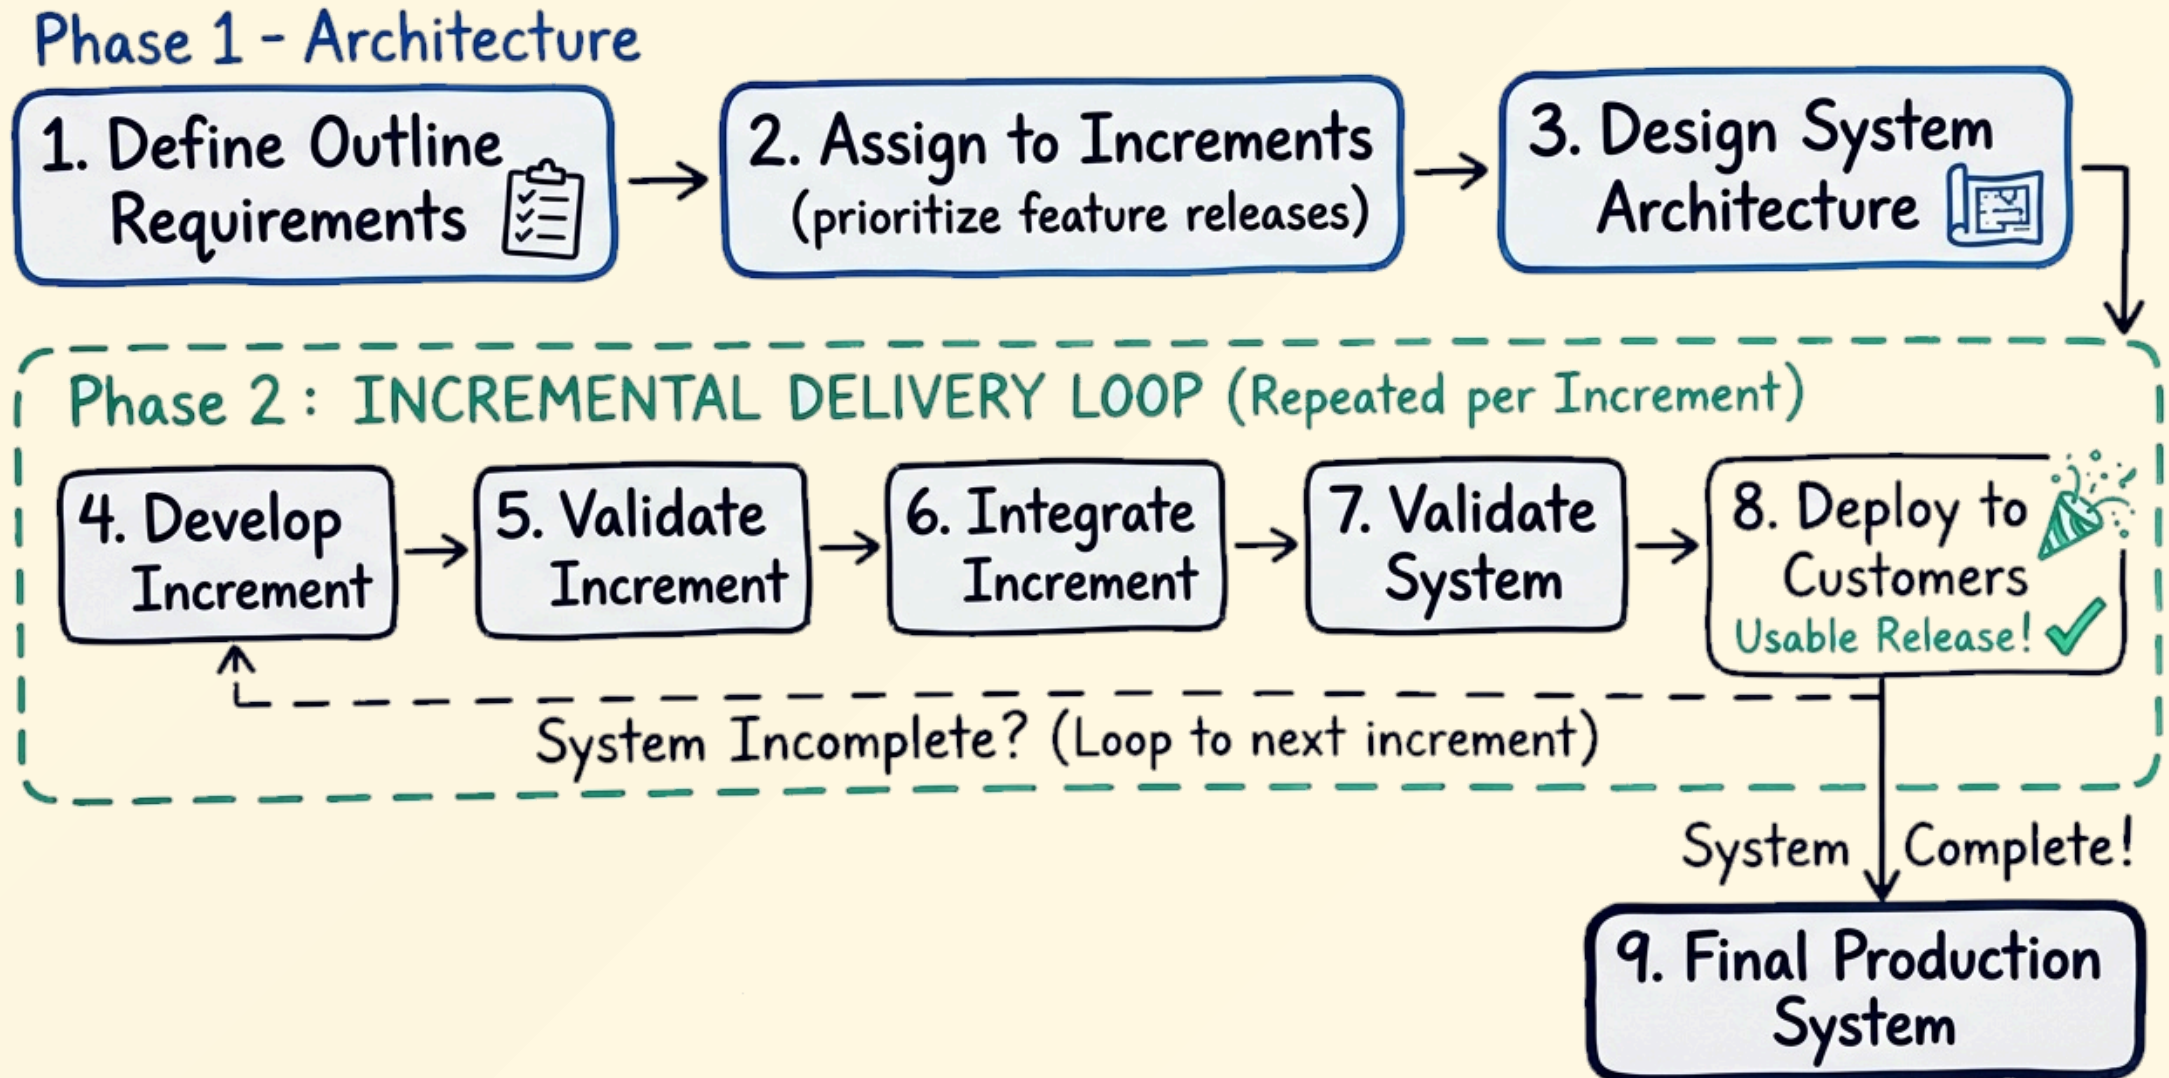

Iterative Development & The Sculptor Analogy

- **Progressive Refinement of the Whole:**

- An incomplete version of the *entire* system is created first, then repeatedly revised, deepened, and polished based on empirical feedback.



- **The Sculptor Metaphor:**

- **Iteration 1 (Rough Silhouette):** Chisel the general shape out of a raw block of marble.
- **Iteration 2 (Proportions & Limbs):** Carve the major muscle groups, limbs, and facial outline.
- **Iteration 3 (Detailing):** Define fine hair, hands, and facial expression.
- **Iteration 4 (Surface Polish):** Smooth the marble surfaces to a polished sheen.

- **Core Takeaway:**

- Every iteration touches and refines the whole product, allowing continuous validation of overall proportions!

Delivering Value vs. Refining Fidelity: The Sculptor Analogy

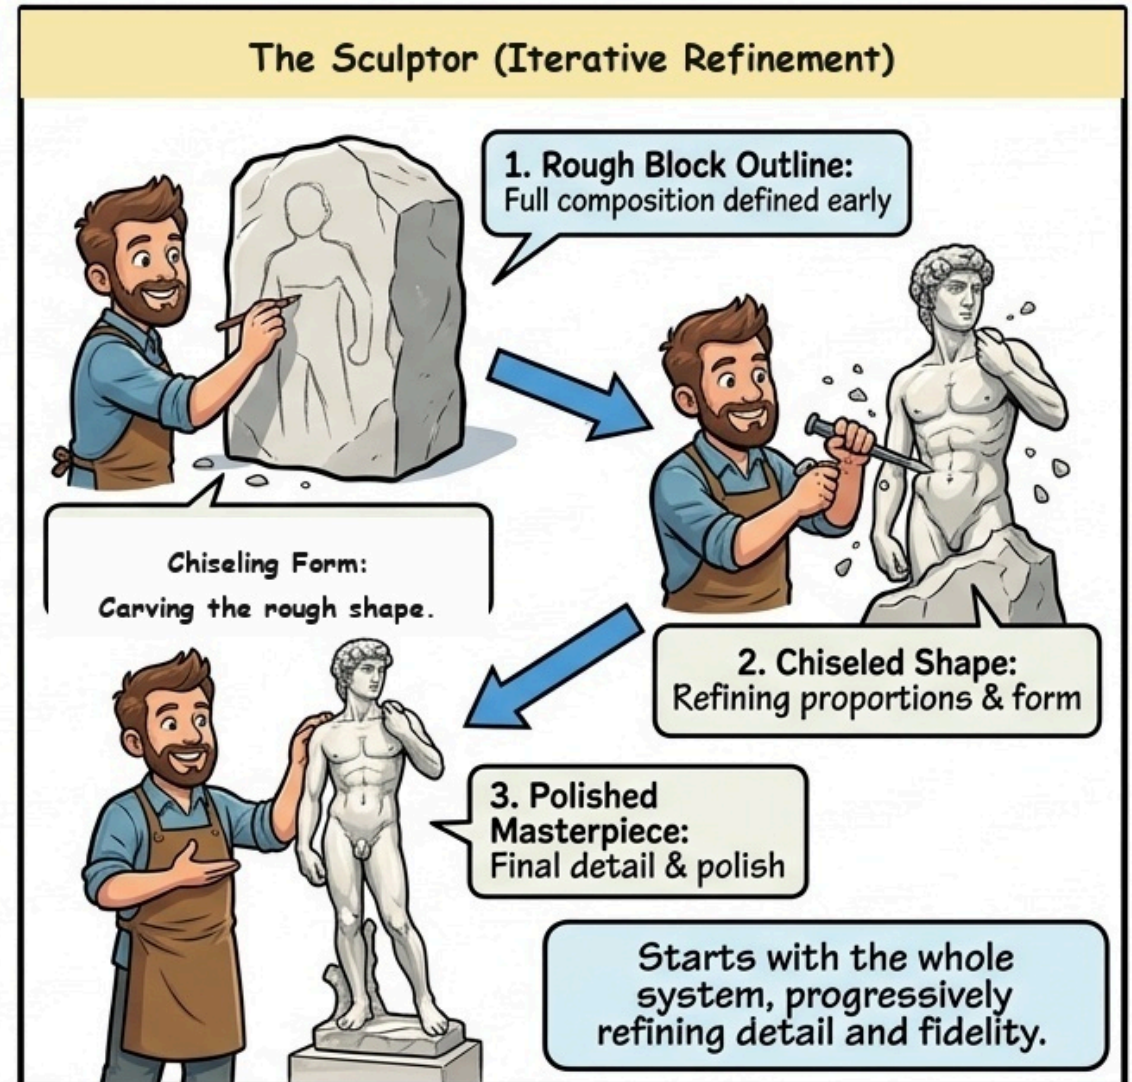
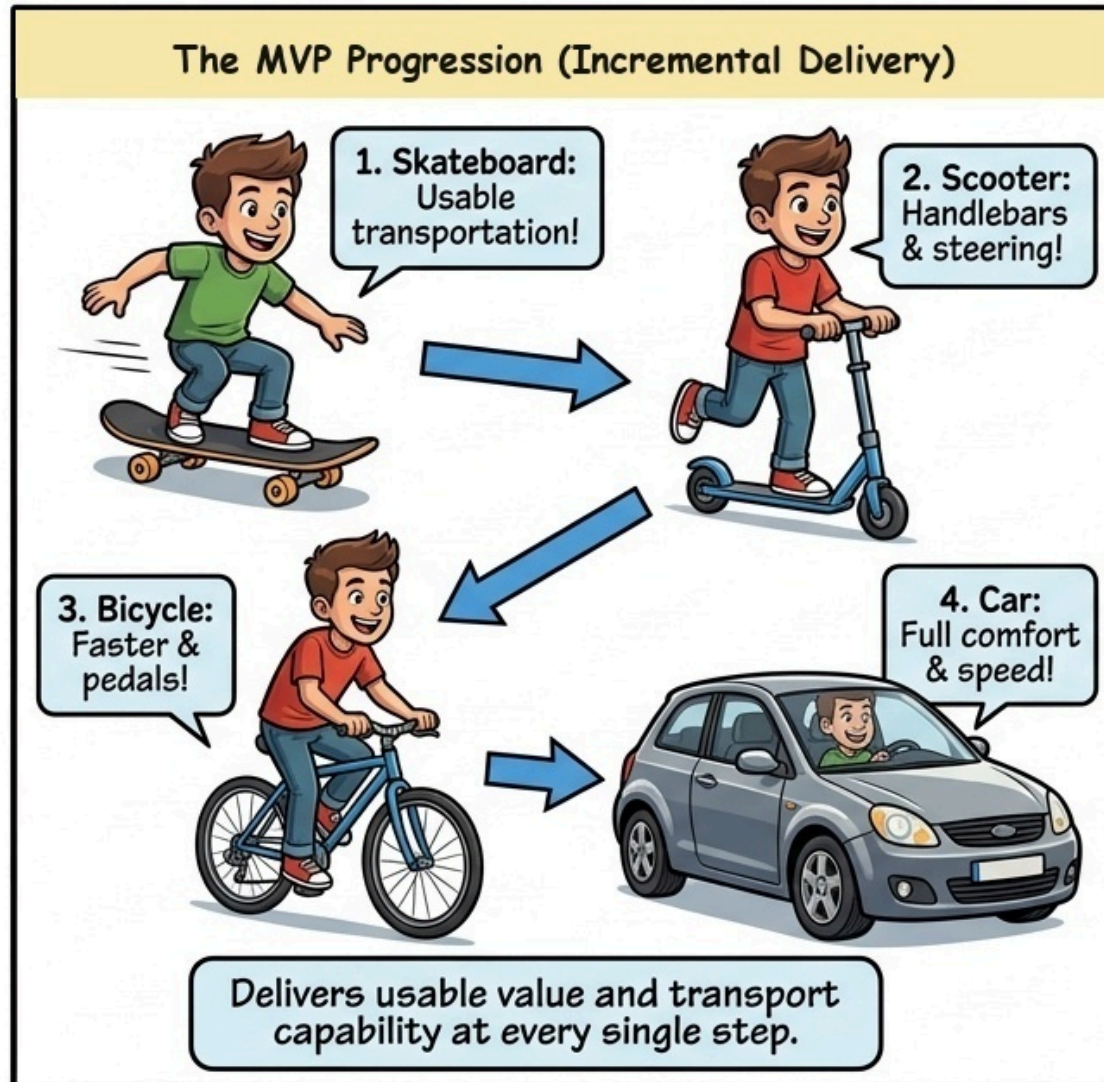


Combined Model (Incremental + Iterative) & The MVP

- **Real-World Agility Combines Both Dimensions:**
 - Deliver functional slices incrementally, while continuously refining existing slices iteratively based on user telemetry.
- **The Henrik Kniberg Car Metaphor:**
 - *Wrong (Pure Incremental without Usability):* Delivering a Wheel → Axle → Chassis → Car.
 - *(A user cannot commute to work on a detached rubber wheel!).*
 - *Right (Combined MVP Progression):* Skateboard → Scooter → Bicycle → Motorcycle → Car.
 - *(Every release provides an end-to-end usable transportation capability!).*
- **Definition of Minimum Viable Product (MVP):**
 - The smallest functional product slice that delivers real user value and allows the team to collect the maximum amount of validated customer learning with the least effort.

Incremental & Iterative MVP Progression

PURE INCREMENTAL (No Early Value)

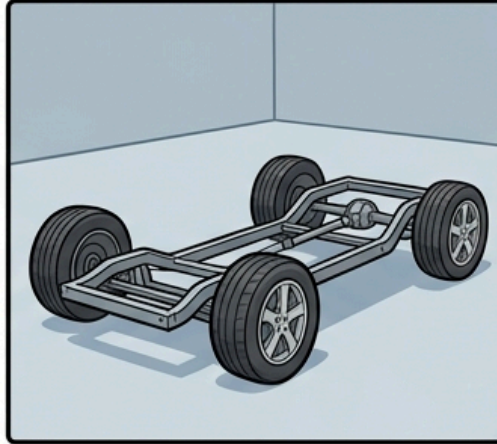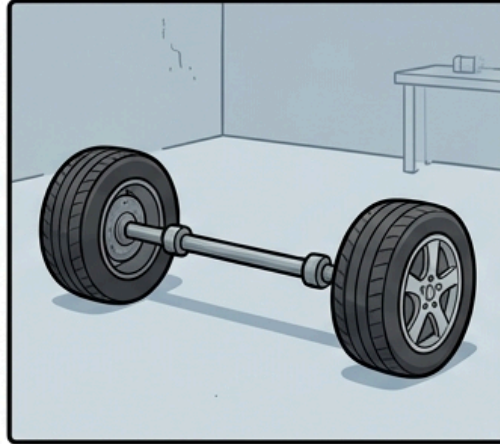

COMBINED MODEL: Incremental + Iterative MVP



Can Incremental Be Applied Alone? A Food Delivery Case Study

- **Food Order & Delivery System Example:**

- **Spring 1 (MVP — Core Flow):** Browse simple text menu → Cash on Delivery → Driver phone dispatch. (*Entire vertical flow works!*)
- **Spring 2 (Incremental Addition):** Add Online Credit Card Payment slice.
- **Spring 3 (Iterative Refinement):** Upgrade driver phone dispatch to Real-Time GPS Map Tracking.

- **Why Incremental Alone Fails in Modern Software:**

- If you spend 6 months building a pristine restaurant catalog without checkout or delivery, users starve and cannot order food.
- **Architectural Synergy:** Incremental adds new capability boundaries; Iterative deepens quality, performance, and user experience.

Concept Check Question 3 (CCQ 3)

In software process engineering, what is the fundamental conceptual difference between "Incremental" and "Iterative" development?

- **A.** Incremental focuses on automated testing; Iterative focuses on UI design.
- **B.** Incremental delivers finished functional slices stage-by-stage; Iterative progressively refines and deepens an evolving system through repeated feedback cycles.
- **C.** Incremental requires frozen upfront specifications; Iterative eliminates all documentation.
- **D.** Incremental is used solely for hardware; Iterative is used solely for cloud software.



Concept Check Question 4 (CCQ 4)

In Henrik Kniberg's famous Minimum Viable Product (MVP) analogy (Skateboard to Car), why is delivering a standalone car wheel in the first release considered an anti-pattern?

- **A.** Because manufacturing an isolated wheel is significantly more expensive than building a skateboard.
- **B.** Because a detached wheel provides zero usable transportation value and yields no validated user learning.
- **C.** Because a wheel violates standard continuous integration and automated test coverage thresholds.
- **D.** Because a wheel cannot be deployed without prior sign-off from international automotive regulatory bodies.



Interactive Activity: Slicing a Chess App (Group Discussion)

Slicing a Web Chess Application (Group Discussion):

- **Scenario:** Your team must build a full-featured Web Chess game in one semester.
- **Question 1 (Incremental Slicing):**
 - Define 3–4 functional increments that deliver end-to-end playable value at each stage.
- **Question 2 (Iterative Refinement):**
 - Pick the *Chess Board UI*. How does it evolve iteratively across releases?
- **Question 3 (Anti-Pattern):**
 - What fatal mistake occurs if you build "Incrementally without Iteration"?




2.4 The Mindset Shift (Agile Philosophy)

"Responding to change over following a plan."

— *The Agile Manifesto (2001)*

”

The Mindset Shift: Traditional vs. Agile Philosophy

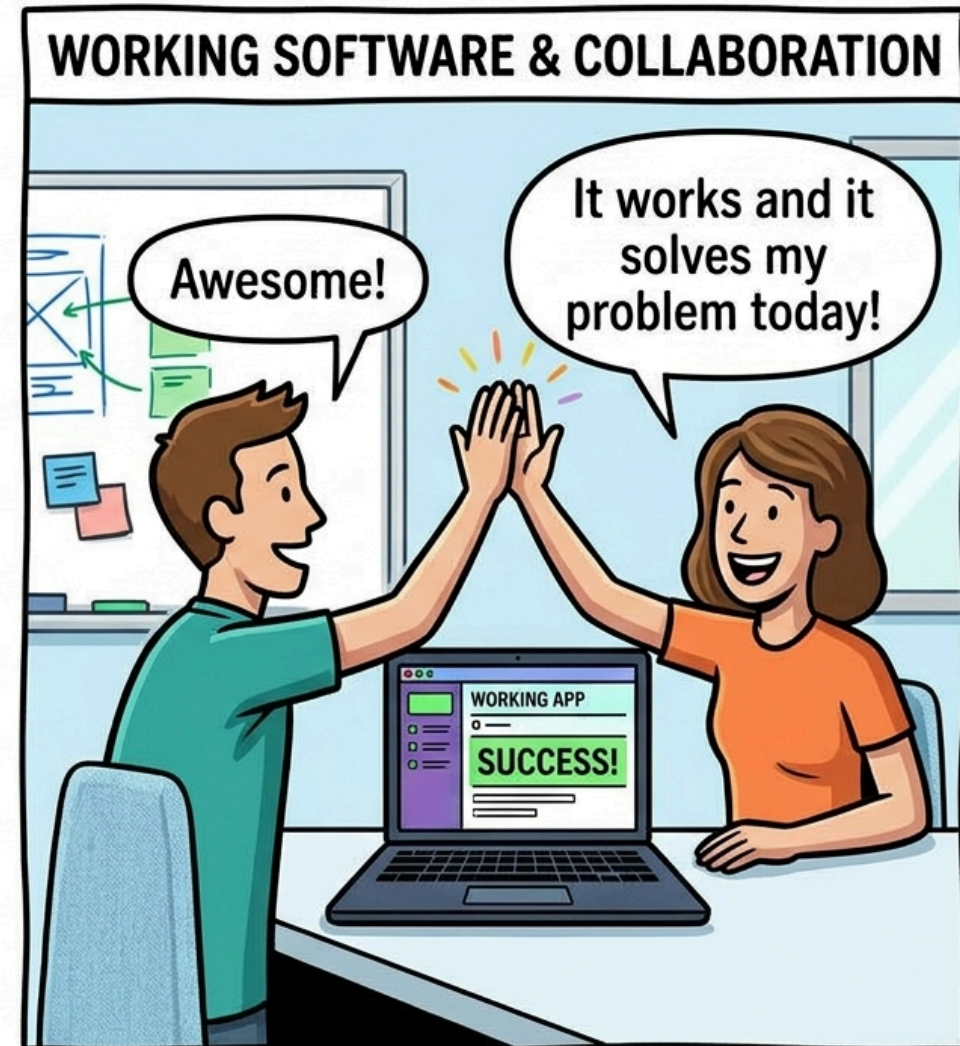

The Mindset Shift — Agile Philosophy

*Agile is **not** a set of bureaucratic rules, a Jira board, or a collection of meetings. Agile is an overarching **cultural mindset and value system** that prioritizes **individuals, working software, customer collaboration, and adaptability** over **rigid plans**.*

”

- **Historical Context: The 1990s Software Crisis:**

- Massive software projects were failing at alarming rates (Standish Group Chaos Reports: >70% challenged or cancelled).
- Teams spent years producing thick requirement binders while the real-world market moved past them.

- **The Snowbird Summit (February 2001):**


- 17 software pioneers (representing Extreme Programming, Scrum, DSDM, Crystal, Feature-Driven Development) gathered in Snowbird, Utah.
- Despite different methodology backgrounds, they found common ground and drafted the **Agile Manifesto**.

The Agile Manifesto: 4 Core Values

In 2001, the **Agile Manifesto** established four fundamental value pairs:

- **Individuals and interactions** over processes and tools
- **Working software** over comprehensive documentation
- **Customer collaboration** over contract negotiation
- **Responding to change** over following a plan
-  *“That is, while there is value in the items on the right, we value the items on the left more.”* ”
- **The Core Cultural Realization:**
 - Processes and tools are useless if developers cannot communicate openly.
 - Comprehensive documentation is worthless if the software does not execute.
 - Rigid contracts breed adversarial relationships; collaboration builds great products.
 - A detailed five-year plan is an illusion in an unpredictable market.

The Agile Manifesto: 4 Core Values on the Balance Scale

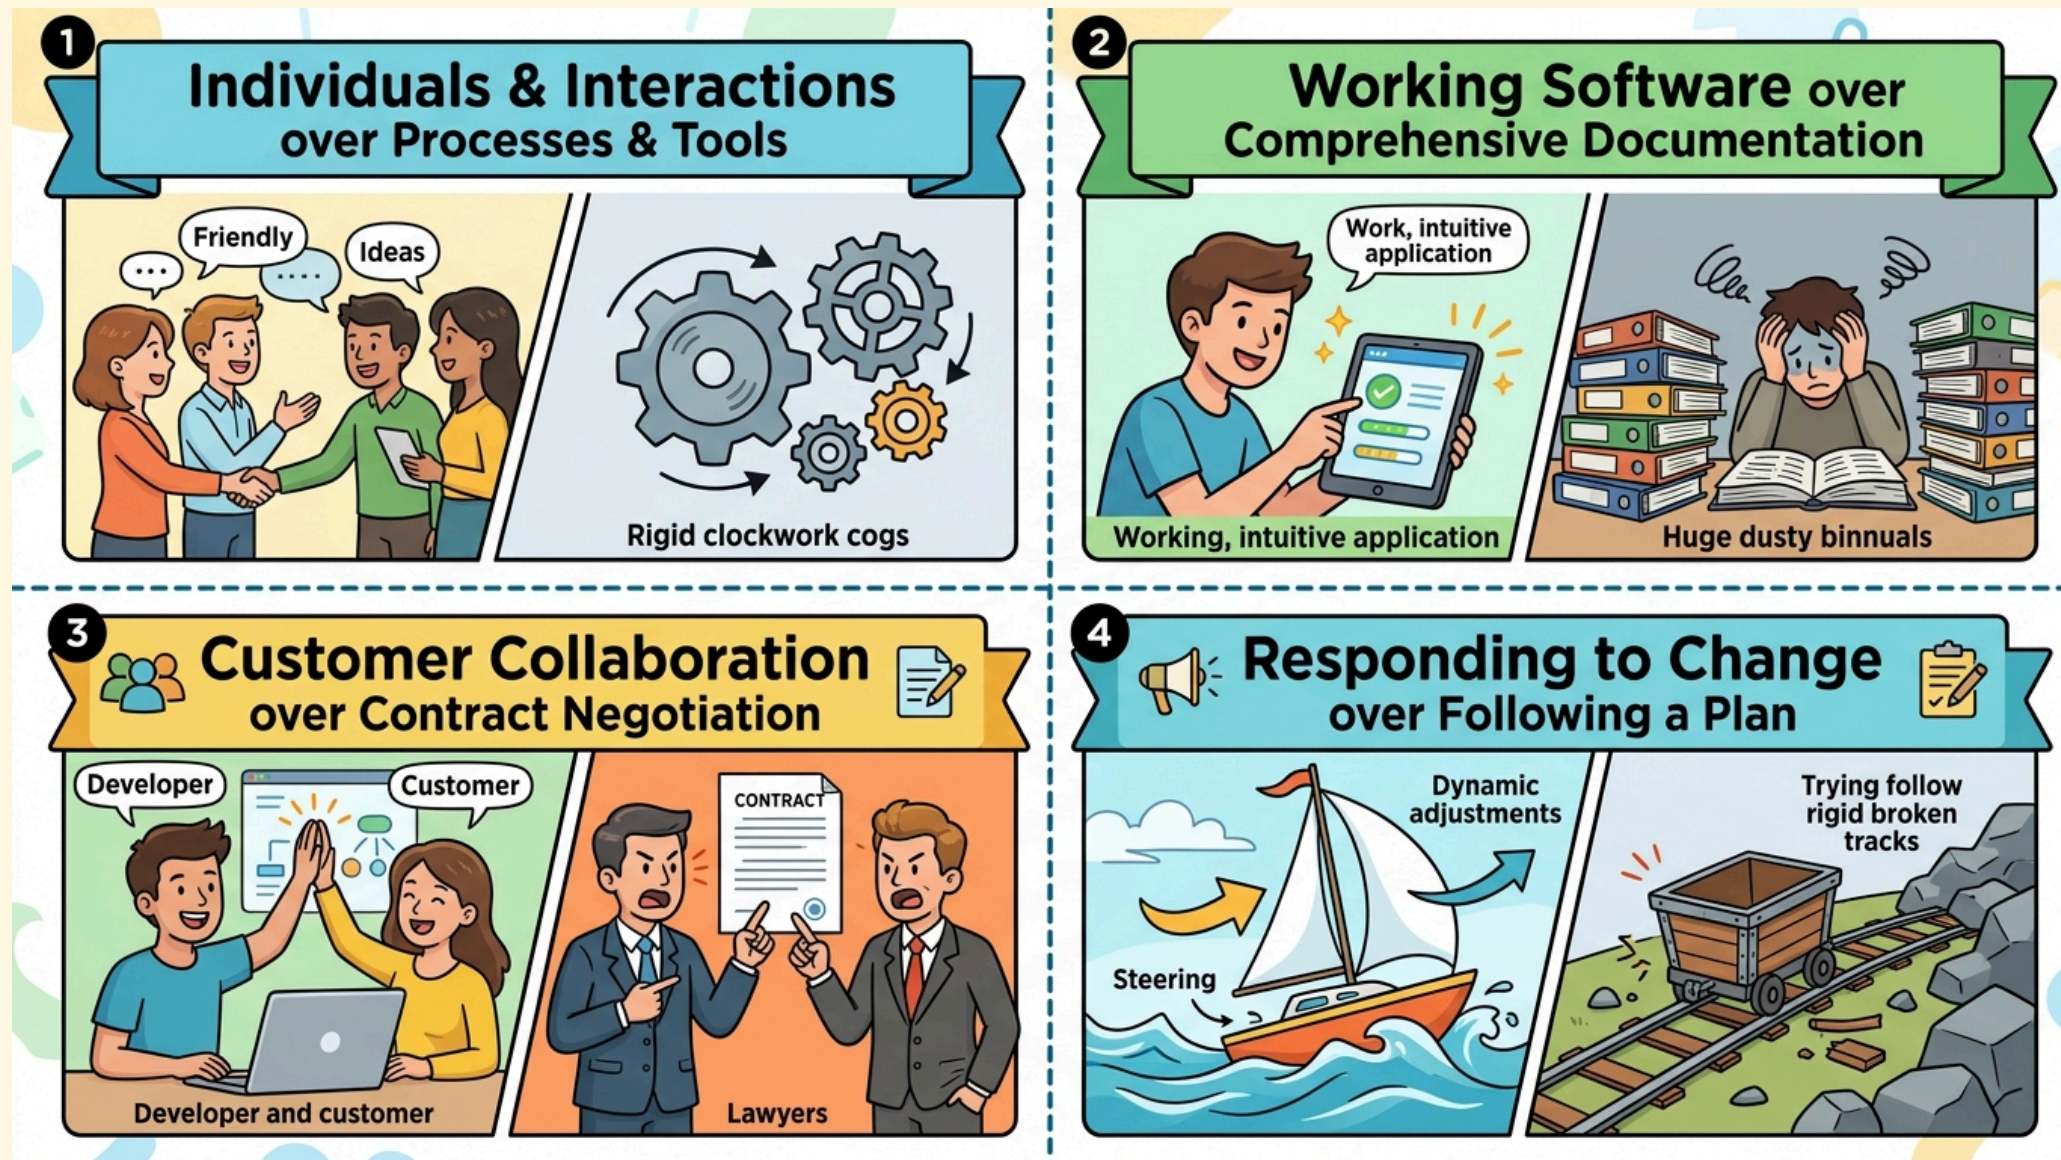

The 12 Principles of Agile Software

Principles 1 – 6: Value & People

1. **Customer Satisfaction:** Satisfy the customer through early and continuous delivery of valuable software.
2. **Welcome Change:** Harness changing requirements for the customer's competitive advantage, even late.
3. **Frequent Delivery:** Deliver working software frequently, from a couple of weeks to a couple of months.
4. **Daily Collaboration:** Business stakeholders and developers must work together daily throughout the project.
5. **Motivated Individuals:** Build projects around motivated people; provide environment, support, and trust.
6. **Face-to-Face Conversation:** The most effective method of conveying information is direct conversation.

Principles 7 – 12: Delivery & Discipline

7. **Working Software:** Working software is the primary measure of progress.
8. **Sustainable Pace:** Maintain a constant, sustainable development pace indefinitely.
9. **Technical Excellence:** Continuous attention to technical excellence and good design enhances agility.
10. **Simplicity:** The art of maximizing the amount of work not done is essential.
11. **Self-Organizing Teams:** The best architectures, requirements, and designs emerge from self-organizing teams.
12. **Regular Reflection:** Regularly reflect on how to become more effective, then tune and adjust.

Concept Check Question 5 (CCQ 5)

The Agile Manifesto states: "*Working software over comprehensive documentation.*" What does this value primarily advocate in practice?

- **A.** Engineering teams are completely prohibited from writing architecture blueprints or API specifications.
- **B.** While documentation has value, delivering functional software that solves user problems is the primary measure of progress.
- **C.** Software architectures should be created completely ad-hoc during coding without any upfront thought.
- **D.** Documentation should only ever be written if mandated by external government regulatory auditors.



Concept Check Question 6 (CCQ 6)

Agile Principle 8 states: *"Agile processes promote sustainable development. The sponsors, developers, and users should be able to maintain a constant pace indefinitely."* What is the primary engineering motivation?

- **A.** To prevent code quality degradation, accumulated defects, and burnout caused by sustained overtime and 'crunch modes.'
- **B.** To enforce that every developer on the team writes the exact same number of lines of code each day.
- **C.** To ensure that software project budgets remain permanently fixed across all financial quarters.
- **D.** To prevent customers from submitting new feature requests after the first sprint planning session.




2.5 Agile Project Management (Scrum & Kanban)

*"Scrum establishes the cadence; Kanban optimizes the flow.
Stop starting, start finishing."*

— Henrik Kniberg

”

Agile Project Management: Scrum Sprints vs. Kanban Pull Flow

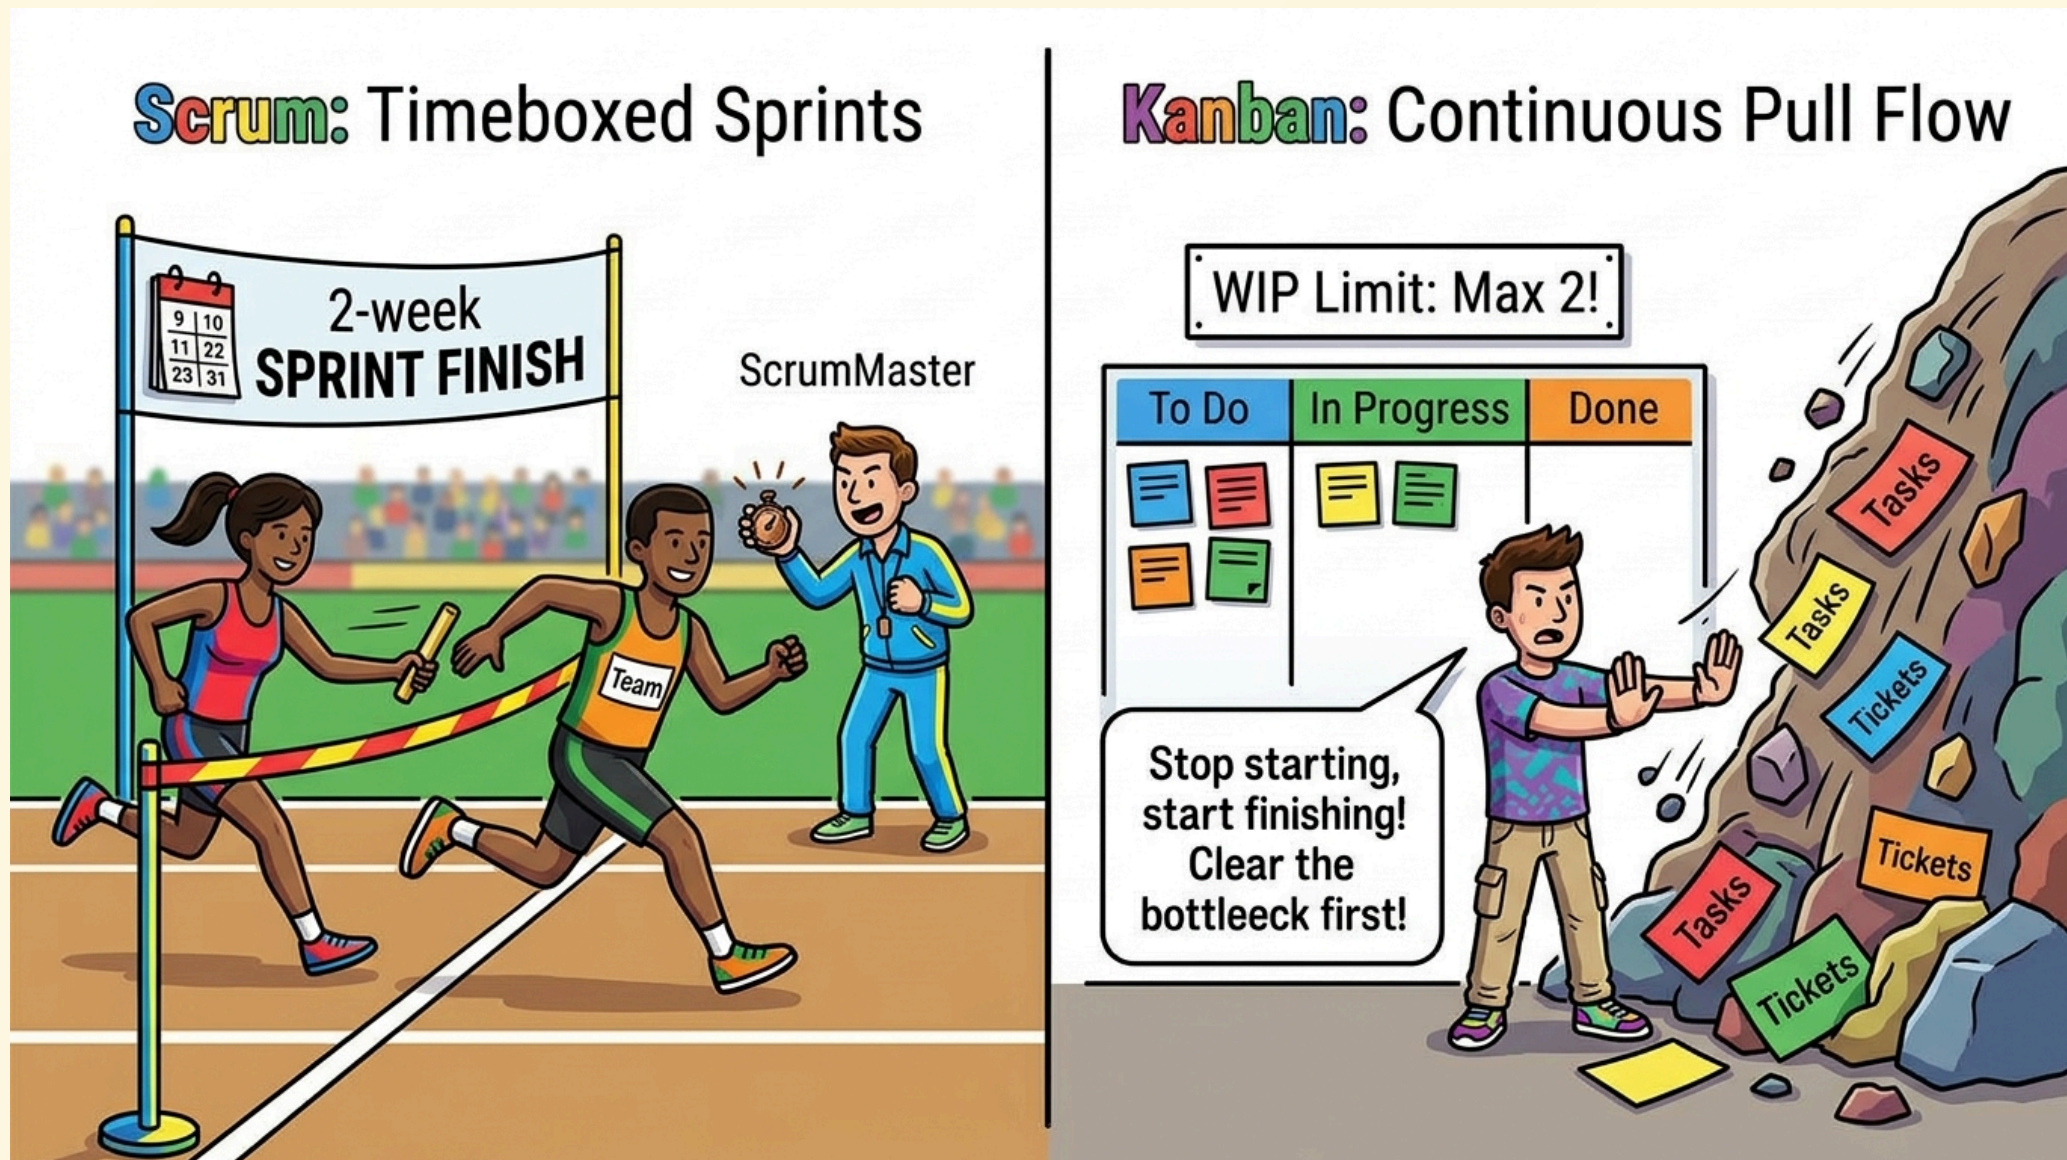

Agile Project Management — Scrum & Kanban

Agile management frameworks organize team collaboration, cadences, and work tracking. They govern HOW WORK IS COORDINATED, but are deliberately silent on how code is engineered.

”

- **Why Do We Need Project Management Frameworks?**

- The Agile Manifesto gives philosophy, but doesn't tell a team what to do on Monday morning!
- Teams need concrete mechanisms to prioritize backlog items, synchronize daily efforts, and inspect deliverables.

- **The Two Dominant Management Paradigms:**

- **Scrum:** Timeboxed cadence (Sprints), fixed roles, ceremonies, and committed sprint backlogs.
- **Kanban:** Continuous flow, pull-based delivery, visual cards, and strict Work In Progress (WIP) limits.

The Scrum Framework: Roles & Artifacts

- **Timeboxed Cadences (Sprints):**

- Development cycles of fixed duration (typically 1 to 4 weeks) with inspect-and-adapt reviews.


- **3 Defined Roles:**

- **Product Owner (PO):** Defines product vision, prioritizes the backlog, maximizes ROI, represents user voice.
- **ScrumMaster:** Servant-leader; coaches the team, removes impediments, shields developers from distractions.
- **Developers:** Cross-functional professionals who build the releasable increment.

- **3 Core Artifacts:**

- **Product Backlog:** Prioritized single source of truth for all proposed features and fixes.
- **Sprint Backlog:** Committed subset of items selected for the active sprint.
- **Increment:** Usable, tested, and potentially releasable product slice meeting the **Definition of Done (DoD)**.

The Complete Scrum Framework Lifecycle

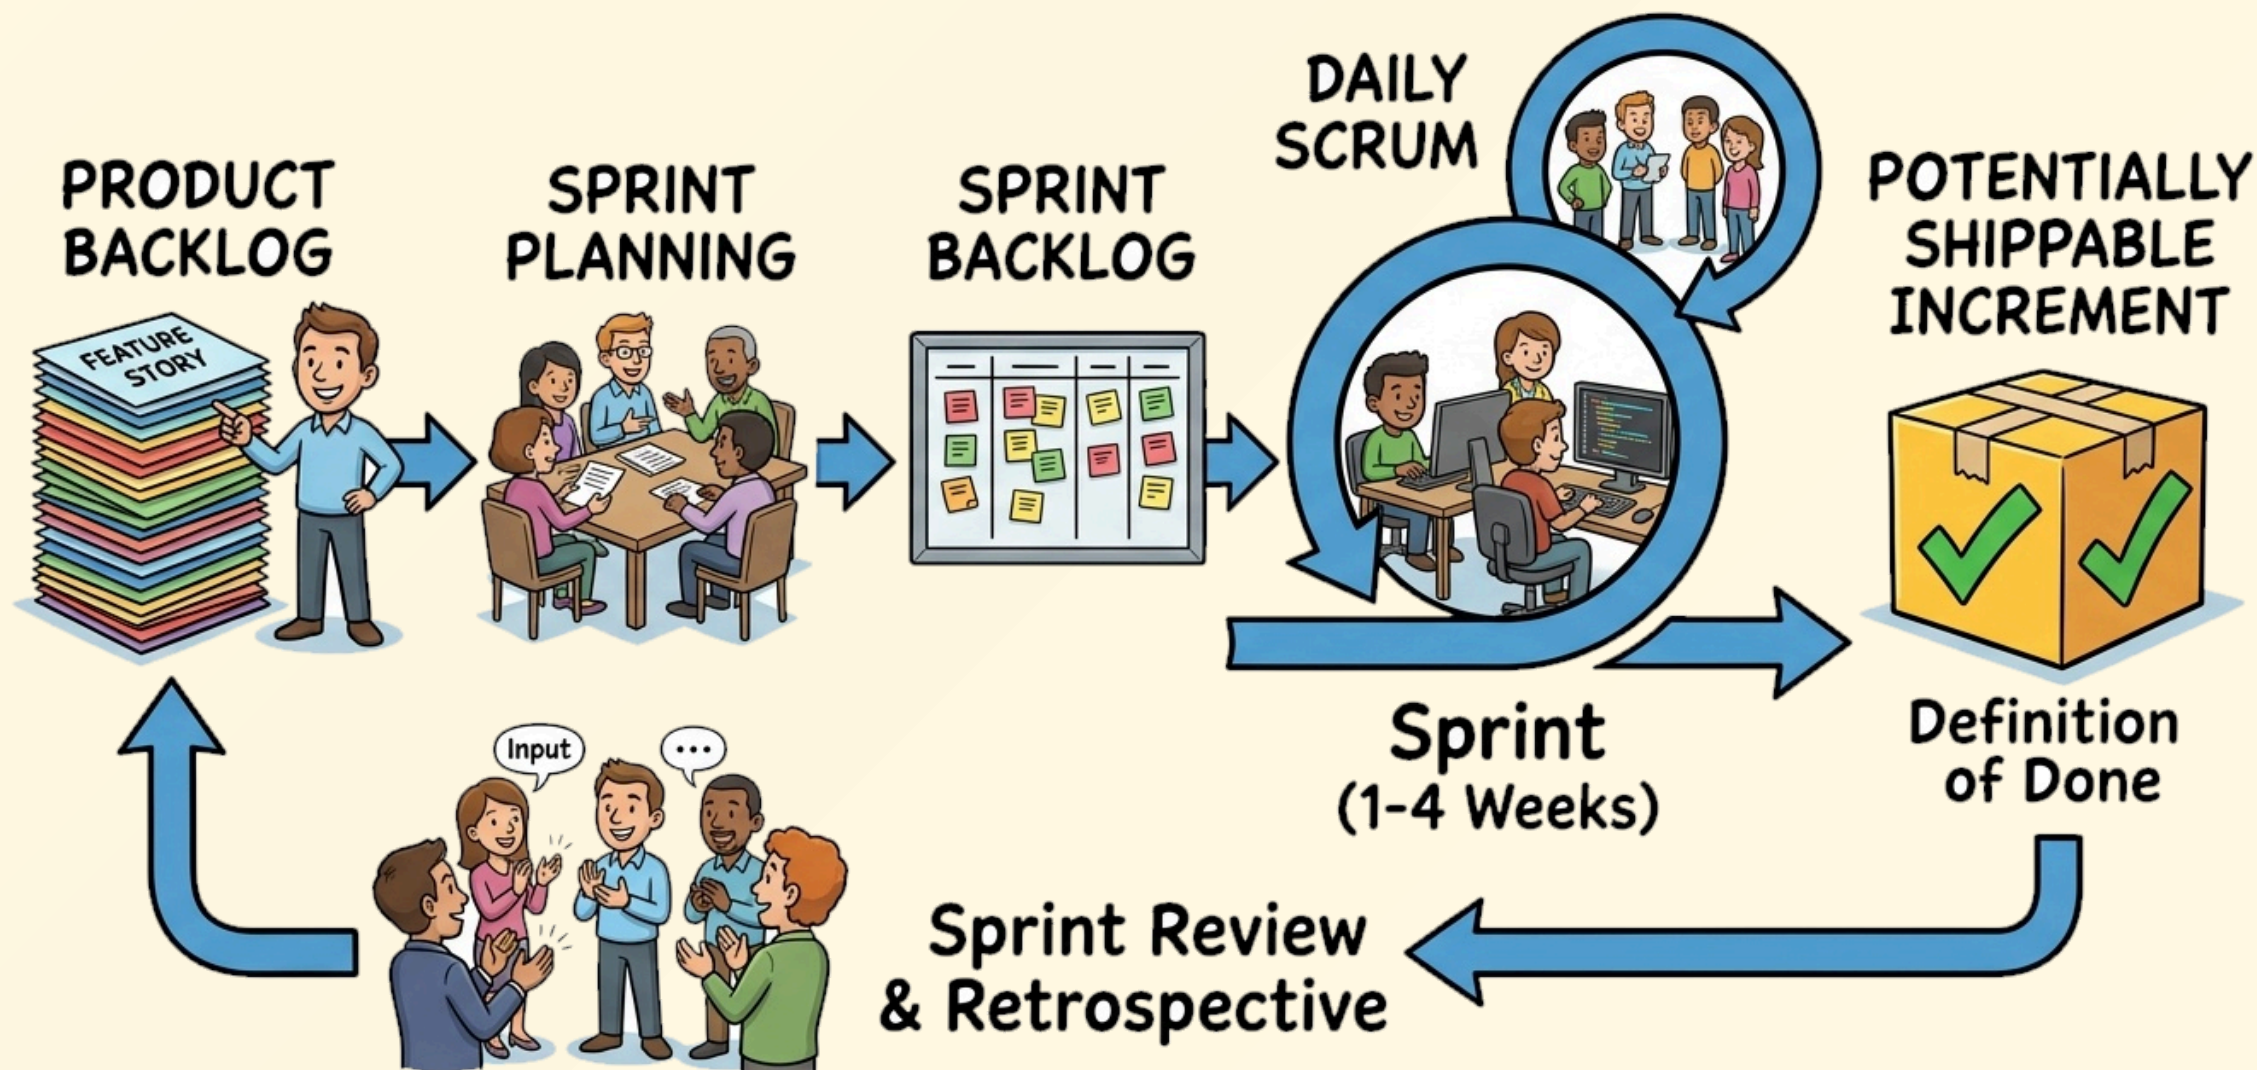

Scrum Ceremonies & The Sprint Rhythm

- **1. Sprint Planning:**

- Team inspects the Product Backlog, agrees on a **Sprint Goal**, and selects backlog items into the Sprint Backlog.

- **2. Daily Scrum (Standup):**

- 15-minute daily synchronization meeting:
 - *What did I accomplish yesterday? What will I work on today? What obstacles are blocking my progress?*

- **3. Sprint Review:**

- Held at the end of the sprint to demonstrate the working Increment to stakeholders and gather live feedback.

- **4. Sprint Retrospective:**

- Dedicated team reflection:
 - *What went well? What went poorly? What concrete process experiments will we adopt next sprint?*

The Kanban Framework: Continuous Flow & Pull Systems


- **Origin & Philosophy:**

- Derived from the **Toyota Production System (Lean Manufacturing)**.
- Instead of fixed timeboxes (sprints), Kanban operates on **continuous flow** through a **pull system**.

- **The 4 Core Practices of Kanban:**

1. **Visualize the Workflow:** Use a Kanban board with distinct columns (To Do, In Progress, Review, Done) to make all work transparent.
2. **Limit Work In Progress (WIP):** Set strict numerical caps on how many tasks can occupy a stage simultaneously.
3. **Manage Flow:** Monitor the movement of items across the board; eliminate blockages.
4. **Make Process Policies Explicit:** Clearly define "Definition of Ready" and "Definition of Done".

Kanban Board Flow with Work-in-Progress (WIP) Limits

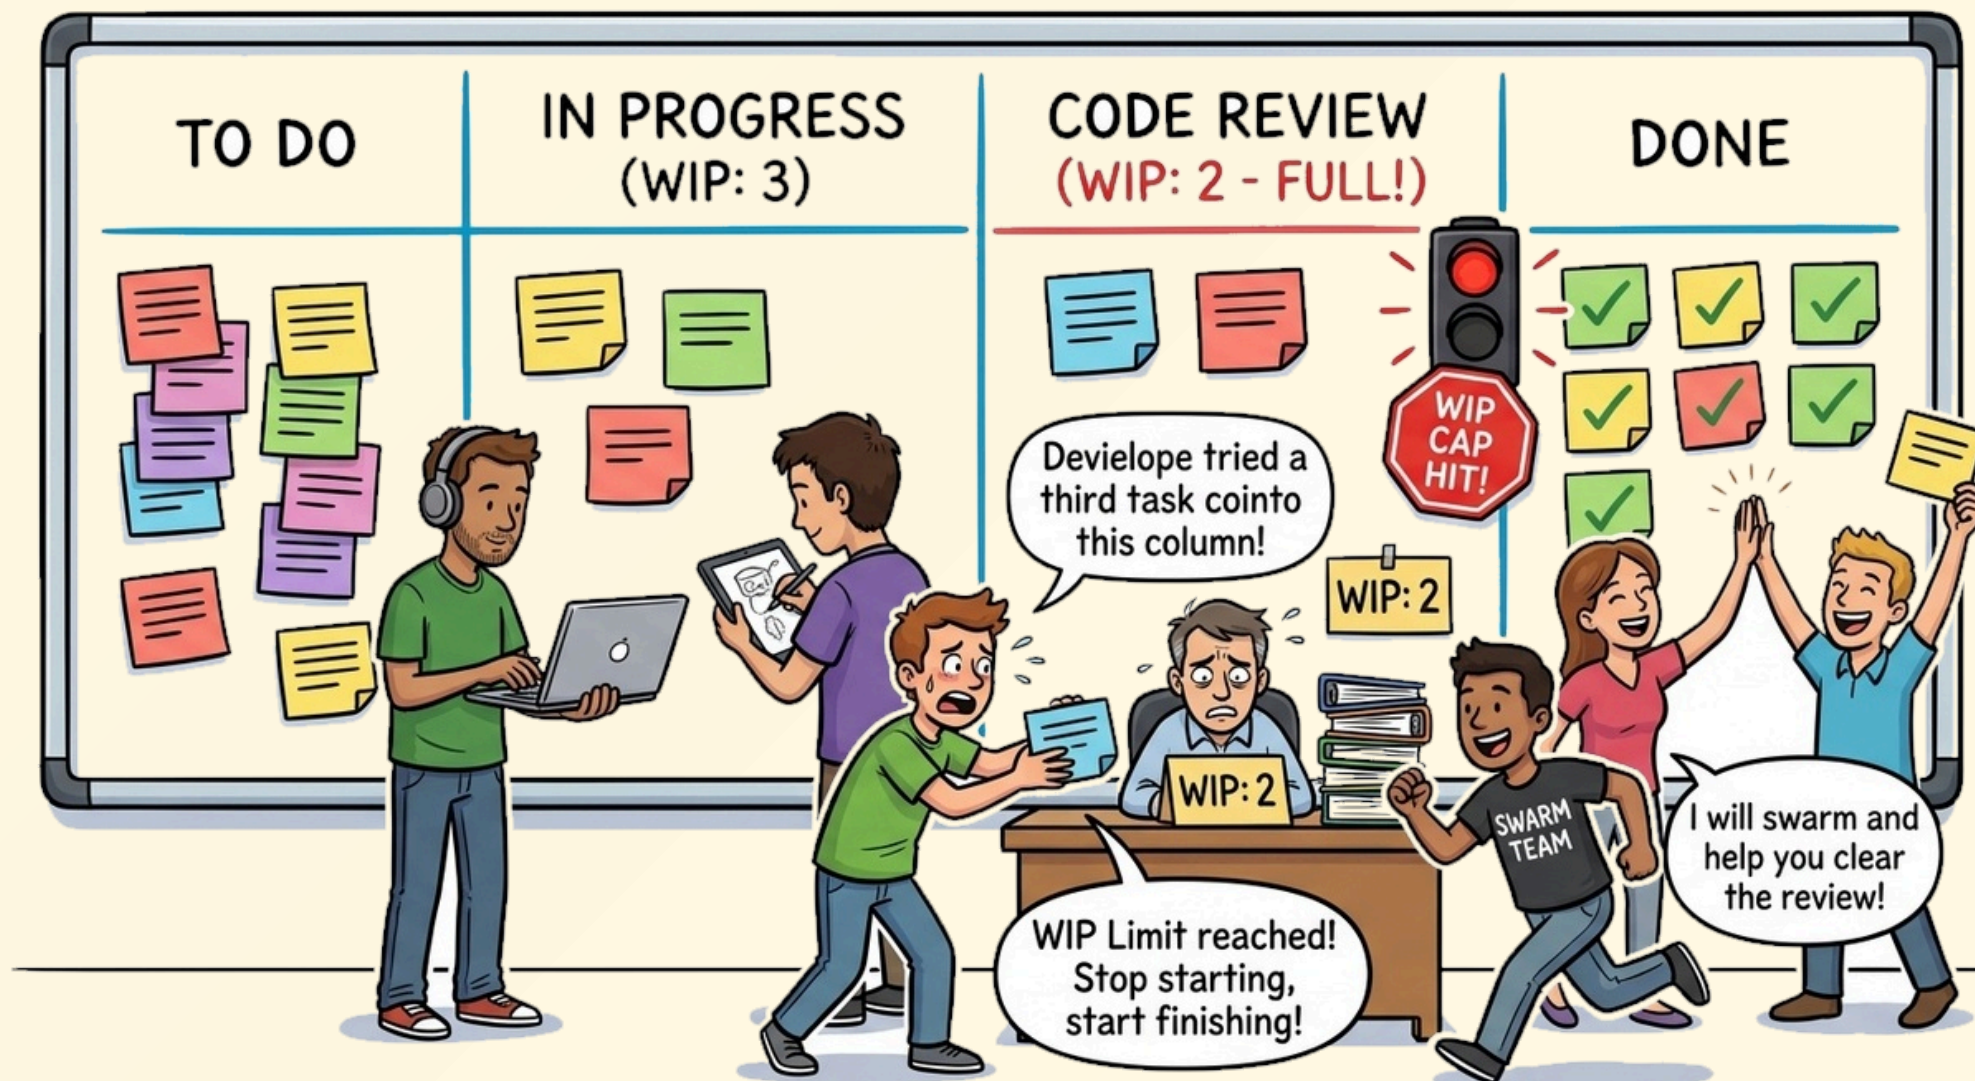

Scrum vs. Kanban: Direct Architectural Comparison

Dimension	Scrum	Kanban
Cadence	Regular, fixed-length sprints (1–4 weeks)	Continuous flow; work pulled as capacity allows
Release Timing	At end of each Sprint (or continuous)	Continuous delivery upon task completion
Roles	Product Owner, ScrumMaster, Developers	No prescribed roles (teams keep existing structure)
WIP Control	Limited by Sprint Backlog commitment	Explicit numerical WIP limits per board column
Mid-Cycle Changes	Discouraged during active sprint	Changes can be made to backlog at any time
Primary Metric	Velocity (Story Points per sprint)	Cycle Time, Lead Time, Throughput
Best Suited For	Product development with feature roadmaps	Maintenance, DevOps, IT support, continuous ops

Concept Check Question 7 (CCQ 7)

In the Kanban process framework, what is the primary operational purpose of enforcing strict "Work In Progress" (WIP) limits on columns?

- **A.** To prevent developers from modifying automated unit test scripts.
- **B.** To expose bottlenecks, reduce multitasking, and maximize delivery flow throughput.
- **C.** To mandate that every team member attends daily 15-minute standup meetings.
- **D.** To ensure all software increments are packaged into fixed 2-week sprint iterations.



Concept Check Question 8 (CCQ 8)

In the Scrum framework, what is the primary operational objective of the **Sprint Retrospective** held at the end of each sprint?

- **A.** To demonstrate working software increments to external business stakeholders and end users.
- **B.** To inspect team collaboration, identify operational friction, and commit to concrete process improvements for the next sprint.
- **C.** To evaluate individual developer velocity and determine annual salary adjustments.
- **D.** To re-architect the entire system database schema and deploy hotfixes to live production servers.



2.6 Technical Debt


"Shipping first time code is like going into debt.

A little debt accelerates development so long as it is paid back promptly with a rewrite."

— Ward Cunningham

”

The Hidden Cost of Speed: Technical Debt

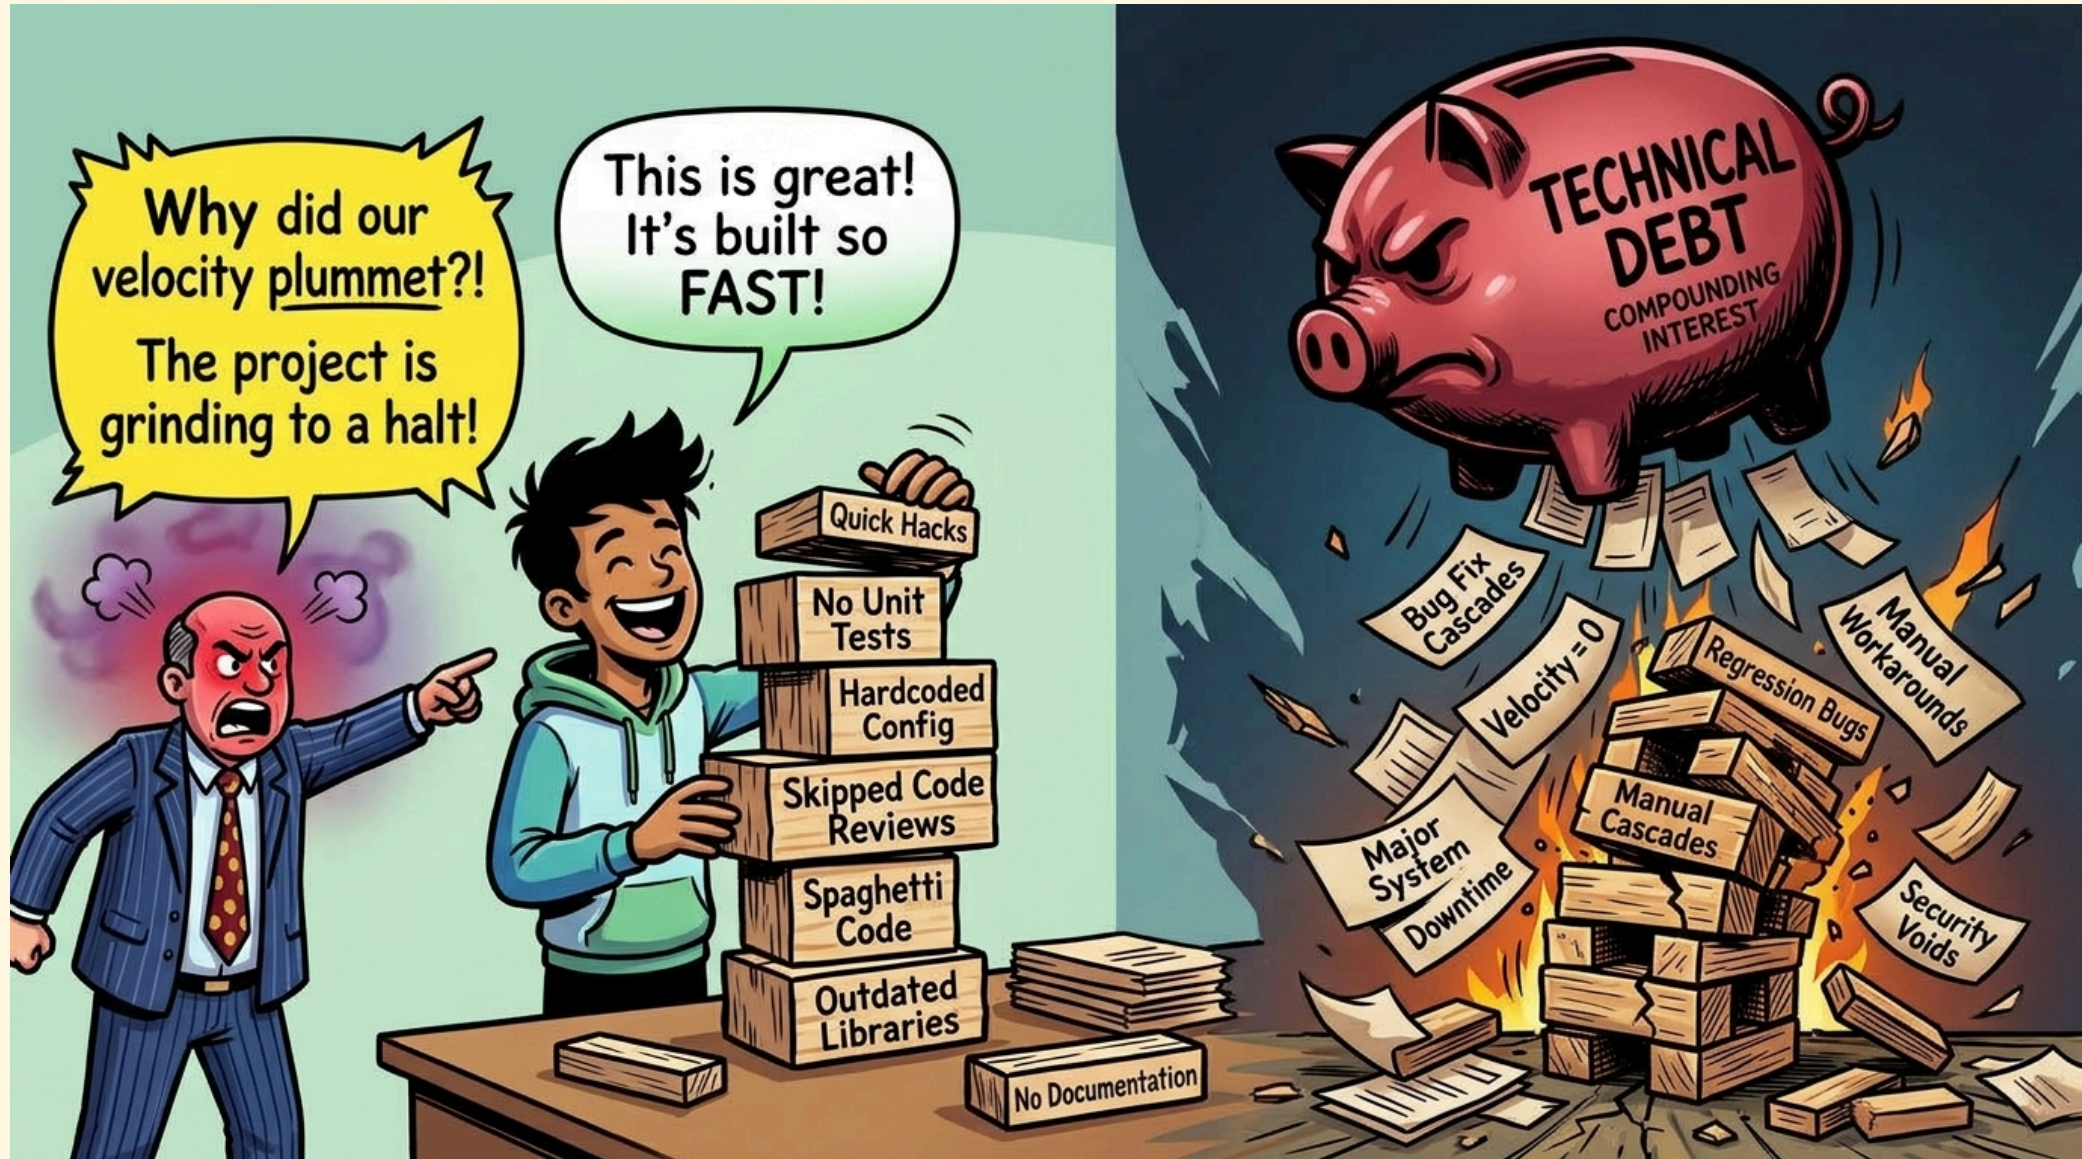

Technical Debt: A Financial Loan on Software

*Shipping code quickly without engineering discipline is like taking out a **financial loan**. It accelerates delivery today, but incurs compounding interest that eventually bankrupts future engineering velocity.*


”

- **Origin of the Metaphor:**

- Coined by **Ward Cunningham (1992)**, co-author of the Agile Manifesto and creator of the first Wiki.

- **The Core Paradox of Agile Delivery:**

- Scrum and Kanban empower teams to demo features sprint after sprint.
- **The Trap:** Prioritizing *feature speed* while neglecting automated tests and architectural health.
- **The Compounding Interest:** You borrowed time today, but pay interest daily via brittle code, regressions, and velocity collapse.

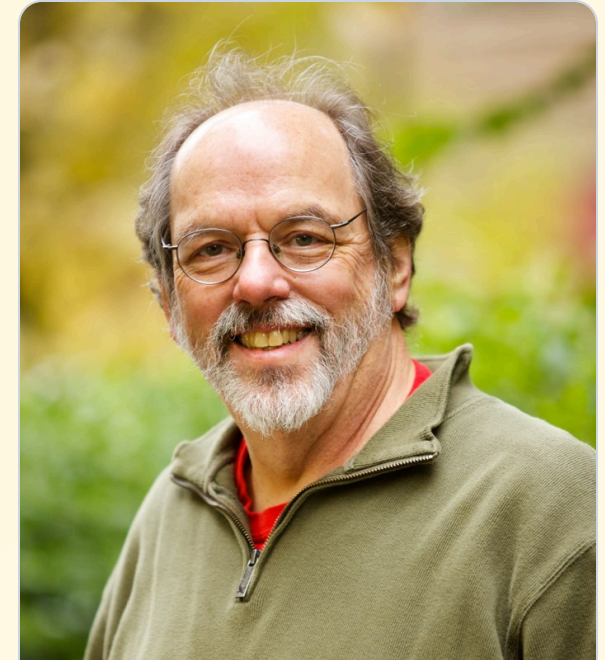

Ward Cunningham

Wikimedia Commons / CC BY-SA

The "Flaccid Scrum" Phenomenon & Architectural Erosion

- **Martin Fowler's Warning: "Flaccid Scrum"**
 - Adopting the superficial management ceremonies of Scrum (standups, sprints, user stories, Jira boards) while **completely ignoring technical engineering practices**.
 - Teams become "feature factories" that rapidly produce fragile, untested code.
- **The Consequences of Technical Neglect:**
 - **Architectural Erosion:** System boundaries blur, modular encapsulation breaks down, turning clean architecture into a **"Big Ball of Mud"**.
 - **Velocity Collapse:** Sprint velocity drops exponentially over time because developers spend 80% of their day fighting regression defects.
 - **Developer Burnout & Turnover:** High friction, fear of touching code, and morale collapse.

Empirical Evidence & Real-World Disasters of Technical Debt

*Technical debt is not an abstract metaphor: it drains **42% of engineering time** worldwide and can trigger **billion-dollar enterprise collapses**.*

”

Global Empirical Data

- **Stripe Developer Coefficient Report (2018):**
 - Developers spend **42% of their weekly time** (~17.3 hrs) on tech debt and bad code.
 - Global GDP loss: **\$85B – \$300B annually** in squandered developer productivity.
- **CISQ Industry Benchmark (2022):**
 - Accumulated technical debt in the US alone exceeded **\$1.52 Trillion**.

Case: Southwest Airlines Meltdown (2022)

- **The Holiday Catastrophe:**
 - **16,700 flights cancelled** in one week; stranded millions of holiday travelers.
 - Direct financial loss of **over \$1 Billion USD** plus severe brand damage.
- **The Technical Root Cause:**
 - Decades of neglected technical debt in the crew-scheduling system (**SkySolver**).
 - Management prioritized expansion while ignoring warnings about obsolete IT systems.

Concept Check Question 9 (CCQ 9)

According to Ward Cunningham's Technical Debt metaphor, what represents the "compounding interest" paid by a software organization?

- **A.** The annual licensing fees paid for cloud hosting infrastructure and IDEs.
- **B.** The ongoing extra time, degraded velocity, and regression defects suffered during all future development.
- **C.** The bonus compensation paid to engineers who complete sprint tickets ahead of schedule.
- **D.** The legal costs of acquiring open-source third-party dependencies.



Concept Check Question 10 (CCQ 10)

Martin Fowler coined the term "**Flaccid Scrum**" to describe which critical software engineering failure?

- **A.** Adopting Scrum management ceremonies (daily standups, sprints, story points) while completely neglecting technical engineering practices like TDD, refactoring, and CI.
- **B.** Refusing to use Jira or commercial issue tracking software in favor of physical sticky notes.
- **C.** Allowing product owners to adjust backlog priorities between sprint planning sessions.
- **D.** Enforcing automated test execution on every Git commit in the continuous integration pipeline.



Interactive Activity: The Technical Debt Dilemma (Pair Discussion)

The Technical Debt Dilemma (Pair Discussion):

- **Scenario:** High-stakes VC demo in 3 weeks to close a \$5M funding round for your startup.
- **Reality:** Payment service has heavy architectural debt (no automated tests, intermittent concurrency crashes).
- **PM's Demand:** "We must build a flashy 1-Click Crypto Checkout feature for the demo!"
- **Pair Discussion Prompts:**
 1. Would you (A) Refuse and refactor, (B) Stack the feature on messy code and pray, or (C) Propose a pragmatic hybrid?
 2. Using Martin Fowler's Quadrant, is this debt *Prudent* or *Reckless*? How do you schedule repayment post-demo?




2.7 Technical Rigor (Extreme Programming)

*"Any fool can write code that a computer can understand.
Good programmers write code that humans can understand."
— Martin Fowler*

”

Extreme Programming (XP): Technical Rigor & Clean Code

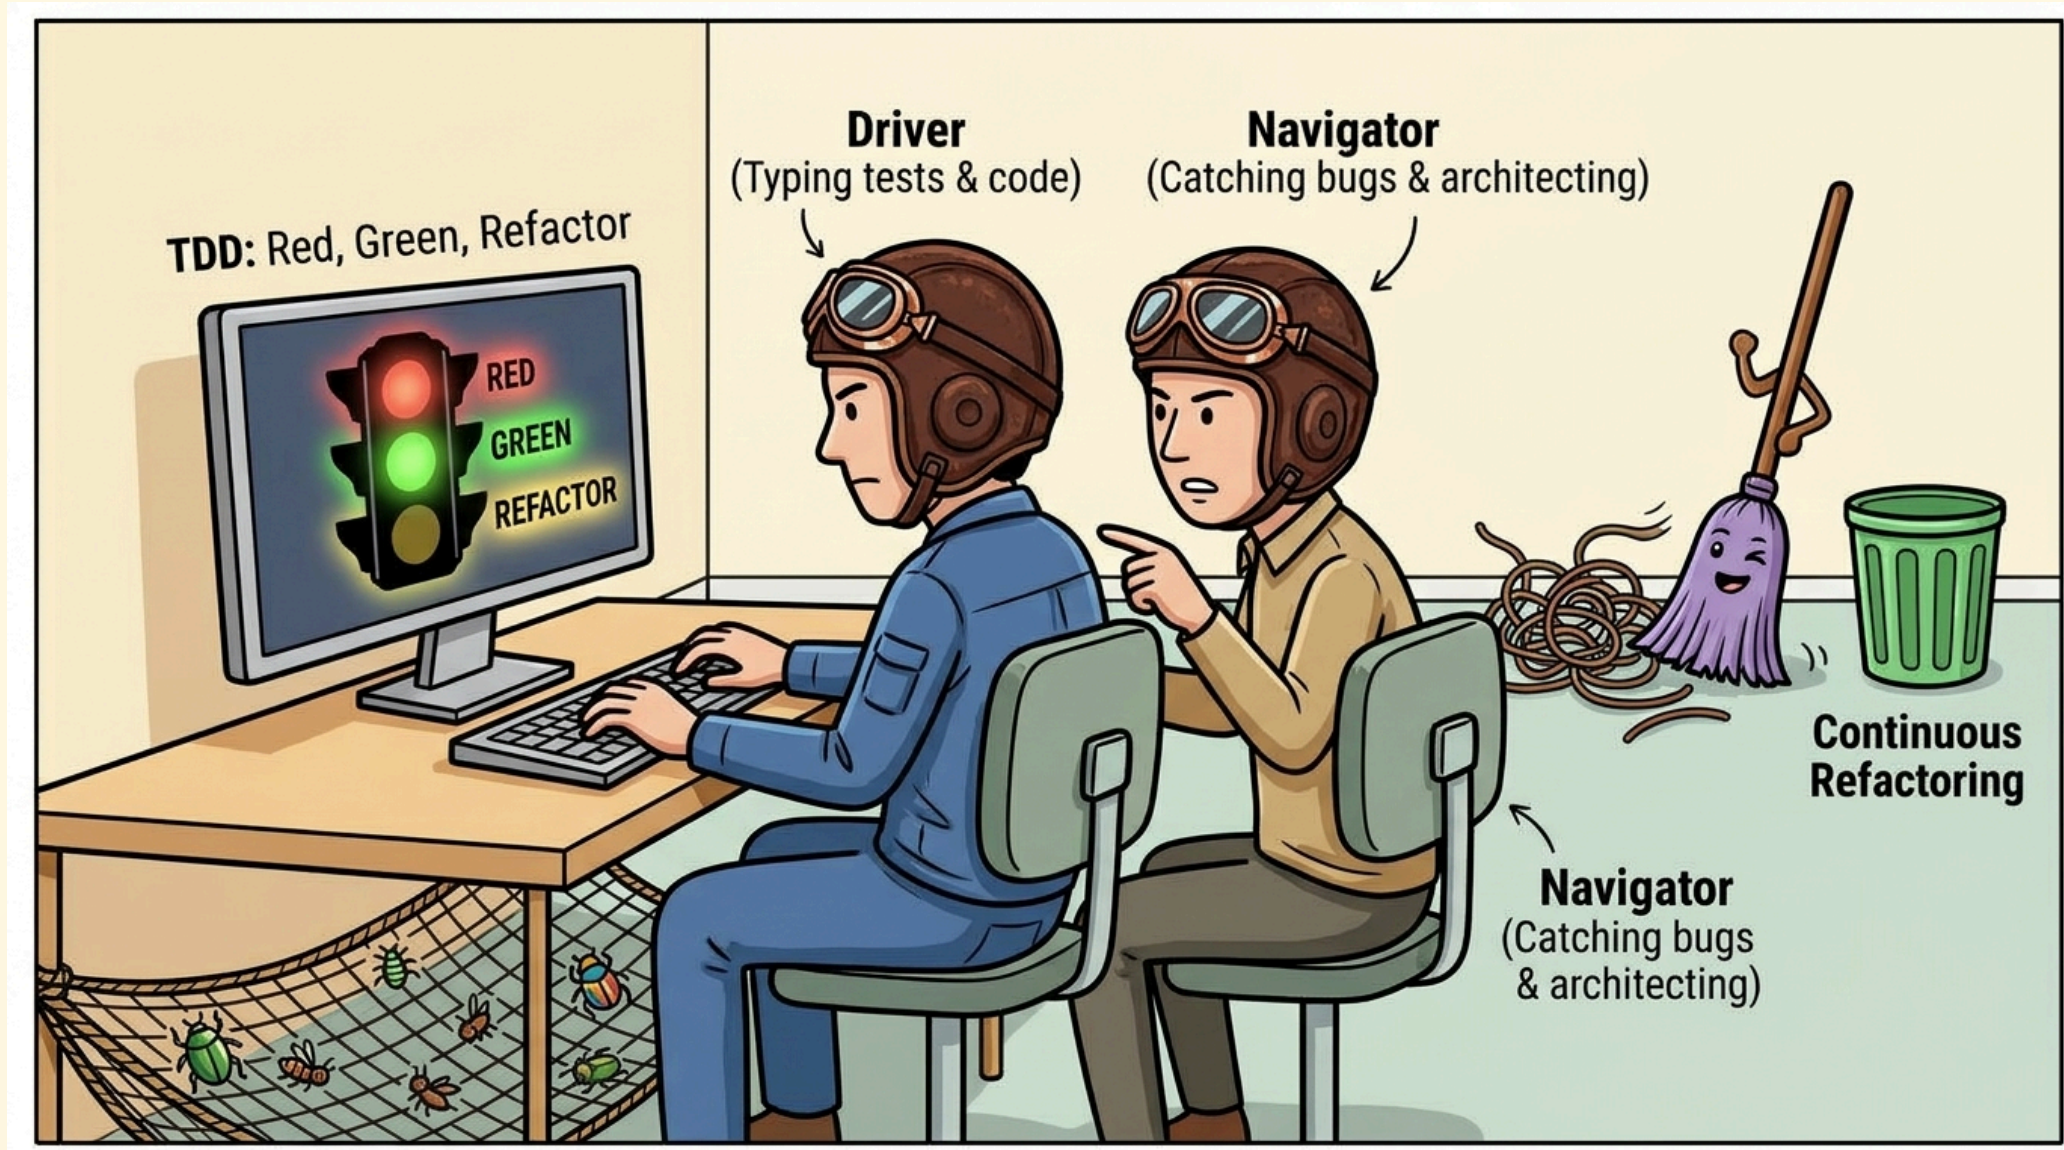

Technical Rigor: Extreme Programming (XP)

Created by Kent Beck in 1996, Extreme Programming (XP) is an Agile process model focused specifically on coding discipline, technical excellence, and continuous refactoring — serving as the primary antidote to Technical Debt.






”

- **Why "Extreme" Programming?**
- Kent Beck asked: *"If an engineering practice is good, what if we turn the dial up to 10 and do it all the time?"*
 - *Testing* is good → Test before writing code (**TDD**).
 - *Code review* is good → Review continuously (**Pair Programming**).
 - *Design* is good → Refactor constantly (**Simple Design**).
 - *Integration* is good → Integrate multiple times a day (**CI/CD**).
 - *Releases* are good → Deliver tiny increments (**Small Releases**).

**Kent Beck**

Wikimedia Commons / CC BY-SA

Core Extreme Programming (XP) Practices & Feedback Loops

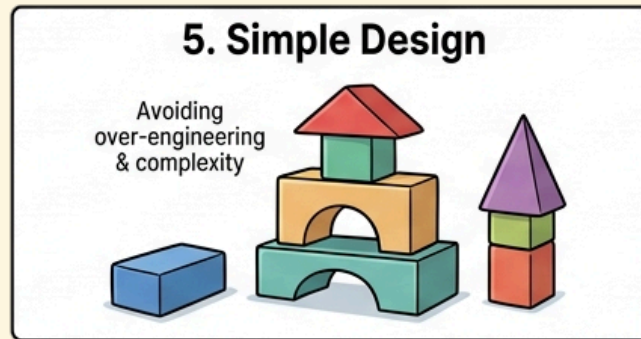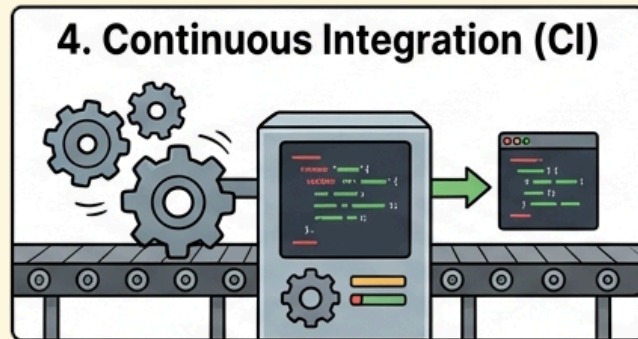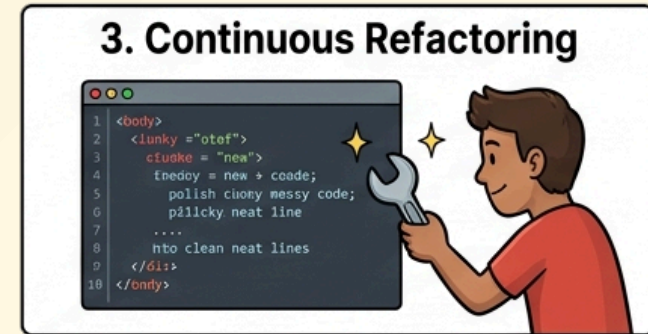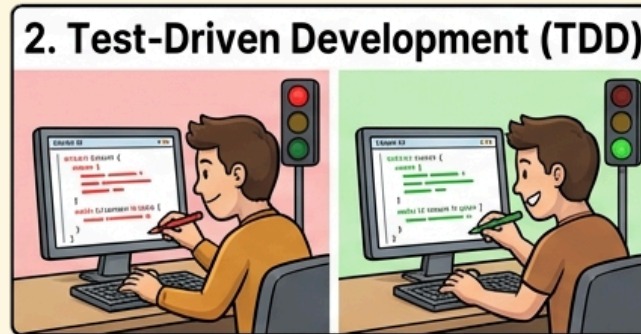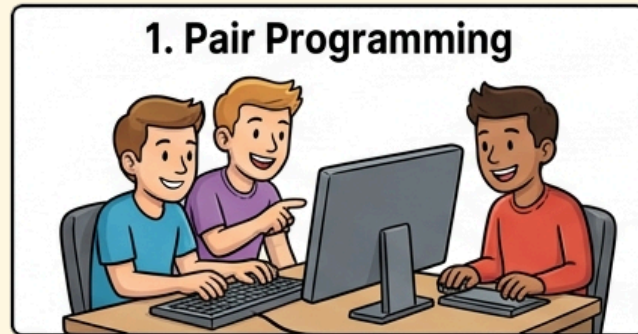

XP Practices: Test-Driven Development (TDD)

- **The Test-First Mindset:**


- Never write a line of production code unless you have a *failing automated test*!

- **The Red-Green-Refactor Cycle:**

1. **RED:** Write a small automated unit test that specifies desired behavior and fails.
2. **GREEN:** Write the absolute minimal production code necessary to pass the test.
3. **REFACTOR:** Clean up structure, remove duplication, and improve names while tests remain green.

- **Result:** Creates an automated regression safety net that makes code changes fearless!

The Test-Driven Development (TDD) Cycle

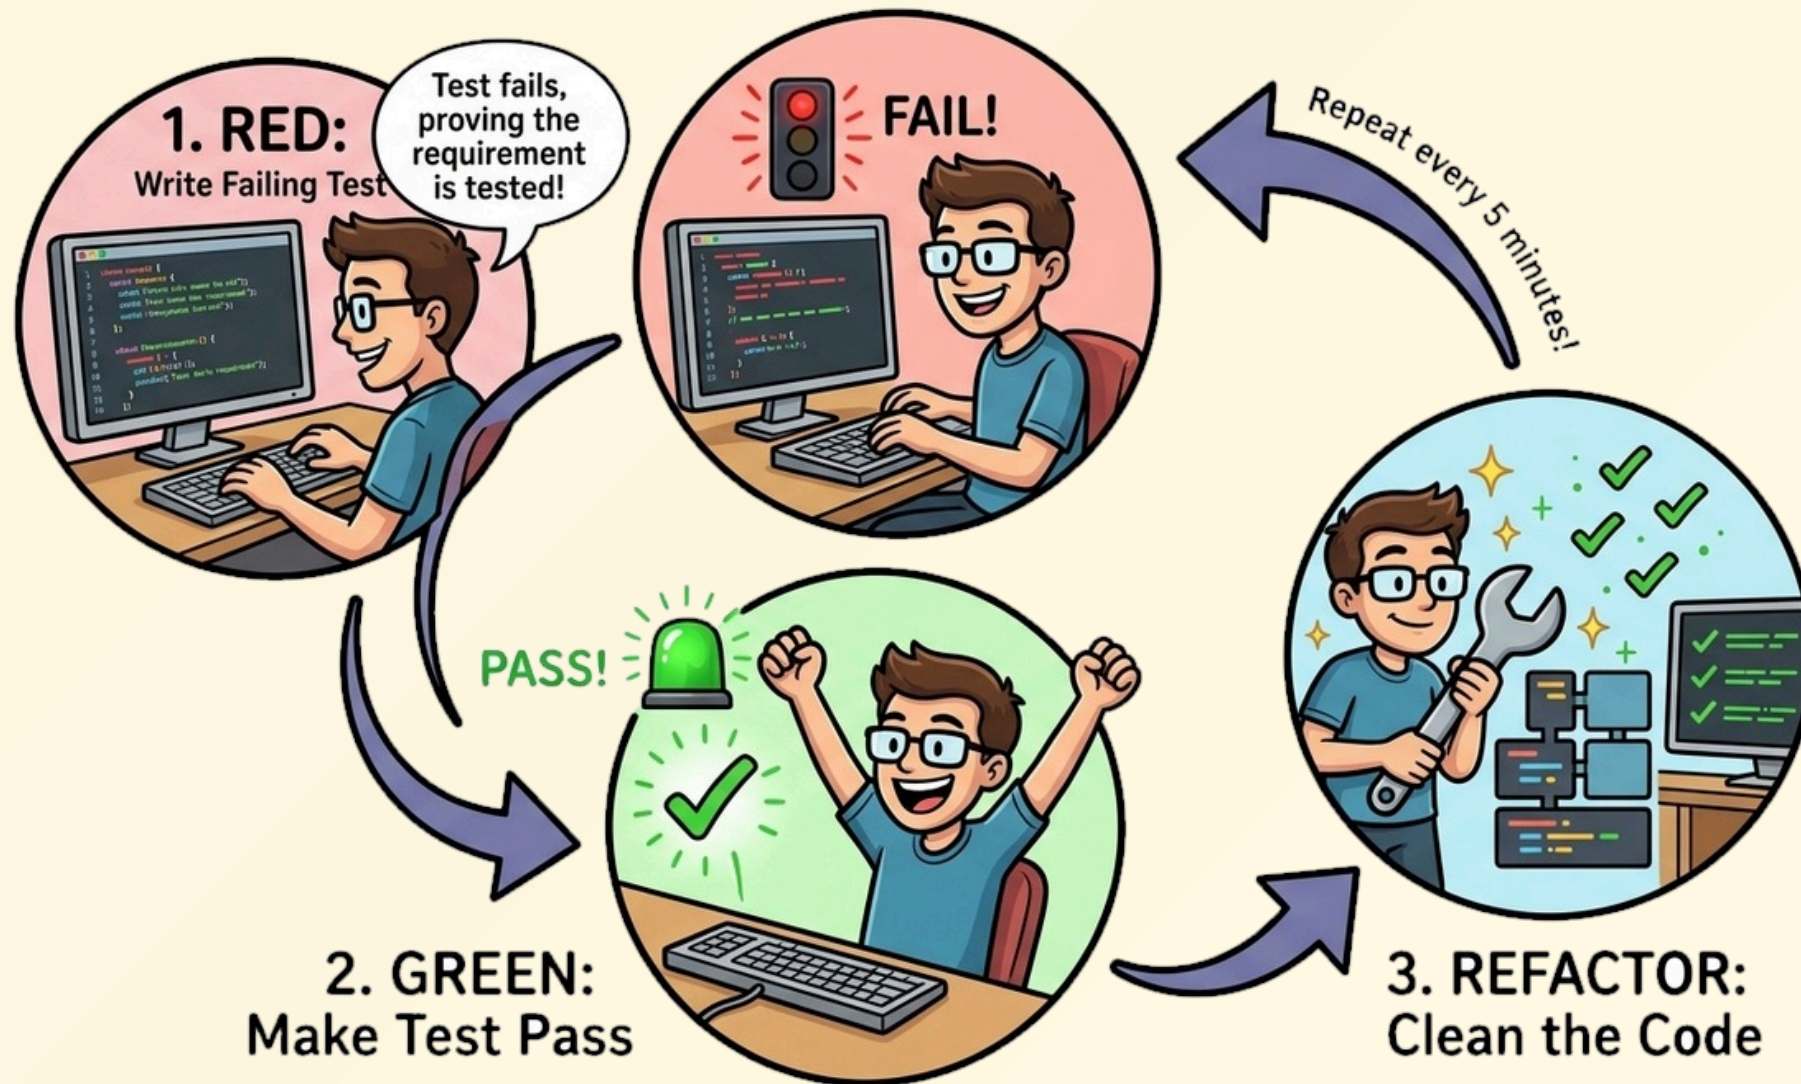

Continuous Refactoring & Simple Design

- **What is Refactoring?**

- Martin Fowler: *"A change made to the internal structure of software to make it easier to understand and cheaper to modify, without changing its observable external behavior."*
- In XP, refactoring is not a special phase scheduled once a year; **it is an hourly developer reflex.**

- **Kent Beck's 4 Rules of Simple Design:**

1. **Passes all tests:** System correctness is verified automatically.
2. **Reveals intent:** Code is *self-documenting* with clear naming and modular responsibilities.
3. **No duplication (DRY):** *Don't Repeat Yourself* — single point of truth for business logic.
4. **Fewest elements:** No speculative over-engineering, unused abstractions, or dead code.

- **The Antidote to Debt:** Continuous refactoring constantly repays technical debt on every commit!

Pair Programming & Collective Code Ownership

- **Pair Programming Dynamics:**

- Two developers collaborate at one workstation: **Driver** (writes code/tests) & **Navigator** (reviews architecture & edge cases).

- **Collective Code Ownership:**

- No single developer "owns" or hoards a module; any pair can refactor code anywhere.



- **Empirical Evidence:**

- Studies show pairing reduces defects by 15–30% and produces cleaner, simpler designs.

- **Eliminating the "Bus Factor":**

- *"The minimum number of engineers whose sudden departure (or being "hit by a bus") would stall the project."*
- A Bus Factor of **1** is a dangerous *Single Point of Failure* (SPOF) caused by knowledge silos.

Pair Programming: Driver & Navigator Dynamics

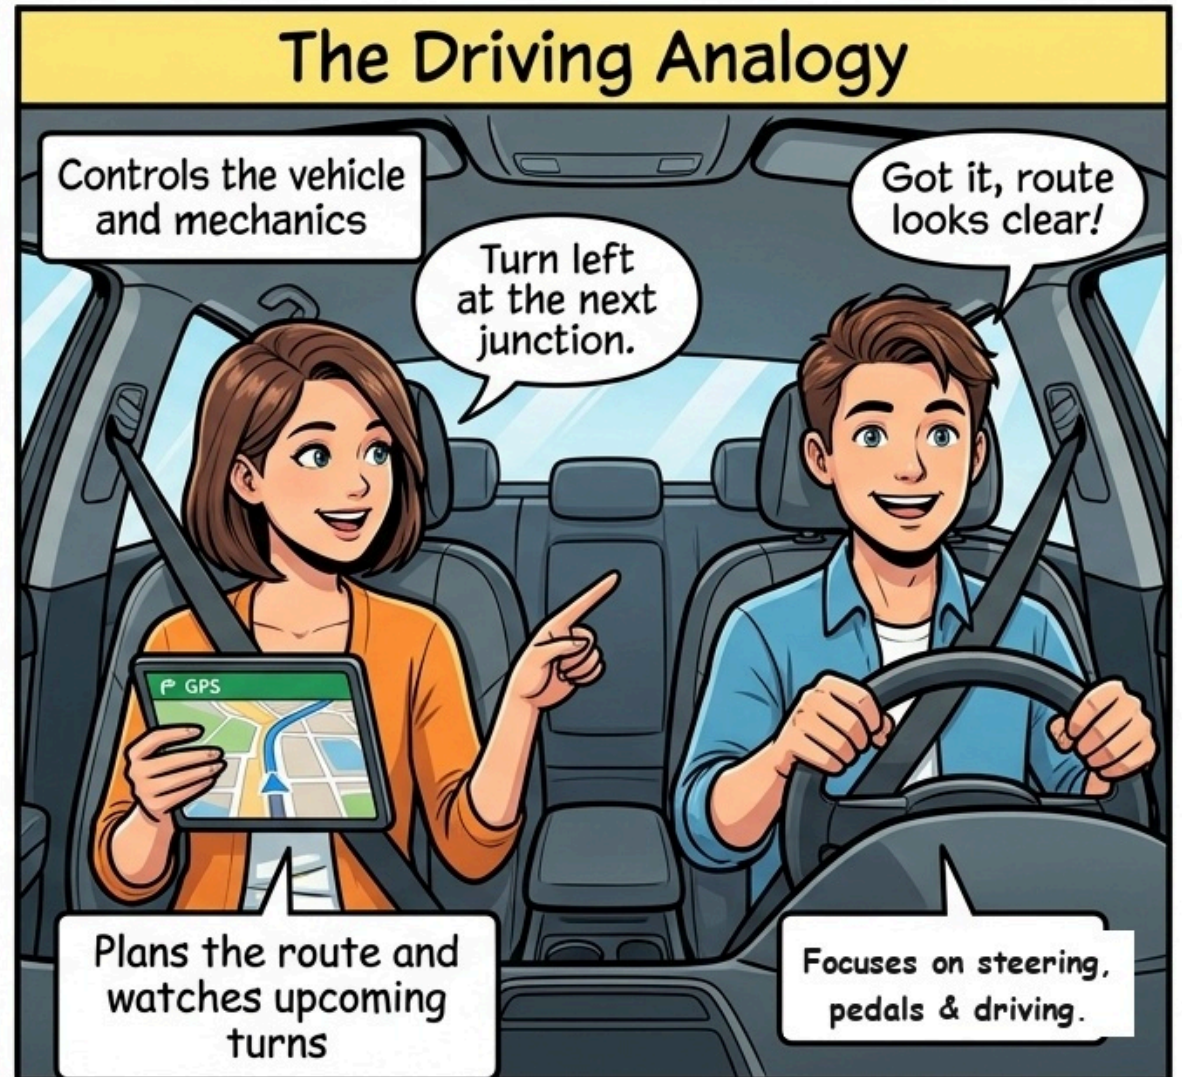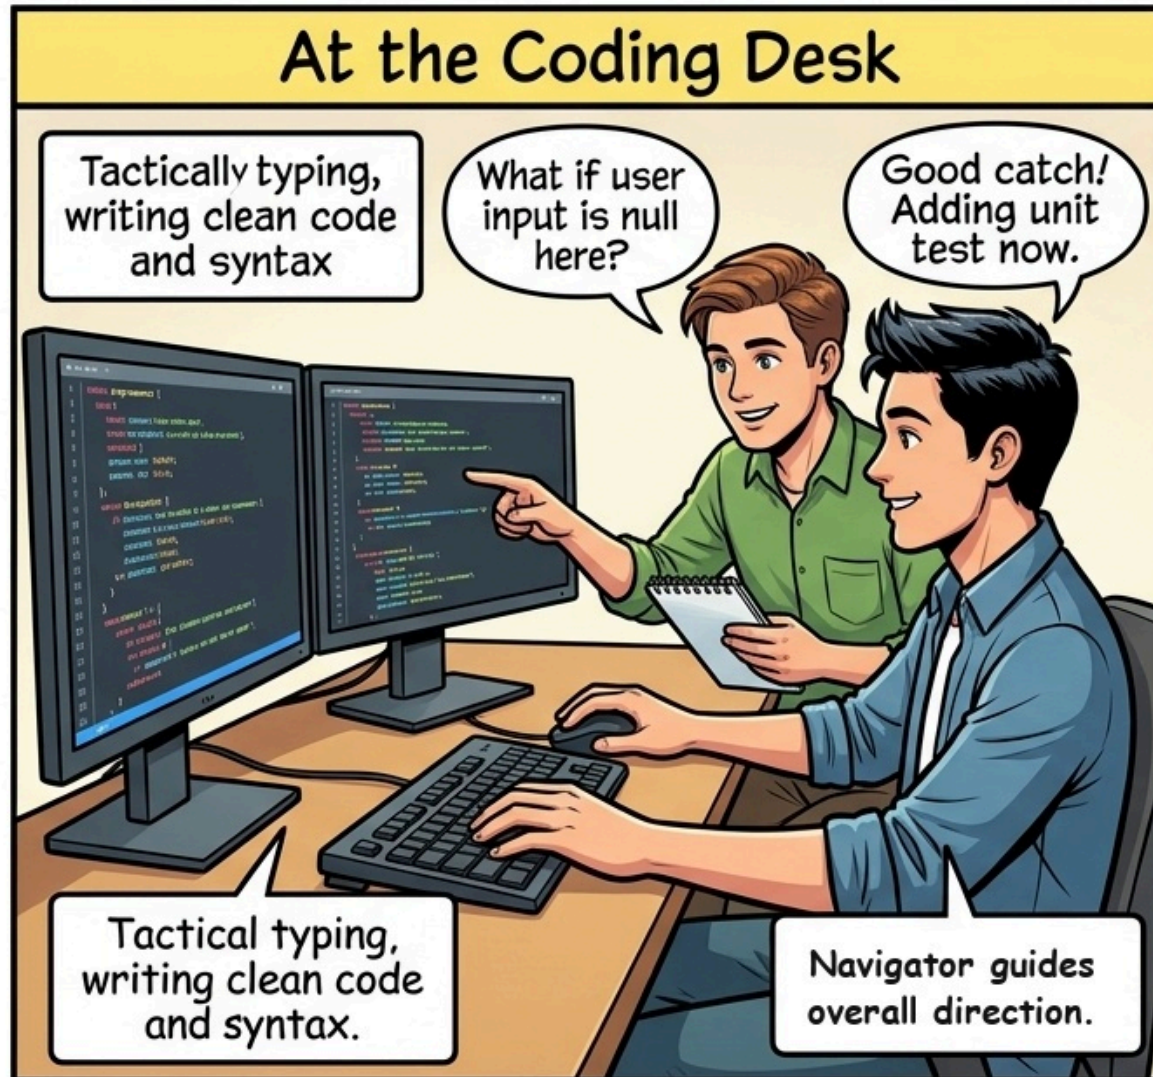

Concept Check Question 11 (CCQ 11)

In Extreme Programming (XP), what is the primary role of the "Navigator" during a pair programming session?

- **A.** Typing out code syntax and executing local terminal commands.
- **B.** Thinking strategically, reviewing code in real time, considering edge cases, and looking at the broader architecture.
- **C.** Serving as the official sprint facilitator and managing Jira backlog ticket status.
- **D.** Negotiating customer contracts and approving annual engineering budgets.



Concept Check Question 12 (CCQ 12)

In Extreme Programming's Test-Driven Development (TDD), what is the specific objective of the "**Refactor**" step in the Red-Green-Refactor cycle?

- **A.** Adding new functional capabilities and expanding the module's public API contract.
- **B.** Improving the internal structure and readability of the code while ensuring all existing automated tests continue to pass.
- **C.** Removing unit tests that take longer than one second to execute in the local test suite.
- **D.** Rewriting the application from an object-oriented language to a functional programming language.



2.8 Systems & Culture (DevOps)


"You build it, you run it."

Breaking down the wall of confusion through continuous delivery and shared operational ownership.

— Werner Vogels, CTO of Amazon

”

DevOps & The "Wall of Confusion" Between Dev and Ops

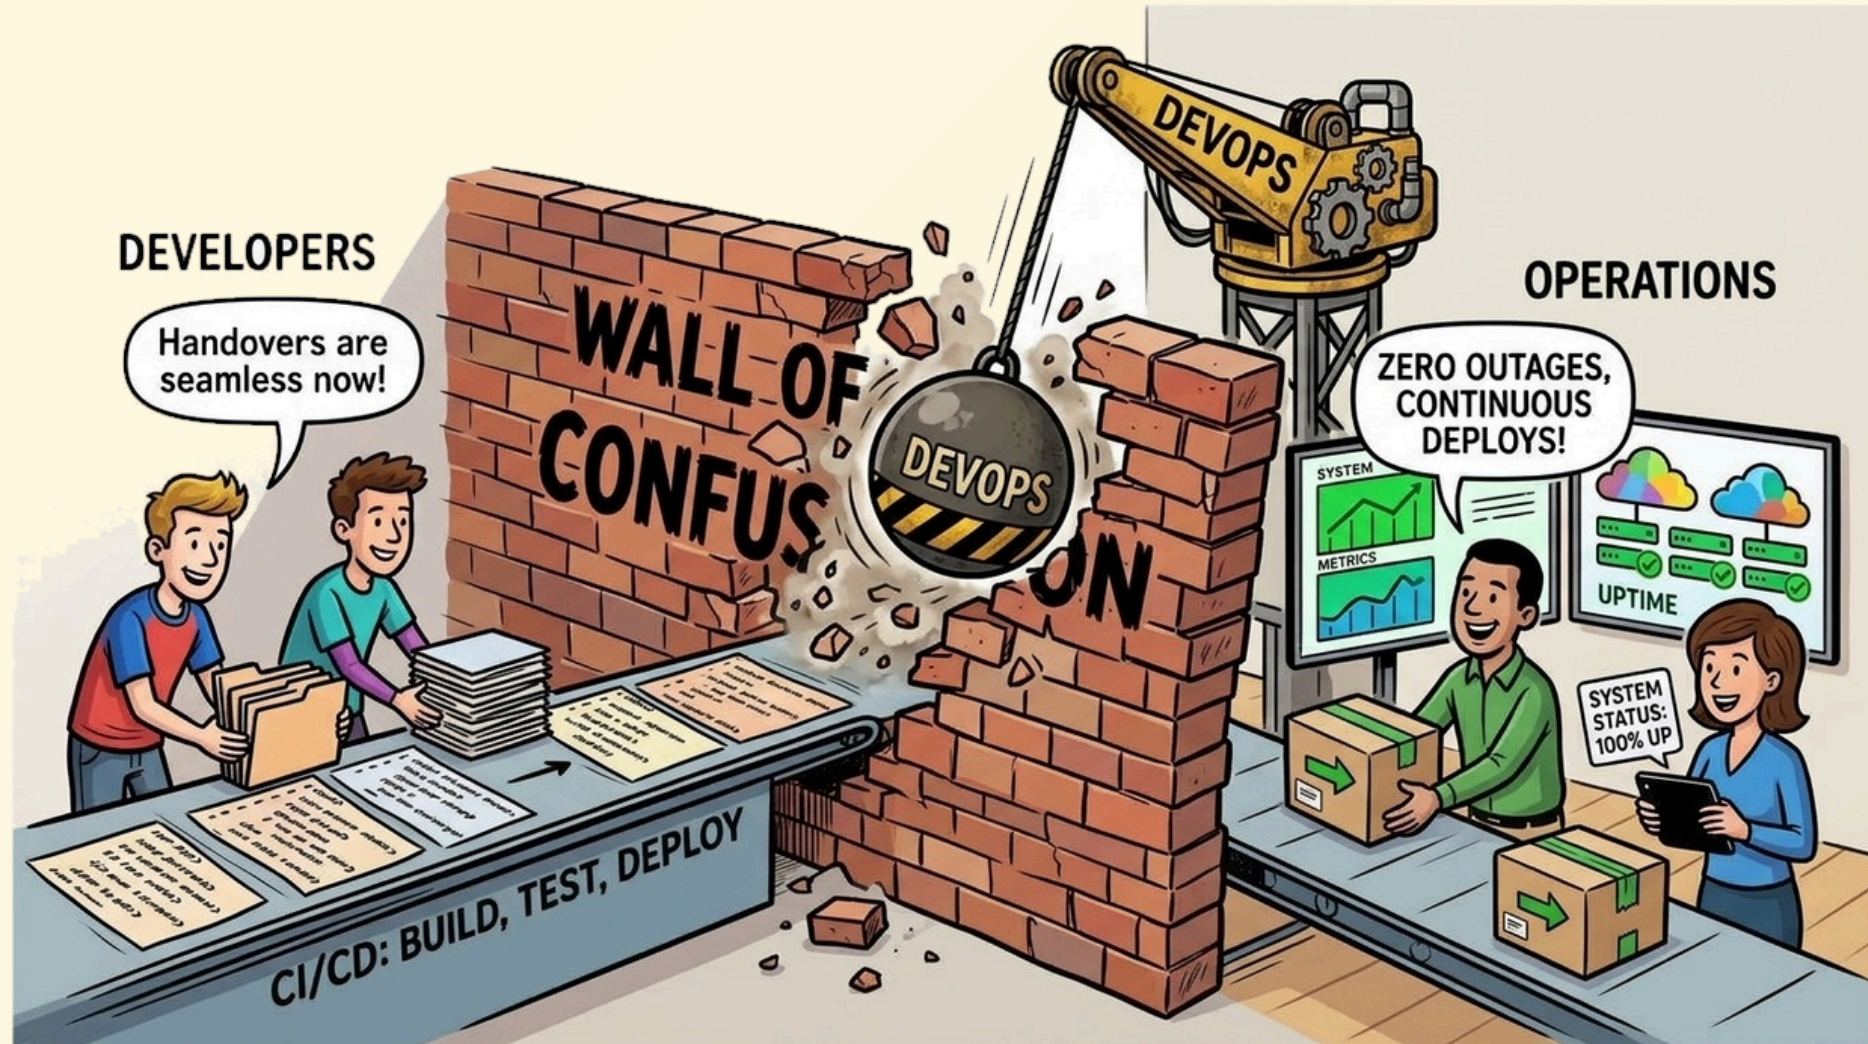

Systems & Culture — DevOps

*A cultural, organizational, and technical movement that bridges the traditional divide between **Development (Dev)** and **Operations (Ops)**, automating the software delivery lifecycle through continuous pipelines, Infrastructure as Code (IaC), and production telemetry.*

”

- **Breaking the "Wall of Confusion":**
 - **Development Incentives:** Rewarded for change, rapid feature velocity, and new releases.
 - **Operations Incentives:** Rewarded for stability, uptime, 99.999% reliability, and minimizing changes.
 - **The Wall:** Devs threw compiled binaries over the wall to Ops: *"It worked on my machine; now it's your problem!"*
 - **The DevOps Solution:** Shared accountability — *"You build it, you run it!"*

Continuous Integration (CI): Breaking the Wall Between Dev & Ops

CI tears down the "Wall of Confusion" by replacing manual handoffs with high-frequency trunk integration and automated quality gates.

”

- **Tearing Down the "Works on My Machine" Wall:**

- Developers integrate code into a shared mainline (**trunk**) multiple times daily, eliminating multi-week *Merge Hell*.
- Integration friction is confronted continuously in tiny, painless increments rather than a catastrophic quarterly surprise.

- **Automated Quality Gates as the Objective Arbiter:**

- Every push automatically triggers clean builds, unit/integration test suites, and security scans (SAST/linters) in an isolated runner.
- Replaces subjective finger-pointing between Dev and QA with an unambiguous, automated single source of truth.

- **Shift-Left Responsibility & The Stop-the-Line Rule:**

- If any test fails, the build is **BROKEN**—the entire team halts new feature work to fix trunk immediately.

Why DevOps Needs CD: Continuous Delivery & Deployment

*Code sitting in a repository yields **zero business value**. CD removes the operational wall to make releasing software a routine, low-risk business decision.*

”

- **De-Risking Releases Through Small Batch Sizes:**

- CD follows the principle: *"If it hurts, do it more often."* Smaller, frequent updates are exponentially easier to test, verify, and rollback.

- **Continuous Delivery (Deployable on Demand):**


- Every passing commit automatically produces a validated, production-ready artifact deployed into a staging environment.
- The final release to live users is a **business decision** (clicking a button), removing technical bottlenecks from product strategy.

- **Continuous Deployment (Zero-Touch Value Stream):**


- Eliminates human operational gatekeepers entirely; passing commits deploy automatically straight to live users in minutes.
- Relies on automated safety nets: Canary rollouts, Blue-Green deployments, and instant automated rollback telemetry.

The Automated DevOps CI/CD Pipeline

CONTINUOUS INTEGRATION (CI)

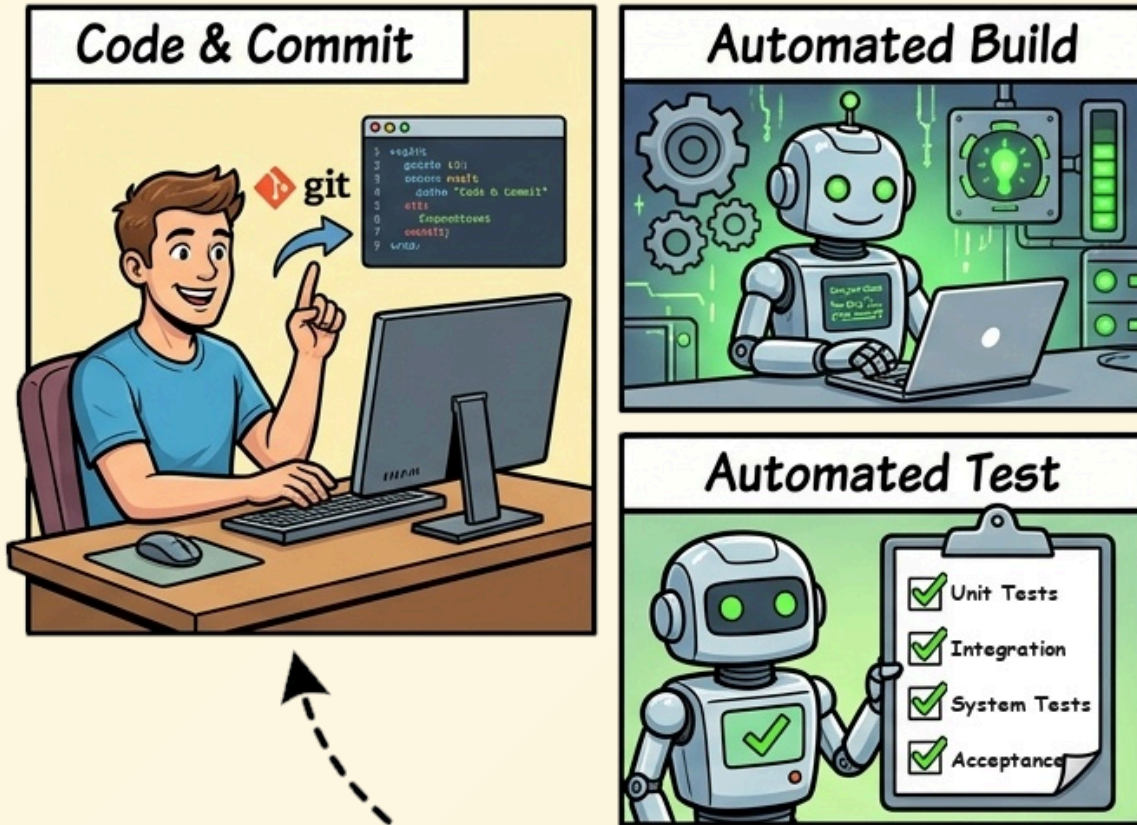

CONTINUOUS DELIVERY & DEPLOYMENT (CD)

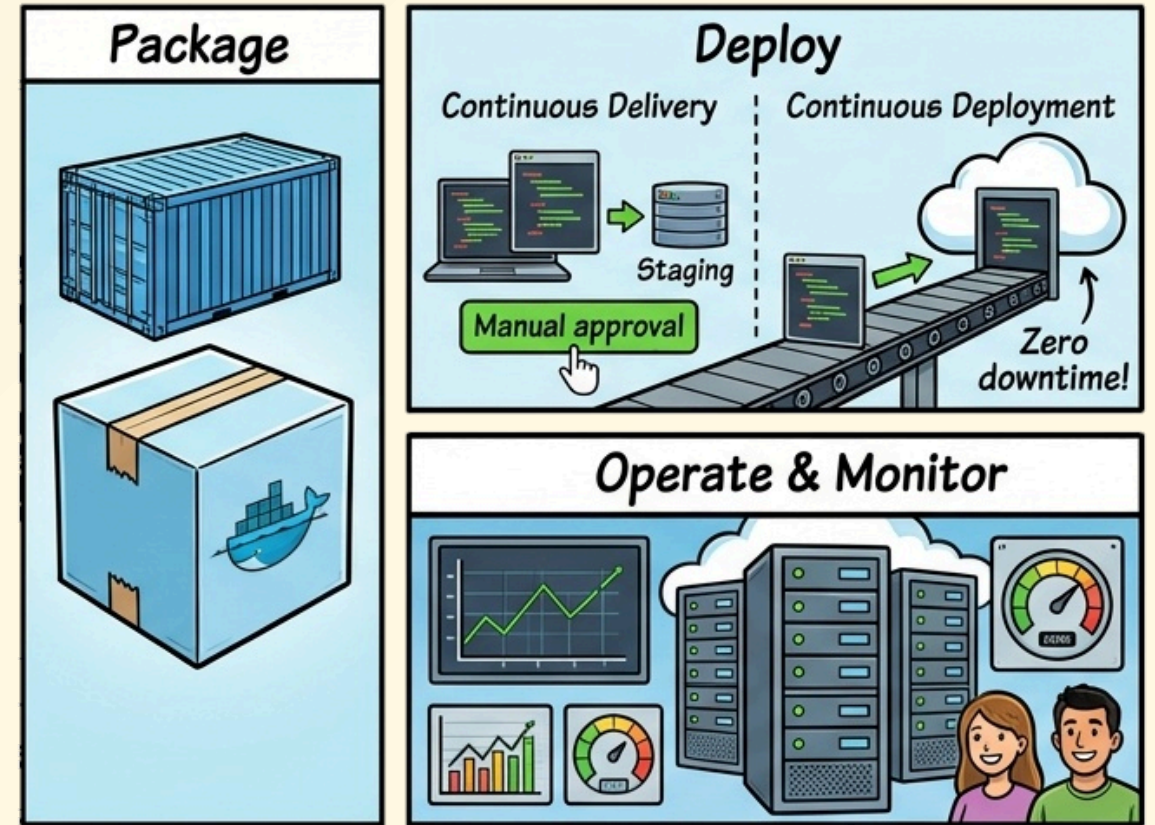

Continuous Feedback Loop

Infrastructure as Code & Production Observability

*In DevOps, **Infrastructure is Software**: Managing cloud topology via declarative, versioned code eliminates environment drift and enables reliable continuous delivery. „*

- **Infrastructure as Code (IaC) – Cattle, Not Pets:**
 - **Declarative Environments:** Tools like Terraform, Docker, and Kubernetes guarantee Dev, Staging, and Production share 100% identical configurations.
 - **Destroys Snowflake Servers:** Eliminates "works on my machine" by treating servers as disposable, immutable assets rather than hand-crafted pets.
- **Production Observability – Closing the Feedback Loop:**
 - **The Three Telemetry Pillars:** Structured **Logs** (events), time-series **Metrics** (CPU, latency, RPS), and distributed **Traces** (end-to-end request lifecycles).
 - **Actionable Engineering Telemetry:** Real-world crashes, performance bottlenecks, and user errors route directly back into developer sprint backlogs.

Concept Check Question 13 (CCQ 13)

What is the defining operational distinction between "Continuous Delivery" and "Continuous Deployment"?

- **A.** Continuous Delivery requires manual code compilation; Continuous Deployment automates compilation.
- **B.** Continuous Delivery stops at staging and requires human business approval to release; Continuous Deployment automatically deploys passing builds directly to live production.
- **C.** Continuous Delivery is used solely for mobile apps; Continuous Deployment is used solely for backend databases.
- **D.** Continuous Delivery eliminates unit testing; Continuous Deployment mandates pair programming.




2.9 The Modern Frontier (AI Spec-Driven Process)

"AI is an amplifier: it amplifies disciplined engineering specifications, but it equally amplifies careless, chaotic habits."

”

Specification-Driven AI vs. Vibe Coding

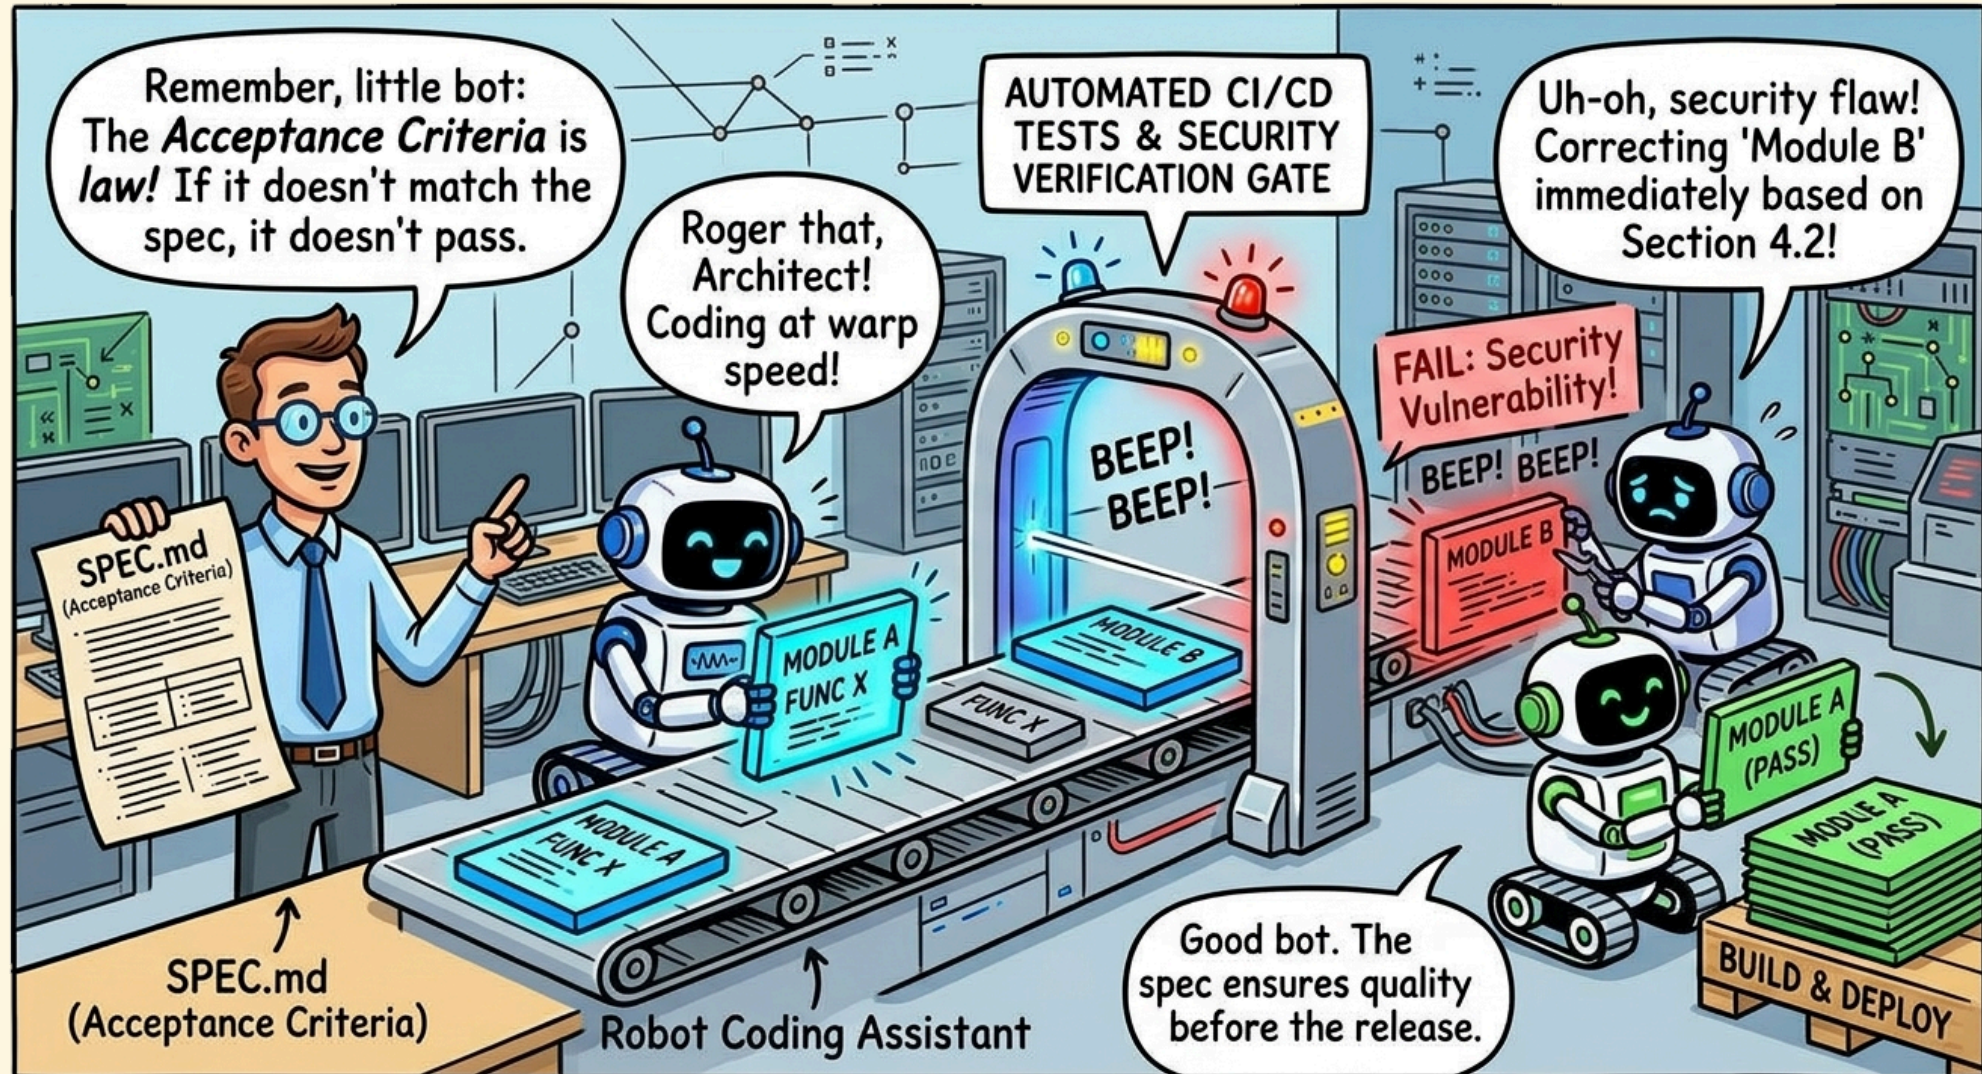

AI-Augmented SDLC: The Paradigm Shift in Process Models

*In the AI era, software engineering is not about typing syntax—it is about **orchestrating the entire life cycle**. AI accelerates construction to near-zero marginal cost, shifting human value to **upstream** specification and **downstream** verification.*

”

- **From Human-Centric to Agentic Processes:**

- **Traditional Process Models (Waterfall / Agile / DevOps):** Designed to coordinate *human developers* through documents, standups, sprint boards, and code reviews.
- **AI-Augmented Process Model:** Coordinates *autonomous AI agents alongside human architects* in a continuous co-engineering loop.

- **The SDLC Bottleneck Inversion:**

- **Implementation is Commoditized:** Writing code, boilerplate, and syntax debugging no longer bottleneck development velocity.
- **Value Shifts to the Bookends:** Critical human engineering shifts to **Upstream Intent (Domain Specs & Architecture)** and **Downstream Assurance (Verification & Safety)**.

Operationalizing the AI Process: The Engineering Harness

*In Agile, process discipline is maintained through human rituals (standups, reviews).
But an autonomous AI agent cannot attend a meeting.*

How do we enforce process discipline on AI? We mechanize the process into an Engineering Harness.

Autonomous Production Agent = LLM Model (Brain) + Harness (Process Rails) „

- **The Process-to-Machinery Bridge:**

- In traditional SDLC, the software process coordinates *human behavior* via social agreements, ceremonies, and manual checkpoints.
- In an AI-augmented SDLC, the process must be **embodied in software infrastructure** that actively steers and restrains autonomous agents.
- The model provides raw generative intelligence; the harness guarantees engineering rigor, safety, and compliance.

- **Harness Engineering (Definition):**

- The discipline of designing the operational equipment, deterministic guardrails, execution environments, and verification feedback loops that safely govern a **probabilistic model**.

The Harness Metaphor: "I Don't Make It Smarter. I Design the Equipment."

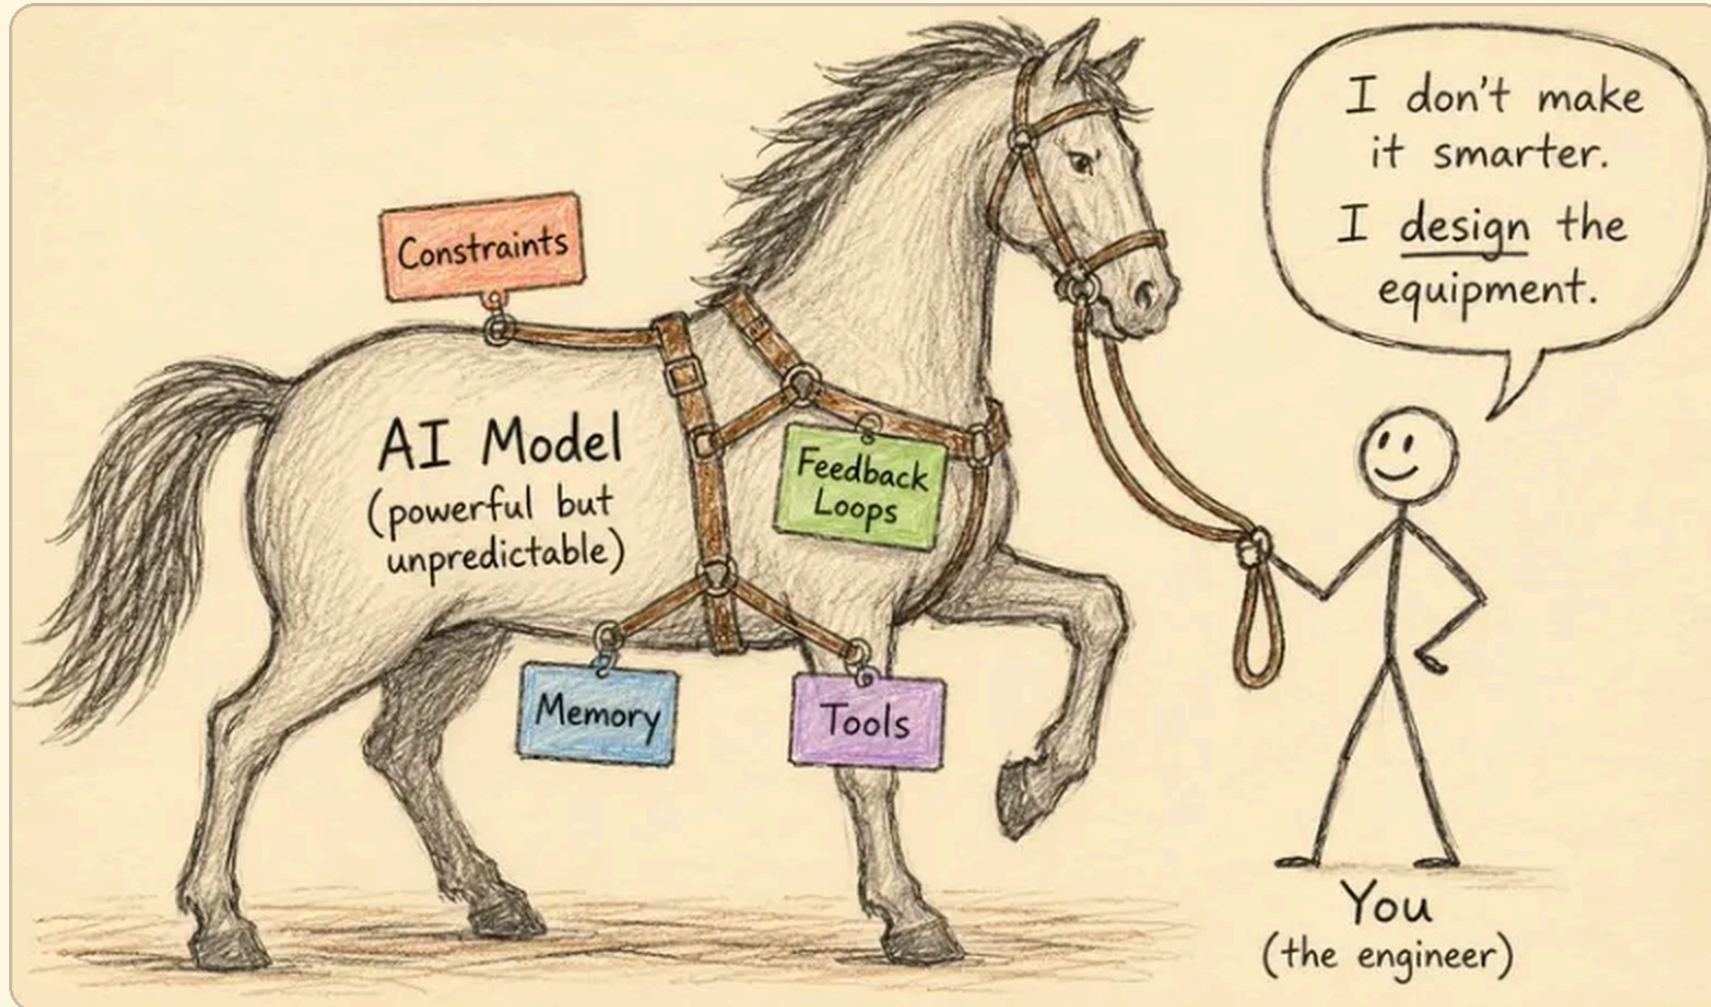


Image Source: [Coding Nexus — Harness Engineering](#)

The Three Pillars of an Agent Engineering Harness

- **1. Context & Specification Harness (Input Rails):**
 - **Constrains Problem Scope:** Feeds machine-readable requirements (`SPEC.md`), architectural rules, and API contracts (`OpenAPI`, `Protobuf`).
 - **Eliminates Hallucination Drift:** Restricts the agent's attention to relevant codebase slices rather than unconstrained prompting.
- **2. Execution Sandbox Harness (Runtime Safety Rails):**
 - **Isolates Side Effects:** Executes code, shell commands, and builds inside ephemeral containers or isolated sandboxes (Docker, WebAssembly).
 - **Permission Boundaries:** Enforces strict file-access controls, preventing destructive deletions or unauthorized network exfiltration.
- **3. Verification & Oracle Harness (Feedback Rails):**
 - **Deterministic Ground Truth:** Compilers, typecheckers, linters, and automated test suites act as the infallible quality arbiter.
 - **Drives Autonomous Recovery:** Captures stack traces and diagnostic logs to feed the self-healing repair loop before human review.

The 3-Step Agentic Feedback Loop in Practice

- **Step 1: Formal Specification (Powered by Input Rails)**
 - Human architect writes unambiguous requirements, data schemas, interface contracts, and acceptance test criteria in structured Markdown (`SPEC.md`).
- **Step 2: Autonomous Agent Execution (Powered by Sandbox Rails)**
 - AI agent inspects repository context, formulates a multi-step plan, and implements code inside the safe execution harness.
- **Step 3: Automated Verification & Self-Healing (Powered by Oracle Rails)**
 - Automated test harness compiles code and executes unit, integration, and security suites.
 - **The Self-Healing Loop:** If any test fails, compiler errors and test traces automatically feed back into the agent harness for autonomous self-repair *before* human code review!

Harness Engineering: From AI Brain to Production Code

HARNESS ENGINEERING

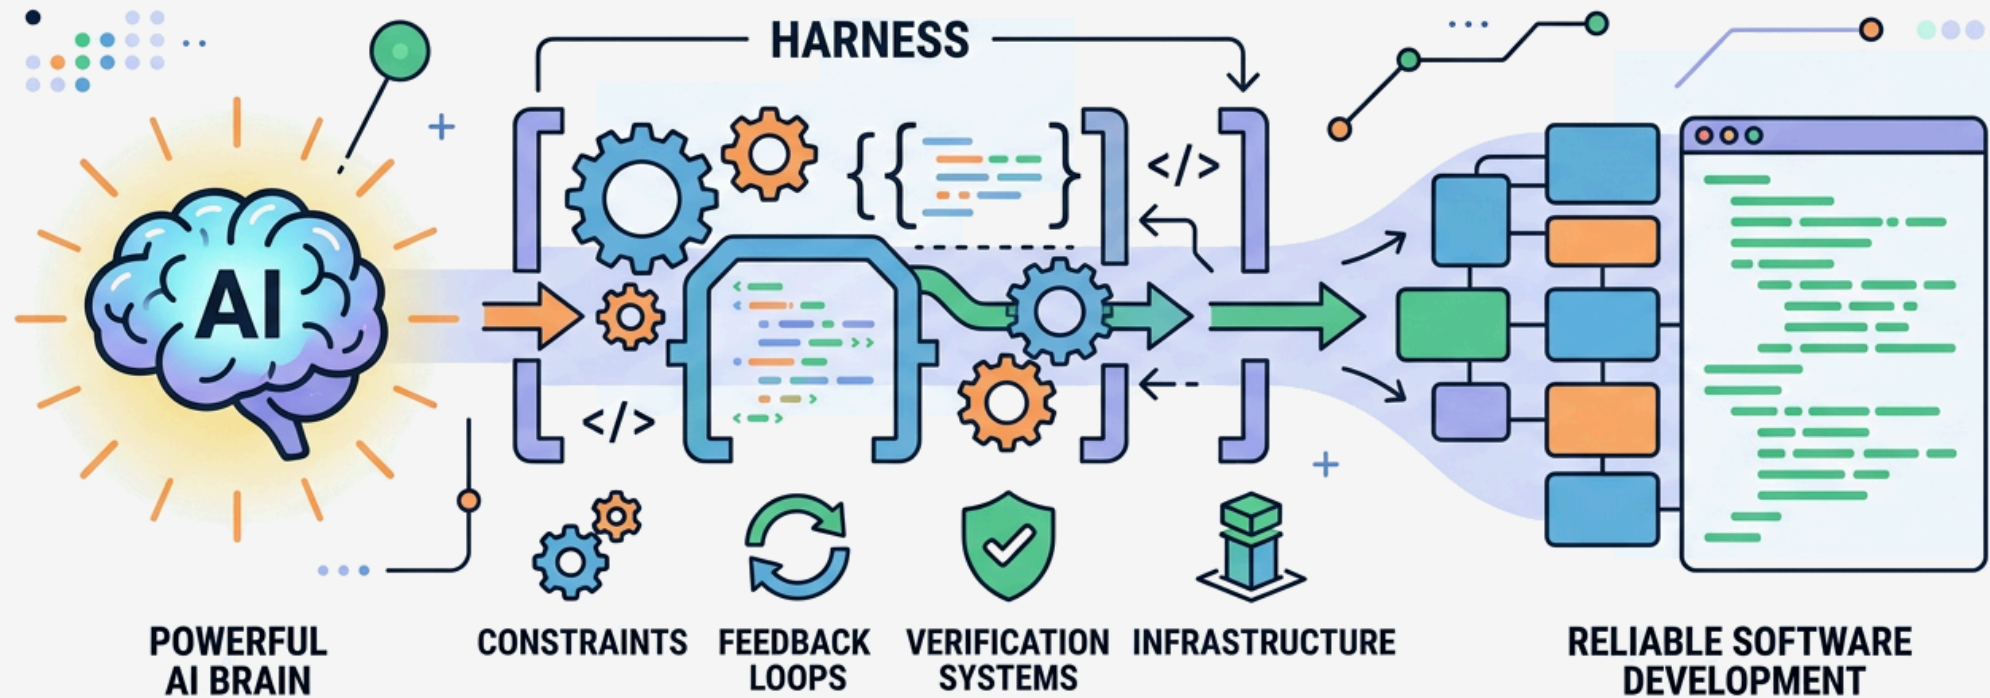


Image Source: [Coding Nexus — Harness Engineering](#)

4 Golden Principles for AI-Driven Processes

1. Specifications as Single Source of Truth:

- LLMs have short attention spans and forget chat history. Structured files (`SPEC.md`, `ARCHITECTURE.md`) provide persistent context.

2. The Harness as Deterministic Ground Truth (Verification Oracle):

- Never trust raw LLM output without execution. Automated test harnesses, compilers, and linters serve as the deterministic oracle for agent validation and self-healing.

3. Small, Testable Incremental Prompts:

- Prompting an AI to "build an entire Amazon clone" yields broken hallucinated code. Break tasks into small vertical slices (TDD style!).

4. Human-in-the-Loop Architectural Governance:

- AI writes the tactical code (Driver); human engineers remain the strategic architects (Navigator).

-  ***The New Role of the Software Engineer:*** You are no longer just a code typist. You are a **Systems Architect, Specification Author, and Verification Governor.**

”

Concept Check Question 14 (CCQ 14)

In modern AI Specification-Driven development, what is the primary role of automated CI/CD verification gates?

- **A.** To prevent human developers from reviewing artificial intelligence output.
- **B.** To enforce deterministic quality, test compliance, and defect containment before AI-generated code merges into production.
- **C.** To convert natural language prompts directly into cloud infrastructure invoices.
- **D.** To replace software specifications with unverified prompt histories.



2.10 Conceptual Recap & References

*"Theory without practice is empty;
practice without theory is blind." „*

Conceptual Recap: Fill-in-the-blank Quiz

Test your mastery across the 9 software process modules:

1. Software processes consist of 4 universal activities: Specification, Design/Implementation, ____, and Evolution.
2. The ____ model organizes testing symmetrically against requirements and design stages.
3. Delivering functional vertical slices is ____, while progressively refining an existing whole is ____.
4. The Agile Manifesto explicitly values ____ over following a plan.
5. In Kanban, the primary mechanism used to expose bottlenecks and optimize flow is limiting ____.
6. Taking shortcuts to ship quickly incurs ____, which degrades future developer velocity.
7. In Extreme Programming, the practice of writing automated tests before production code is ____.
8. In DevOps, the elite performance metrics established by Google are known as the

References & Further Reading

- **Ian Sommerville** (2016). *Software Engineering* (10th Edition). Pearson.
- **Kent Beck** (2004). *Extreme Programming Explained: Embrace Change* (2nd Edition). Addison-Wesley.
- **Martin Fowler** (2018). *Refactoring: Improving the Design of Existing Code* (2nd Edition). Addison-Wesley.
- **Ken Schwaber & Jeff Sutherland** (2020). *The Scrum Guide*. scrumguides.org.
- **Nicole Forsgren, Jez Humble, Gene Kim** (2018). *Accelerate: Building and Scaling High Performing Technology Organizations (DORA)*. IT Revolution.

```
<script> (function() { function initHeaderDropdown() { const sections = []; const seenTitles = new
Set(); const slideSections = document.querySelectorAll('section[id]'); // 1. Scan unique section titles
and their slide IDs slideSections.forEach(sec => { const header = sec.querySelector('header'); if
(!header) return; let title = header.textContent.trim(); title = title.replace(/^[◀◀]\s*/, '').replace(/\s*
[▶▶]$/, '').trim(); if (!title || seenTitles.has(title)) return; seenTitles.add(title); sections.push({ id:
sec.id, title: title }); }); if (sections.length === 0) return; // Detect language: if slide titles don't have
Chinese characters, use English const allTitles = sections.map(s => s.title).join(''); const isEn =
!/[\\u4e00-\\u9fa5]/.test(allTitles); const txtOutline = isEn ? '📄 Table of Contents' : '📄 章節目錄';
```