The *Celestial Emporium of Benevolent Knowledge*, a fictitious taxonomy of animals in *The Analytical Language of John Wilkins*, was said to divide animals into

> *"(a) those that belong to the Emperor, (b) embalmed ones, (c) those that are trained, (d) suckling pigs, (e) mermaids, (f) fabulous ones, (g) stray dogs, (h) those that are included in the present classification, (i) those that tremble as if they are mad, (j) innumerable ones, (k) those drawn with a very fine camelhair brush, (l) others, (m) those that have just broken a flower vase, (n) those that look like flies from a long way off"*
>
> — *Jorge Luis Borges*

ILOs

After this class the student

- understands and is able to explain a modular approach to text classification composed of a probabilistic model and a decision rule;
- understands and is able to explain the need for vector-valued representations of text;
- is able to design hand-crafted representation spaces;
- understands and is able to explain softmax regression;
- knows how to evaluate the different a text classifier;
- can recognise and explain limitations of the approaches presented.

NLP1

Text Classification

Wilker Aziz



https://nlp-illc.github.io/nlp1/2026/

Fall 2026

Outline

1. Text Classification
   - Basic Example
2. Text Representation
3. Softmax Regression
   - Log-Linear Parameterisation
   - Neural Parameterisation
   - Parameter Estimation
4. Evaluation
5. Limitations

Text Classification

Text classification



An input text is categorised as pertaining to one of K possible classes.



The home team won the league championship on Sunday after its captain scored in the final minute. Thousands of fans celebrated as the players lifted the trophy following a tense 2–1 victory.




An input text is categorised as pertaining to one of K possible classes.

Probabilistic Model

We use ideas from ML to parameterise a Categorical probability mass function (pmf),



The home team won the league championship on Sunday after its captain scored in the final minute. Thousands of fans celebrated as the players lifted the trophy following a tense 2–1 victory.

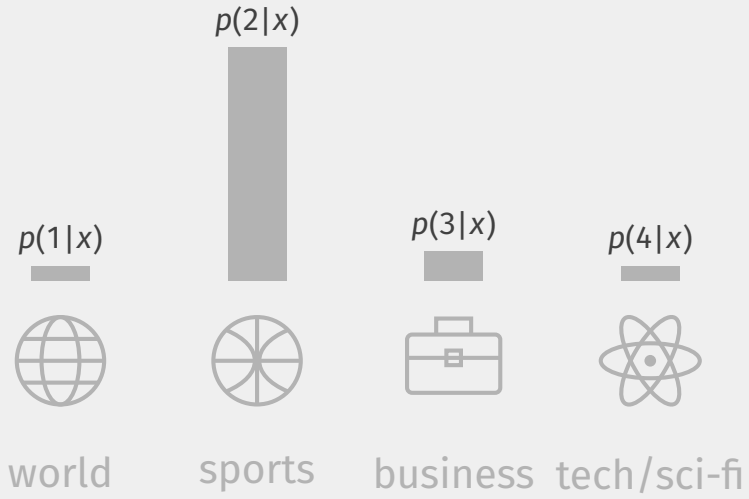


with probability masses predicted conditioned on x.

Decision Rule

To go from a pmf to a class, for a given input x, we employ a **decision rule**.

In NLP, it is common to use the **mode** of the distribution:

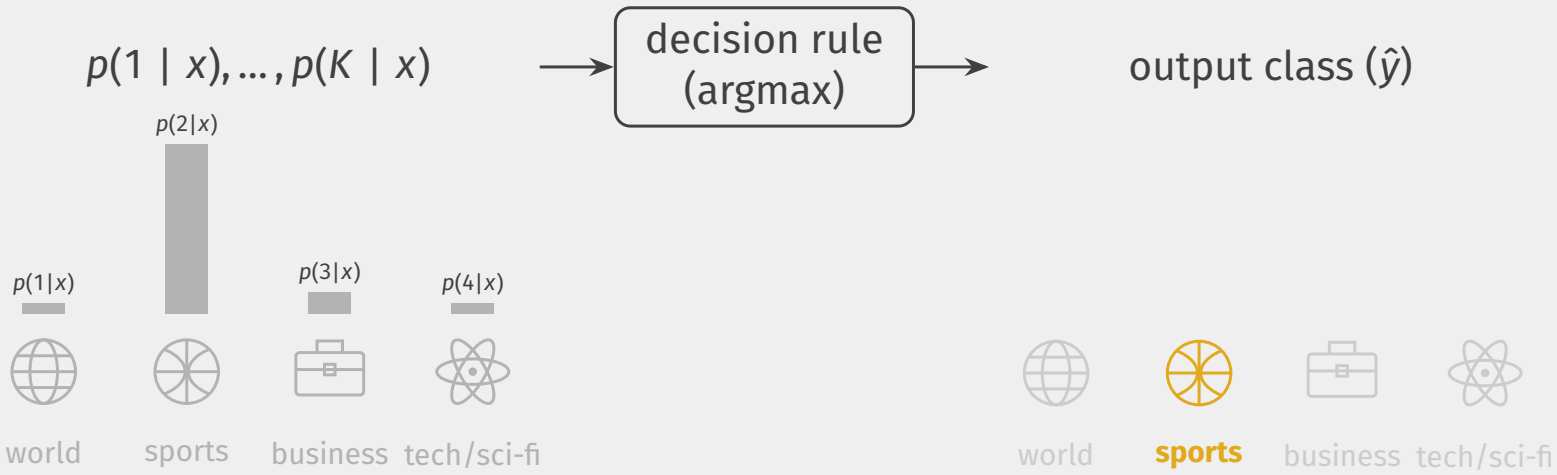

Text Classification

Basic Example

Tabular Conditional Probability Distributions

A tabular CPD simply stores the probabilities of the possible classes, given each of the possible conditions.

Document (x)	world	sports	business	tech/sci-fi
Peace talks resume as leaders agree to meet.	$\frac{1}{1}$	$\frac{0}{1}$	$\frac{0}{1}$	$\frac{0}{1}$
Late goal seals league championship victory.	$\frac{0}{1}$	$\frac{1}{1}$	$\frac{0}{1}$	$\frac{0}{1}$
Company shares rise after record quarterly profits.	$\frac{0}{1}$	$\frac{0}{1}$	$\frac{1}{1}$	$\frac{0}{1}$
Researchers unveil a faster, energy-efficient computer chip.	$\frac{0}{1}$	$\frac{0}{1}$	$\frac{0}{1}$	$\frac{1}{1}$
China and the US announce a new trade agreement.	$\frac{1}{2}$	$\frac{0}{2}$	$\frac{1}{2}$	$\frac{0}{2}$

Each row specifies the pmf for one document. In this example, we use the relative frequency of $Y = k$ given $X = x$ in a dataset of labelled documents.

Limitations of Tabular CPDs

A tabular CPD grows with the number of outcomes and conditions: one parameter for each possible class, per condition.

Easy to estimate from data. For example, the maximum likelihood estimate is a table of relative frequencies.

- but then they grow with the number of observed conditions;
- and the table is mostly sparse (like in our example);
- and unseen documents have no place in the table.

All in all, tabular CPDs are based on too crude ML/stats to be useful for text classification.[1]

[1] A Naive Bayes Classifier (NBC; Appendix B of textbook) is an example of a better way to approach text classification with tabular CPDs.

Text Representation

Key Limitation

Consider two documents

I

The team won the championship after a late goal. Fans celebrated the victory as the team lifted the trophy.

II

The champions returned home to cheering crowds. The captain thanked fans as players paraded the trophy through the city.

Our mechanism to parameterise the pmf $p(\cdot|x^{I})$ is completely independent of the mechanism to parameterise $p(\cdot|x^{II})$.

Key Limitation

Consider two documents

I

The team won the championship after a late goal. Fans celebrated the victory as the team lifted the trophy.

II

The champions returned home to cheering crowds. The captain thanked fans as players paraded the trophy through the city.

Our mechanism to parameterise the pmf $p(\cdot|x^{I})$ is completely independent of the mechanism to parameterise $p(\cdot|x^{II})$.

We need a view of x^{I} and x^{II} that reveals their relatedness.

Representation Space

Let's imagine a way, a **feature function** $\mathbf{h}(\cdot)$, to map any given text x to a point in a $\mathbb{R}^D$.

Each coordinate of the feature function captures an aspect of the text that's potentially relevant to the task.

For example, both documents mention **trophy**, a word relevant to sports, so we could reserve a dimension of $\mathbf{h}(x)$ to indicate its presence in a tokenized view of x.[2]

[2] For tokenization, see tutorial 1.

A (sports)

The team won the championship after a late goal. Fans celebrated the victory as the team lifted the trophy.

B (tech)

The team launched a new chip for faster computing. The chip improves performance while reducing power consumption. The team demonstrated the technology.

Feature	$\mathbf{h}(A)$	$\mathbf{h}(B)$
championship		
computing		
late goal		
new chip		
power consumption		
team		
trophy		
victory		

1 = present; 0 = absent

The selection of features is a choice of the designer; once chosen, this is a fixed aspect of the design. **See tutorial 1.**

A (sports)

The team won the championship after a late goal. Fans celebrated the victory as the team lifted the trophy.

B (tech)

The team launched a new chip for faster computing. The chip improves performance while reducing power consumption. The team demonstrated the technology.

Feature	$\mathbf{h}(A)$	$\mathbf{h}(B)$
championship	1	0
computing	0	1
late goal	1	0
new chip	0	1
power consumption	0	1
team	1	1
trophy	1	0
victory	1	0

1 = present; 0 = absent

The selection of features is a choice of the designer; once chosen, this is a fixed aspect of the design. **See tutorial 1.**

Named Axes

A (sports)

The team won the championship after a late goal. Fans celebrated the victory as the team lifted the trophy.

B (tech)

The team launched a new chip for faster computing. The chip improves performance while reducing power consumption. The team demonstrated the technology.

Word Counts (or BoW)

Feature	$\mathrm{h}(A)$	$\mathrm{h}(B)$
championship		
chip		
computing		
fans		
goal		
launched		
performance		
power		
team		
technology		
trophy		
victory		
won		

Values = occurrence counts

The selection of features is a choice of the designer; once chosen, this is a fixed aspect of the design. **See tutorial 1.**

Named Axes

A (sports)

The team won the championship after a late goal. Fans celebrated the victory as the team lifted the trophy.

B (tech)

The team launched a new chip for faster computing. The chip improves performance while reducing power consumption. The team demonstrated the technology.

Word Counts (or BoW)

Feature	$\mathrm{h}(A)$	$\mathrm{h}(B)$
championship	1	0
chip	0	2
computing	0	1
fans	1	0
goal	1	0
launched	0	1
performance	0	1
power	0	1
team	2	2
technology	0	1
trophy	1	0
victory	1	0
won	1	0


Values = occurrence counts

The selection of features is a choice of the designer; once chosen, this is a fixed aspect of the design. **See tutorial 1.**

Softmax Regression

Softmax Regression

A fixed representation $\mathbf{h}(x)$ of the input text x is mapped to K scores (or *logits*), which are then turned into a normalised probability vector via softmax:

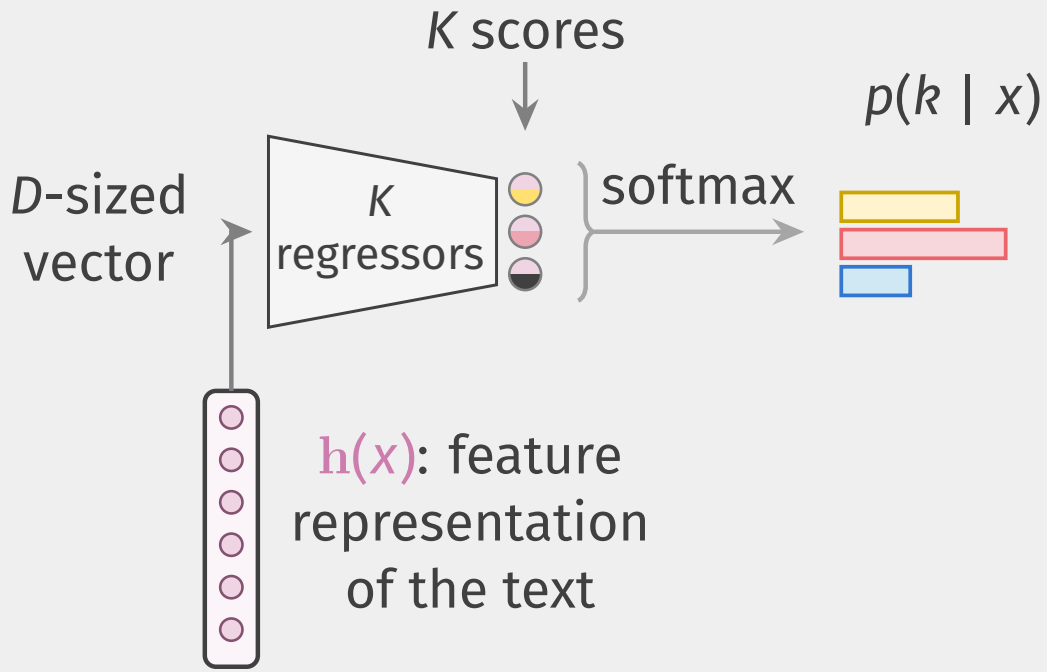

Recall that softmax exponentiates each score, then divides the result by the sum of exponentiated scores.


Softmax Regression

Log-Linear Parameterisation

Log-Linear Model

With *K linear regressors*, followed by softmax, we get a log-linear model. Each score $s_k(x)$ is obtained via


$$s_k(x) = \mathbf{w}_k^\top \mathbf{h}(x) + b_k \qquad \text{where } \mathbf{w}_k \in \mathbb{R}^D \text{ and } b \in \mathbb{R}$$

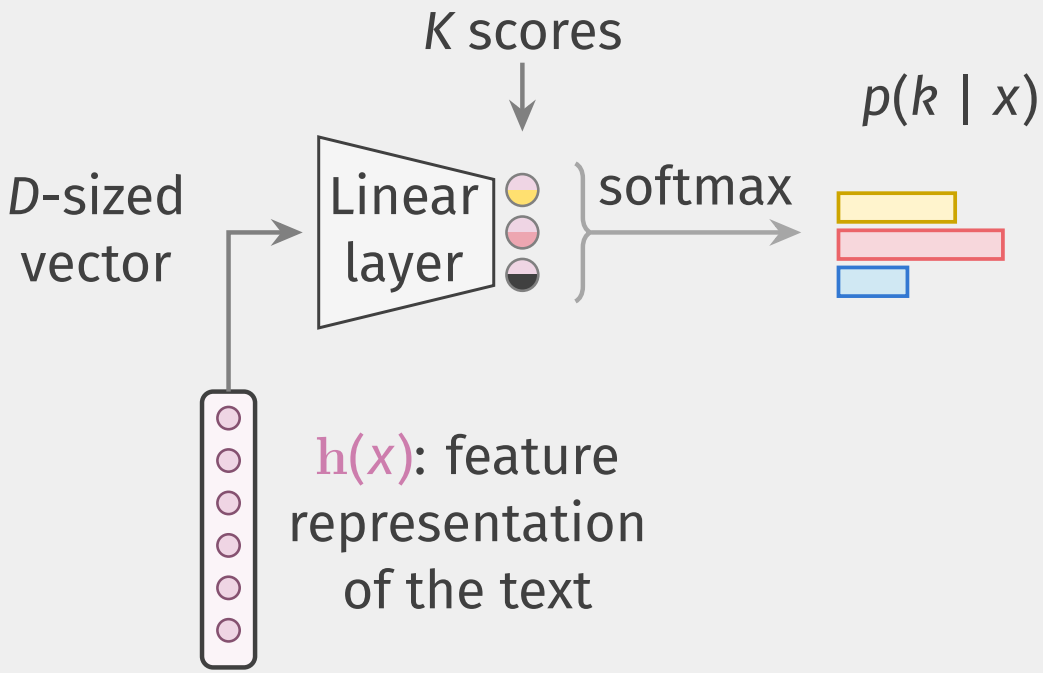

Log-Linear Model

With *K linear regressors*, followed by softmax, we get a log-linear model. Each score $s_k(x)$ is obtained via

$$s_k(x) = \mathbf{w}_k^\mathsf{T}\mathbf{h}(x) + b_k \qquad \text{where } \mathbf{w}_k \in \mathbb{R}^D \text{ and } b \in \mathbb{R}$$

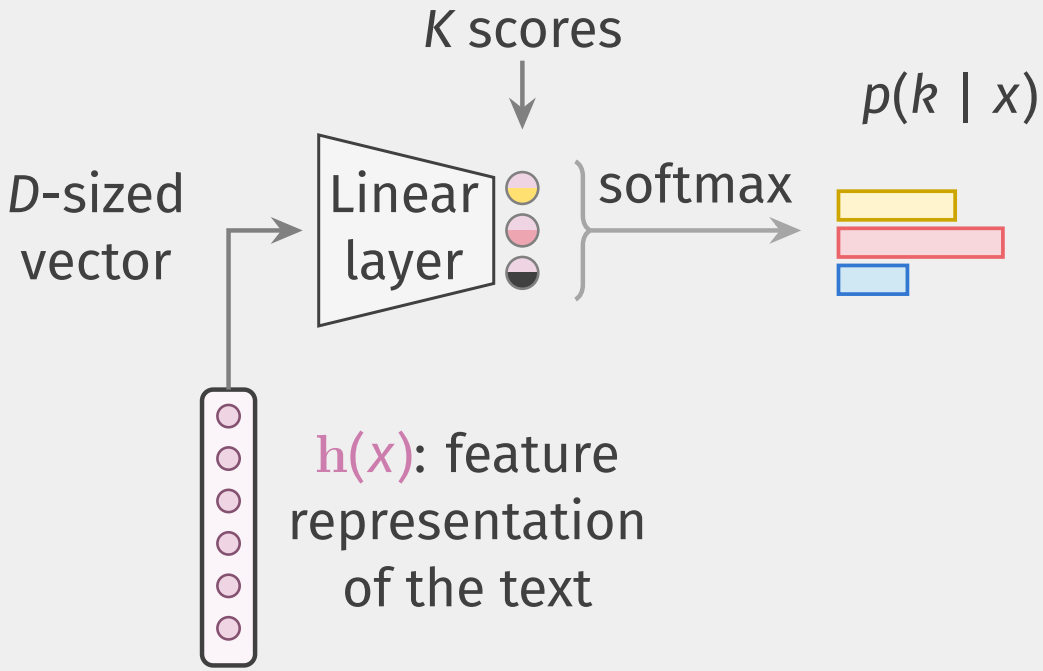


We have $D \times K + K$ parameters. They capture: affinity between features and classes ($w_{k,d}$); input-indep. bias for classes (b_k).


Softmax Regression

Neural Parameterisation

With a neural network for the regression component, we get a more expressive probabilistic model. In vector form, the K scores $\mathbf{s}(x)$ are obtained via $\mathbf{s}(x) = \text{NN}(\mathbf{h}(x); \theta)$:

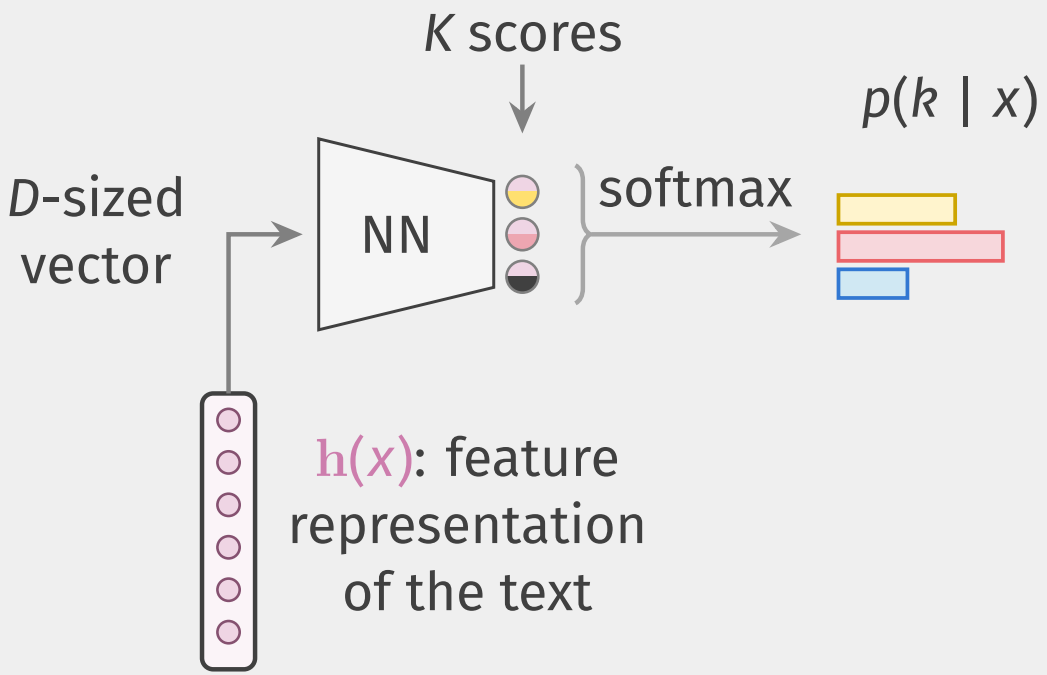


With a neural network for the regression component, we get a more expressive probabilistic model. In vector form, the K scores $\mathbf{s}(x)$ are obtained via $\mathbf{s}(x) = \text{NN}(\mathbf{h}(x); \theta)$:

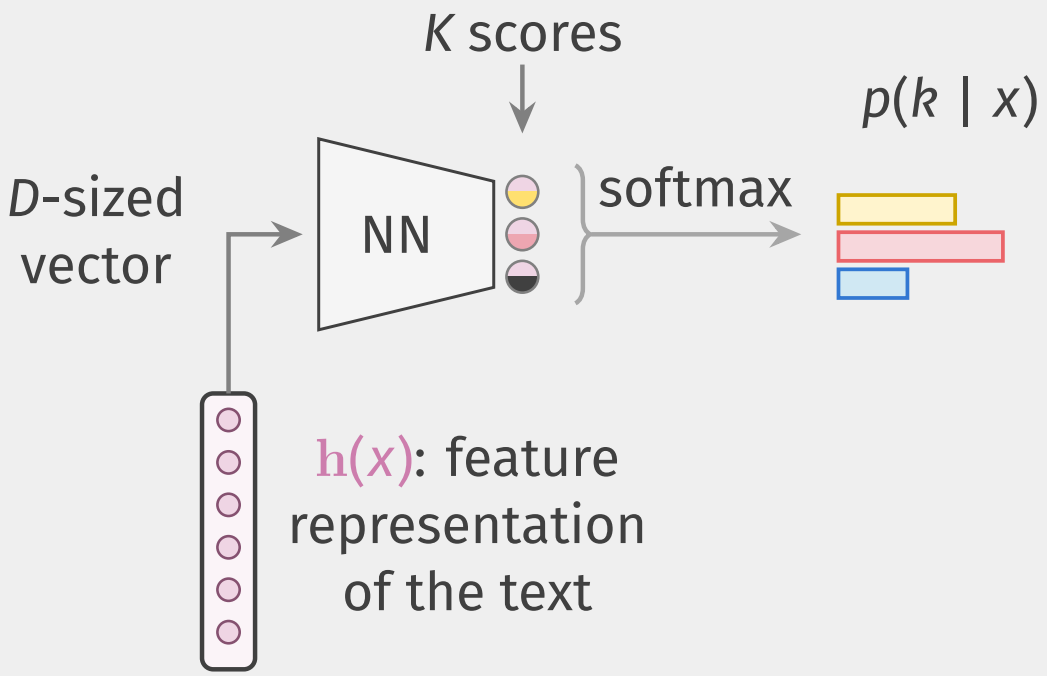


A simple NN might be: ...

With a neural network for the regression component, we get a more expressive probabilistic model. In vector form, the K scores $\mathbf{s}(x)$ are obtained via $\mathbf{s}(x) = \text{NN}(\mathbf{h}(x); \theta)$:

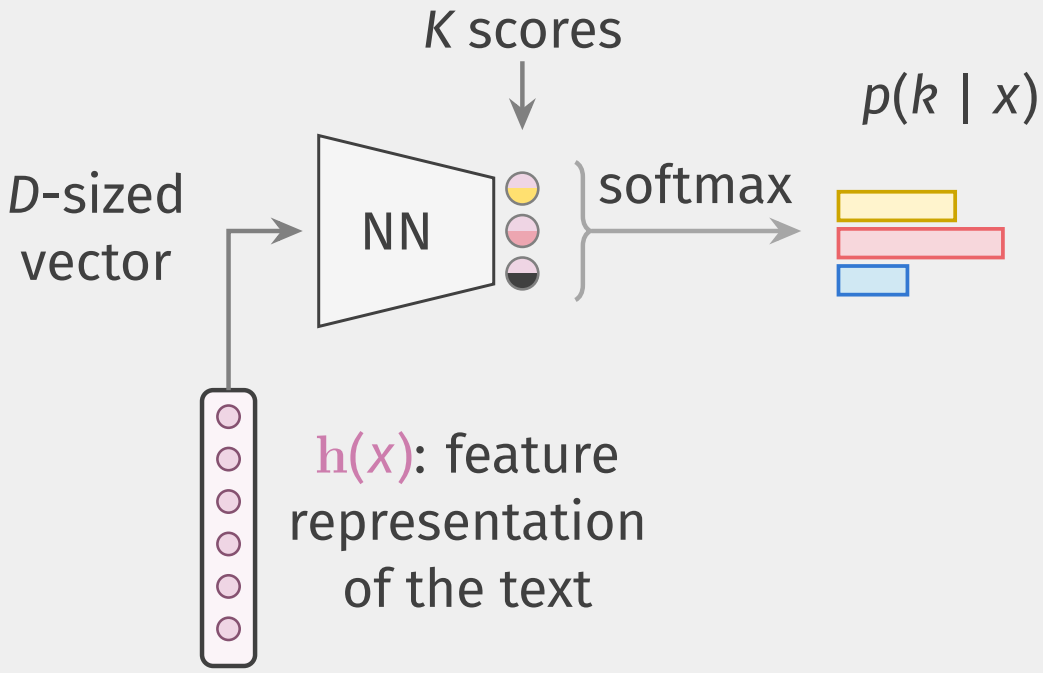

A simple NN might be: $\text{linear}_K(\text{ReLU}(\text{linear}_H(\text{inputs})))$, then the parameters of the linear layers have shape ...


With a neural network for the regression component, we get a more expressive probabilistic model. In vector form, the K scores $\mathbf{s}(x)$ are obtained via $\mathbf{s}(x) = \text{NN}(\mathbf{h}(x); \theta)$:

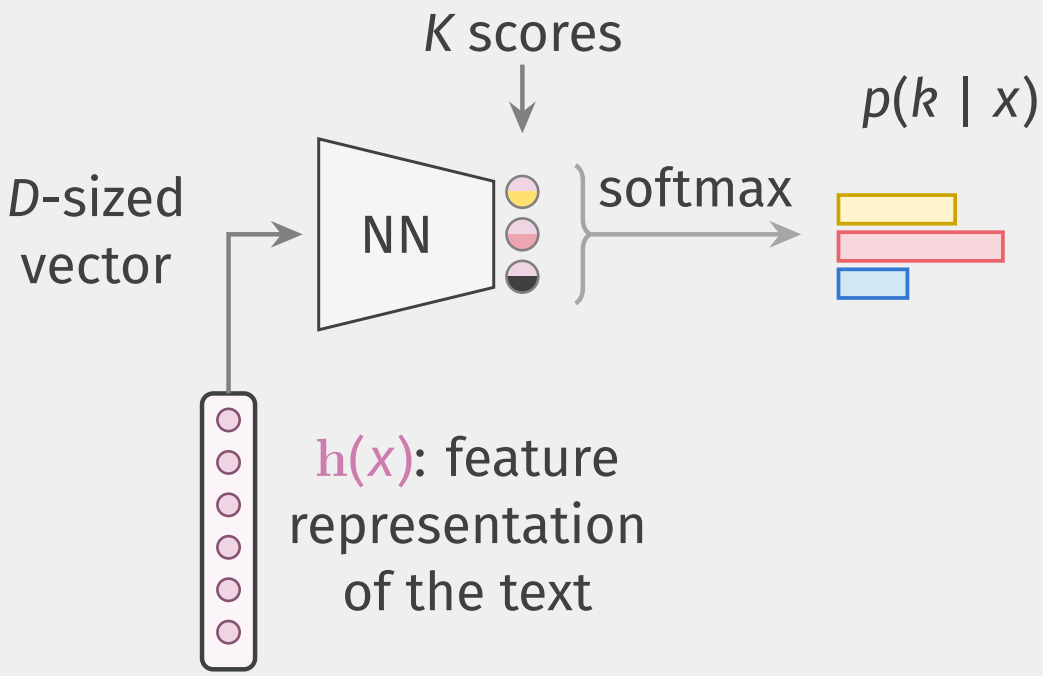


A simple NN might be: $\text{linear}_K(\text{ReLU}(\text{linear}_H(\text{inputs})))$, then the parameters of the linear layers have shape $D \times H + H$ and $H \times K + K$.

Softmax Regression


Parameter Estimation

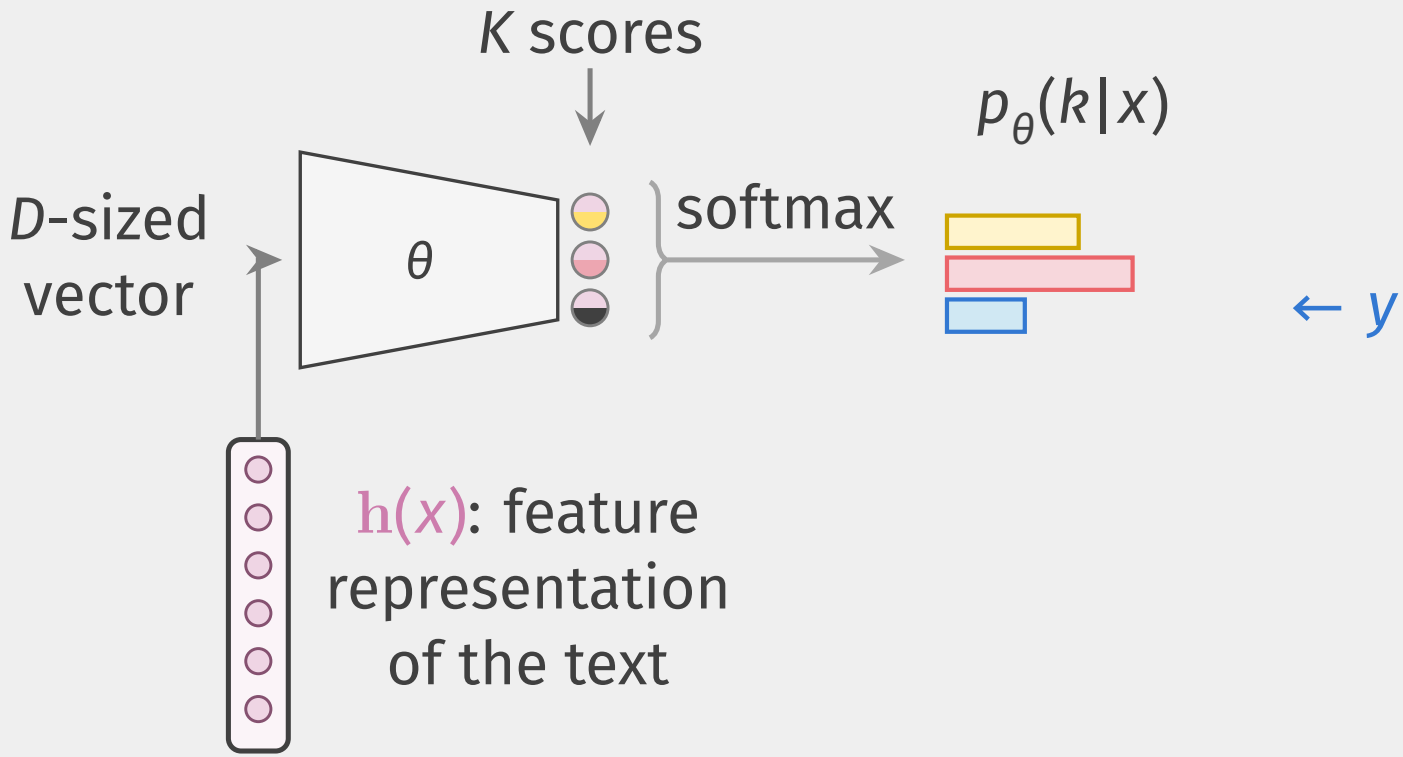


Given x, the model assigns probability $p_\theta(y|x)$ to the observed class y.

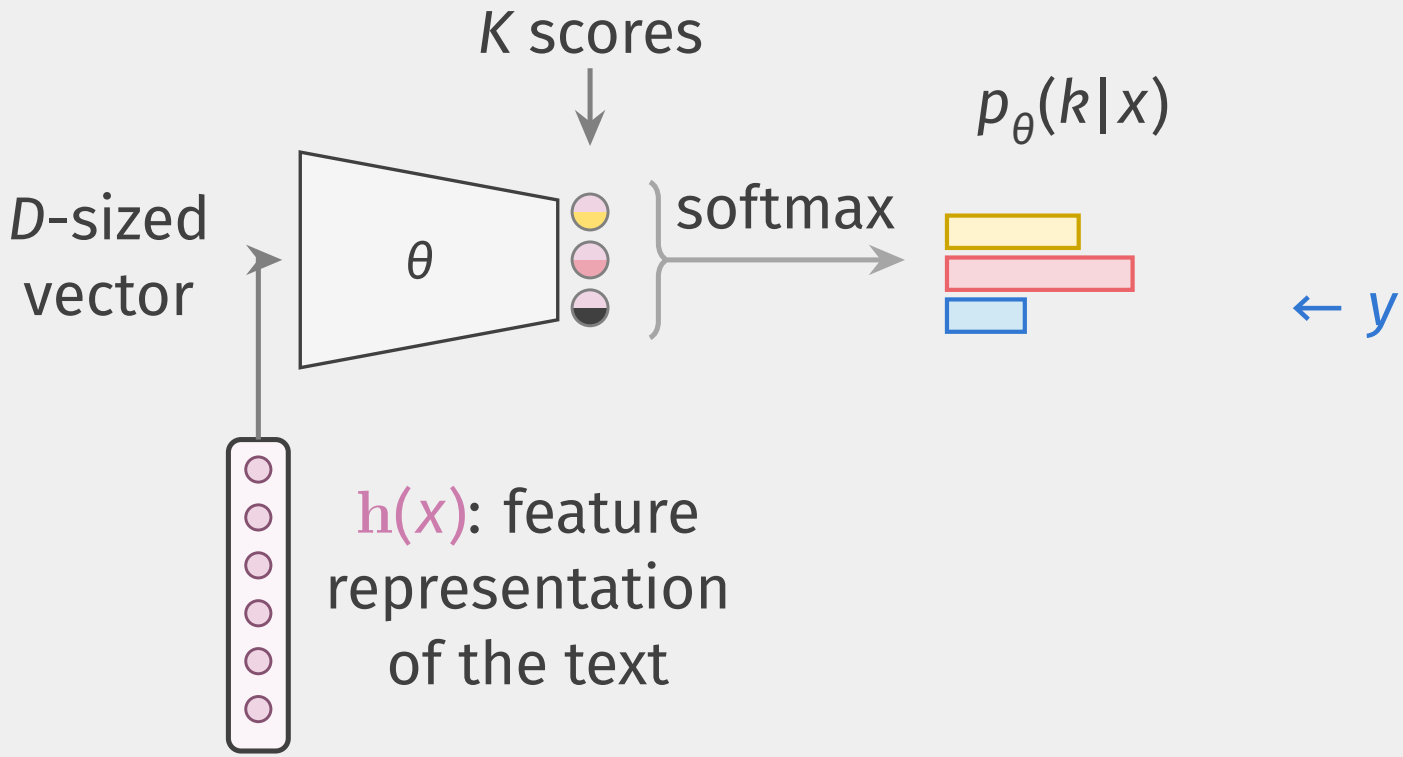

The quantity $\log p_\theta(y|x)$, when regarded as a function of θ, is a single-sample estimate of the model's log-likelihood.

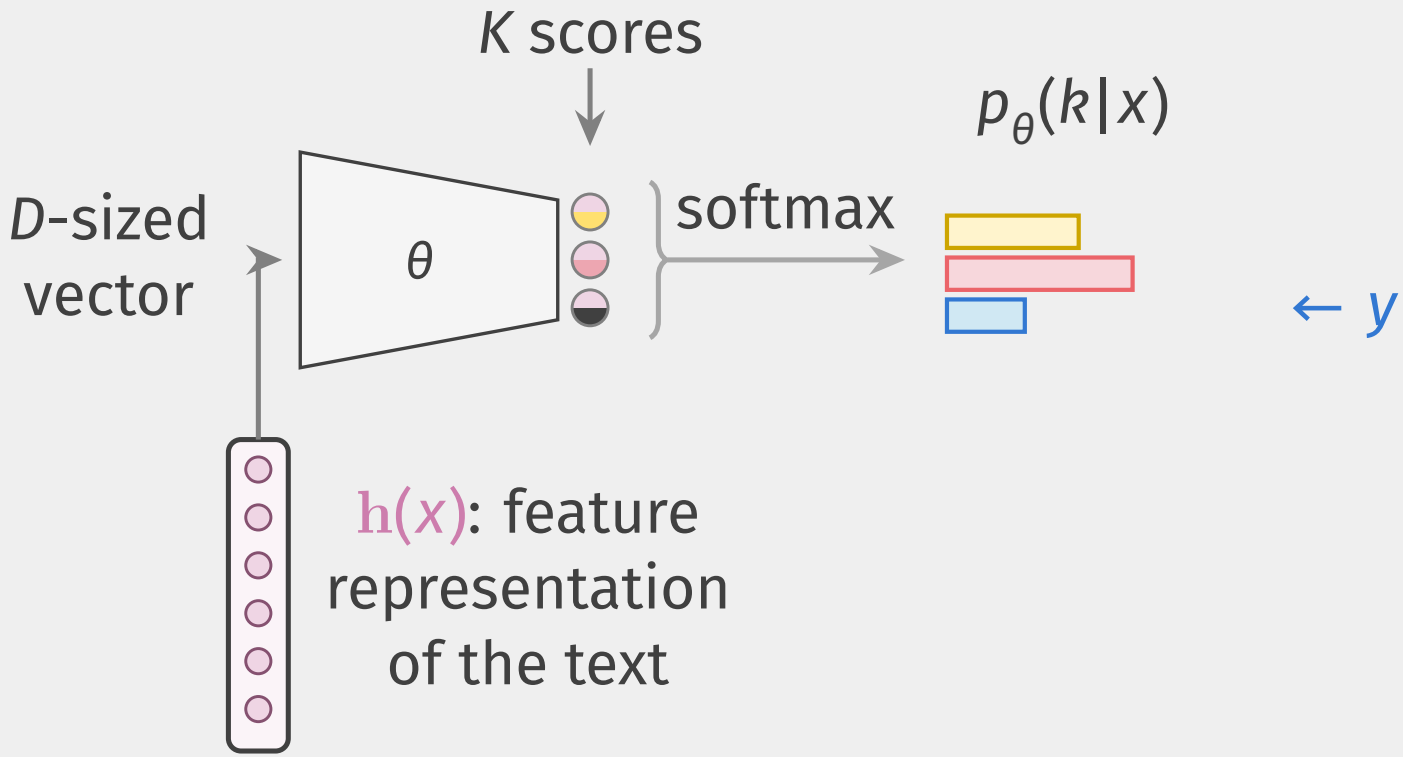

From this, we can characterise a *loss* for parameter estimation: $\ell(\theta|x, y) = -\log p_\theta(y|x)$.

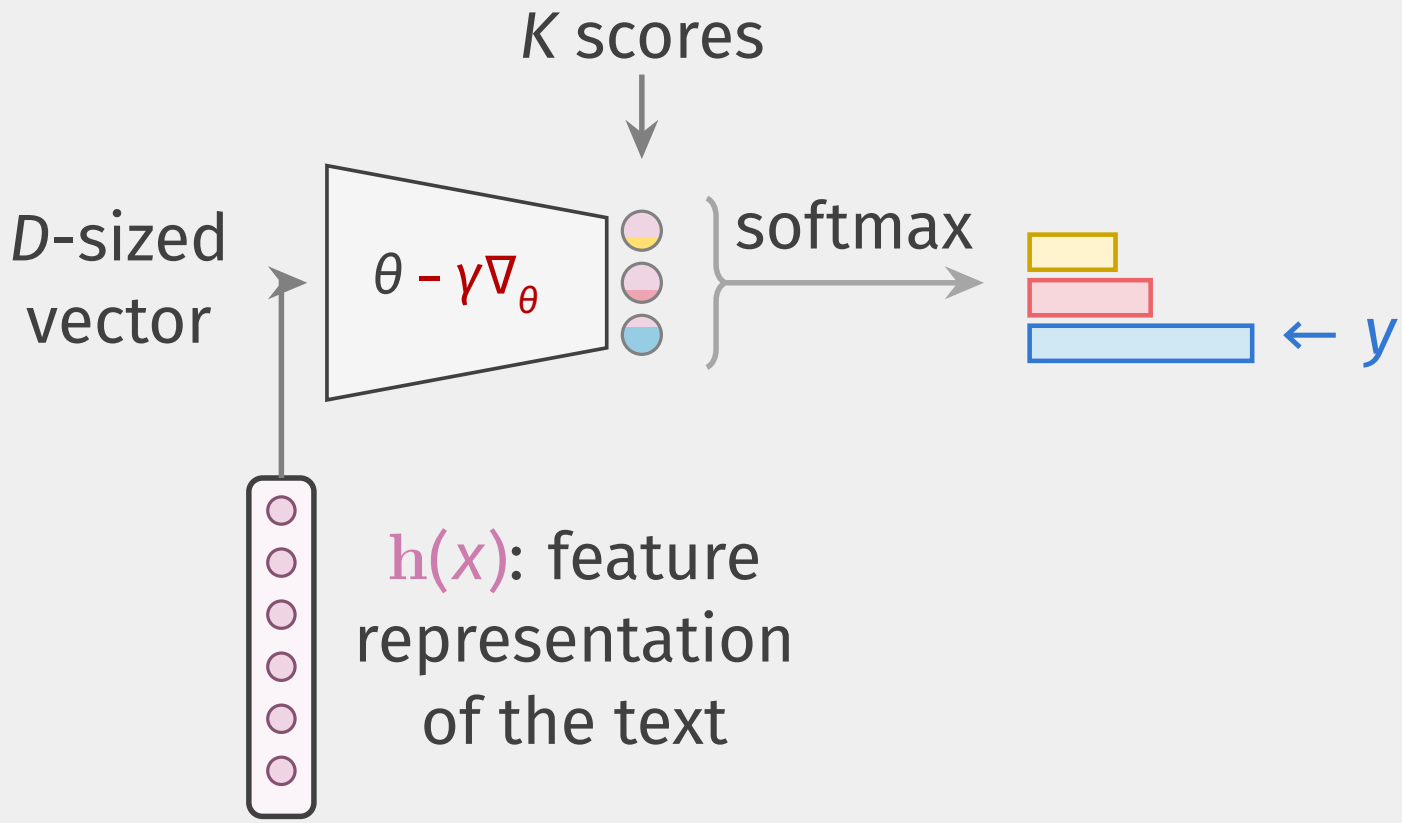

An update in the direction of $-\nabla_\theta \ell(\theta|x, y)$ moves the model closer to a (local) optimum of the loss function.

Strategy

Objective: maximise the model's likelihood

- we use log-likelihood, which is equivalent and numerically stable;
- we minimise its negative (aka cross-entropy loss);
- estimated on a subset (or batch) of observations (because it's more efficient and asymptotically equivalent);

Algorithm: iteratively, we

- assess the objective using the current parameters;
- calculate the gradient (via automatic differentiation);
- update the current parameters.

Modern optimisers maintain dynamic learning rates (important for convergence).

Regularisation

Weight decay: equivalent to L2 penalty on the weights.

Dropout: independently and at random, set a portion (e.g., 10%) of the inputs of linear layers to zero.

- used during training;
- test-time dropout has an approximate Bayesian interpretation, but it's not very common in NLP;
- the dropout rate is a hyperparameter to be determined empirically (say via cross-validation).

Evaluation

Evaluation Metrics

Probabilistic model: assess the training criterion with a different set of observations.

$$\frac{-1}{|T|} \sum_{x,y \in T} \log p_\theta(y|x)$$

Text classifier: compare model-based decisions to human-made decisions. [Textbook, Section 4.9]

- accuracy
- F1

Limitations

Uninformative Representations

A (sports)

The report covers football, not technology.

B (tech)

The report covers technology, not football.

Both texts have identical bag-of-words representations, but concern different topics.

Uninformative Representations

A (sports)

The report covers football, not technology.

B (tech)

The report covers technology, not football.


Both texts have identical bag-of-words representations, but concern different topics.

Better features via feature combination and engineering (e.g., n-gram features, mark words with negation scope, etc.) and/or better machine learning (next week).

Arbitrariness of Argmax



The home team won the league championship on Sunday after its captain scored in the final minute. Thousands of fans celebrated as the players lifted the trophy following a tense 2–1 victory.

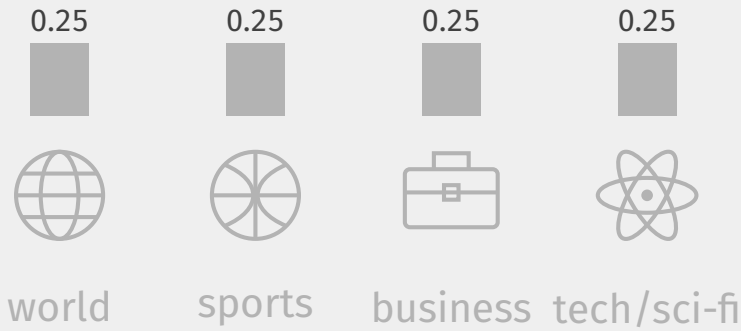


All four classes are equally probable: argmax needs a tie-breaking rule. Abstaining may be preferable if the task allows it.

Arbitrariness of Argmax



The home team won the league championship on Sunday after its captain scored in the final minute. Thousands of fans celebrated as the players lifted the trophy following a tense 2–1 victory.

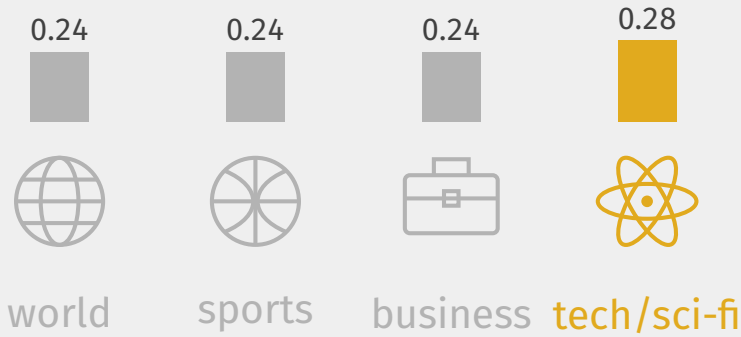

Argmax selects **tech/sci-fi**. But if we take the predicted pmf seriously, it assigns probability **0.72** to the label **not** being tech/sci-fi.

Uncertainty-Aware Decisions and Evaluation

Here are some strategies to counter limitations due to the **arbitrariness of argmax**.

Maximisation of expected utility: a decision rule that maximises the expectation of a user-defined utility function. See for example, Section 1.5 of Bishop's PRML or [1].

Uncertainty-aware evaluation: correlate confidence in prediction and correctness. [for example [2]]

- selective prediction
- AUROC

These are optional topics, for now.

Label Variation and Data Collection

TBD: discuss inherent label variation.

Summary

TBD

What Next?

Self-study

- Chapter 4 of textbook (skip 4.11 and treat 4.15 as optional)
  `https://web.stanford.edu/~jurafsky/slp3/4.pdf`
- Useful before next class: sections 14.1 and 14.2 of textbook
  `https://web.stanford.edu/~jurafsky/slp3/14.pdf`

Deadlines

- TBA

Next class: Text generation

References I



Bryan Eikema and Wilker Aziz.
Sampling-based approximations to minimum Bayes risk decoding for neural machine translation.
In Yoav Goldberg, Zornitsa Kozareva, and Yue Zhang, editors, *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pages 10978–10993, Abu Dhabi, United Arab Emirates, December 2022. Association for Computational Linguistics.



Evgenia Ilia and Wilker Aziz.
A tale of two error categories: Exploring concealed trade-offs in the errors of automated judges in evaluation of uncertainty quantifiers.
In *Proceedings of the 19th International Conference on Natural Language Generation (INLG)*, 2026.
arXiv:2610.09693 [cs.AI].