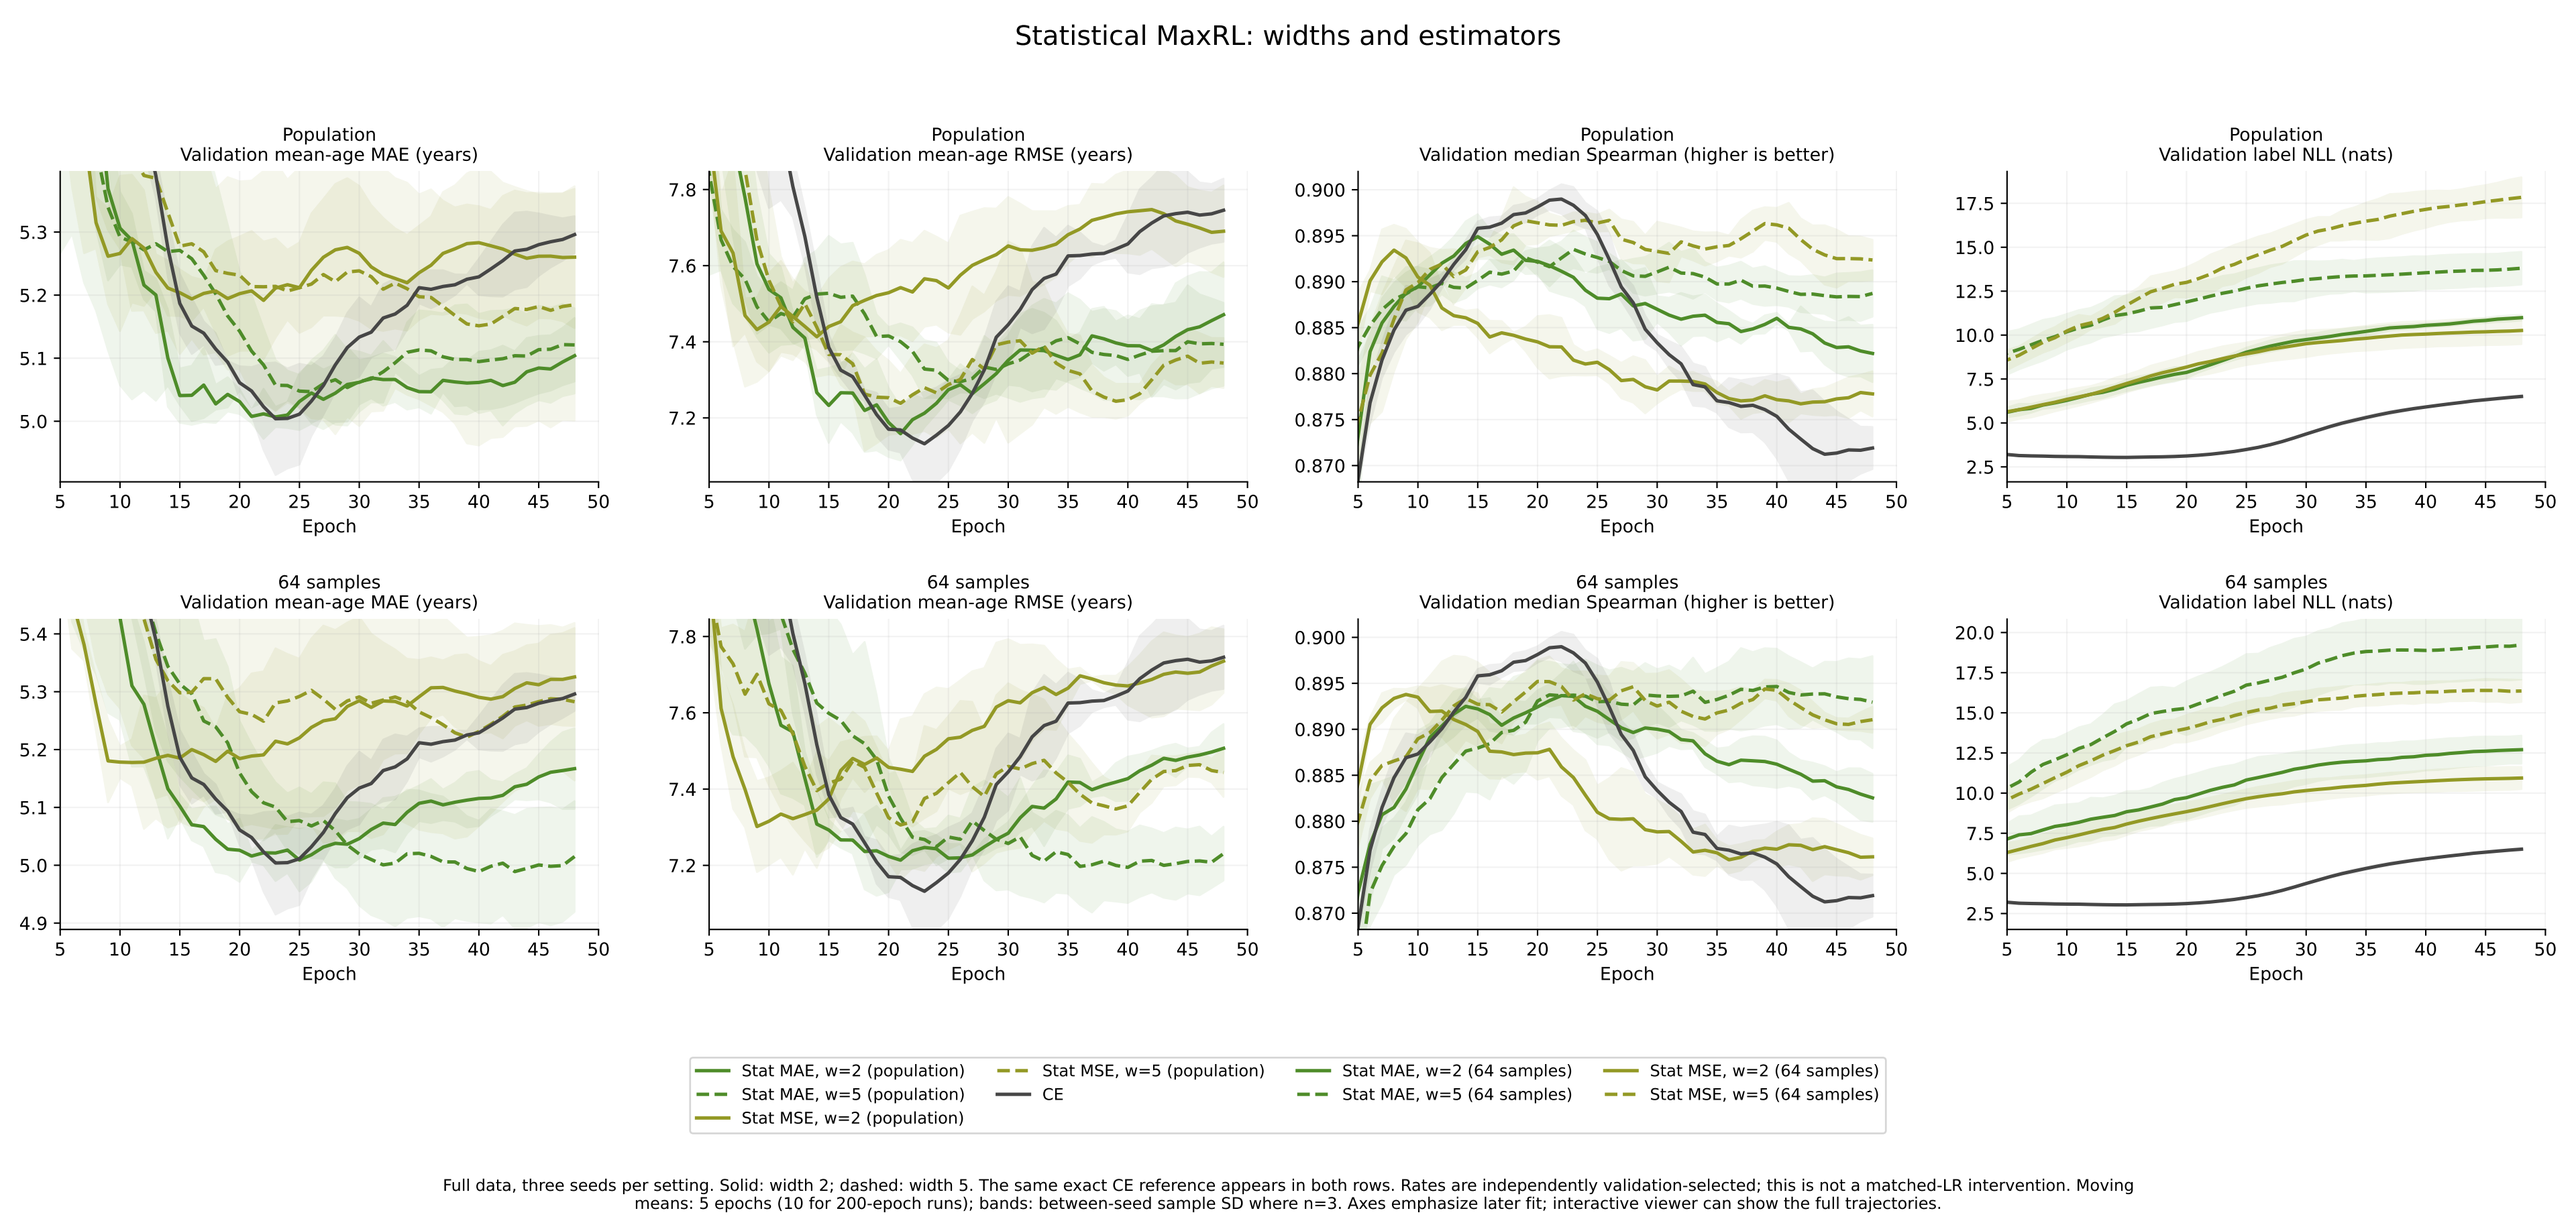

Statistical MaxRL: widths and estimators
Population
Validation mean-age MAE (years)
Population
Validation mean-age RMSE (years)
Population
Validation median Spearman (higher is better)
Population
Validation label NLL (nats)
64 samples
Validation mean-age MAE (years)
64 samples
Validation mean-age RMSE (years)
64 samples
Validation median Spearman (higher is better)
64 samples
Validation label NLL (nats)
Epoch
Stat MAE, w=2 (population)
Stat MAE, w=5 (population)
Stat MSE, w=2 (population)
Stat MSE, w=5 (population)
CE
Stat MAE, w=2 (64 samples)
Stat MAE, w=5 (64 samples)
Stat MSE, w=2 (64 samples)
Stat MSE, w=5 (64 samples)
Full data, three seeds per setting. Solid: width 2; dashed: width 5. The same exact CE reference appears in both rows. Rates are independently validation-selected; this is not a matched-LR intervention. Moving means: 5 epochs (10 for 200-epoch runs); bands: between-seed sample SD where n=3. Axes emphasize later fit; interactive viewer can show the full trajectories.