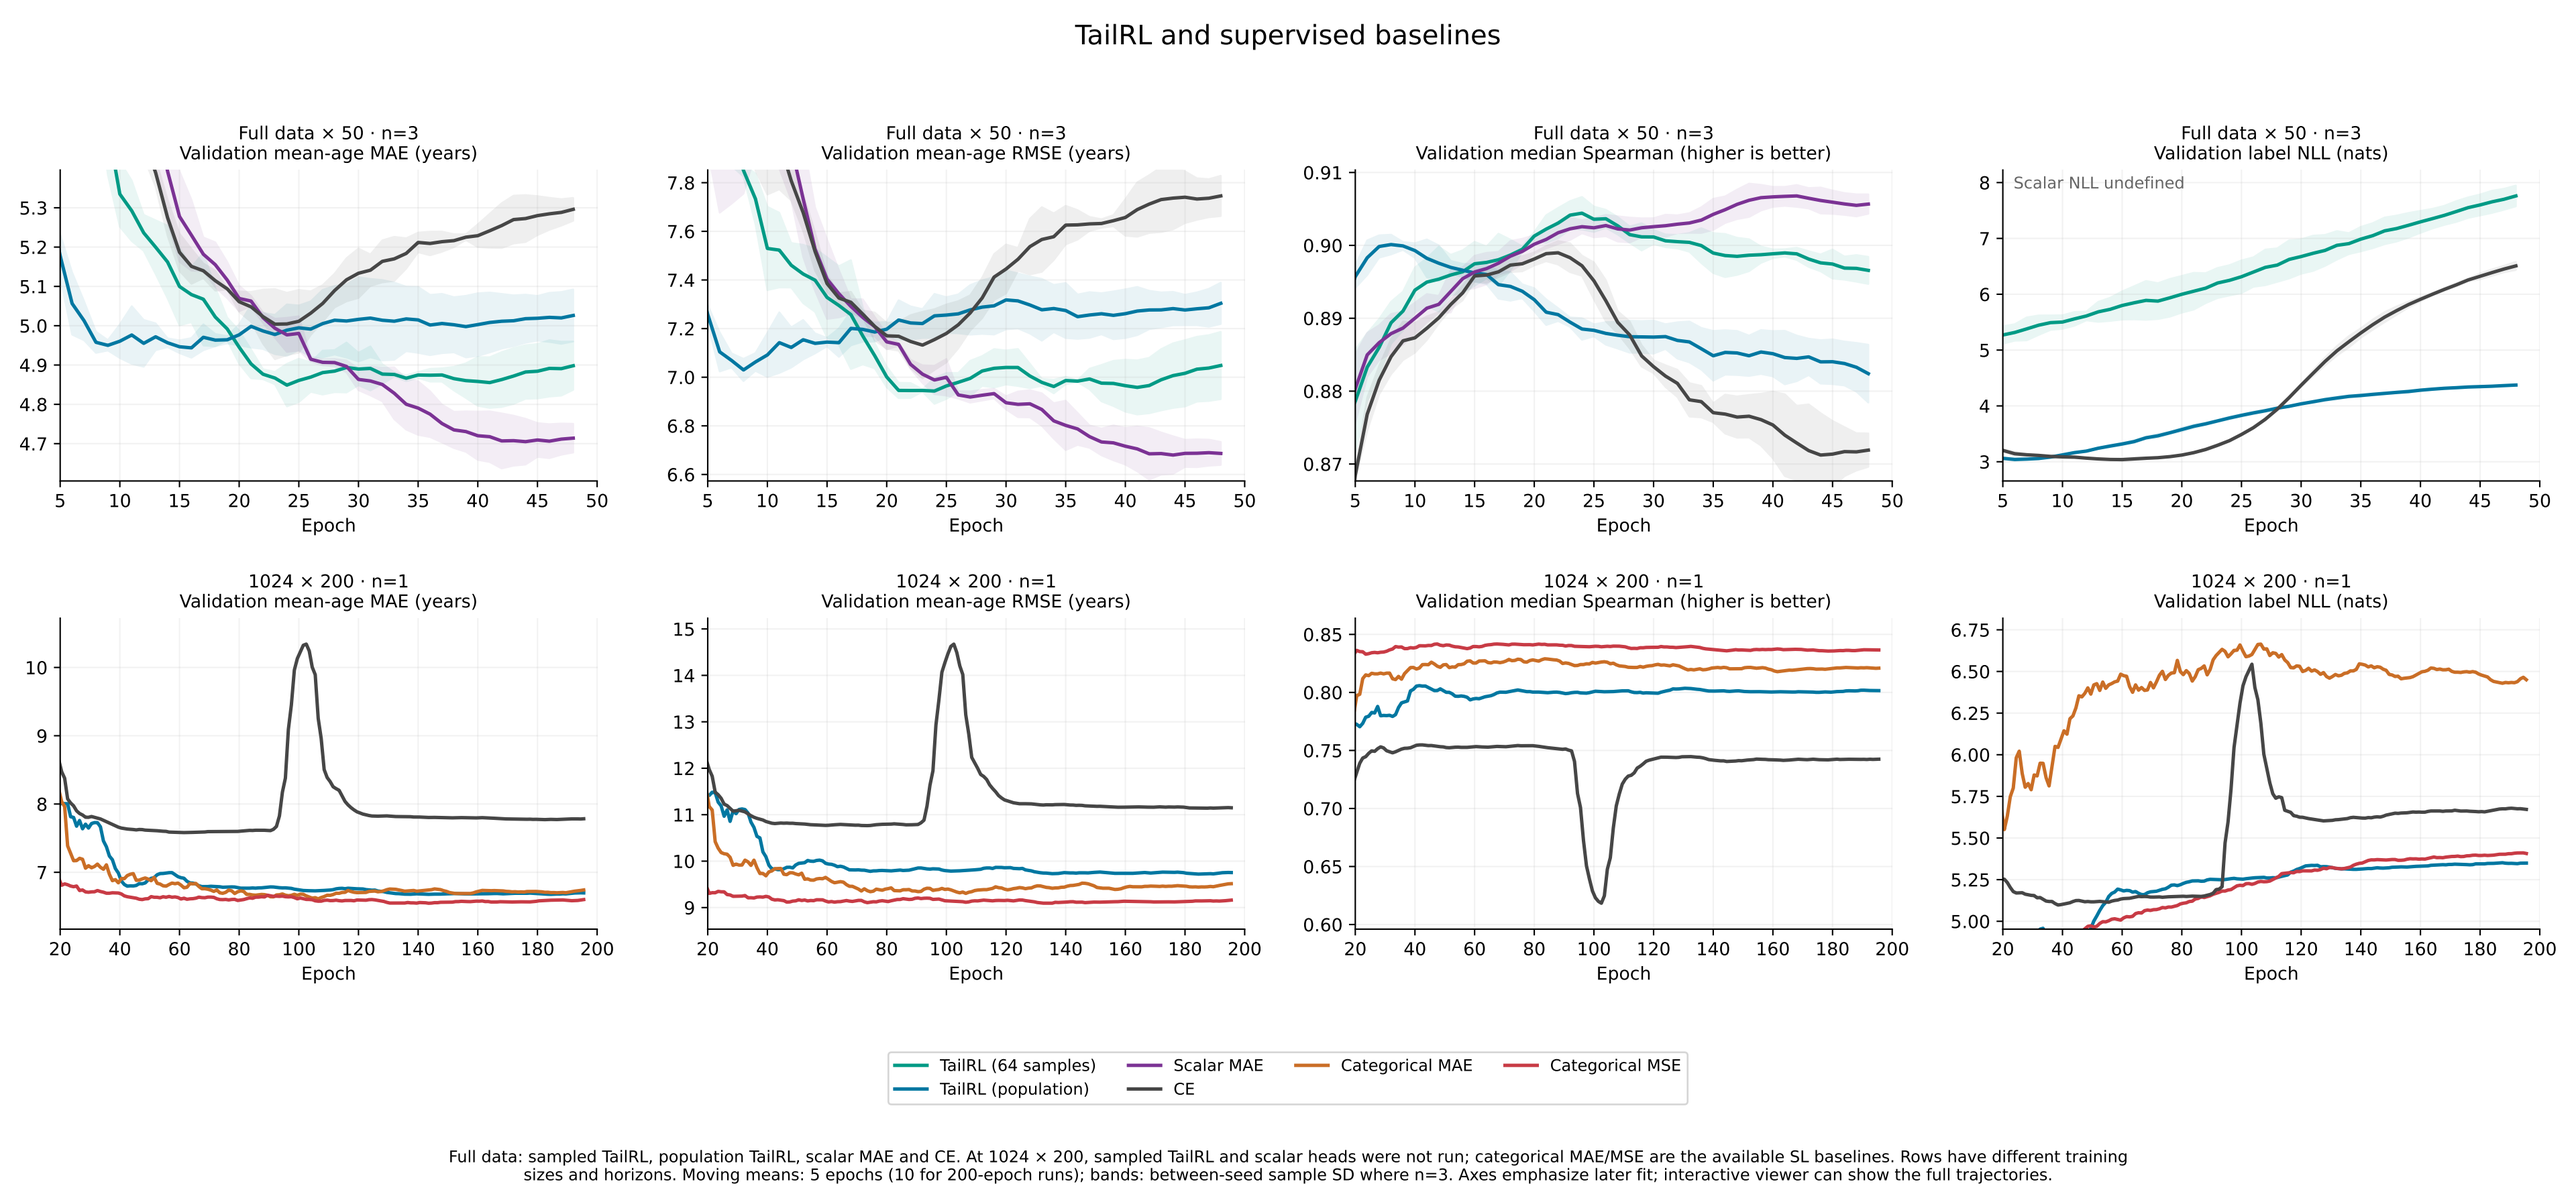

TailRL and supervised baselines
Full data × 50 · n=3
Validation mean-age MAE (years)
Full data × 50 · n=3
Validation mean-age RMSE (years)
Full data × 50 · n=3
Validation median Spearman (higher is better)
Full data × 50 · n=3
Validation label NLL (nats)
Scalar NLL undefined
1024 × 200 · n=1
Validation mean-age MAE (years)
1024 × 200 · n=1
Validation mean-age RMSE (years)
1024 × 200 · n=1
Validation median Spearman (higher is better)
1024 × 200 · n=1
Validation label NLL (nats)
Epoch
TailRL (64 samples)
TailRL (population)
Scalar MAE
CE
Categorical MAE
Categorical MSE
Full data: sampled TailRL, population TailRL, scalar MAE and CE. At 1024 × 200, sampled TailRL and scalar heads were not run; categorical MAE/MSE are the available SL baselines. Rows have different training sizes and horizons. Moving means: 5 epochs (10 for 200-epoch runs); bands: between-seed sample SD where n=3. Axes emphasize later fit; interactive viewer can show the full trajectories.