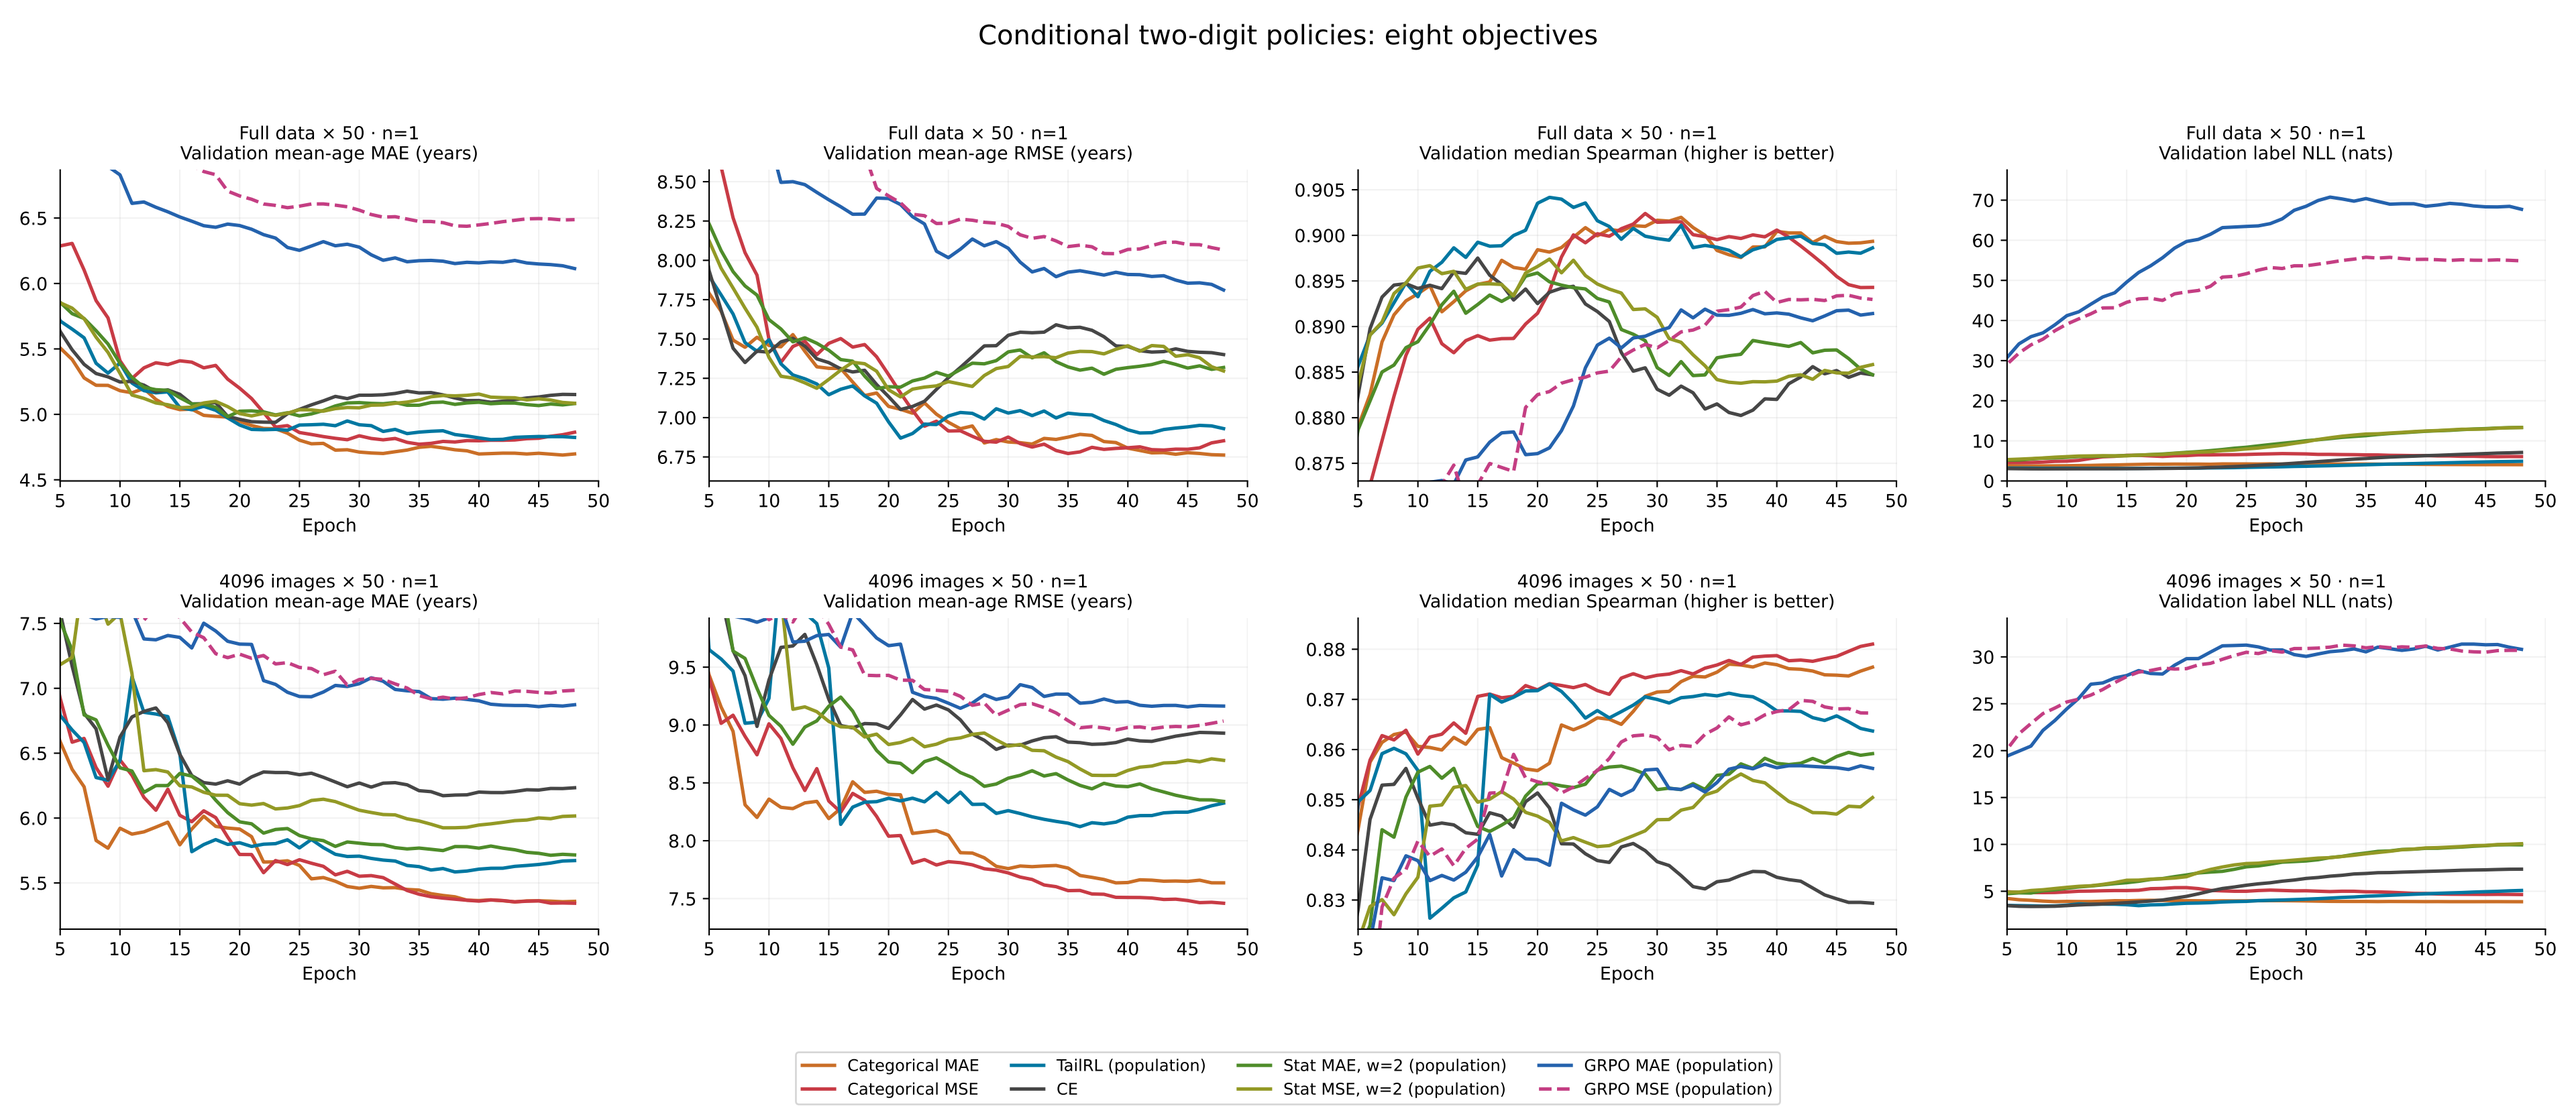
Conditional two-digit policies: eight objectives
Full data × 50 · n=1
Validation mean-age MAE (years)
Full data × 50 · n=1
Validation mean-age RMSE (years)
Full data × 50 · n=1
Validation median Spearman (higher is better)
Full data × 50 · n=1
Validation label NLL (nats)
4096 images × 50 · n=1
Validation mean-age MAE (years)
4096 images × 50 · n=1
Validation mean-age RMSE (years)
4096 images × 50 · n=1
Validation median Spearman (higher is better)
4096 images × 50 · n=1
Validation label NLL (nats)
Epoch
Categorical MAE
Categorical MSE
TailRL (population)
CE
Stat MAE, w=2 (population)
Stat MSE, w=2 (population)
GRPO MAE (population)
GRPO MSE (population)
Seed 42. Eight conditional 10×10 objectives on full data and 4096 images. All digit rates were selected on 4096 images; full-data digit runs reuse them. These panels contain digit policies only. Moving means: 5 epochs (10 for 200-epoch runs); bands: between-seed sample SD where n=3. Axes emphasize later fit; interactive viewer can show the full trajectories.