Full data: eight-method comparison

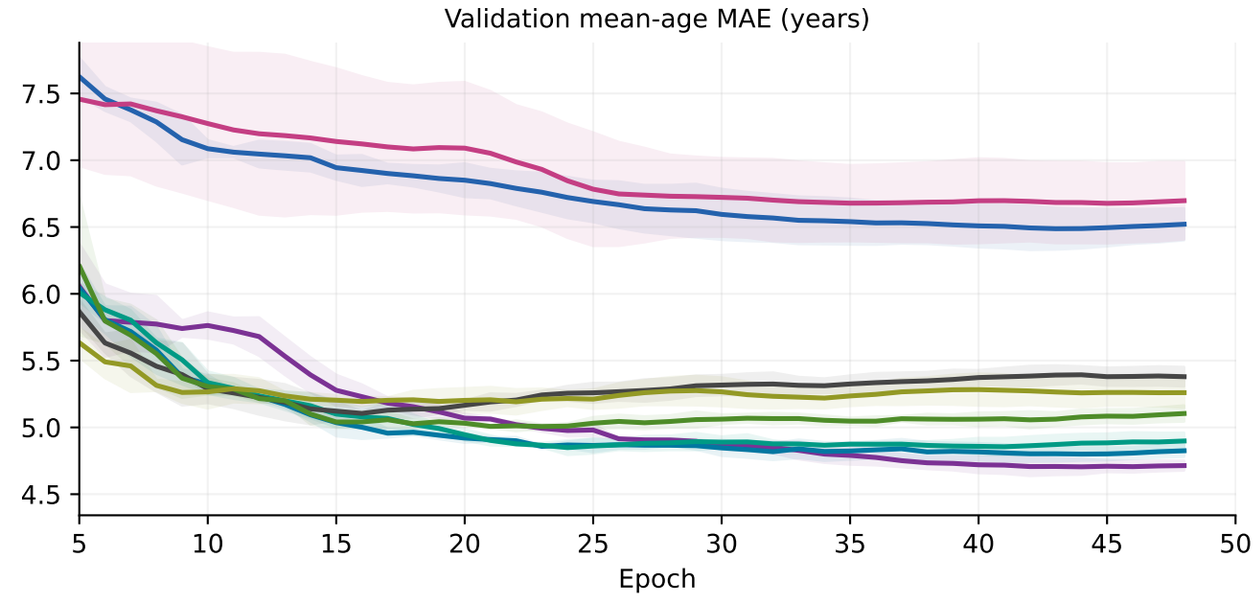

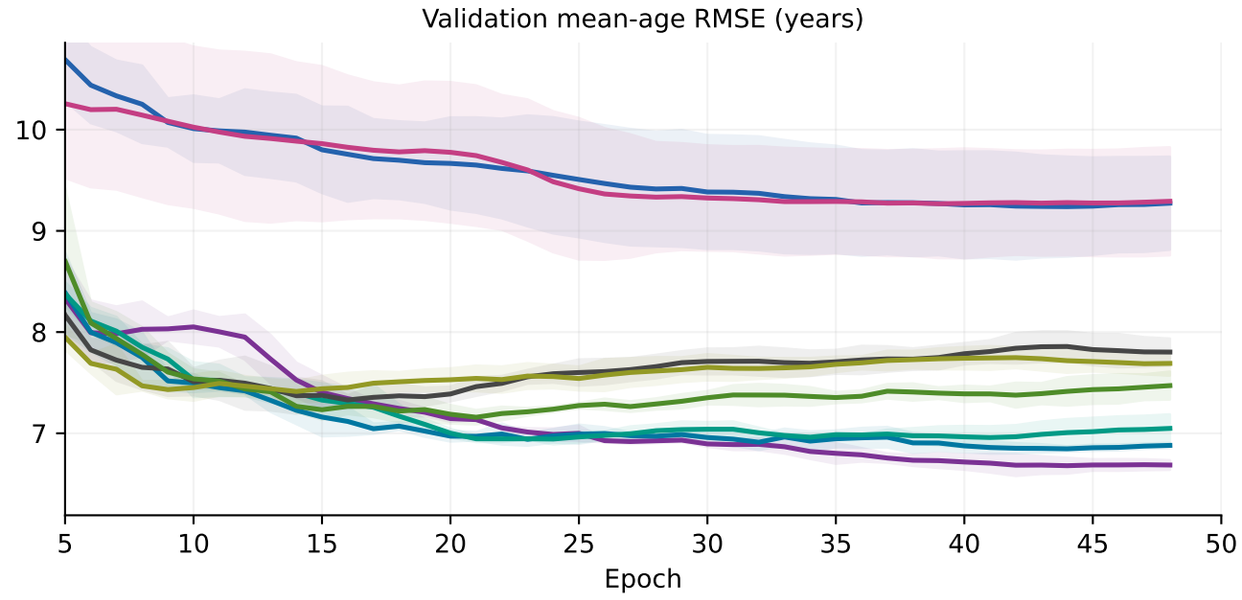

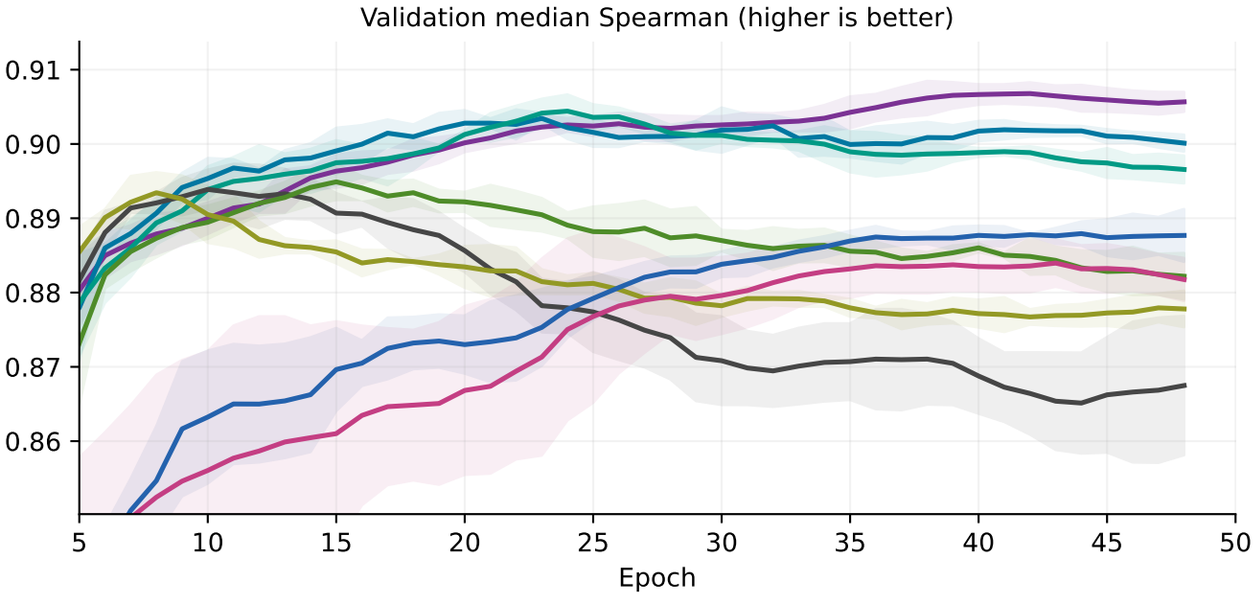

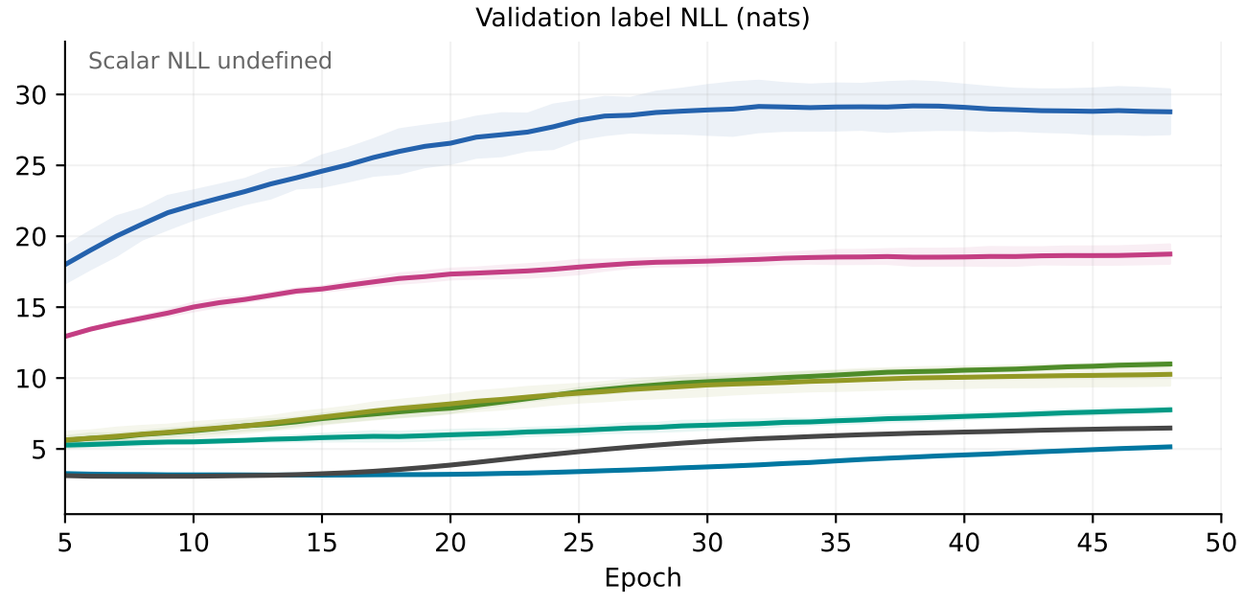

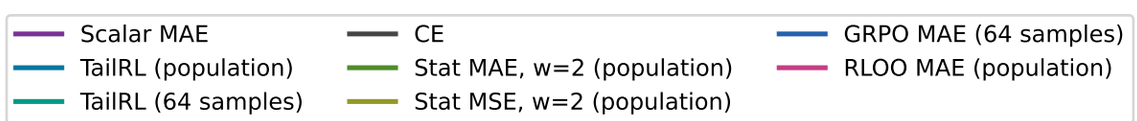

18,462 images × 50 epochs; three matched seeds. GRPO/RLOO configurations were selected by mean best validation MAE, without test outcomes. Moving means: 5 epochs (10 for 200-epoch runs); bands: between-seed sample SD where n=3. Axes emphasize later fit; the interactive viewer can show full training trajectories.