

1024 images × 200 epochs: eight tested methods


Validation mean-age MAE (years)

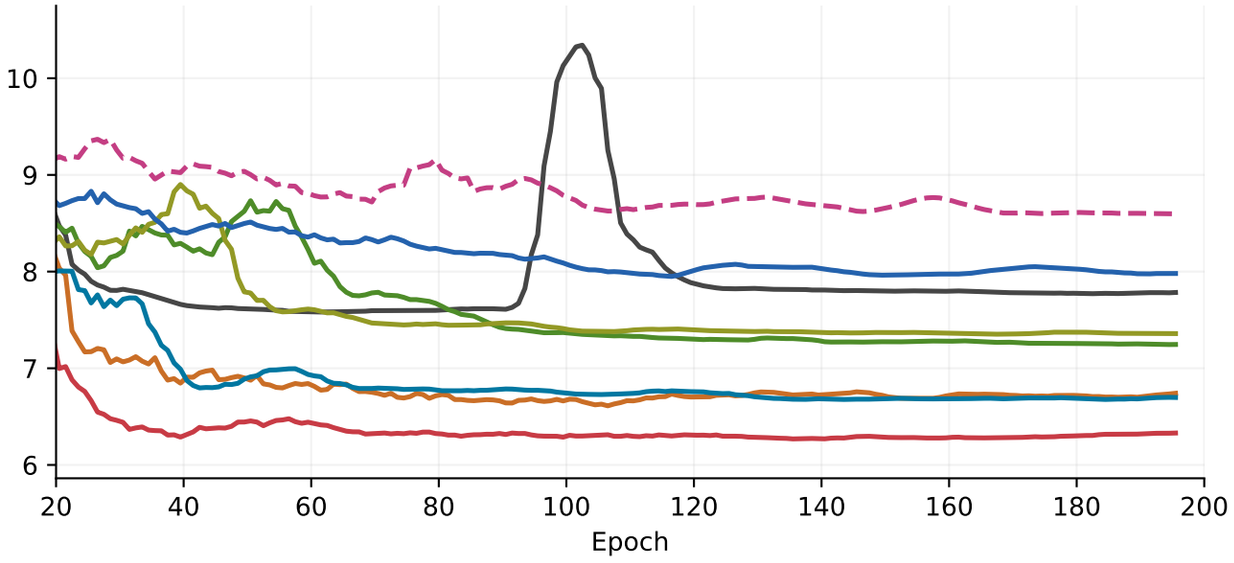


Validation mean-age RMSE (years)

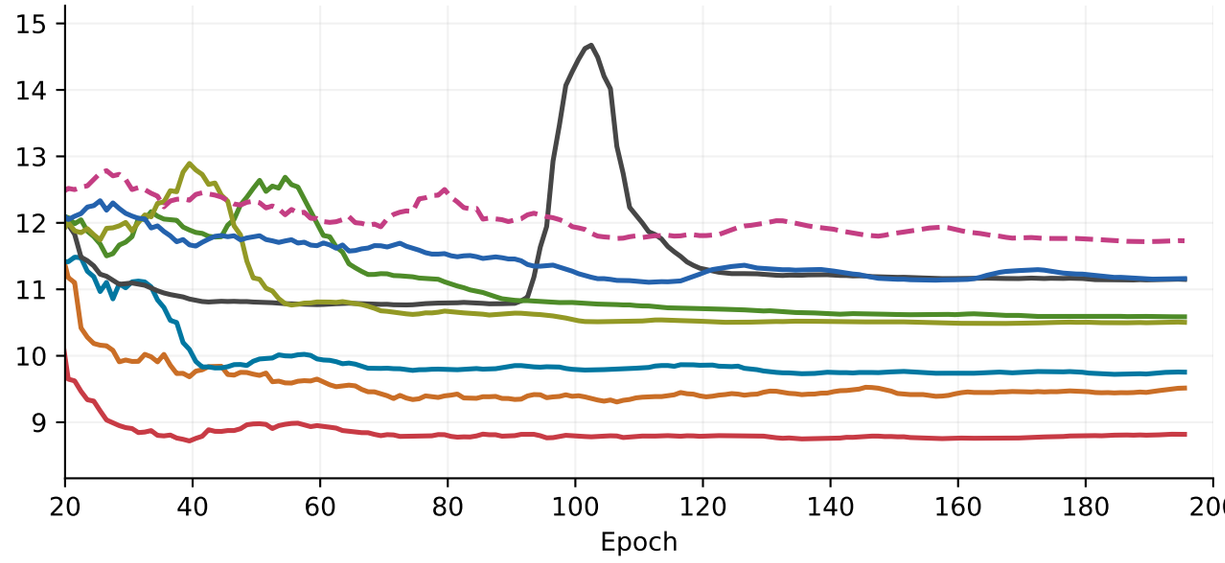

Validation median Spearman (higher is better)

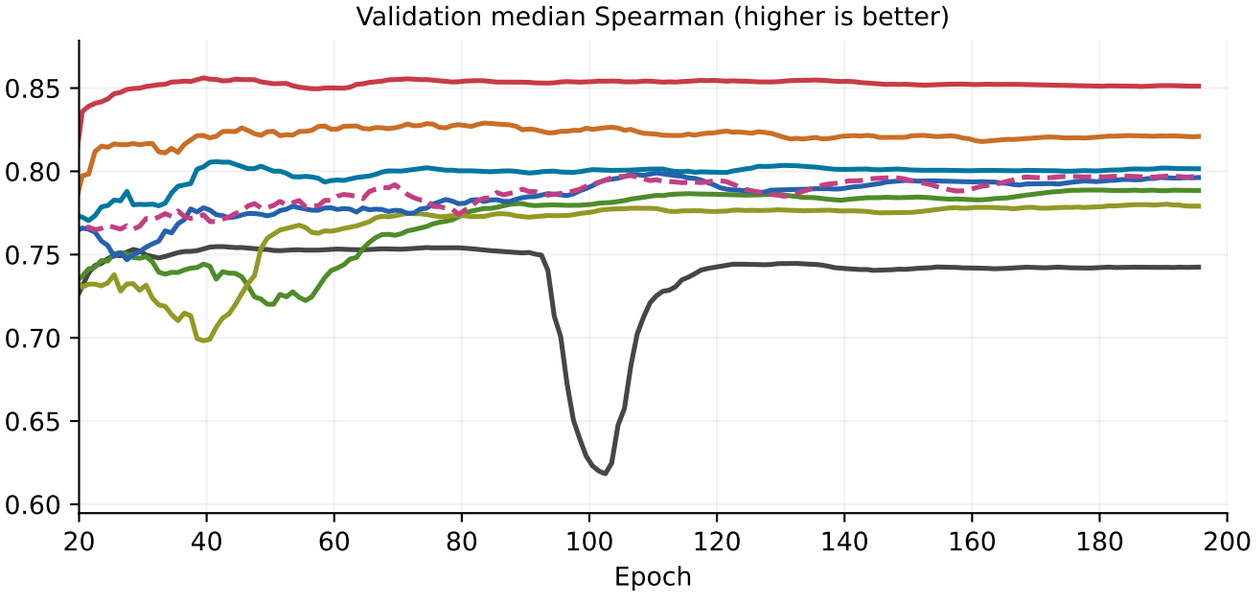

Validation label NLL (nats)

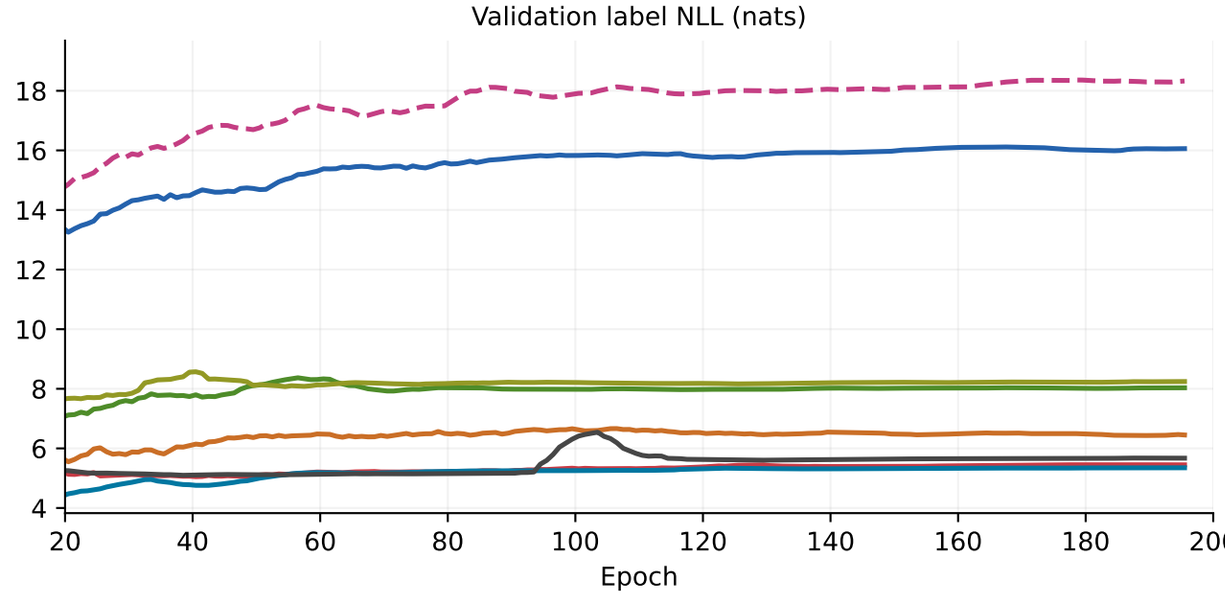

Categorical MAE
Categorical MSE
TailRL (population)
CE
Stat MAE, w=2 (population)
Stat MSE, w=2 (population)
GRPO MAE (population)
GRPO MSE (population)

Seed 42. Adapted to the eight completed categorical settings: categorical MAE/MSE and both population GRPO rewards replace the unrun scalar, sampled-TailRL and RLOO settings. Moving means: 5 epochs (10 for 200-epoch runs); bands: between-seed sample SD where n=3. Axes emphasize later fit; the interactive viewer can show full training trajectories.