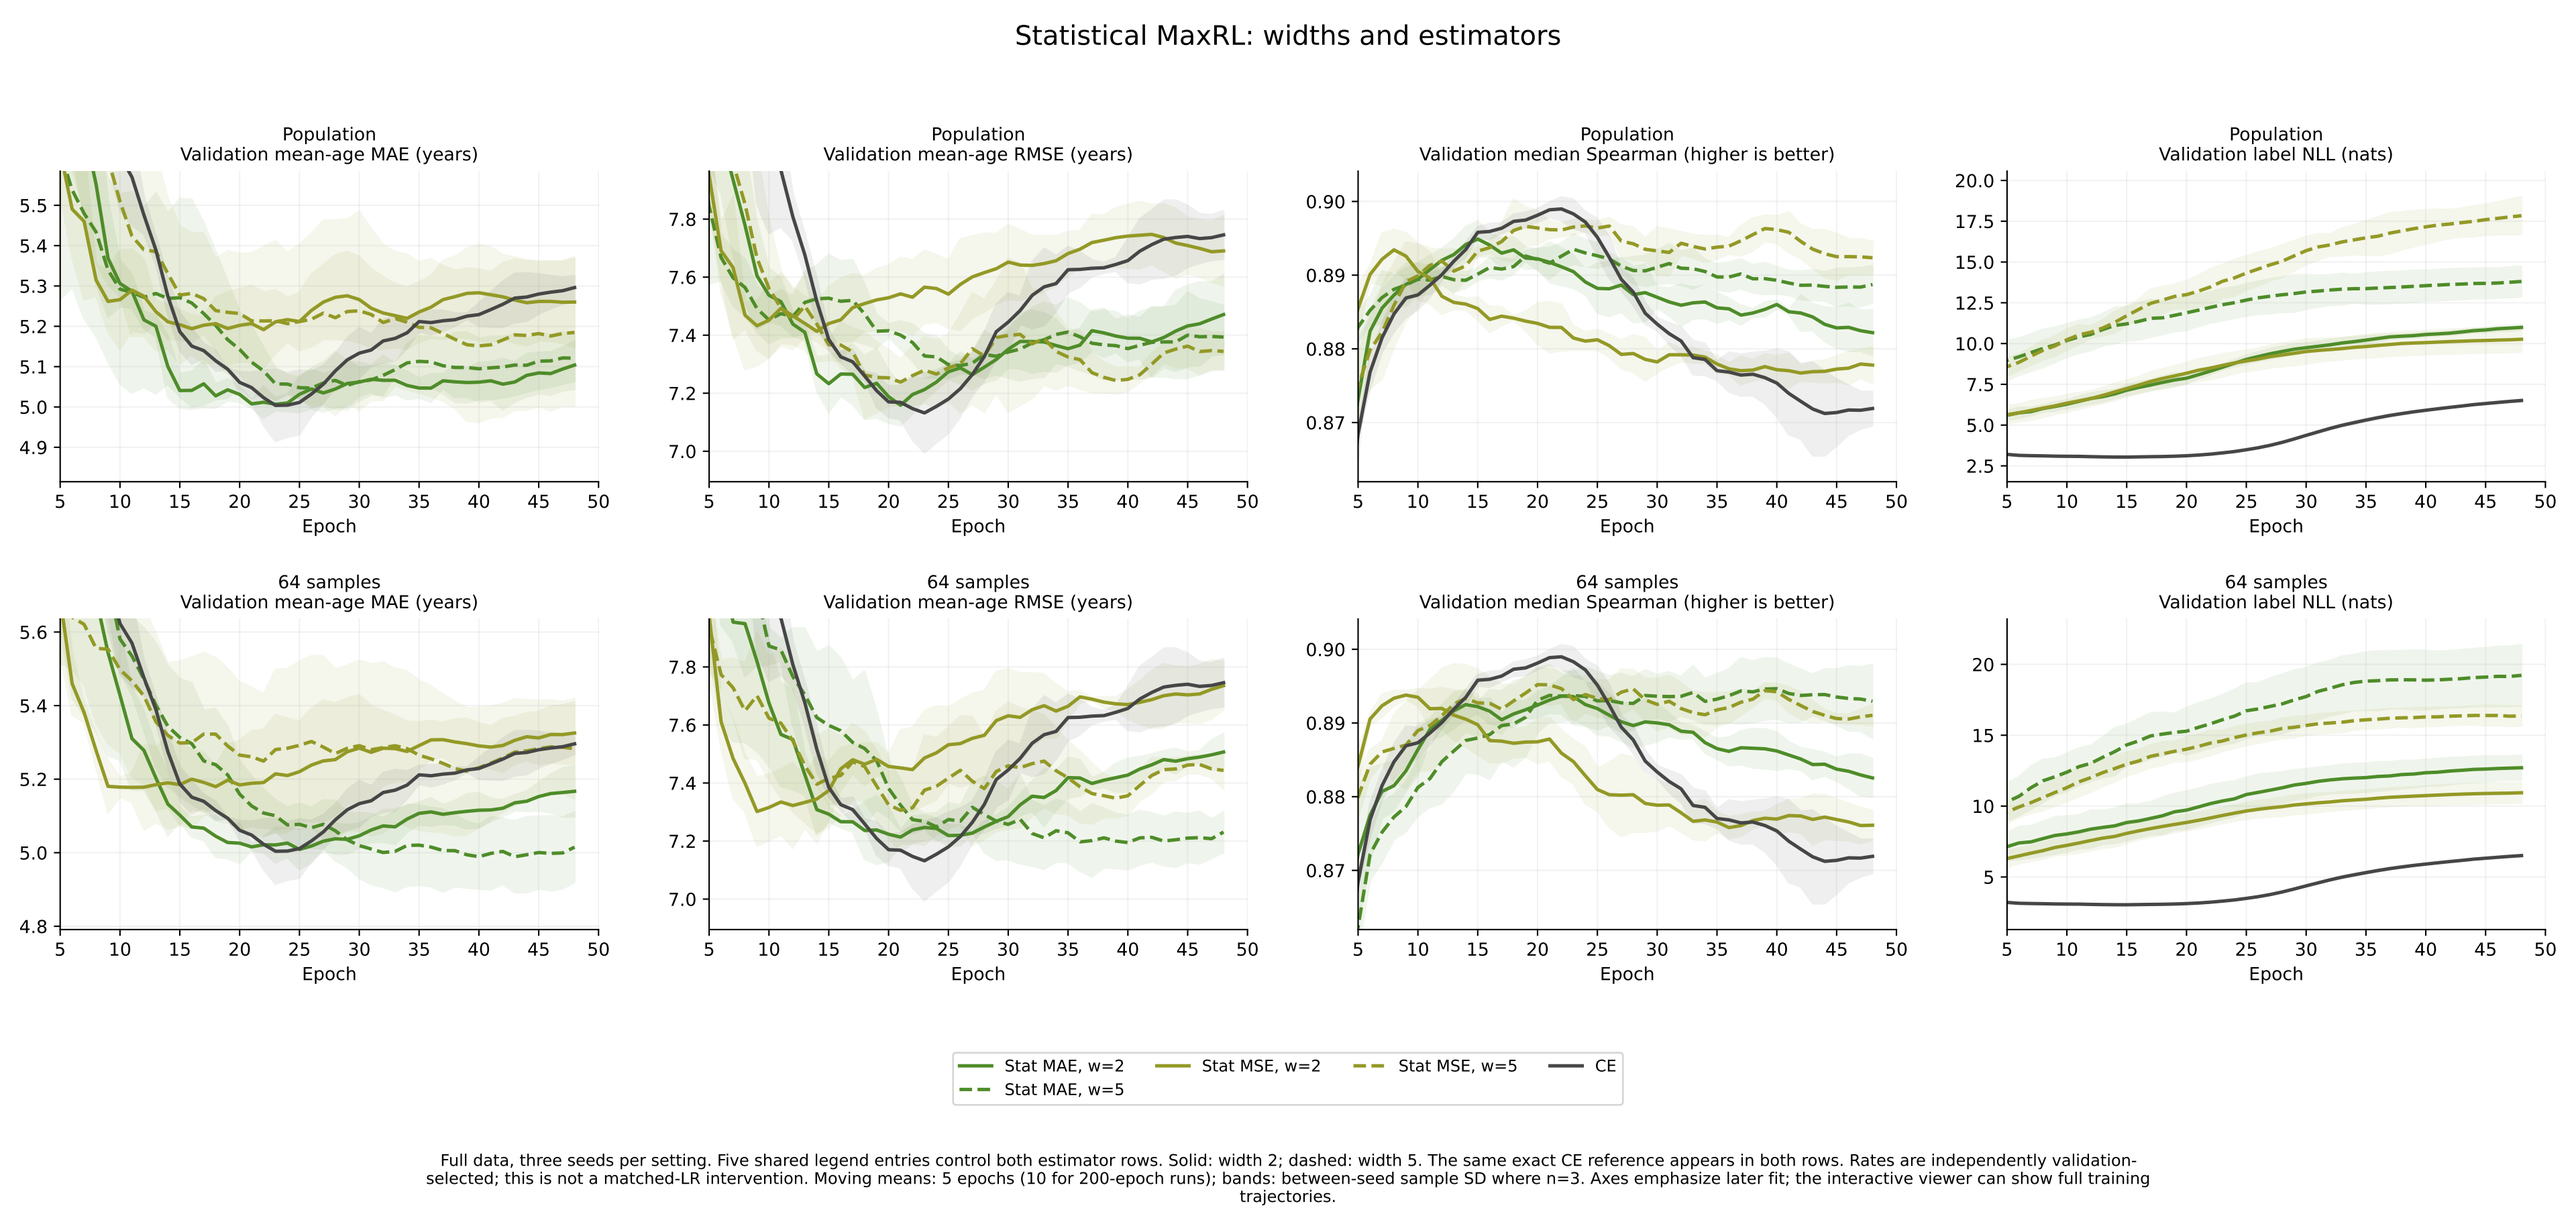

Statistical MaxRL: widths and estimators
Population
Validation mean-age MAE (years)
Population
Validation mean-age RMSE (years)
Population
Validation median Spearman (higher is better)
Population
Validation label NLL (nats)
64 samples
Validation mean-age MAE (years)
64 samples
Validation mean-age RMSE (years)
64 samples
Validation median Spearman (higher is better)
64 samples
Validation label NLL (nats)
Epoch
Stat MAE, w=2
Stat MAE, w=5
Stat MSE, w=2
Stat MSE, w=5
CE
Full data, three seeds per setting. Five shared legend entries control both estimator rows. Solid: width 2; dashed: width 5. The same exact CE reference appears in both rows. Rates are independently validation-selected; this is not a matched-LR intervention. Moving means: 5 epochs (10 for 200-epoch runs); bands: between-seed sample SD where n=3. Axes emphasize later fit; the interactive viewer can show full training trajectories.