

```
> restart;  
read("c:/appl/appl7.txt");
```

#### PROCEDURES:

*AllPermutations(n), AllCombinations(n, k), Benford(X), BootstrapRV(Data),  
CDF:CHF:HF:IDF:PDF:SF(X, [x]), CoefOfVar(X), Convolution(X, Y),  
ConvolutionIID(X, n), CriticalPoint(X, prob), Determinant(MATRIX), Difference(X, Y),  
Display(X), ExpectedValue(X, [g]), KSTest(X, Data, Parameters), Kurtosis(X),  
Maximum(X, Y), MaximumIID(X, n), Mean(X), MGF(X), Minimum(X, Y),  
MinimumIID(X, n), Mixture(MixParameters, MixRVs),  
MLE(X, Data, Parameters, [Rightcensor]), MLENHPP(X, Data, Parameters, obstime),  
MLEWeibull(Data, [Rightcensor]), MOM(X, Data, Parameters),  
NextCombination(Previous, size), NextPermutation(Previous), OrderStat(X, n, r, ["wo"]),  
PlotDist(X, [low], [high]), PlotEmpCDF(Data, [low], [high]),  
PlotEmpCIF(Data, [low], [high]), PlotEmpSF(Data, Censor),  
PlotEmpVsFittedCDF(X, Data, Parameters, [low], [high]),  
PlotEmpVsFittedCDF(X, Data, Parameters, [low], [high]),  
PlotEmpVsFittedSF(X, Data, Parameters, Censor, low, high),  
PPPlot(X, Data, Parameters), Product(X, Y), ProductIID(X, n),  
QQPlot(X, Data, Parameters), RangeStat(X, n, ["wo"]), Skewness(X), Transform(X, g),  
Truncate(X, low, high), Variance(X), VerifyPDF(X)*

#### Procedure Notation:

*X and Y are random variables  
Greek letters are numeric or symbolic parameters  
x is numeric or symbolic  
n and r are positive integers,  $n \geq r$   
low and high are numeric  
g is a function  
Brackets [] denote optional parameters  
"double quotes" denote character strings  
MATRIX is a 2 x 2 array of random variables  
A capitalized parameter indicates that it must be  
entered as a list --> ex. Data := [1, 12.4, 34, 52.45, 63]*

#### Variate Generation:

*ArcTanVariate(alpha, phi), BinomialVariate(n, p, m), ExponentialVariate(lambda),  
NormalVariate(mu, sigma), UniformVariate(), WeibullVariate(lambda, kappa, m)*

#### DATA SETS:

*BallBearing, HorseKickFatalities, Hurricane, MP6, RatControl, RatTreatment, USSHalfBeak*

*ArcSinRV(), ArcTanRV(alpha, phi), BetaRV(alpha, beta), CauchyRV(a, alpha), ChiRV(n),*

*ChiSquareRV(n), ErlangRV(lambda, n), ErrorRV(mu, alpha, d), ExponentialRV(lambda),  
 ExponentialPowerRV(lambda, kappa), ExtremeValueRV(alpha, beta), FRV(n1, n2),  
 GammaRV(lambda, kappa), GeneralizedParetoRV(gamma, delta, kappa),  
 GompertzRV(delta, kappa), HyperbolicSecantRV(), HyperExponentialRV(p, l),  
 HypoExponentialRV(l), IDBRV(gamma, delta, kappa), InverseGaussianRV(lambda, mu),  
 InvertedGammaRV(alpha, beta), KSRV(n), LaPlaceRV(omega, theta),  
 LogGammaRV(alpha, beta), LogisticRV(kappa, lambda), LogLogisticRV(lambda, kappa),  
 LogNormalRV(mu, sigma), LomaxRV(kappa, lambda), MakehamRV(gamma, delta, kappa),  
 MuthRV(kappa), NormalRV(mu, sigma), ParetoRV(lambda, kappa), RayleighRV(lambda),  
 StandardCauchyRV(), StandardNormalRV(), StandardTriangularRV(m),  
 StandardUniformRV(), TRV(n), TriangularRV(a, m, b), UniformRV(a, b),  
 WeibullRV(lambda, kappa)*

Error, attempting to assign to `DataSets` which is protected.  
 Try declaring `local DataSets`; see ?protect for details.

```

> bf := ArcTanRV(2,3);
bfname := "ArcTanRV(2,3)";
bf := 
$$\left[ x \rightarrow \frac{2}{\left( \arctan(6) + \frac{1}{2} \pi \right) (1 + 4(x-3)^2)} \right], [0, \infty], ["Continuous", "PDF"]$$

bfname := "ArcTanRV(2,3)"

```

(1)

```

> #plot(1/csch(t)+1, t = 0..0.0010);
#plot(diff(1/csch(t),t), t=0..0.0010);
#limit(1/csch(t), t=0);
> solve(exp(-t) = y, t);

```

-ln(y) (2)

```

> # discarded -ln(t + 1), t-> csch(t), t->arccsch(t), t -> tan(t),
> #name of the file for latex output
filename := "C:/LatexOutput/Trash.tex";

glist := [t -> t^2, t -> sqrt(t), t -> 1/t, t -> arctan(t), t
-> exp(t), t -> ln(t), t -> exp(-t), t -> -ln(t), t -> ln(t+1),
t -> 1/(ln(t+2)), t -> tanh(t), t -> sinh(t), t -> arcsinh(t),
t-> csch(t+1), t->arccsch(t+1), t-> 1/tanh(t+1), t-> 1/sinh(t+1),
t-> 1/arcsinh(t+1), t-> 1/csch(t)+1, t-> tanh(1/t), t->csch
(1/t), t-> arccsch(1/t), t-> arctanh(1/t) ]:

base := t -> PDF(bf, t):

print(base(x)):

#begin loopint through transformations
for i from 18 to 22 do
#for i from 1 to 3 do

```

```

print( "i is", i, " -----"
-----" );

g := glist[i]:
l := bf[2][1];
u := bf[2][2];
Temp := Transform(bf, [[unapply(g(x), x)], [l,u]]);

#terminal output

PlotDist(PDF(Temp), 0, 40);
PlotDist(HF(Temp), 0, 40);

od;

```

$$filename := "C:/LatexOutput/Trash.tex"$$

$$\frac{2}{\left(\arctan(6) + \frac{1}{2} \pi\right) (1 + 4 (x - 3)^2)}$$

```

"i is", 18,
" -----"
-----"

```

$$g := t \rightarrow \frac{1}{\operatorname{arcsinh}(t + 1)}$$

$$l := 0$$


$$u := \infty$$

$$Temp := \left[ \left[ y \sim \rightarrow \frac{4 \cosh\left(\frac{1}{y \sim}\right)}{(2 \arctan(6) + \pi) y \sim^2 \left(4 \cosh\left(\frac{1}{y \sim}\right)^2 - 32 \sinh\left(\frac{1}{y \sim}\right) + 61\right)} \right], \left[ 0, \right. \right.$$

$$\left. \left. \frac{1}{\ln(1 + \sqrt{2})} \right], ["Continuous", "PDF"] \right]$$

WARNING(PlotDist): High value provided by user, 40 is greater than maximum support value of the random variable,  $\frac{1}{\ln(1 + \sqrt{2})}$


Resetting high to RV's maximum support value

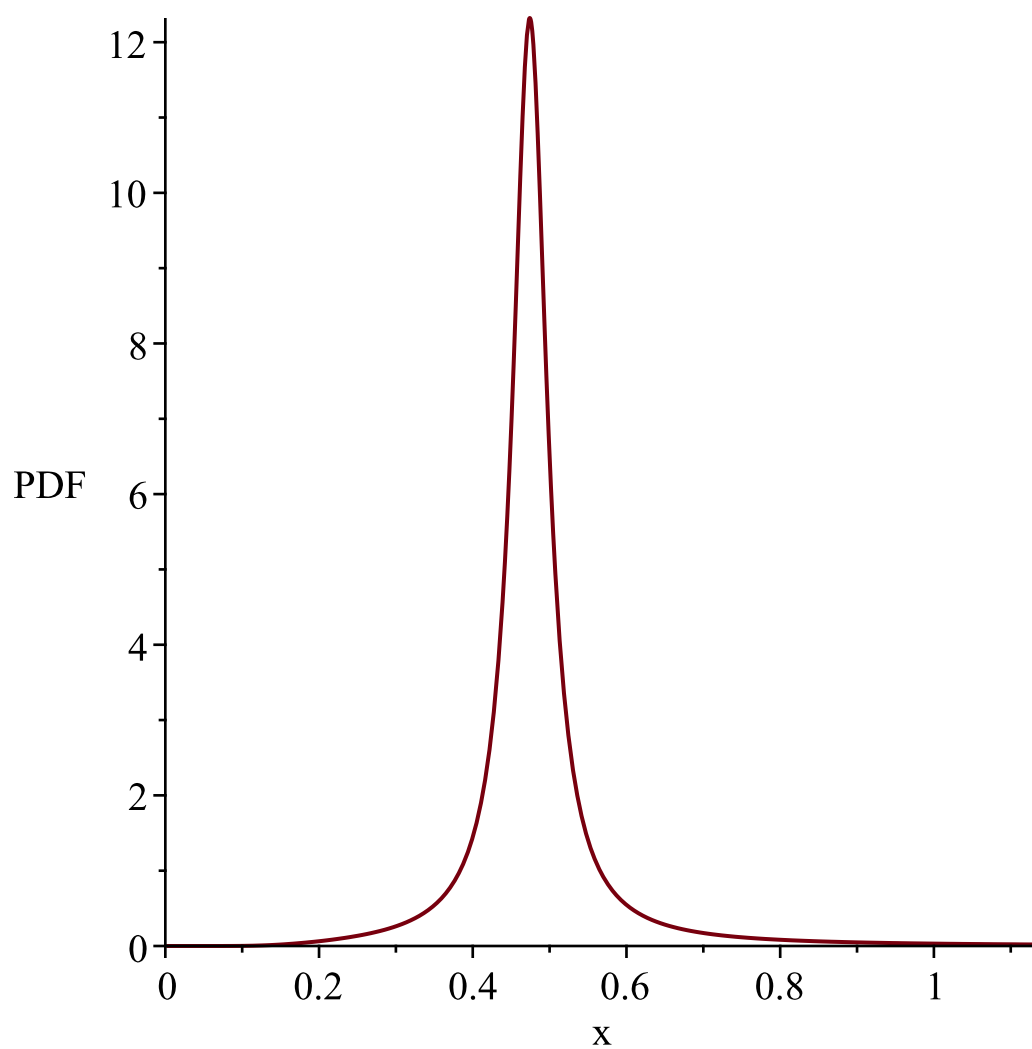

*WARNING(PlotDist): High value provided by user, 40  
is greater than maximum support value of the random*

*variable,  $\frac{1}{\ln(1 + \sqrt{2})}$*

*Resetting high to RV's maximum support value*

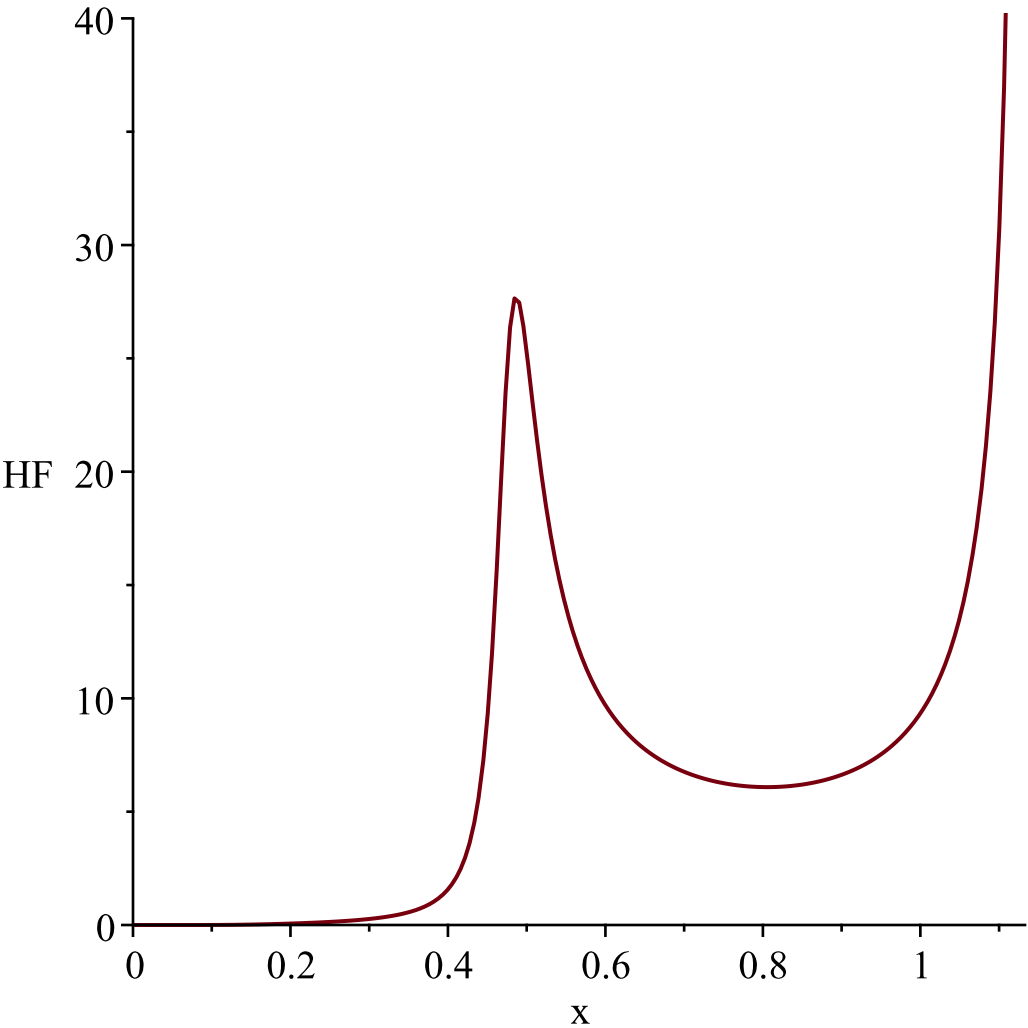

"i is", 19,  
 "-----"  
 "-----"


$$g := t \rightarrow \frac{1}{\operatorname{csch}(t)} + 1$$

$$l := 0$$

$$u := \infty$$

$$Temp := \left[ \left[ y_{\sim} \rightarrow 4 \Big/ \left( \sqrt{y_{\sim}^2 - 2 y_{\sim} + 2} \left( 2 \arctan(6) + \pi \right) \left( 4 \operatorname{arccsch}\left( \frac{1}{y_{\sim} - 1} \right)^2 - 24 \operatorname{arccsch}\left( \frac{1}{y_{\sim} - 1} \right) + 37 \right) \right) \right], [1, \infty], ["Continuous", "PDF"] \right]$$


*WARNING(PlotDist): Low value provided by user, 0 is less than minimum support value of random variable*

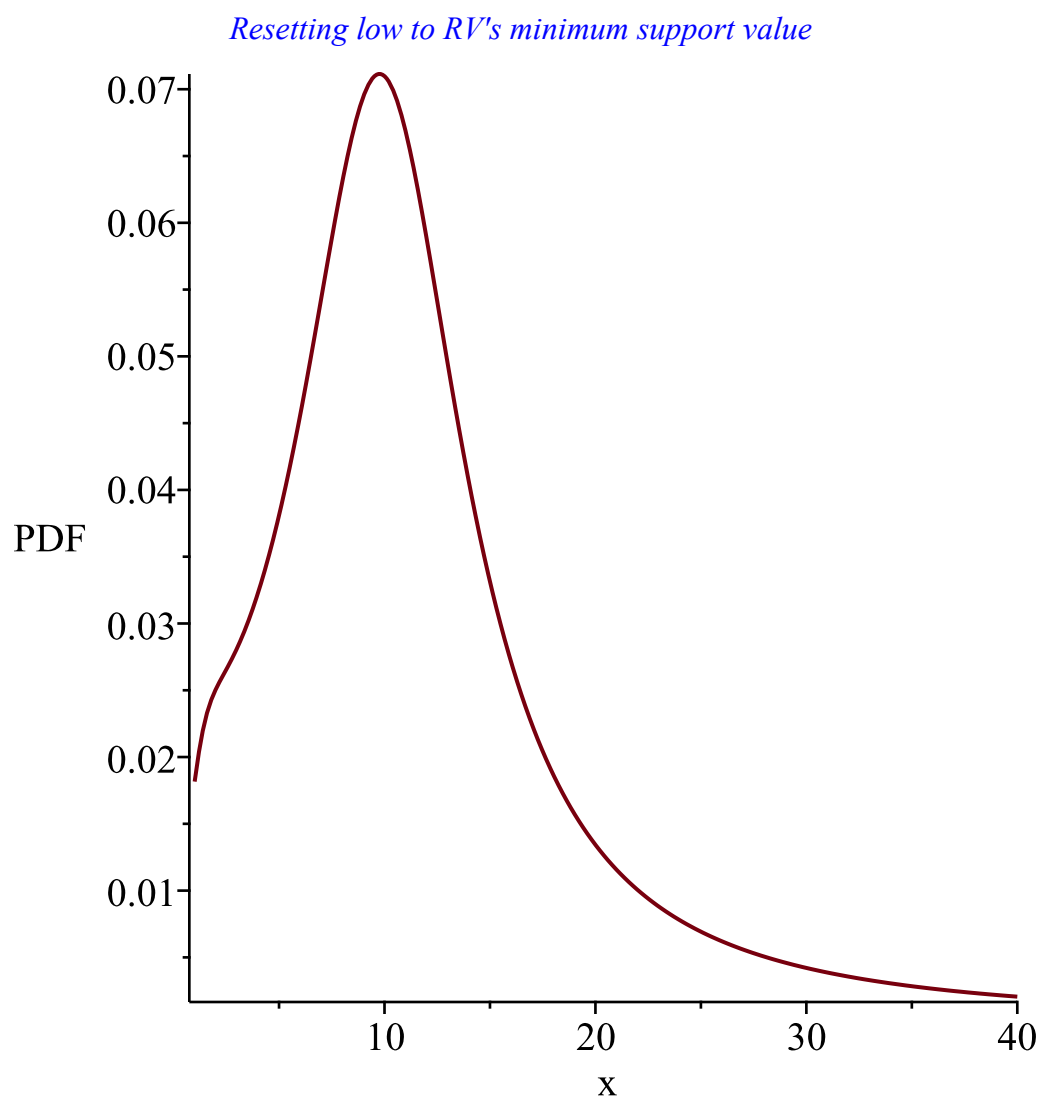

*WARNING(PlotDist): Low value provided by user, 0  
is less than minimum support value of random variable*

1


*Resetting low to RV's minimum support value*

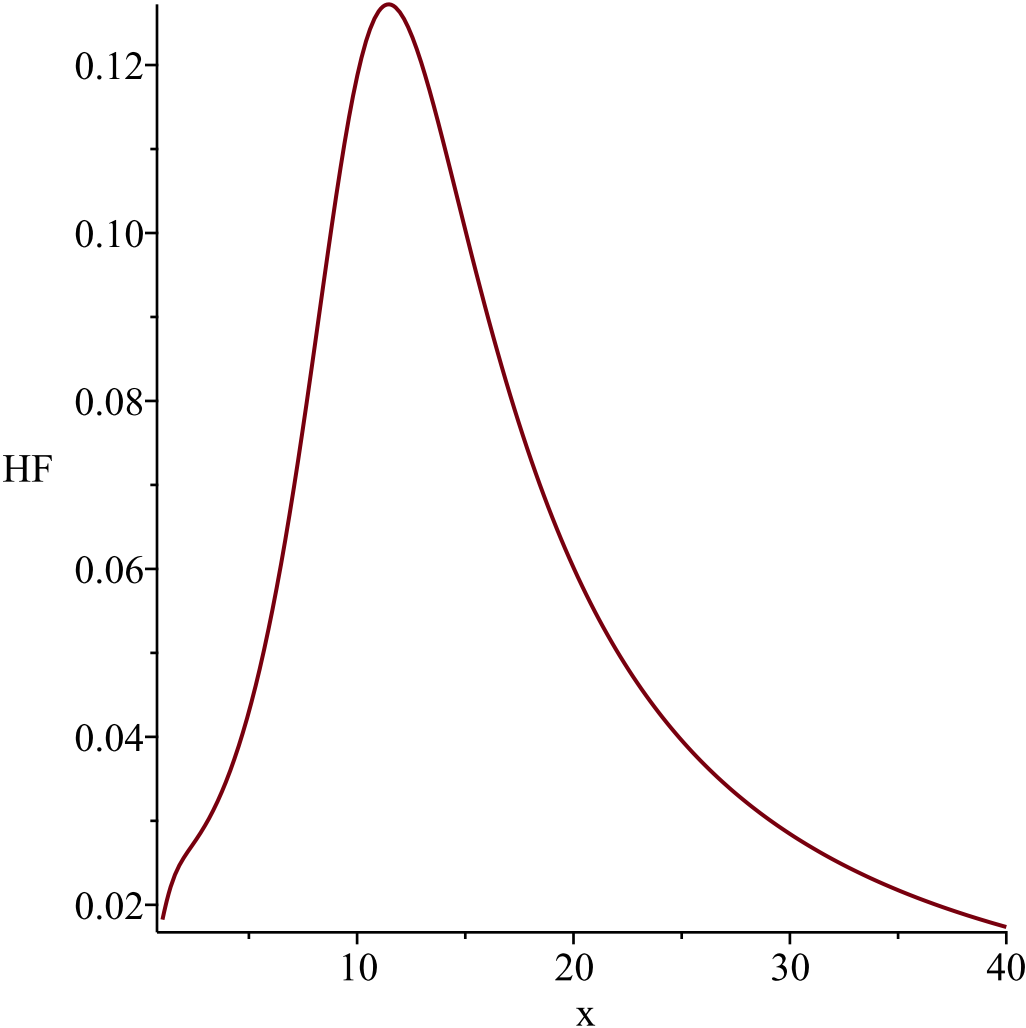

"i is", 20,  
"-----"  
-----"


$$g := t \rightarrow \tanh\left(\frac{1}{t}\right)$$
$$l := 0$$
$$u := \infty$$
$$Temp := \left[ \left[ y \sim \rightarrow - \frac{4}{(2 \arctan(6) + \pi) (37 \operatorname{arctanh}(y \sim)^2 - 24 \operatorname{arctanh}(y \sim) + 4) (y \sim^2 - 1)} \right], \right. \\ \left. [0, 1], ["Continuous", "PDF"] \right]$$

*WARNING(PlotDist): High value provided by user, 40  
is greater than maximum support value of the random  
variable, 1  
Resetting high to RV's maximum support value*

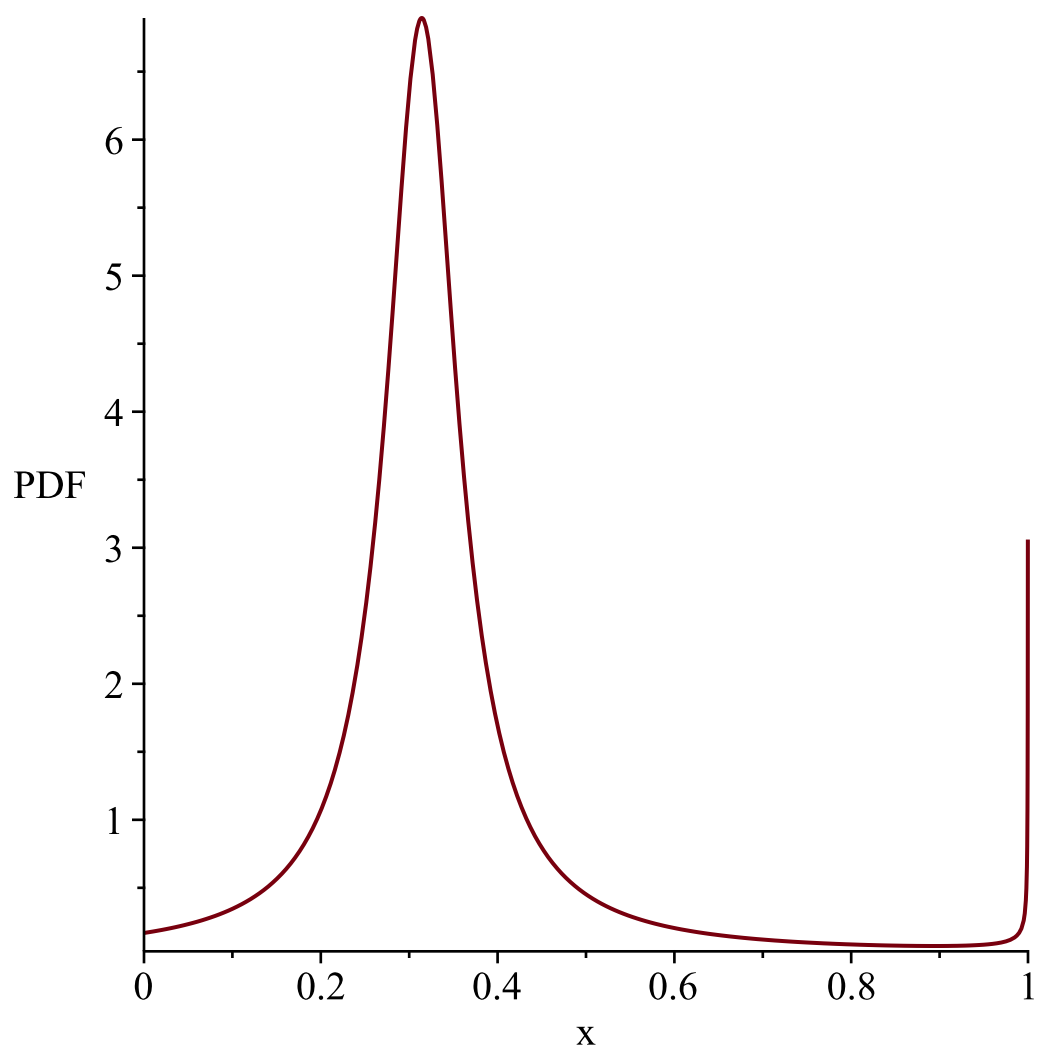

*WARNING(PlotDist): High value provided by user, 40  
is greater than maximum support value of the random  
variable, 1  
Resetting high to RV's maximum support value*




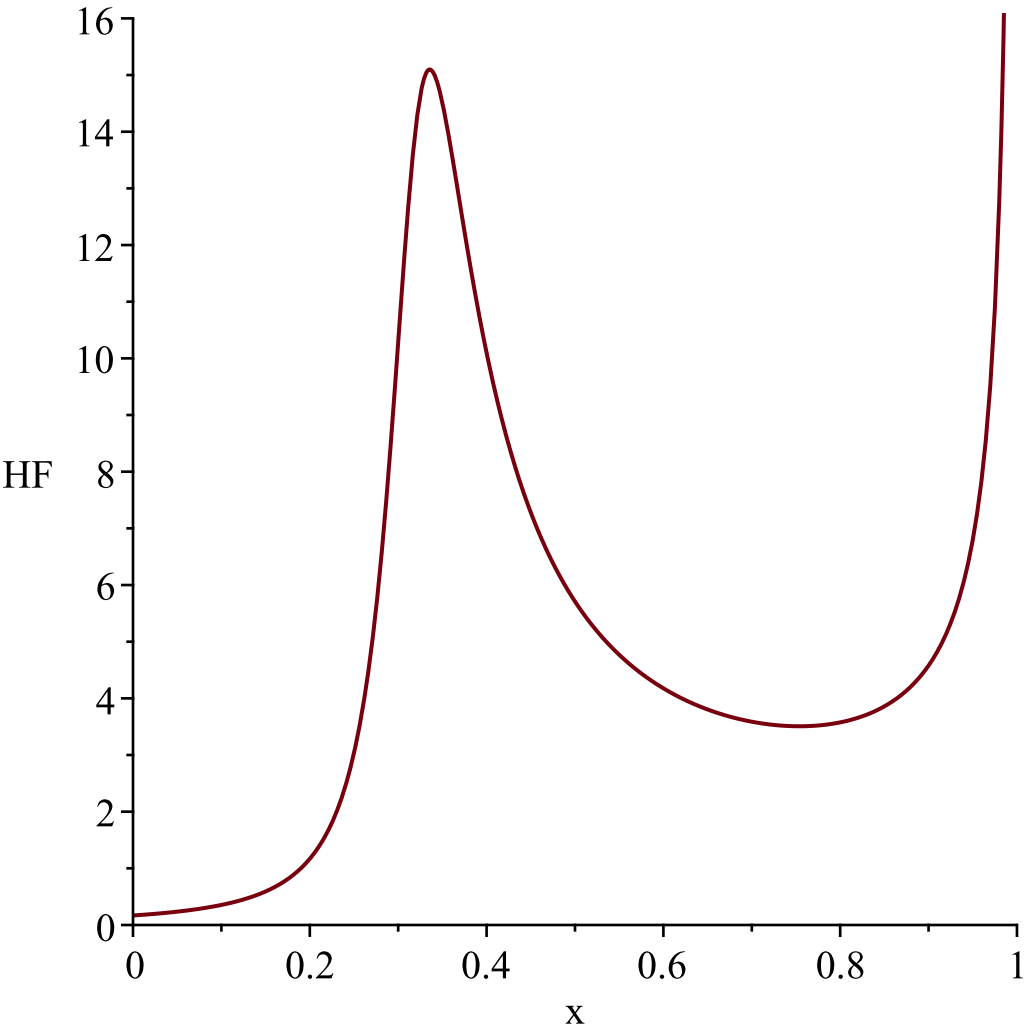

"i is", 21,  
"-----"  
-----"

$$g:=t\rightarrow\operatorname{csch}\left(\frac{1}{t}\right)$$
$$l:=0$$
$$u:=\infty$$

$$Temp:=\left[\left[y\sim\right.\right.\\ \left.\left.\rightarrow\frac{4}{\sqrt{y\sim^2+1}\left(2\arctan(6)+\pi\right)\left(37\operatorname{arccsch}(y\sim)^2-24\operatorname{arccsch}(y\sim)+4\right)\left|y\sim\right|}\right],\left[0,\infty\right],\right.\\ \left.\left["Continuous","PDF"\right]\right]$$

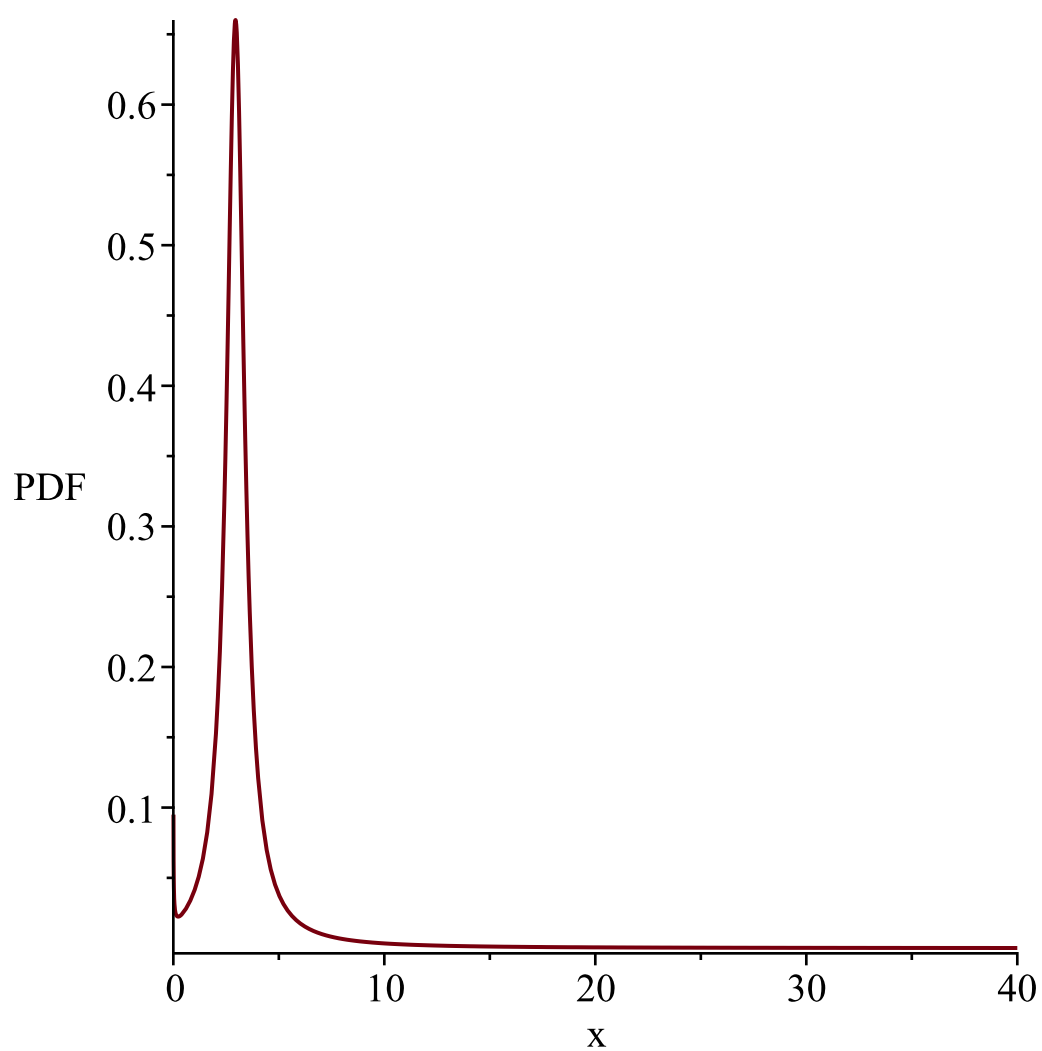

[Warning, computation interrupted](#)