


deeplearning.ai

## One hidden layer Neural Network

Backpropagation intuition (Optional)

## Computing gradients

Logistic regression

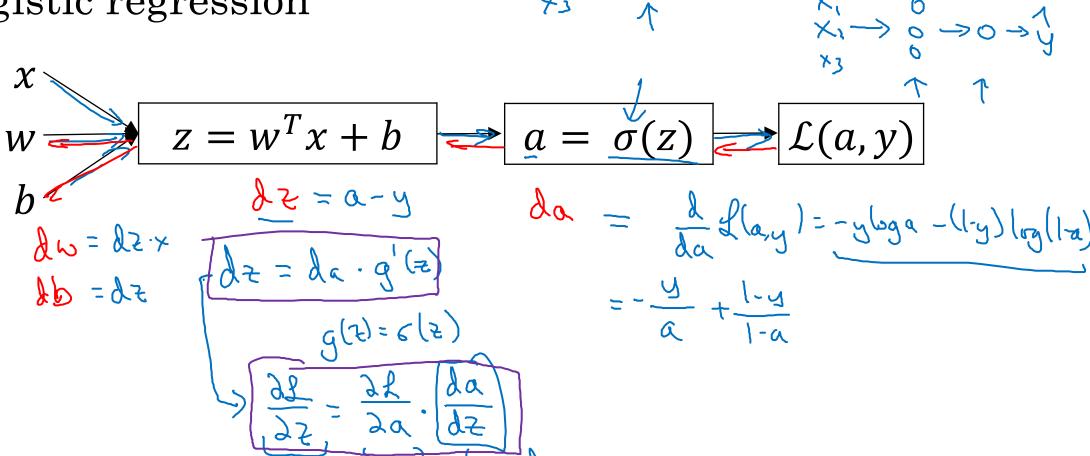

Neural network gradients  $z^{[2]} = W^{[2]}x + b^{[2]}$ du = de a Tos > db (s) = dz [s] K  $\left( \begin{array}{cccc} n^{T\lambda_{2}} & n^{Li_{2}} \end{array} \right)$ 

## Summary of gradient descent

$$dz^{[2]} = a^{[2]} - y$$
 $dW^{[2]} = dz^{[2]}a^{[1]^T}$ 
 $db^{[2]} = dz^{[2]}$ 
 $dz^{[1]} = W^{[2]T}dz^{[2]} * g^{[1]'}(z^{[1]})$ 
 $dW^{[1]} = dz^{[1]}x^T$ 
 $db^{[1]} = dz^{[1]}$ 

Vectorized Implementation:

$$z^{(1)} = (U^{(1)} \times V + b^{(1)})$$

$$Z^{(1)} = g^{(1)}(Z^{(1)})$$

$$Z^{(1)} = \left[ Z^{(1)}(J^{(1)}) + Z^{(1)}(J^{(1)}) \right]$$

$$Z^{(1)} = U^{(1)} \times V + b^{(1)}$$

$$Z^{(1)} = U^{(1)} \times V + b^{(1)}$$

$$Z^{(1)} = g^{(1)}(Z^{(1)})$$

## Summary of gradient descent

$$dz^{[2]} = a^{[2]} - y$$

$$dW^{[2]} = dz^{[2]}a^{[1]^T}$$

$$db^{[2]} = dz^{[2]}$$

$$dz^{[1]} = W^{[2]T}dz^{[2]} * g^{[1]'}(z^{[1]})$$

$$dW^{[1]} = dz^{[1]}x^T$$

$$db^{[1]} = dz^{[1]}$$

$$dz^{[2]} = a^{[2]} - y$$

$$dW^{[2]} = dz^{[2]}a^{[1]^T}$$

$$db^{[2]} = dz^{[2]}$$

$$dz^{[1]} = W^{[2]T}dz^{[2]} * g^{[1]'}(z^{[1]})$$

$$dW^{[1]} = dz^{[1]}x^T$$

$$db^{[1]} = dz^{[1]}$$

$$dz^{[1]} = W^{[2]T}dz^{[2]} * g^{[1]'}(z^{[1]})$$

$$dz^{[1]} = W^{[2]T}dz^{[2]} * g^{[1]'}(z^{[1]})$$

$$dw^{[1]} = dz^{[1]}x^T$$

$$dz^{[1]} = W^{[2]T}dz^{[2]} * g^{[1]'}(z^{[1]})$$

$$dw^{[1]} = \frac{1}{m}dz^{[1]}x^T$$

$$dz^{[1]} = W^{[2]T}dz^{[2]} * g^{[1]'}(z^{[1]})$$

$$dw^{[1]} = \frac{1}{m}dz^{[1]}x^T$$

$$dz^{[1]} = \frac{1}{m}dz^{[1]}x^T$$

$$dz^{[1]} = \frac{1}{m}dz^{[1]}x^T$$