



Using Single-Row Functions to Customize Output


What You will learn at the end of this Session?

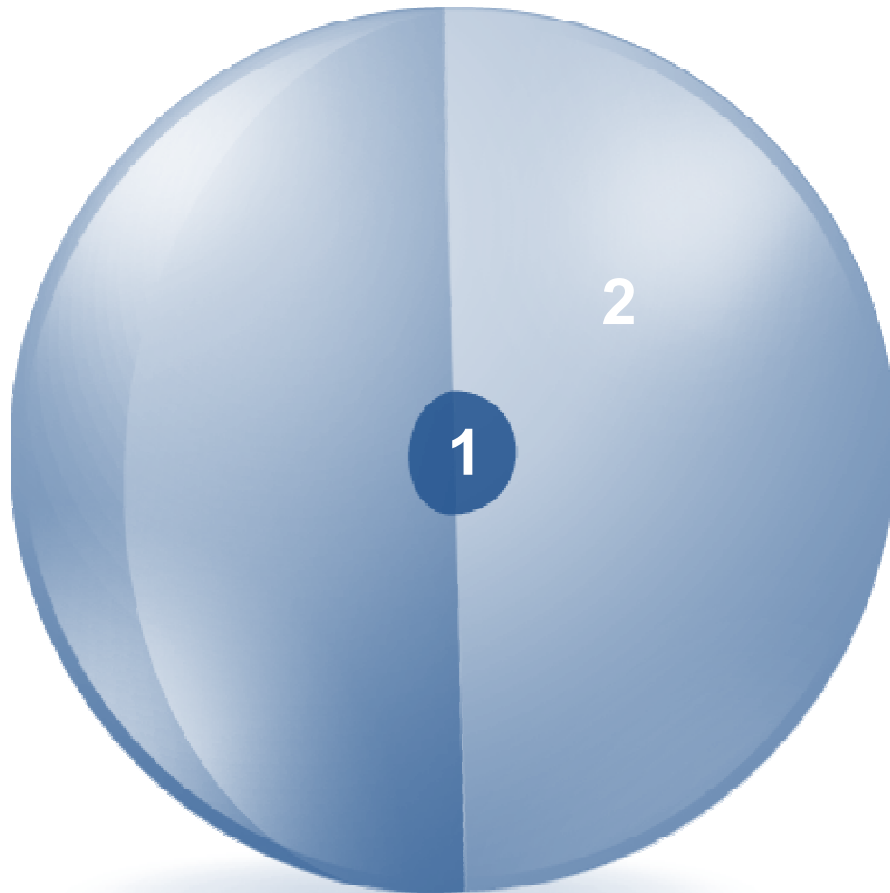

1. Describe the various types of functions available in SQL
2. Use the character, number, and date functions in SELECT statements

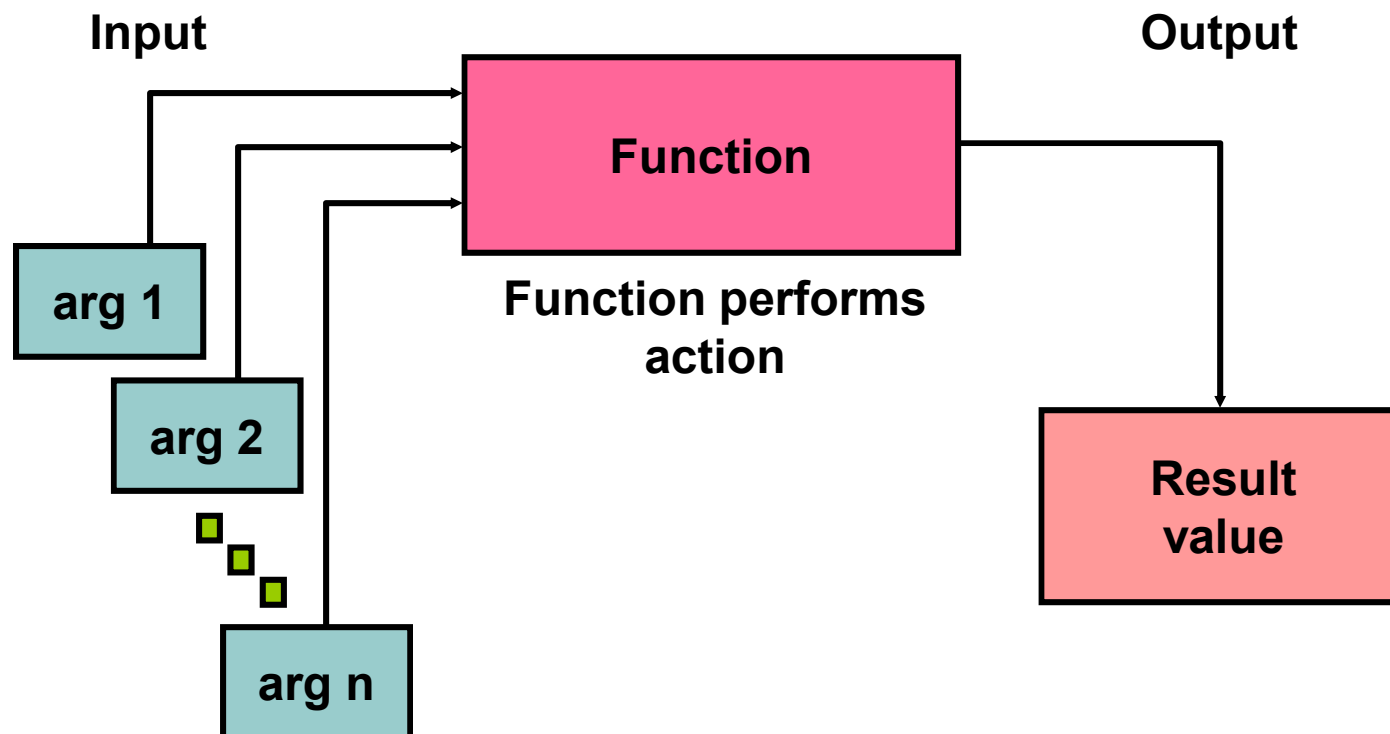

Two Types of SQL Functions

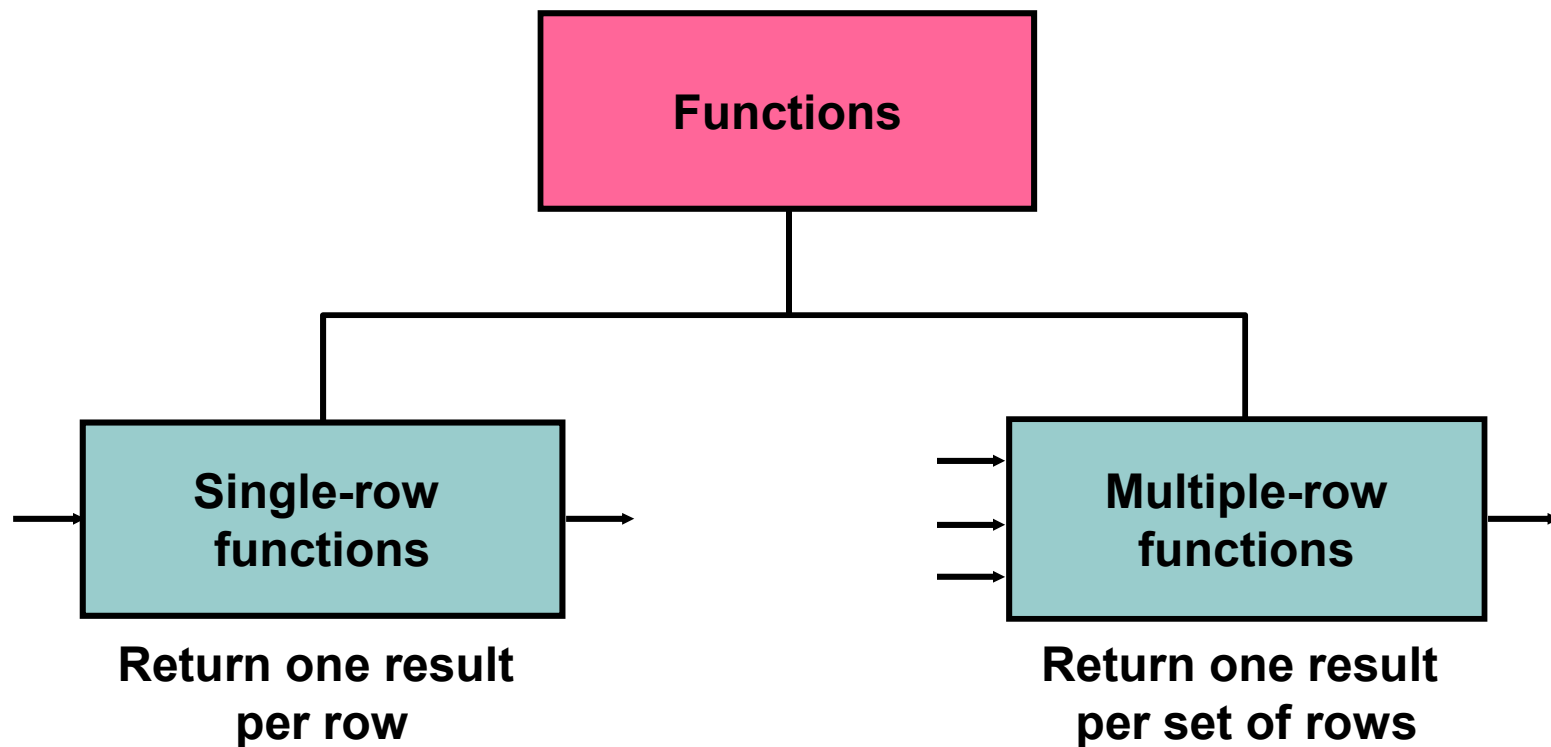



Single-Row Functions

Manipulate data items

Accept arguments and return one value

Act on each row that is returned

Return one result per row


May modify the data type


Can be nested

Accept arguments that can be a column or an expression

```
function_name [(arg1, arg2,...)]
```

Single-Row Functions

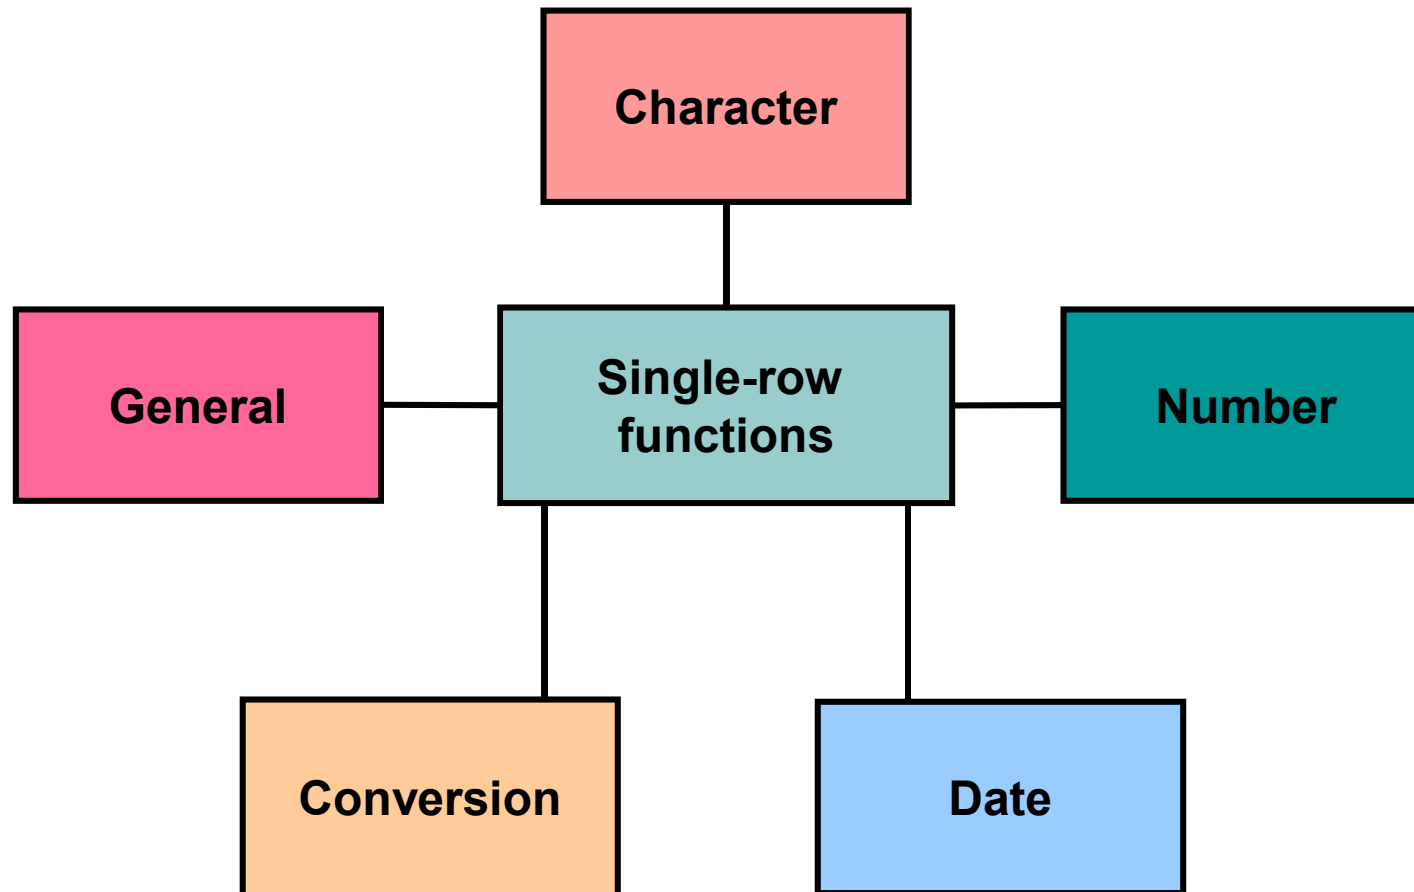

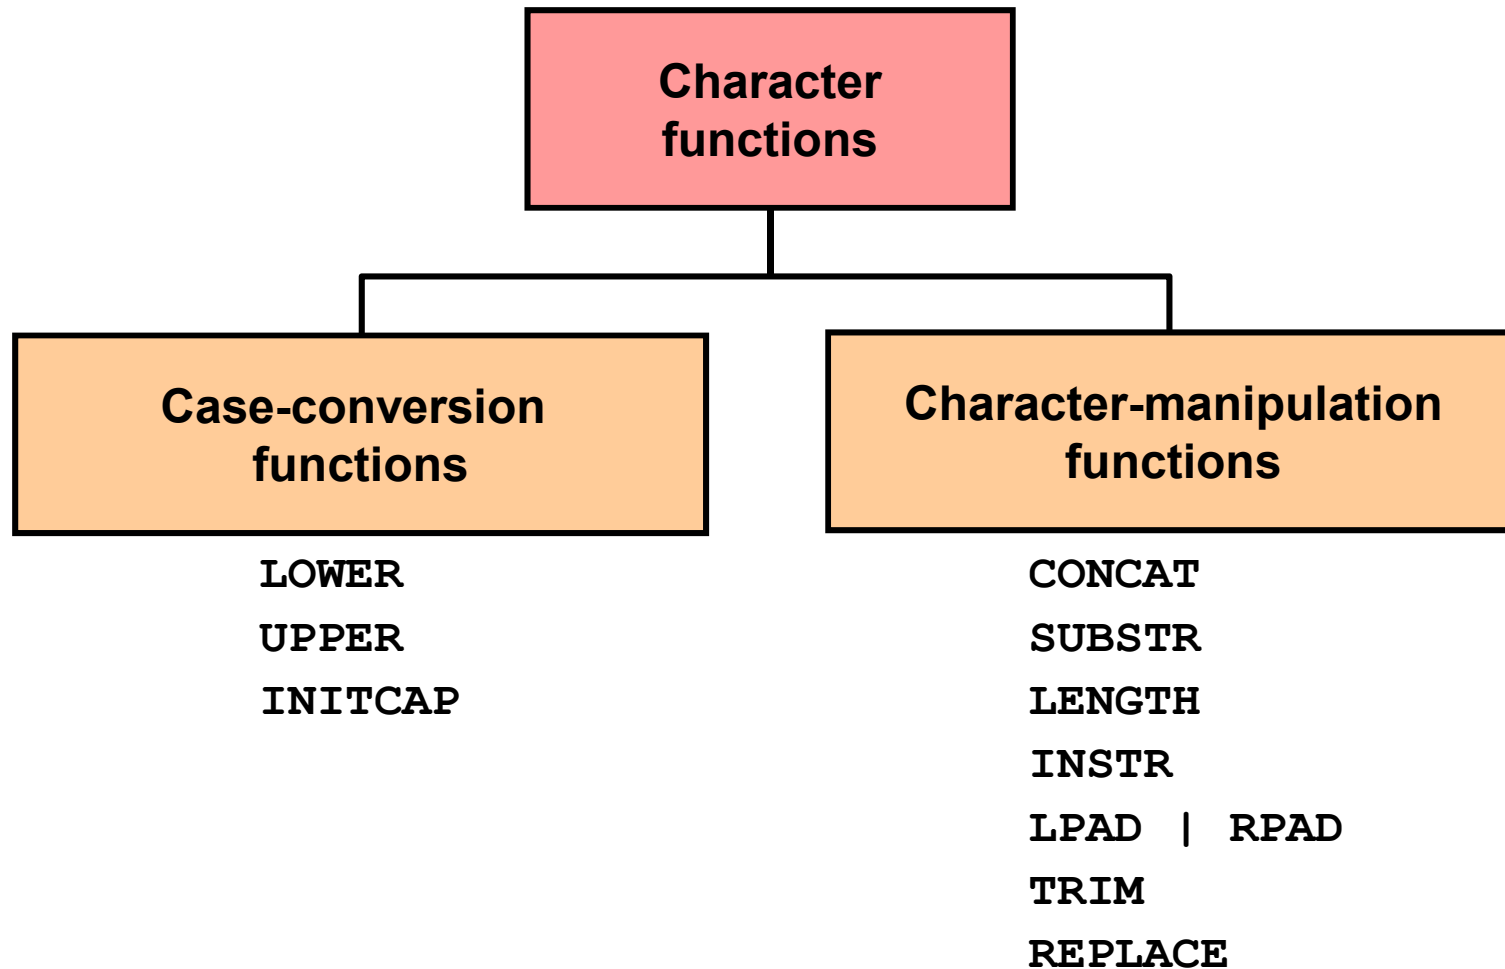





Case-Conversion Functions

- These functions convert the case for character strings:

Function	Result
<code>LOWER('SQL Course')</code>	sql course
<code>UPPER('SQL Course')</code>	SQL COURSE
<code>INITCAP('SQL Course')</code>	Sql Course




Using Case-Conversion Functions

- Display the first name, last name, and email for customer Donald:

```
SELECT first_name, last_name, email  
FROM customers  
WHERE first_name = 'donald';
```

0 rows selected

```
SELECT first_name, last_name, email  
FROM customers  
WHERE lower(first_name) = 'donald';
```

	 FIRST_NAME	 LAST_NAME	 EMAIL
1	Donald	OConnell	DOCONNEL

Character-Manipulation Functions

•These functions manipulate character strings:

Function	Result
CONCAT('Hello', 'World')	HelloWorld
SUBSTR('HelloWorld',1,5)	Hello
LENGTH('HelloWorld')	10
INSTR('HelloWorld', 'W')	6
LPAD(salary,10, '*')	*****24000
RPAD(salary, 10, '*')	24000*****
REPLACE ('JACK and JUE', 'J', 'BL')	BLACK and BLUE
TRIM('H' FROM 'HelloWorld')	elloWorld

Using the Character-Manipulation Functions

```
SELECT employee_id, CONCAT(first_name, last_name) NAME,  
       job_id, LENGTH (last_name),  
       INSTR(last_name, 'a') "Contains 'a'?"  
FROM   employees  
WHERE  SUBSTR(job_id, 4) = 'REP';
```

	EMPLOYEE_ID	NAME	JOB_ID	LENGTH(LAST_NAME)	Contains 'a'?
1	202	PatFay	MK_REP	3	2
2	174	EllenAbel	SA_REP	4	0
3	176	JonathonTaylor	SA_REP	6	2
4	178	KimberelyGrant	SA_REP	5	3

1

2

3

1

2

3

ORACLE




Number Functions

- **ROUND:** Rounds value to a specified decimal
- **TRUNC:** Truncates value to a specified decimal
- **MOD:** Returns remainder of division


Function	Result
ROUND (45.926, 2)	45.93
TRUNC (45.926, 2)	45.92
MOD (1600, 300)	100

Using the ROUND Function

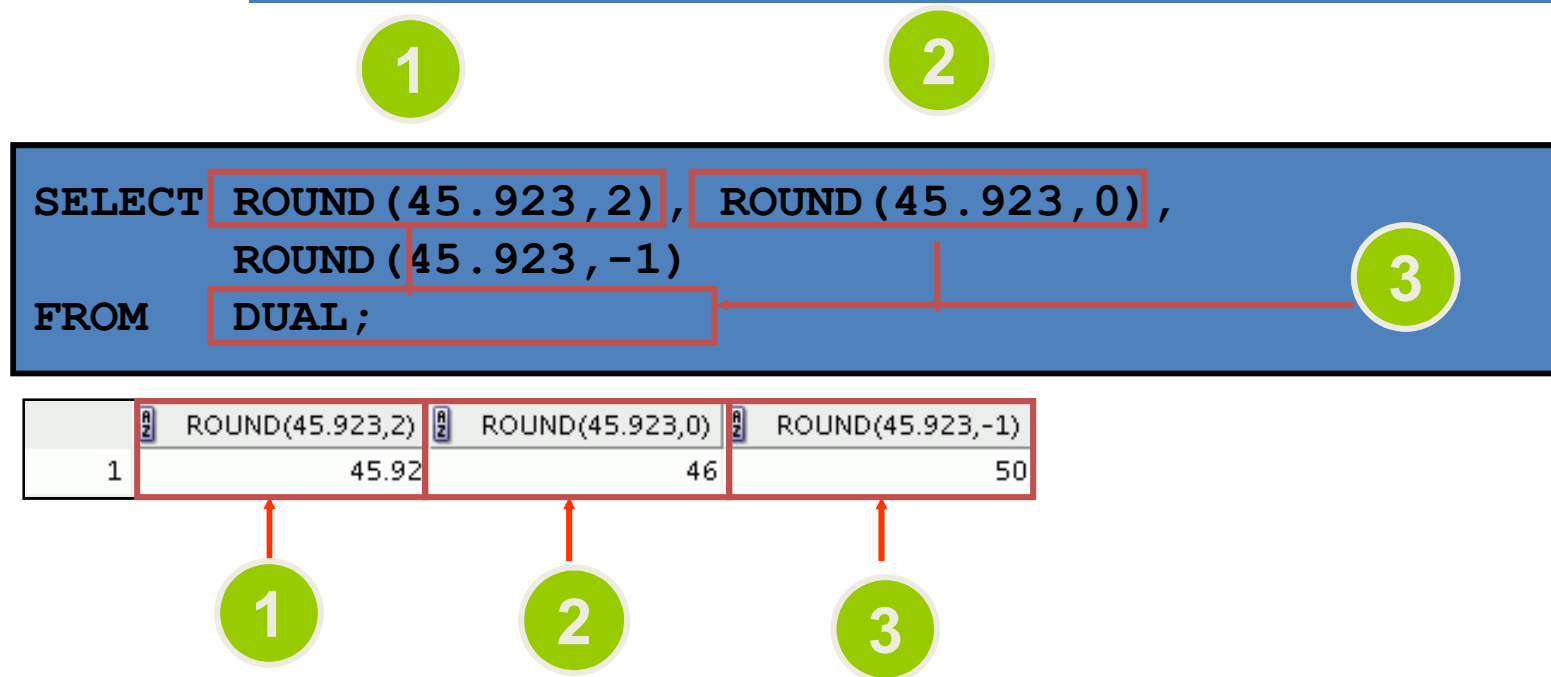

DUAL is a public table that you can use to view results from functions and calculations.

Using the TRUNC Function

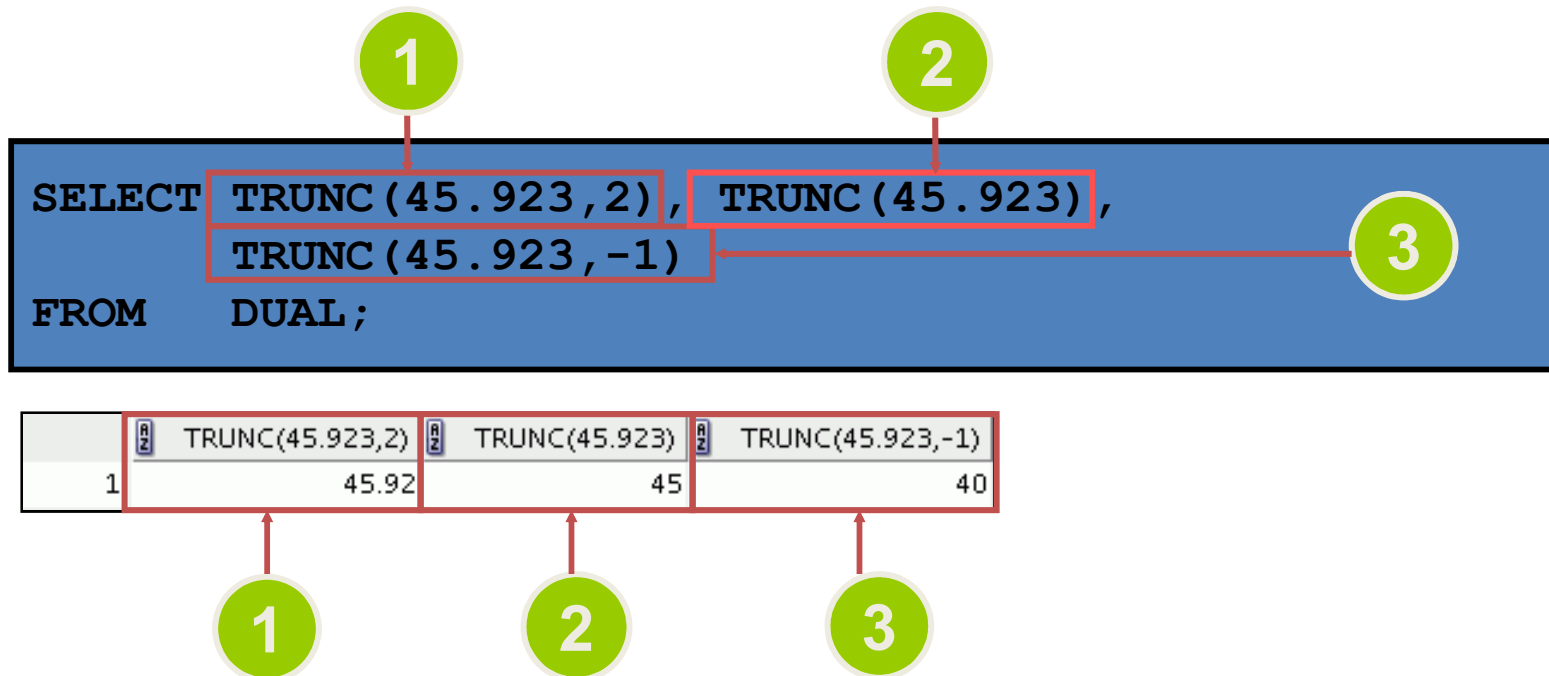

Using the MOD Function

- For all employees with the job title of Sales Representative, calculate the remainder of the salary after it is divided by 5,000.

```
SELECT order_id, order_total, MOD(order_total, 5000)
FROM orders
WHERE order_id IN(2458, 2397, 2454) ;
```

	ORDER_ID	ORDER_TOTAL	MOD(ORDER_TOTAL,5000)
1	2397	42283.2	2283.2
2	2454	6653.4	1653.4
3	2458	70647.34	647.34

Working with Dates


- The Oracle Database stores dates in an internal numeric format: century, year, month, day, hours, minutes, and seconds.
- The default date display format is DD-MON-RR.
 - Enables you to store 21st-century dates in the 20th century by specifying only the last two digits of the year
 - Enables you to store 20th-century dates in the 21st century in the same way

```
SELECT order_id, round(order_date), order_status  
FROM orders  
WHERE order_date <= ' 21-MAR-96 ' ;
```

	ORDER_ID	ROUND(ORDER_DATE)	ORDER_STATUS
1	2442	28-JUL-90	9
2	2445	28-JUL-90	8

Current Year	Specified Date	RR Format	YY Format
1995	27-OCT-95	1995	1995
1995	27-OCT-17	2017	1917
2001	27-OCT-17	2017	2017
2001	27-OCT-95	1995	2095

		If the specified two-digit year is:	
		0–49	50–99
If two digits of the current year are:	0–49	The return date is in the current century	The return date is in the century before the current one
	50–99	The return date is in the century after the current one	The return date is in the current century




Using the SYSDATE Function

•SYSDATE is a function that returns:

- Date
- Time

```
SELECT sysdate  
FROM dual;
```

	 SYSDATE
1	10-JUN-09



Arithmetic with Dates

- **Add or subtract a number to or from a date for a resultant date value.**
- **Subtract two dates to find the number of days between those dates.**
- **Add hours to a date by dividing the number of hours by 24.**


Using Arithmetic Operators with Dates

```
SELECT order_id, (SYSDATE - round(Order_date)) / 7 AS "WEEKS"  
FROM orders  
WHERE order_id IN(2458, 2397, 2454);
```

	ORDER_ID	WEEKS
1	2397	599.501043320105820105820105820106
2	2454	606.358186177248677248677248677249
3	2458	613.072471891534391534391534391534

•Which of the following statements are true about single-row functions?

- 1.Manipulate data items
- 2.Accept arguments and return one value per argument
- 3.Act on each row that is returned
- 4.Return one result per set of rows
- 5.May not modify the data type
- 6.Can be nested
- 7.Accept arguments that can be a column or an expression

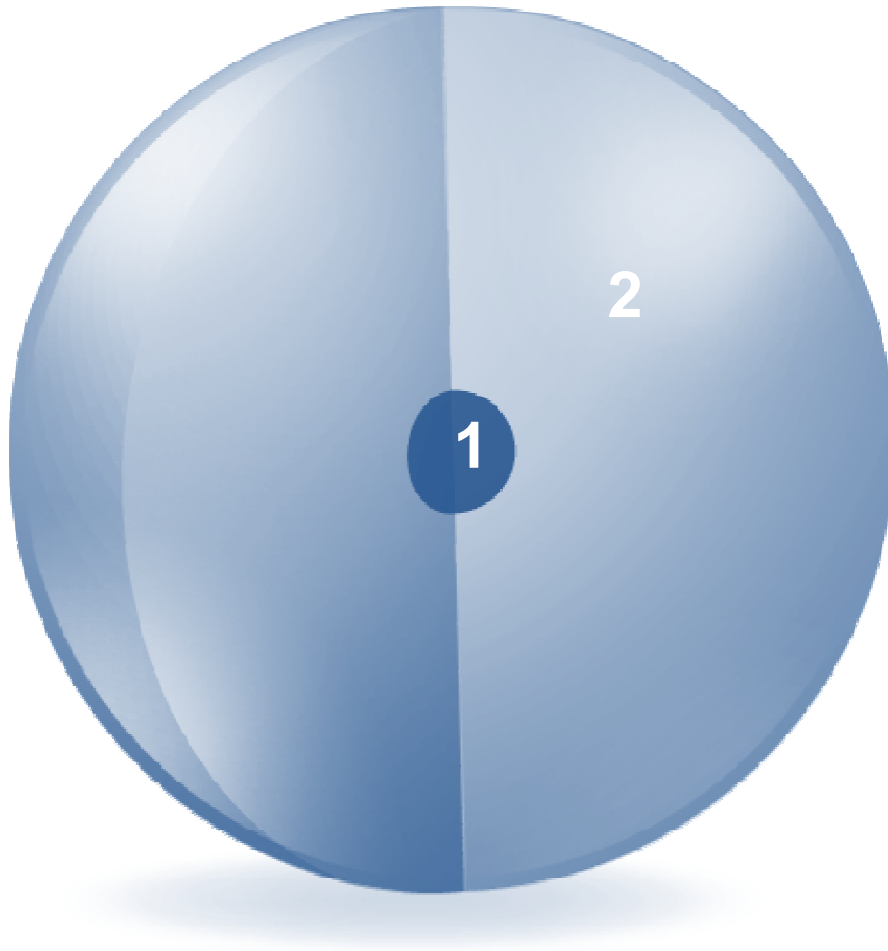

1. Perform calculations on data using functions

2. Modify individual data items using functions

Practice 3: Overview

This practice covers the following topics

