

The Social Discounting Task Manual

Naomi Nero & Abigail A. Marsh

Version 1.0.0 (April 2026)

Table of Contents

General Remarks	2
Introduction	2
Data Collection	7
Data Preparation	8
Cleaning and Calculation of Maximum Willing to Forgo	9
Alternative Estimation Approach for Missing Data.....	12
Hyperbolic Model	13
Extraction of logk and AUC	15
Visualization	16

Correspondence concerning this manual should be addressed to Naomi Nero, Department of Psychology, Georgetown University, White Gravenor Hall, Washington, DC 20057, United States. Email: nn444@georgetown.edu

General Remarks

This manual provides conceptual background on the purpose of the Social Discounting Task (Jones & Rachlin, 2006, 2009), a description of how the task is administered, and a step-by-step guide for data cleaning and analysis. In addition to the original Social Discounting Task, this manual includes background information, data preparation procedures, and analytic steps for the Social Discounting Task Short Form (Amormino et al., 2025, 2026).

This manual is designed to be used alongside the accompanying R Markdown script, which walks users through the full data processing pipeline for both versions of the task. The repository also includes downloadable Qualtrics survey templates for the original Social Discounting Task and the Social Discounting Task Short Form, allowing researchers to easily implement the measures. These Qualtrics survey templates can be uploaded into Qualtrics and already contain the correct item and question names that correspond with the R Markdown Script. Altogether, these materials are intended to support transparent, reproducible use of social discounting paradigms in behavioral research.

Introduction

The Social Discounting task was originally developed by Jones and Rachlin (Jones & Rachlin, 2006) as a behavioral measure of how individuals value the welfare of others as a function of social distance. In this paradigm, participants make decisions about allocating monetary rewards between themselves and another person who varies in closeness to them, or social distance.

Conceptually, social discounting is closely related to temporal discounting, which examines how people devalue rewards that occur in the future compared to immediate rewards. In contrast, social discounting examines how individuals discount the subjective value of resources as a function of the social distance of the person the resources are shared with. The task, therefore, provides a behavioral index of generosity and the valuation of others' outcomes.

The Social Discounting Task has been used by many researchers examining the relationship between social valuation and prosocial behavior (Amormino et al., 2025), individual differences in personality and antisocial traits (Malesza & Kalinowski, 2021; Nero et al., 2025; Romanowich et al., 2021; Sharp et al., 2012), social relationships and perceived closeness (Rhoads et al., 2023; Sherman & Lynam, 2017).

This manual provides guidance for implementing and analyzing two versions of the measure:

1. The Original Social Discounting Task (Jones & Rachlin, 2006)
2. The Social Discounting Task Short Form (Amormino et al., 2025), which was developed to provide a shorter, more efficient version of the task

The Measures

The Original Social Discounting Task

The Social Discounting Task asks participants to imagine a list of 100 people, with position #1 being the person closest to them and position #100 being a stranger. Participants are then asked to provide the name and relationship of real individuals they know who correspond to seven specific social distances ($N = 1, 2, 5, 10, 20, 50$, and 100).

For each of the seven names provides (corresponding to seven social distances), participants make a series of nine dichotomous choices (Figure 1 from Nero et al., 2025). In each choice, participants can select a selfish option, in which they keep money for themselves, or a generous option, in which money is shared with the person at the specified social distance. For each social distance, the selfish option begins with the participant keeping \$155, and the amount decreases by \$10 across nine decisions, ending with the option to keep \$75. Alternatively, participants may choose the generous option of splitting \$150 with the social distance. Thus, across the decision sequence, participants choose between keeping a progressively smaller amount for themselves or opting for a consistent equal split with the other person at the specified social distance.

These choices allow for the calculation of the “indifference point”, defined as the point at which participants switch from choosing the selfish option to choosing the generous option. From this indifference point, the maximum amount of money the individual is willing to forgo for that social distance is generated by subtracting \$75 from the indifference point for each block for each participant. For example, if someone switched from being selfish to being generous at the second trial when offered to keep \$145 or split \$150, the participant has sacrificed \$70 (\$145 - \$75), representing the maximum amount willing to forgo. This results in 7 “maximum amount willing to forgo”, one for each social distance, for each participant. These seven values are later used to estimate the social discounting function using a hyperbolic model (see Data analysis section).

For participants who choose the selfish option for all the trials for the social distance, the indifference point is assumed at the final trial (\$75) and the amount willing to forgo is \$0. For participants who chose the generous option for all trials in the block, the indifference point is assumed at the first trial (\$155) and the amount willing to forgo is \$80.

Social Discounting Task Short Form

Although the original Social Discounting Task has produced robust findings (Amormino et al., 2025), completing the task requires answering 9 questions for each of 7 social distances (63 questions total). The Social Discounting Short Form was therefore developed to provide a more efficient version of the measure.

Participants are still instructed to imagine a list of 100 people and then provide the names and relationships corresponding to seven social distances ($N = 1, 2, 5, 10, 20, 50, 100$). However, rather than making 7 decisions per social distance, participants make a single decision for each distance. This reduces the total number of decisions from 63 to 7 and shortens completion time. For each social distance, participants decide how to split \$10 between themselves and the social distance. Response options range from keeping all \$10 and giving \$0 to the other person, to giving the full \$10 to the other person. Importantly, unlike the original Social Discounting Task, participants have the option to give more to the other person than they keep for themselves. From these seven decisions, the maximum amount willing to forgo is calculated as \$10 – the amount kept for each social distance. These values are then used to estimate the hyperbolic social discounting function.

Remember you made a list of the 100 people closest to you in the world ranging from your dearest friend or relative at #1 to a mere acquaintance or stranger at #100. You will now be making choices for the #1 person on the list, XXX.

Now imagine the following choice between an amount of money for you and an amount for the #1 person on the list, XXX.

\$155 for you alone

☐

\$75 for you and \$75 for the #1 person on the list

☐

Now imagine the following choice between an amount of money for you and an amount for the #1 person on the list, XXX.

\$145 for you alone

☐

\$75 for you and \$75 for the #1 person on the list

☐

Now imagine the following choice between an amount of money for you and an amount for the #1 person on the list, XXX.

\$135 for you alone

☐

\$75 for you and \$75 for the #1 person on the list

☐

Now imagine the following choice between an amount of money for you and an amount for the #1 person on the list, XXX.

\$125 for you alone

☐

\$75 for you and \$75 for the #1 person on the list

☐

•

•

•

Now imagine the following choice between an amount of money for you and an amount for the #1 person on the list, XXX.

\$75 for you alone

☐

\$75 for you and \$75 for the #1 person on the list

☐

Note. An example of one block of the social discounting task where the participant makes a series of monetary decisions between them and their N = 1 on the list they previously provided. The names of the social distances were inserted into each question. This is then repeated for the 6 other social distances (N = 1, 2, 5, 10, 20, 50, 100) (Jones & Rachlin, 2006).

Imagine you have been given ten dollars. You are to divide the \$10 between yourself and XXX. You are free to give as much or as little of the amount of money as you wish, and you will receive what is left. Please allocate the amount you wish to offer XXX.

- \$10 for you
\$0 for XXX.
- \$9 for you
\$1 for XXX.
- \$8 for you
\$2 for XXX.
- \$7 for you
\$3 for XXX.
- \$6 for you
\$4 for XXX.
- \$5 for you
\$5 for XXX.
- \$4 for you
\$6 for XXX.
- \$3 for you
\$7 for XXX.
- \$2 for you
\$8 for XXX.
- \$1 for you
\$9 for XXX.
- \$0 for you
\$10 for XXX.

Note. An example of one block of the social discounting task where the participant makes a series of monetary decisions between them and their N = 1 on the list they previously provided. The names of the social distances were inserted into each question. This is then repeated for the 6 other social distances (N = 1, 2, 5, 10, 20 50, 100) (Jones & Rachlin, 2006).

Modeling Social Discounting: The Hyperbolic Function (logk and AUC)

Social discounting is typically modeled using a hyperbolic discounting function, which describes how the value assigned to another person decreases as social distance increases. The hyperbolic model is defined as:

$$V = \frac{V_0}{1 + k N}$$

Where:

- V = amount willing to forgo at a given social distance
- V_0 = model-implied intercept representing baseline generosity (i.e., predicted value at $N = 0$)
- k = the social discounting rate
- N = social distance

V_0 represents the intercept, or the amount of money willing to forgo when $N = 0$. In this analysis pipeline, social distances begin at $N = 1$. As a result, V_0 is not directly observed in the data but is instead estimated as the extrapolated intercept of the fitted hyperbolic function. The parameter k reflects how steeply generosity declines as social distance increases, or how steeply the value assigned to others declines as social distance increases. Higher k values indicate steeper discounting, while lower k values indicate shallower discounting. Because k is constrained to be positive and is often highly skewed, it is typically estimated on the log scale and reported as $\log k$. In the model implementation used here, $\log k$ is estimated and then exponentiated (i.e., $k = \exp(\log k)$) to ensure that k remains positive.

When interpreting $\log k$, a more negative $\log k$ indicates shallower social discounting (greater generosity across social distances), while a more positive $\log k$ indicates steeper social discounting (generosity declining more quickly with distance).

The accompanying R Markdown script demonstrates how to estimate $\log k$ for each participant using the indifference points and the maximum amount willing to forgo.

In addition to estimating the hyperbolic discounting parameter k , researchers often compute the Area under the curve (AUC). AUC is a model-free measure of social discounting and represents the overall generosity across all social distances. This is calculated by plotting the amount willing to forgo at each social distance and computing the total area under the resulting discounting curve. AUC values range from 0 to 1 with higher AUC values indicating greater generosity (shallower discounting) and lower AUC values indicating less generosity (steeper discounting).

Both $\log k$ and AUC capture the same underlying social discounting construct, with $\log k$ being model-based and AUC being model-free. Additionally, $\log k$ represents the rate at which social valuation changes with social distance, while AUC represents overall social valuation across all social distances.

Data Collection

In this repository, we provide two mechanisms for collecting data for both the Original Social Discounting Task and the Social Discounting Task Short Form that can be used with the provided R Markdown Analysis scripts: (1) Qualtrics survey templates and (2) R-based Shiny applications. This manual corresponds to the Qualtrics Templates, Shiny Applications, and R Markdown scripts Version 1.0.0.

Qualtrics Templates

We provide downloadable Qualtrics survey templates for both versions of the task. These templates are pre-formatted with the correct item structure and variable names, allowing for straightforward implementation. Once uploaded into Qualtrics, the surveys can be used without further modification, and response data will align directly with the accompanying analysis scripts provided in this repository.

Shiny Applications

We also provide R code to run custom Shiny applications for both the Original Social Discounting Task and the Short Form.

The Shiny applications are interactive web-based implementations of the task developed in R using the Shiny framework. They are designed to standardize task presentation, automate progression through the task, and directly record participant responses in a structured format that corresponds with the analysis scripts.

To run the applications locally, users should open the corresponding R script in RStudio and click “Run App” (or execute `shiny::runApp()` from the console). This will launch the application in a web browser window where participants can complete the task.

Each application guides participants through the full task sequence, including:

- Entry of a participant identifier by the researcher
- Instruction screens
- Entry of social distance names and relationships
- Decision-making trials for each social distance condition

Upon completion, the application automatically exports a .csv file containing participant responses in wide format that can be combined with those from other participants and then used in the analysis scripts.

Together, these tools provide flexible options for both traditional survey-based implementation (Qualtrics) and fully programmatic, locally hosted data collection (Shiny).

Data Preparation

Up to this point, we have described the conceptual basis of the Social Discounting Task, the two task versions, and how social discounting is modeled using hyperbolic functions to generate logk or AUC. The following sections describe tips for preparing, cleaning, and analyzing social discounting data. The procedures are based on the outputs from the Qualtrics templates or Shiny Apps, using R Markdown scripts provided with this manual, but steps can be modified or adapted for datasets collected using other survey formats.

This section covers:

1. Overview of expected data structure
2. Data Cleaning procedures
3. Calculation of indifference points and maximum amount willing to forgo
4. Hyperbolic Model (and comparison to exponential and linear models)
5. Extraction of logk and AUC

Data Overview

This subsection describes the **expected data structure and variable naming** required by the R Markdown data cleaning and analysis scripts. Using the provided Qualtrics templates or Shiny Apps ensures the correct structure automatically, but if you create your own survey, following these conventions is necessary for the scripts to work properly.

CSV Format: Export from Qualtrics as a CSV file with response values, not labels.

Subject Identifier: column 'subnum' should contain unique participant IDs. Participants without a value in 'subnum' will be removed during data cleaning.

Note: The Qualtrics templates have a question where a participant ID can be entered in manually; however, Qualtrics can also randomly generate participant IDs (added in the survey flow) or embed IDs into the survey link.

Social Discounting Task: Trial Naming and Variables

Trials from the original social discounting task follow the naming convention: sd[distance]_[trial], where

- distance is social distance (1, 2, 5, 10, 20, 50, 100)
- trial is the trial number within that social discounting block (1-9)

The outline of the trial variable names is below:

Social Distance	Trial Variables
1	sd1_1 – sd1_9
2	sd2_1 – sd2_9
5	sd5_1 – sd5_9
10	sd10_1 – sd10_9
20	sd20_1 – sd20_9
50	sd50_1 – sd50_9
100	sd100_1 – sd100_9

Response coding

Responses are recoded in Qualtrics. For trials 1-8, 0 indicates the participant kept the larger sum of money for themselves, while positive values (10-80) indicate the participant shared the money, choosing the \$75/75 split. These positive values are calculated by subtracting 75 from the amount offered to keep for themselves, generating the amount willing to forgo for that trial (ex: \$155 for you, or give \$75 and keep \$75 is recoded to 80). For Trial 9 (keep \$75 for yourself, or give \$75 to N and keep \$75), -5 indicates the participant kept the money, and 0 indicates they shared money. These recoded values are used to calculate the indifferent point in R and the maximum amount willing to forgo.

Social Discounting Task Short Form: Trial Naming and Variables

Trials from the social discounting task short form follow the naming convention:

X[block number]_SDshortdecision, where:

- block number is social distance (block 1 = N1, block 2 = N2, block 3 = N5, block 4 = N10, block 5 = N20, block 6 = N50, block 7 = N100)

Response coding

Responses are recoded in Qualtrics and each social distance has one response value. Response options are recoded reflect the amount given to the N for that choice (ex: keep \$10 and give \$0 is recoded to be 0).

Cleaning and Calculation of Maximum Willing to Forgo

Social Discounting Task

Using the answer choices in Qualtrics with the recoded values, the following steps describe the data cleaning procedures to calculate participant-level indifference points and the maximum amount willing to forgo.

1. Reshape Data (wide to long)

Raw Qualtrics exports contain each trial as a separate column (e.g., sd1_1, sd10_5). To facilitate trial-level processing, the data are converted from wide format to long format. In the long format, each row corresponds to a single trial observation, such that the participant identifier (subnum) is repeated for the total number of trials. After reshaping, the 'trial' column contains the item or trial name (e.g., sd1_1) and the 'choice' column contains the participant's response.

2. Split trial information

Each trial name contains two pieces of information: social distance (sd1, sd2) and the trial number within the distance block. These are split into separate columns ('distance' and 'amount1').

Reference Tabel for Amounts Offered to Keep

Trial Number	Amount Offered
1	155
2	145
3	135
4	125
5	115
6	105
7	95
8	85
9	75

3. Recode Choice Values

As previously described, most trials are coded in Qualtrics as 0 = participant kept the money and a positive value (10-80) = participant shared the money. Trial 9 (final trial) uses -5 = participant kept the money and 0 = participant shared the money. To simplify the calculation of the crossover point, -5 is temporarily recoded to 5. This ensures that participants who keep money on all trials are correctly identified as having their maximum willing to forgo at the last trial.

4. Remove Invalid/Missing Responses

Ideally for datasets with minimal missingness, rows with missing responses are removed and all 'choice' values are confirmed to be numeric. Only rows with choice greater than or equal to 0 are retained (after recoding -5 to 5). This ensures that only valid trials are considered when calculating indifferent points.

5. Convert Social Distance Labels to Numeric

Distance labels (sd1, sd2, etc) are converted to numeric values (1, 2, etc) in a new column called 'Distance'.

6. Compute Indifference Points and Maximum Amount Willing to Forgo

For each participant and social distance, we first identify the maximum choice for that distance. This represents the crossover point where the participant switched from keeping money. This will either be a switch from a positive number (10-80) to 0, or a switch from 0 to 5 (if the participant kept the money for all of the trials). The maximum choice value for that distance is stored in a new column called 'max_rating'. Any temporary 5 values are converted back to -5 to distinguish participants who kept money on all trials. The output is a dataframe called 'trial_filtered_data' which contains one row per participant per social distance, with the value under 'max_rating' representing the maximum amount willing to forgo. This cleaned dataset is ready for estimating hyperbolic discounting parameters (logk) or AUC in subsequent analysis steps.

Note: Alternative methods exist for participants who switch back and forth multiple times, but this approach uses the first crossover to standardize calculations

Social Discounting Task Short Form

Data cleaning for the Social Discounting Task Short form is more straightforward than the original task because participants make only one decision per social distance, reducing the total number of trials from 63 to 7 and eliminating the need to calculate the indifference point. The following steps describe how to convert raw Qualtrics exports to generate participant-level maximum amount willing to forgo for each social distance.

1. Reshape Data (wide to long)

Raw exports contain one column per social distance decision (e.g., X1_SDshort_decision). To facilitate trial-level processing, the data are converted from wide format to long format. In the long format, each row corresponds a single decision for a single participant. After reshaping 'trial' column contains the trial name, and the 'max_rating' column contains the participant's response for that social distance.

2. Split trial information

The trial name is split into 'distance' (e.g., X1) and 'amount1' (every row will have SDshort_decision).

3. Remove Invalid/Missing Responses

Ideally for datasets with minimal missingness, rows with missing responses are removed and all 'max_rating' values are confirmed numeric. Only rows with 'max_rating' greater than or equal to 0 are retained.

4. Convert Social Distance Labels to Numeric

The social distance labels (X1 to X7) are converted to numeric values:

Label	Distance
X1	1
X2	2
X3	5
X4	10
X5	20
X6	50
X7	100

This numeric 'Distance' column is required for estimating hyperbolic discounting parameters (logk) or AUC

5. Maximum Amount Willing to Forgo

In the Short Form, each decision directly represents the amount the participant is willing to give to the N. Therefore, there is no need to calculate a crossover point like in the original task. The 'max_rating' column is then equivalent to the maximum amount willing to forgo for that social distance.

Alternative Estimation Approach for Missing Data

This is only used in the long-form task, where the indifferent point needs to be estimated from multiple decisions within each social distance. In contrast, the short-form task includes only one decision per social distance, meaning the indifferent point is directly observed.

When to use this approach:

- Datasets with missing trial-level responses (e.g., neuroimaging or large-scale online studies)
- When the crossover-based method is not approach due to incomplete choice sequences

In these cases, the standard crossover-based method for estimating indifference points may not be appropriate, as it relies on observing a complete sequence of choices within each social distance.

To address this, indifference points can alternatively be estimated using a trial-level logistic regression approach, which uses all available observed trials without requiring complete data.

Specifically, we model the probability of choosing to share (coded as 1; keep = 0) as a function of the amount of money forgone on each trial. The logistic regression model is defined as:

$$\text{logit}(P(\text{share})) = \beta_0 + \beta_1 \times \text{amount_forgone}$$

Here, *amount_forgone* represents the monetary cost associated with choosing to share, ranging from \$80 to \$0 across trials. The model estimates how the probability of sharing changes as a function of increasing monetary cost by fitting a continuous logistic choice function across this range of observed values.

Rather than identifying a discrete switching point in the observed data, the model describes a smooth decision curve over the range of possible forgone amounts.

The indifference point is defined as the value of *amount_forgone* at which the predicted probability of sharing equals 0.5. This represents the point of equal likelihood between keeping and sharing and can be interpreted as the participant's maximum willingness to forgo monetary reward at a given social distance.

At this point, the logit equals zero, and the indifference point can be derived analytically as:

$$\text{Indifference Point} = -\beta_0 / \beta_1$$

Note. Participants with no variability in responses (i.e., always choosing to keep or always choosing to share) are assigned boundary values corresponding to the limits of the task, as logistic regression cannot be reliably estimated in the absence of response variability. Additionally, indifference points are not estimated for participant–distance combinations with fewer than three valid responses, as such cases do not provide sufficient information for stable model fitting.

This approach yields participant- and distance-specific estimates that are directly comparable to those obtained from the crossover method and can be used in subsequent analyses, such as estimating hyperbolic discounting parameters ($\log(k)$) or area under the curve (AUC).

Hyperbolic Model

After computing the maximum amount willing to forgo for each participant and social distance, the next step is to estimate the hyperbolic discounting function using nonlinear mixed-effects modeling. A nonlinear mixed-effects model (NLME) is a statistical approach used to estimate nonlinear relationships while accounting for both:

- Fixed effects (overall average v_0 and $\log k$)
- Random effects (participant-specific deviations in v_0 and $\log k$, corresponding to random intercepts and random effects on the discounting parameter)

This allows estimation of individual level discounting parameters while accounting for repeated observations across social distances. The provided R script uses the nlme package to implement the hyperbolic model.

1. Base Model (No Predictors)

The base model estimates the hyperbolic function without including predictors/covariates and is used to obtain participant-level $\log k$ values.

Researchers should typically:

1. Run this base model first
2. Extract individual $\log k$ values
3. Use those values in subsequent analyses (e.g., regression models)

Key components:

- $v_0 / (1 + \exp(\log k) * \text{Distance}) \rightarrow$ hyperbolic function
- $\exp(\log k) \rightarrow$ ensures the discounting parameter (k) is positive
- $\text{random} = v_0 + \log k \sim 1 \mid \text{subnum} \rightarrow$ estimates individual-level parameters

2. Alternative Models (Optional but Recommended)

Although the hyperbolic model is standard in social discounting research, it is good practice to compare it with alternative models. Here we compare it to an exponential and linear model. The exponential model assumes a constant rate of decline and the linear model assumes a straight-line decrease.

To evaluate which model best fits the data, we compare models using Akaike's Information Criterion (AIC). AIC balances model fit and model complexity with lower AIC values indicate better-fitting models. We provide two ways to compare AIC values to present evidence for the best fitting model.

Delta AIC (ΔAIC): Delta AIC (ΔAIC): ΔAIC represents how much worse a model fits relative to the best-fitting model (i.e., the model with the lowest AIC). It is calculated by subtracting the lowest AIC value across all candidate models from the AIC of each model. In most cases, the hyperbolic model will have the lowest AIC, meaning that the exponential and linear models will have positive ΔAIC values relative to the hyperbolic model. In this case, subtract AIC from hyperbolic model from that of exponential or linear model:

- $\Delta AIC < 2 \rightarrow$ substantial support (models are essentially equivalent)
- $\Delta AIC 4-7 \rightarrow$ considerably less support
- $\Delta AIC > 10 \rightarrow$ essentially no support (lower AIC model is a better fit)

AIC Weights: AIC weights represent the relative likelihood that each model is the best among the candidate models. Each model is assigned an AIC weight with values ranging from 0 to 1 and all weights summing to 1. The model with a high AIC weight (close to 1) has strong support.

3. Predictor Model

In addition to estimating participant-level discounting parameters, researchers may wish to examine whether individual differences (e.g., demographic variables personality traits, or group membership) predict variability in the social discounting function. This predictor model extends the base hyperbolic model by including predictors/covariates on the discounting rate parameter ($\log k$). Therefore, predictors explain between-person differences in how steeply generosity declines across social distances. Positive coefficients indicate steeper discounting (less generosity) whereas negative coefficients indicate shallower discounting (greater generosity)

Tips for using this model:

- Make sure you modify predictors to match variables available in your dataset
- Predictors included in the fixed effects list ($\log k \sim$) model individual differences in discounting rate, not baseline generosity (v_0)
- Ensure that the number of starting values for $\log k$ ($\text{start} = c()$) matches the number of predictors. The first value corresponds to the intercept of $\log k$, followed by one value for each predictor in the same order.

Common Issues and Troubleshooting

When fitting nonlinear mixed-effects models, convergence issues are relatively common. Singularity and non-convergence errors are often related and can arise from similar underlying issues (e.g., poor starting values, overly complex models, or limited variability in the data).

1. Singularity Error

Example Error:

```
Warning: Singular precision matrix in level -1, block 1
Error in nlme.formula((as.numeric(max_rating)) ~ v0/(1 + exp
(logk) * Distance), :
Singularity in backsolve at level 0, block 1
```

This indicates that the model has reached an unstable or undefined solution during estimation. This can occur due to numerical issues (e.g., poor starting values) or because the model is too complex relative to the data.

2. Non-Convergence (Maximum Iterations Reached)

Example Error:

```
Error in nlme.formula((as.numeric(max_rating)) ~ v0/(1 + exp(logk) * Distance), :  
maximum number of iterations (maxIter = 50) reached without convergence
```

This means the model failed to find stable parameter estimated within the allowed number of iterations.

Common Causes:

Both errors typically arise from one or more of the following:

- Poor starting values for model parameters (v0, logk)
- Overly complex random effects structure (e.g., random slopes for logk)
- Limited variability in participant responses (e.g., always choosing 0 or maximum)
- Too few observations per participant (especially in the Short Form)
- Predictors on very different scales (in predictor models)

Recommended Solutions:

The following steps can be used to resolve most convergence issues:

- Adjust starting values: choose initial estimates close to plausible values (v0 near mean max_rating, logk near -1). Iteratively adjusting starting values is standard practice and helps ensure reliable parameter estimation.
- Iteration limits: increase msMaxIter or adjust tol if convergence is not achieved.
- Simplifying random effects: consider removing reducing model complexity by removing random effects (e.g., only allowing random intercepts), rather than estimating both participant-specific v) and logk simultaneously

Extraction of logk and AUC

Once the hyperbolic model has been fitted to the cleaned social discounting data, the next step is to extract participant-level estimates of social discounting. Two commonly reported metrics are:

1. logk – the model-based social discounting rate
2. AUC (Area Under the Curve) – a model-free measure of overall generosity

The procedures for extracting these metrics are the same for both the original Social Discounting Task and the Short Form.

1. Extracting Individual logk Values

The hyperbolic model estimates two types of parameters:

- Fixed effects: population-average estimates of v0 (baseline generosity) and logk (discounting rate)
- Random effects: participant-level deviations from these averages

To obtain participant-specific logk values:

1. Extract the random effect deviations for logk. These represent how much each participant's discounting rate differs from the population average.
2. Repeat these random effects for each row in the dataset so that they align with the number of social distances per participant.
3. Extract the fixed effect estimate for logk.
4. Combine the fixed effect and the random effect to produce the final participant-level logk values.

These values represent individual discounting rates, derived directly from observed behavior rather than from predictors. They can then be used in downstream analyses such as correlations, regressions, or group comparisons.

2. Extracting Area Under the Curve (AUC)

AUC provides a model-free measure of overall generosity:

1. For each participant, the amount willing to forgo is plotted across all social distances (1, 2, 5, 10, 20, 50, 100).
2. The area under this curve is calculated using numerical integration (trapezoidal method) which treats each pair of adjacent points (amount willing to forgo for two social distances) as a trapezoid. For each interval, the area is computed as: (difference in social distance) x (average of adjacent willingness-to-forgo values). The segment-wise areas are then summed to produce a single raw AUC value per participant
3. The resulting raw AUC value is then normalized by the maximum possible area to yield a standardized AUC value bounded between 0 and 1. The normalization is defined as: (Maximum N – Minimum N) x maximum possible amount to forgo. This reflects the total span of the observed social distance axis (i.e., $100 - 1 = 99$), over which the trapezoidal integration is performed.
 - For the Original Social Discounting Task this is $99 * 80$
 - For the Social Discounting Short Form this is $99 * 10$
4. Higher AUC values indicate greater generosity and shallower social discounting, and lower AUC values indicate steeper discounting

Unlike logk, AUC does not rely on fitting a specific model and provides a complementary perspective on overall social valuation across distances.

Summary

By extracting logk and AUC:

- logk captures how rapidly generosity declines with social distance (model-based)
- AUC captures overall generosity across social distances (model-free)

Both metrics are useful for individual differences analyses, allowing researchers to relate social discounting behavior to personality traits, demographic variables, or other outcomes.

Visualization


Visualizing participants' generosity across social distance provides an intuitive representation of social discounting behavior. The plot shows the proportion of the maximum amount participants are willing to forgo at each social distance.

Key features of the visualization:

1. Scaling
 - Values are expressed as a proportion of the maximum possible amount (percentage).
 - This ensures that curves are directly comparable across participants, groups, and task versions.
2. Group Comparisons (Optional)
 - If a grouping variable (e.g., experimental condition or demographic group) is present, separate curves are plotted for each group.
 - Shaded ribbons represent ± 1 standard error of the mean, providing a visual sense of variability within each group.
3. Single Curve (No Groups)
 - If no grouping variable is present, a single curve is plotted with a shaded ribbon representing ± 1 standard error across all participants.
4. Interpretation
 - Steeper declines in the curve reflect steeper social discounting (participants give less as social distance increases).
 - Flatter curves indicate shallower discounting (participants maintain generosity across social distances).
 - The curve can also be compared visually to individual or group-level logk estimates.

This visualization is useful both for descriptive reporting and for checking whether the hyperbolic model captures the overall pattern of generosity in the sample.

Figure 3 (from Nero et al., 2025)
Hyperbolic Social Discounting Curve Across Studies

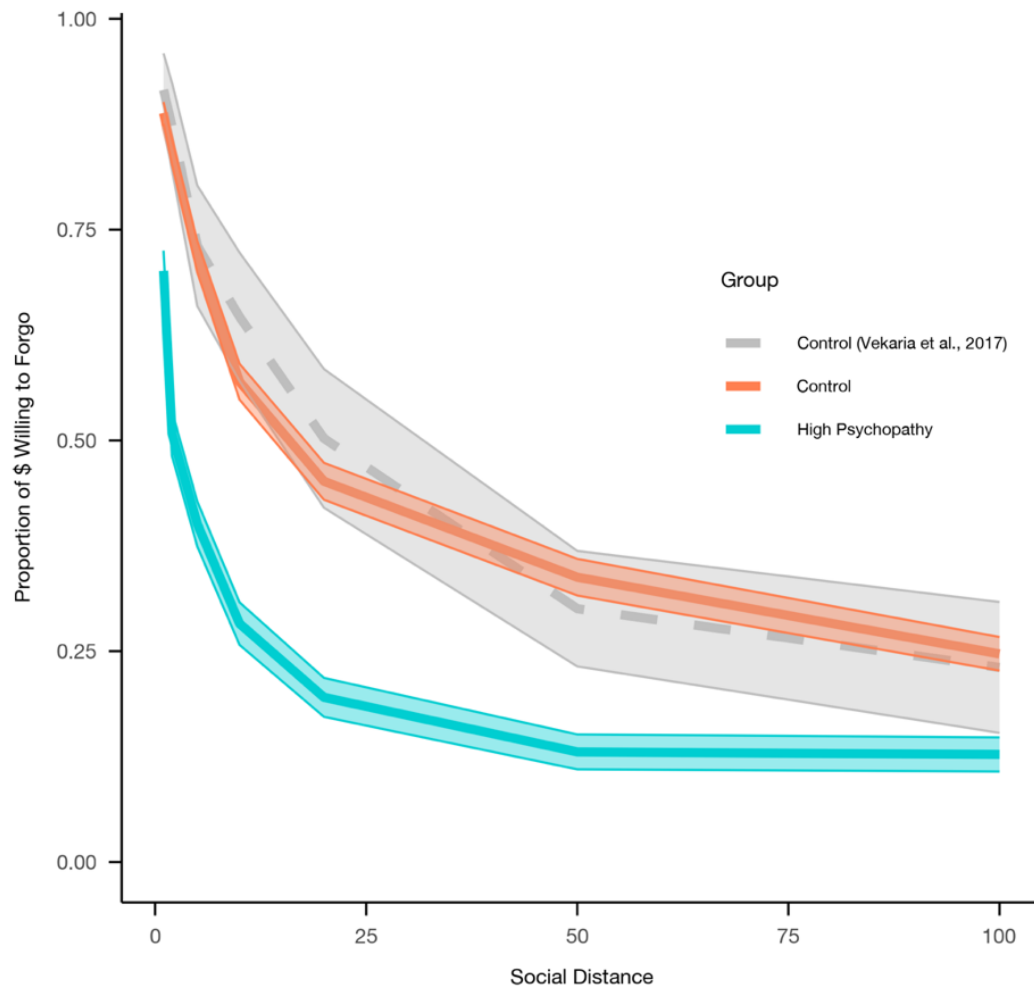

Note. From Nero et al., 2025. Social discounting curves with standard error for the current study (control and high psychopathy group) and Vekaria et al (2017) (controls). The high psychopathy group had higher discounting than both control groups, with control groups overlapping. The shaded region represents the standard error around the mean.

References

- Amormino, P., Gao, J., Li, P., Induni, S., Amar, S., Balabanis, K., Burt, A., Dockray, K., Doherty, H., Dube, N., Janney, L., Kales, E., King, I., Kronthal, E., Lee, B., Regan, E., Romero, I., Jones, B. A., Seaman, K. L., & Marsh, A. A. (2025). Social discounting and anti-/pro-sociality: A meta-analysis and (short-form) replication. *Personality and Individual Differences*, 247, 113447. <https://doi.org/10.1016/j.paid.2025.113447>
- Amormino, P., Graue, A. E., Marsh, A. A., & Wilson, A. V. (2026). Development and Validation of the Social Discounting Task: Short Form. *Social Psychological and Personality Science*, 17(4), 536–543. <https://doi.org/10.1177/19485506251328706>
- Jones, B., & Rachlin, H. (2006). Social Discounting. *Psychological Science*, 17(4), 283–286.
- Jones, B., & Rachlin, H. (2009). Delay, Probability, and Social Discounting in A Public Goods Game. *Journal of the Experimental Analysis of Behavior*, 91(1), 61–73. <https://doi.org/10.1901/jeab.2009.91-61>
- Malesza, M., & Kalinowski, K. (2021). Willingness to share, impulsivity and the Dark Triad traits. *Current Psychology*, 40(8), 3888–3896. <https://doi.org/10.1007/s12144-019-00351-5>
- Nero, N., Dressel, M., Amormino, P., Freeburg, P., Somers, M., Poplinski, L., Duhamel, K., Alvarez-Toro, V., & Marsh, A. A. (2025). Adults with more severe psychopathy in the community show increased social discounting. *Communications Psychology*, 3(1), 175. <https://doi.org/10.1038/s44271-025-00353-z>

Rhoads, S. A., O'Connell, K., Berluti, K., Ploe, M. L., Elizabeth, H. S., Amormino, P., Li, J. L.,

Dutton, M. A., VanMeter, A. S., & Marsh, A. A. (2023). Neural responses underlying extraordinary altruists' generosity for socially distant others. *PNAS Nexus*, 2(7).

<https://doi.org/10.1093/pnasnexus/pgad199>

Romanowich, P., Igaki, T., Yamagishi, N., & Norman, T. (2021). Differential Associations

between Risky Cell-Phone Behaviors and Discounting Types. *The Psychological Record*, 71(2), 199–209. <https://doi.org/10.1007/s40732-020-00446-7>

Sharp, C., Barr, G., Ross, D., Bhimani, R., Ha, C., & Vuchinich, R. (2012). Social Discounting

and Externalizing Behavior Problems in Boys. *Journal of Behavioral Decision Making*, 25(3), 239–247. <https://doi.org/10.1002/bdm.719>

Sherman, E. D., & Lynam, D. R. (2017). Psychopathy and low communion: An overlooked and

underappreciated core feature. *Personality Disorders: Theory, Research, and Treatment*, 8(4), 309–318. <https://doi.org/10.1037/per0000203>

Vekaria, K. M., Brethel-Haurwitz, K. M., [Link to external site, this link will open in a new tab](#),

Cardinale, E. M., Stoycos, S. A., & Marsh, A. A. (2017). Social discounting and distance perceptions in costly altruism. *Nature Human Behaviour*, 1(5).

<https://doi.org/10.1038/s41562-017-0100>