

# **Blockchain for Industrial Engineers: Decentralized Application Development**

**บล็อกเชนสำหรับวิศวกรอุตสาหกรรม: การพัฒนาแอปพลิเคชันแบบ  
กระจายศูนย์**

# ERC Token


# What is a token?

- Something of value
  - Currency
  - Voting right
  - Stock
- Token standard
  - EIP (*Ethereum Improvement Proposal*)
    - Guideline
  - ERC (*Ethereum Request for Comments*)
    - Implementation

# Popular token standards

- **ERC-20**
  - Fungible tokens
  - Most used for representing currency
- **ERC-721**
  - Non-fungible tokens (NFTs)
  - Most used for representing digital artwork and collectibles
- **ERC-1155**
  - Multi-token standard
  - Combining the abilities of ERC-20 and ERC-720

# Timeline

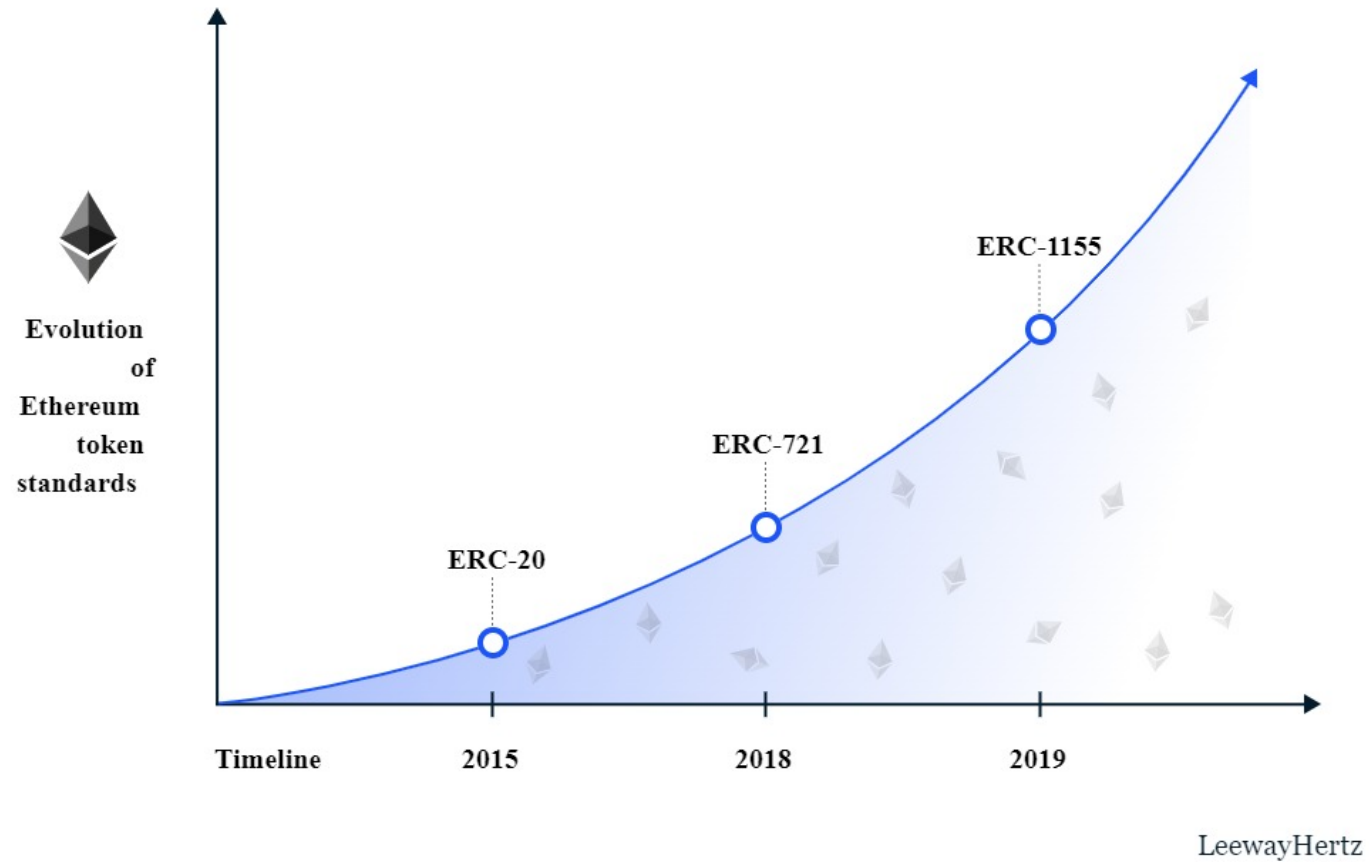

## Source

# Token list

- <https://etherscan.io/tokens>

**Let's make your own ERC-20 token.**

# You need to know

- Inheritance
- Abstract
- Interface
- Event



# Inheritance

- A contract can inherit from another contract (base contract).
  - State variables
  - Functions
- Use a keyword `is`.

# Abstract contract

- Abstract contract cannot be deployed.
  - Can only be used as a base contract.
  - Used as a "designed" contract.
- Abstract contract can contain `virtual` functions.
  - A `virtual` function does not contain implementation.
  - Need a keyword `virtual`.
- When implementing a `virtual` function
  - Need to use `override` keyword.

# Interface

- Cannot be deployed.
- Cannot have a constructor.
- Cannot declare a state variable.
- Cannot have function implementation.
- All declared functions must be `external`
  - `external` makes a function callable from outside contract only.
  - *Note: `public` can be called from both externally and internally.*
- The function implementation can be declared `public`.

# Events

- An inheritable member of a contract
- Stores the arguments passed in the transaction logs when `emitted`.
- Used to inform the calling application about the current state of the contract.
  - MetaMask use `event` to inform user of the progress of the deployment.

# ERC-20 Token Interface

- Standard

```

interface ERC20Interface {
    // State variables
    function name() external view returns (string memory);
    function symbol() external view returns (string memory);
    function decimals() external view returns (uint8);
    function totalSupply() external view returns (uint256);

    // Mandatory functions
    function balanceOf(address _owner) external view returns (uint256 balance);
    function transfer(address _to, uint256 _value) external returns (bool success);

    // Optional functions
    function allowance(address _owner, address _spender) external view returns (uint256 remaining);
    function approve(address _spender, uint256 _value) external returns (bool success);
    function transferFrom(address _from, address _to, uint256 _value) external returns (bool success);

    // Events
    event Transfer(address indexed _from, address indexed _to, uint256 _value);
    event Approval(address indexed _owner, address indexed _spender, uint256 _value);
}

```

# Decimals

- How many decimal places a token (say, `GLD`) has.
- If `decimal = 1`, internally, 10 `unit` is equal to 1 `GLD`.
- If you want to transfer 1.5 `GLD`, internally you will actually transfer 15 `unit`.
- Decimals is only used for display purposes.
  - All arithmetic inside the contract is still performed on integers,