

Blockchain for Industrial Engineers: Decentralized Application Development

**บล็อกเชนสำหรับวิศวกรอุตสาหกรรม: การพัฒนาแอปพลิเคชันแบบ
กระจายศูนย์**

```
// SPDX-License-Identifier: GPL-3.0

pragma solidity >=0.7.0 <0.9.0;

/**
 * @title Storage
 * @dev Store & retrieve value in a variable
 * @custom:dev-run-script ./scripts/deploy_with_ethers.ts
 */
contract Storage {
    uint256 number;

    /**
     * @dev Store value in variable
     * @param num value to store
     */
    function store(uint256 num) public {
        number = num;
    }

    /**
     * @dev Return value
     * @return value of 'number'
     */
    function retrieve() public view returns (uint256){
        return number;
    }
}
```

SPDX License Identifier

```
// SPDX-License-Identifier: GPL-3.0
```

- Specify that the source code is available.
- Every source file should start with a comment indicating its license.

Pragma

```
pragma solidity >=0.7.0 <0.9.0;
```

- Specify the version of compiler to use.
- Help reject compilation with future compiler versions that might introduce incompatible changes.

Comment

```
// This is a single-line comment.
```

```
/*  
This is a  
multi-line comment.  
*/
```

Basic syntax

- Case sensitive
- Every statement must end with a semicolon `;`.
- Use curly braces `{}` for a block of code.
- Most of the structures are available
 - `if`, `else`, `while`, `for`, `break`, `return`

Variable

- State variables
- Local variables

State variables

- Declared at the contract level.
- Permanently stored in contract storage.
- Can be set as `constant`.
- Expensive to use
 - *Costs gas*
- To set value of a state variable
 - Initialize value at declaration.

Local variables

- Declared inside functions.
- Free (no gas cost).
- Use `memory` keyword for `string`.

Where is the data stored?

1. Storage

- Holds state variables.
- Persistent and expensive
 - It costs gas.
- Like a computer HDD.


2. Stack

- Holds local variables defined inside functions
 - If they are not reference types
 - `int`, `uint`, for example
- Free to be used
 - It doesn't cost gas.

3. Memory

- Holds local variables defined inside functions
 - If they are reference types.
 - `string` , `array` , `struct` and `mapping`
 - Use `memory` keyword.
- Holds function arguments;
- Like a computer RAM;
- Free to be used
 - It doesn't cost gas.

ETHEREUM VIRTUAL MACHINE

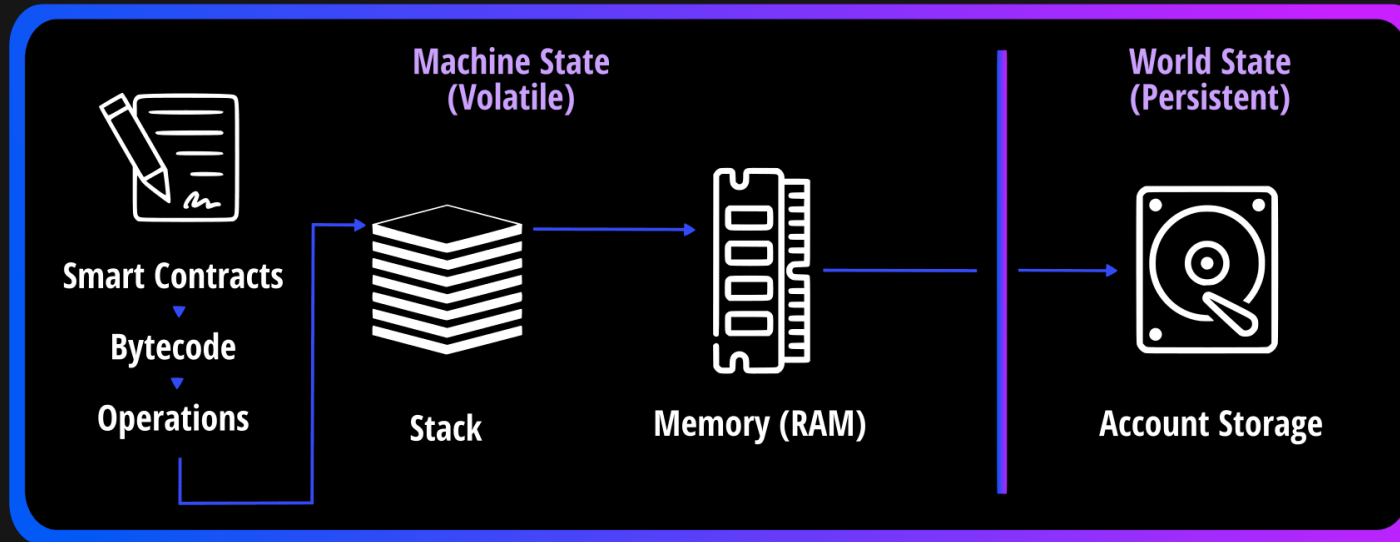

<https://jamesbachini.com>



James Bachini



@james_bachini

Source