
Production Supporting Systems in Factories


ระบบสนับสนุนการผลิตในโรงงานอุตสาหกรรม

Module 2-1: HTTP POST Server

- Create a server that receives POST requests.
 - Flow

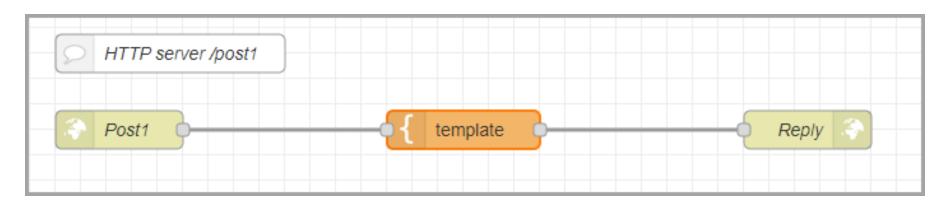


• http in node

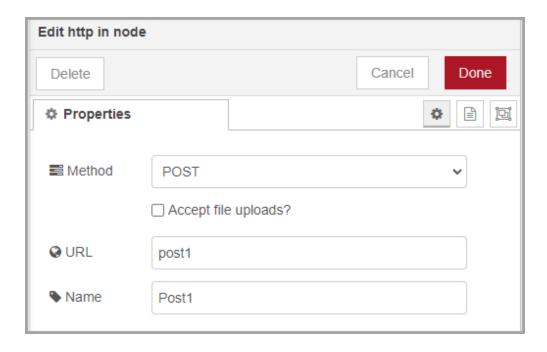


- Send the transformed message back.
- Try sending the post requests to your friends public address.


template node

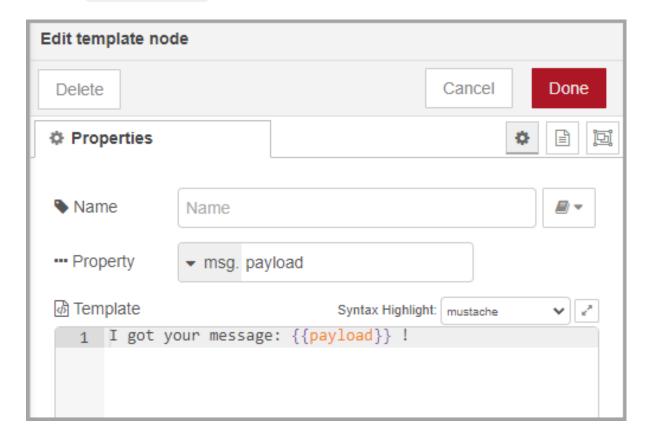


http response node

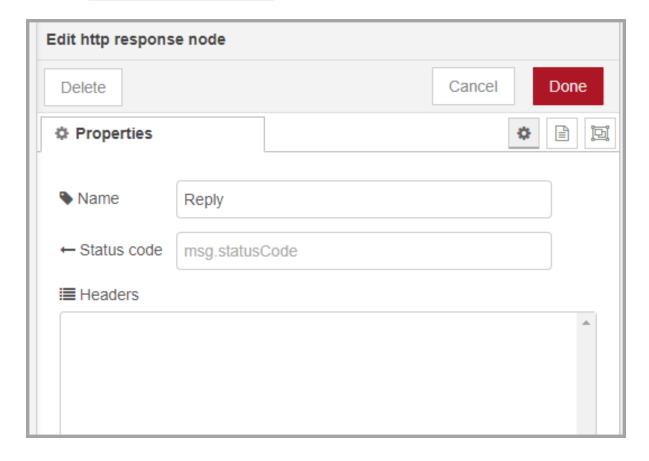


Create a post requestFlow

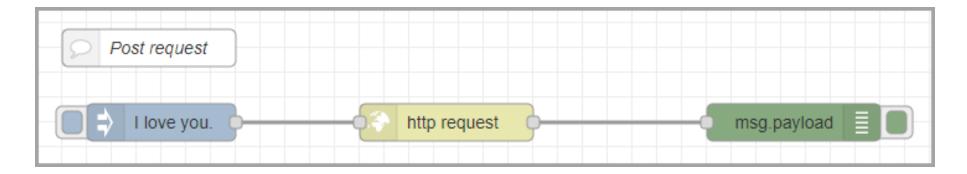

• inject node

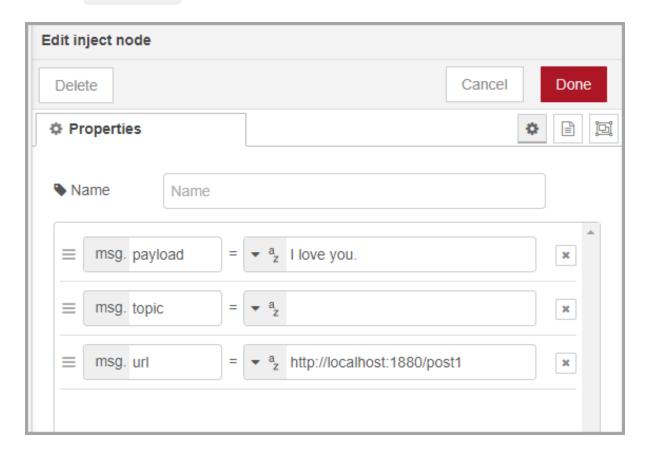


- Create another url that response with dynamic content.
 - Flow

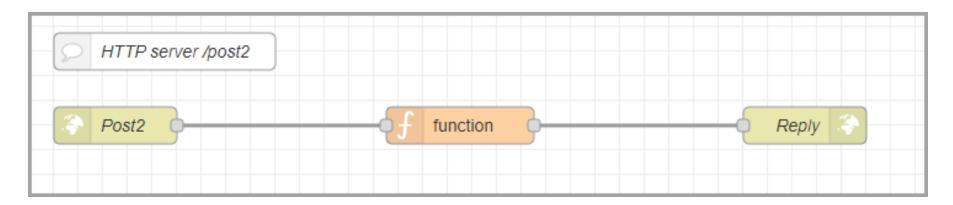

http in node

function node

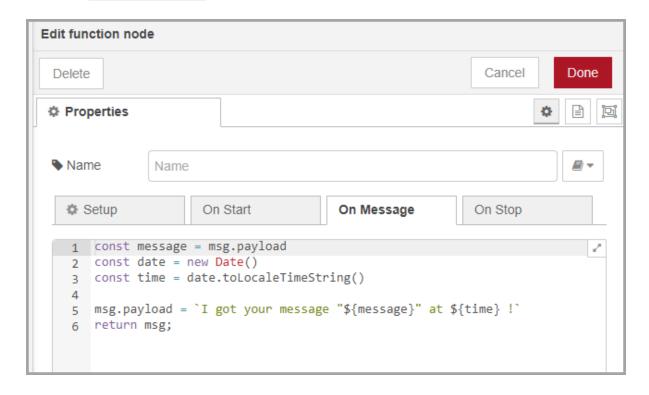

(code on the next page)

```
const message = msg.payload;
const date = new Date();
const time = date.toLocaleTimeString();

msg.payload = `I got your message "${message}" at ${time} !`;
return msg;
```


- Try send in a post message to .../post2.
- Also try sending a post message to your friend's public address.

Module 2-2: Line Notify


- สร้างกลุ่ม LINE ภายใน Group
- ไปที่ https://notify-bot.line.me/en/
 - Login (need to verify number on smart phone)
 - Go to My page
 - Click Generate token
 - Enter Token Name and select a chat room.
 - Copy the token and store it somewhere.

• Let send a line notification through Node-Red

Flow

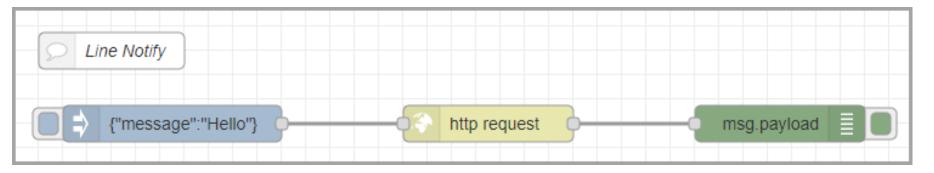


• inject node

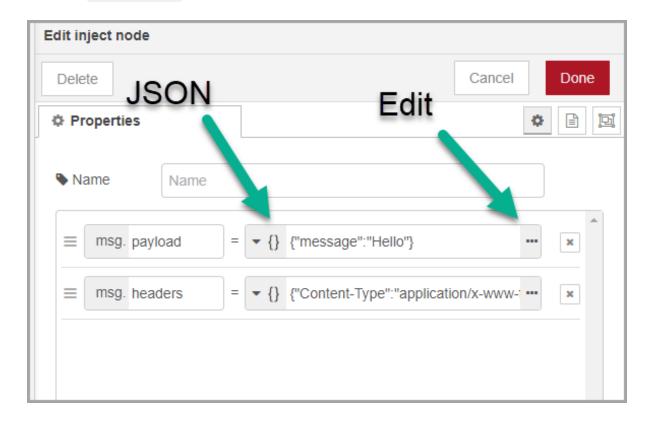


Set msg.payload to (JSON)

```
{
   "message":"Hello"
}
```

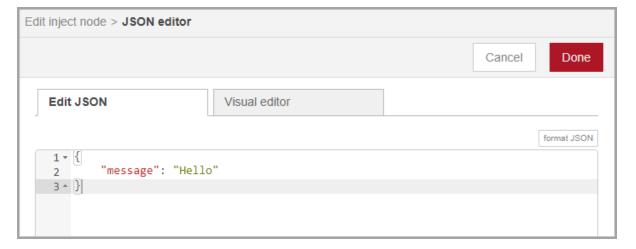

Set msg.headers to (JSON)


```
{
  "Content-Type": "application/x-www-form-urlencoded",
  "Authorization": "Bearer <<YOUR LINE TOKEN>>"
}
```

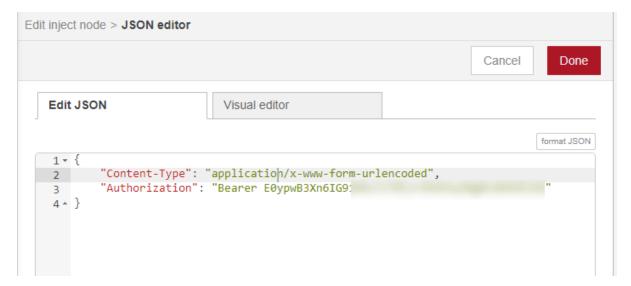

http request node

O Method: POST

○ URL: https://notify-api.line.me/api/notify

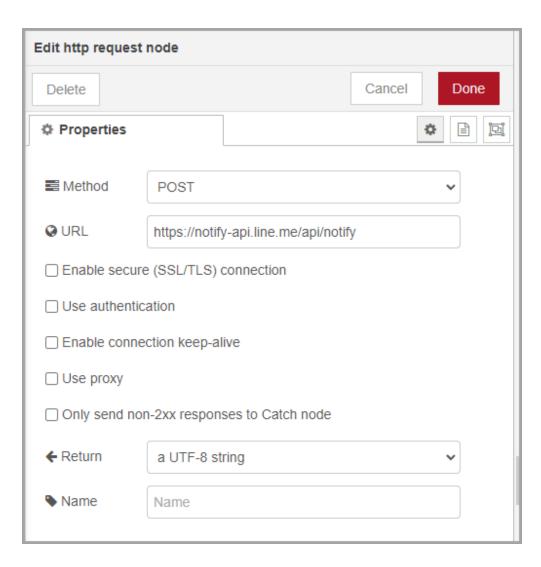

- Add debug node to see the output.
 - You can inspect the error.
- Try injecting to see if the notification.

Extra


- Make a server that send the message to Line.
 - The message comes from the POST request.

เรามาเช็คชื่อแบบท่ายากกัน


- Send Post request to https://materials-line.herokuapp.com/prodsup
- Payload
 - cmu_id : your 9-digit student id
 - o code: 4-character code from the screen (ไม่เอา code:)

```
{
   "cmu_id": "111222333",
   "code": "xxxx"
}
```

Flow

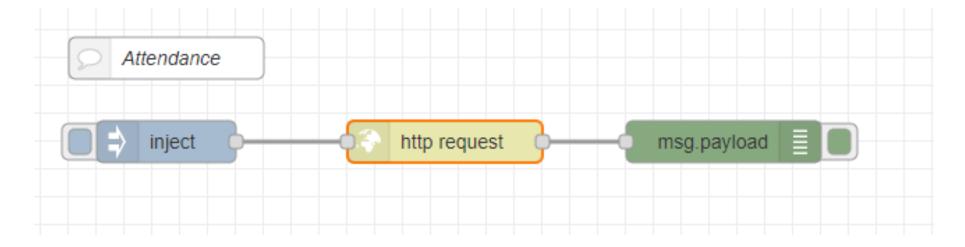

- inject node
 - o msg.payload

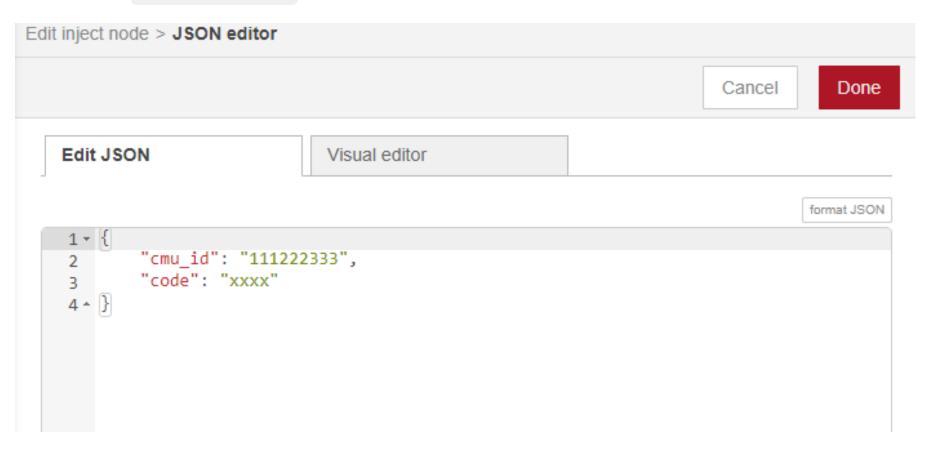

http request node

