

Web Application Development for Industrial Engineers

การพัฒนาเว็บแอปพลิเคชันสำหรับวิศวกรอุตสาหกรรม

CSS

- Cascading Style Sheets (CSS)
- Stylesheet language used to describe the presentation of a document written in HTML.
- Not a programming language nor a markup language.

Structure

- Inline style
- Internal stylesheet
- External stylesheet

Inline style

```
<h1 style="color: blue">Header</h1>
```

Internal stylesheet

```
<head>
  ...
  <style>
    h1 {
      color: blue;
    }
  </style>
  ...
</head>
```

External stylesheet

index.html


```
<head>
  ...
  <link rel="stylesheet" href="style.css" />
  ...
</head>
```

style.css

```
h1 {
  color: blue;
}
```

Anatomy

- Selector
 - Defines the element(s) to be styled
- Properties
- Property values

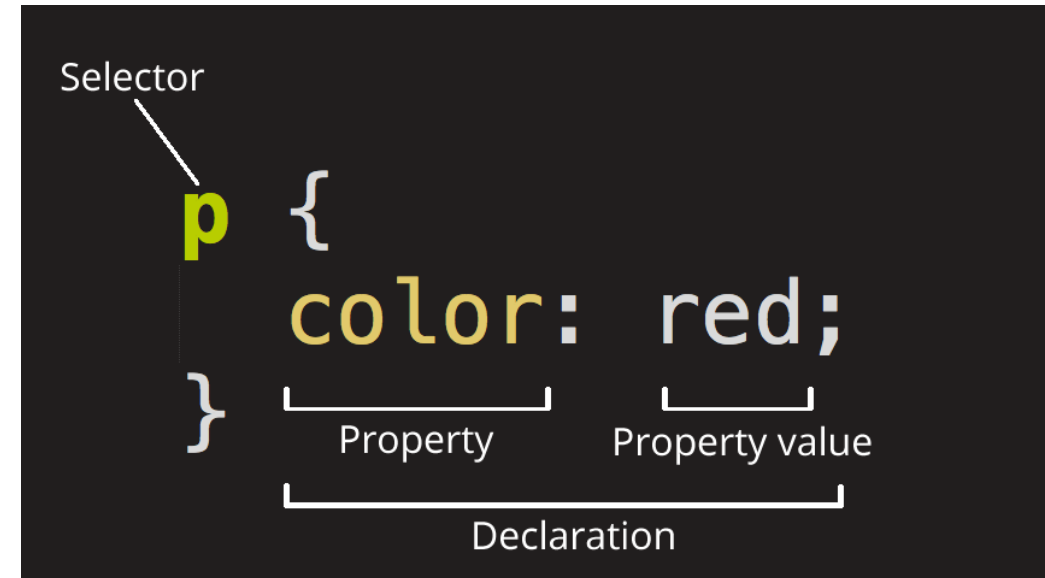

Selectors

- Element selector
 - Also called a tag or type selector
- ID selector
- Class selector
- Attribute selector
- Pseudo-class selector
- Pseudo-element selector

Element selector

- Select all `<h1>` elements

```
h1 {  
  color: blue;  
}
```

ID Selector

- Select the element on the page with the specified ID

```
<p id="my-id">Text</p>
```

```
#my-id {  
  color: blue;  
}
```

Class selector

- Select the element(s) on the page with the specified class.
 - Multiple instances of the same class can appear on a page.

```
<p class="my-class">Text</p>
```

```
.my-class {  
  color: blue;  
}
```

Attribute selector

- Select the element(s) on the page with the specified attribute.

```
<a href="https://www.google.com" target="_blank">Google</a>
```

```
a[target] {  
  color: blue;  
}
```

Pseudo-class selector

- Select the specified element(s), but only when in the specified state.
 - For example, when a cursor hovers over a link.
- Selects `<a>` but only when the mouse pointer is hovering over the link.

```
a:hover {  
  color: blue;  
}
```

Pseudo element selector

- Keyword added to a selector that lets you style a specific part of the selected element(s).

```
/* The first line of every <p> element. */  
p::first-line {  
    color: blue;  
    text-transform: uppercase;  
}
```

```
/* Add content after <a> element*/  
a::after {  
    content: " 🚀";  
}
```

CSS selector refernces

- <https://developer.mozilla.org/en-US/docs/Web/CSS/Reference#selectors>
- https://www.w3schools.com/cssref/css_selectors.asp

Specificity

- Specificity is the means by which browsers decide which CSS property values are the most relevant to an element and, therefore, will be applied.
- When multiple declarations have equal specificity, the last declaration found in the CSS is applied to the element.

Specificity – Selector

- Level of specificity (increasing order)
 - i. **Type selectors** (`h1`) and **pseudo-elements** (`::before`)
 - ii. **Class selectors** (`.example`), **attributes selectors** (`[type="radio"]`) and **pseudo-classes** (`:hover`)
 - iii. **ID selectors** (`#example`)
 - iv. **Inline style** (`<h1 style="color: blue">`)

!important

- When an important rule is used on a style declaration, this declaration overrides any other declarations, even inline style.
- พ่อทุกสถาบัน

```
<h1 style="color: red">I am red.</h1>
```

```
h1 {  
  color: blue !important;  
}
```