

# VacQ-Project Evolution

Bird's eye view: Stop the headache


### It began with 1 server file that has everything. A working server.

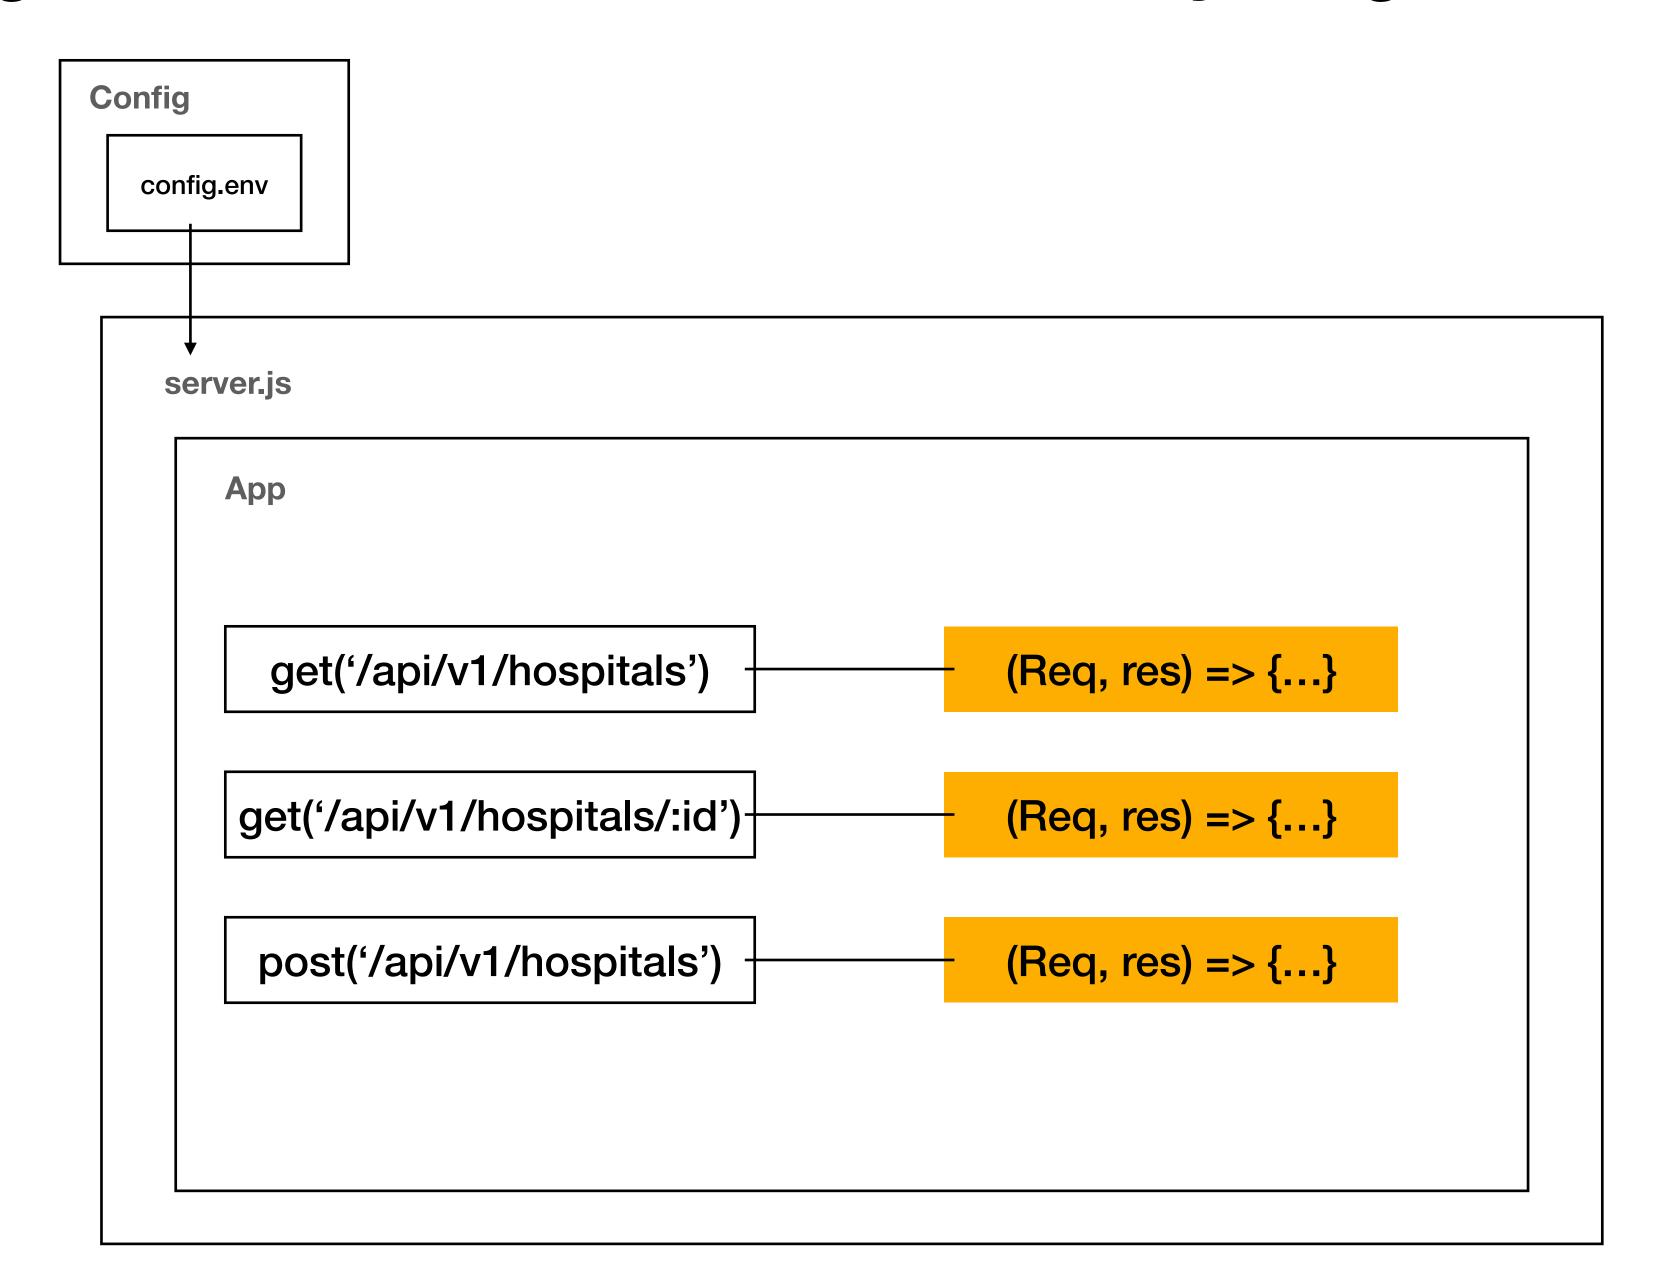

## Router files to handle the routes with same prefix

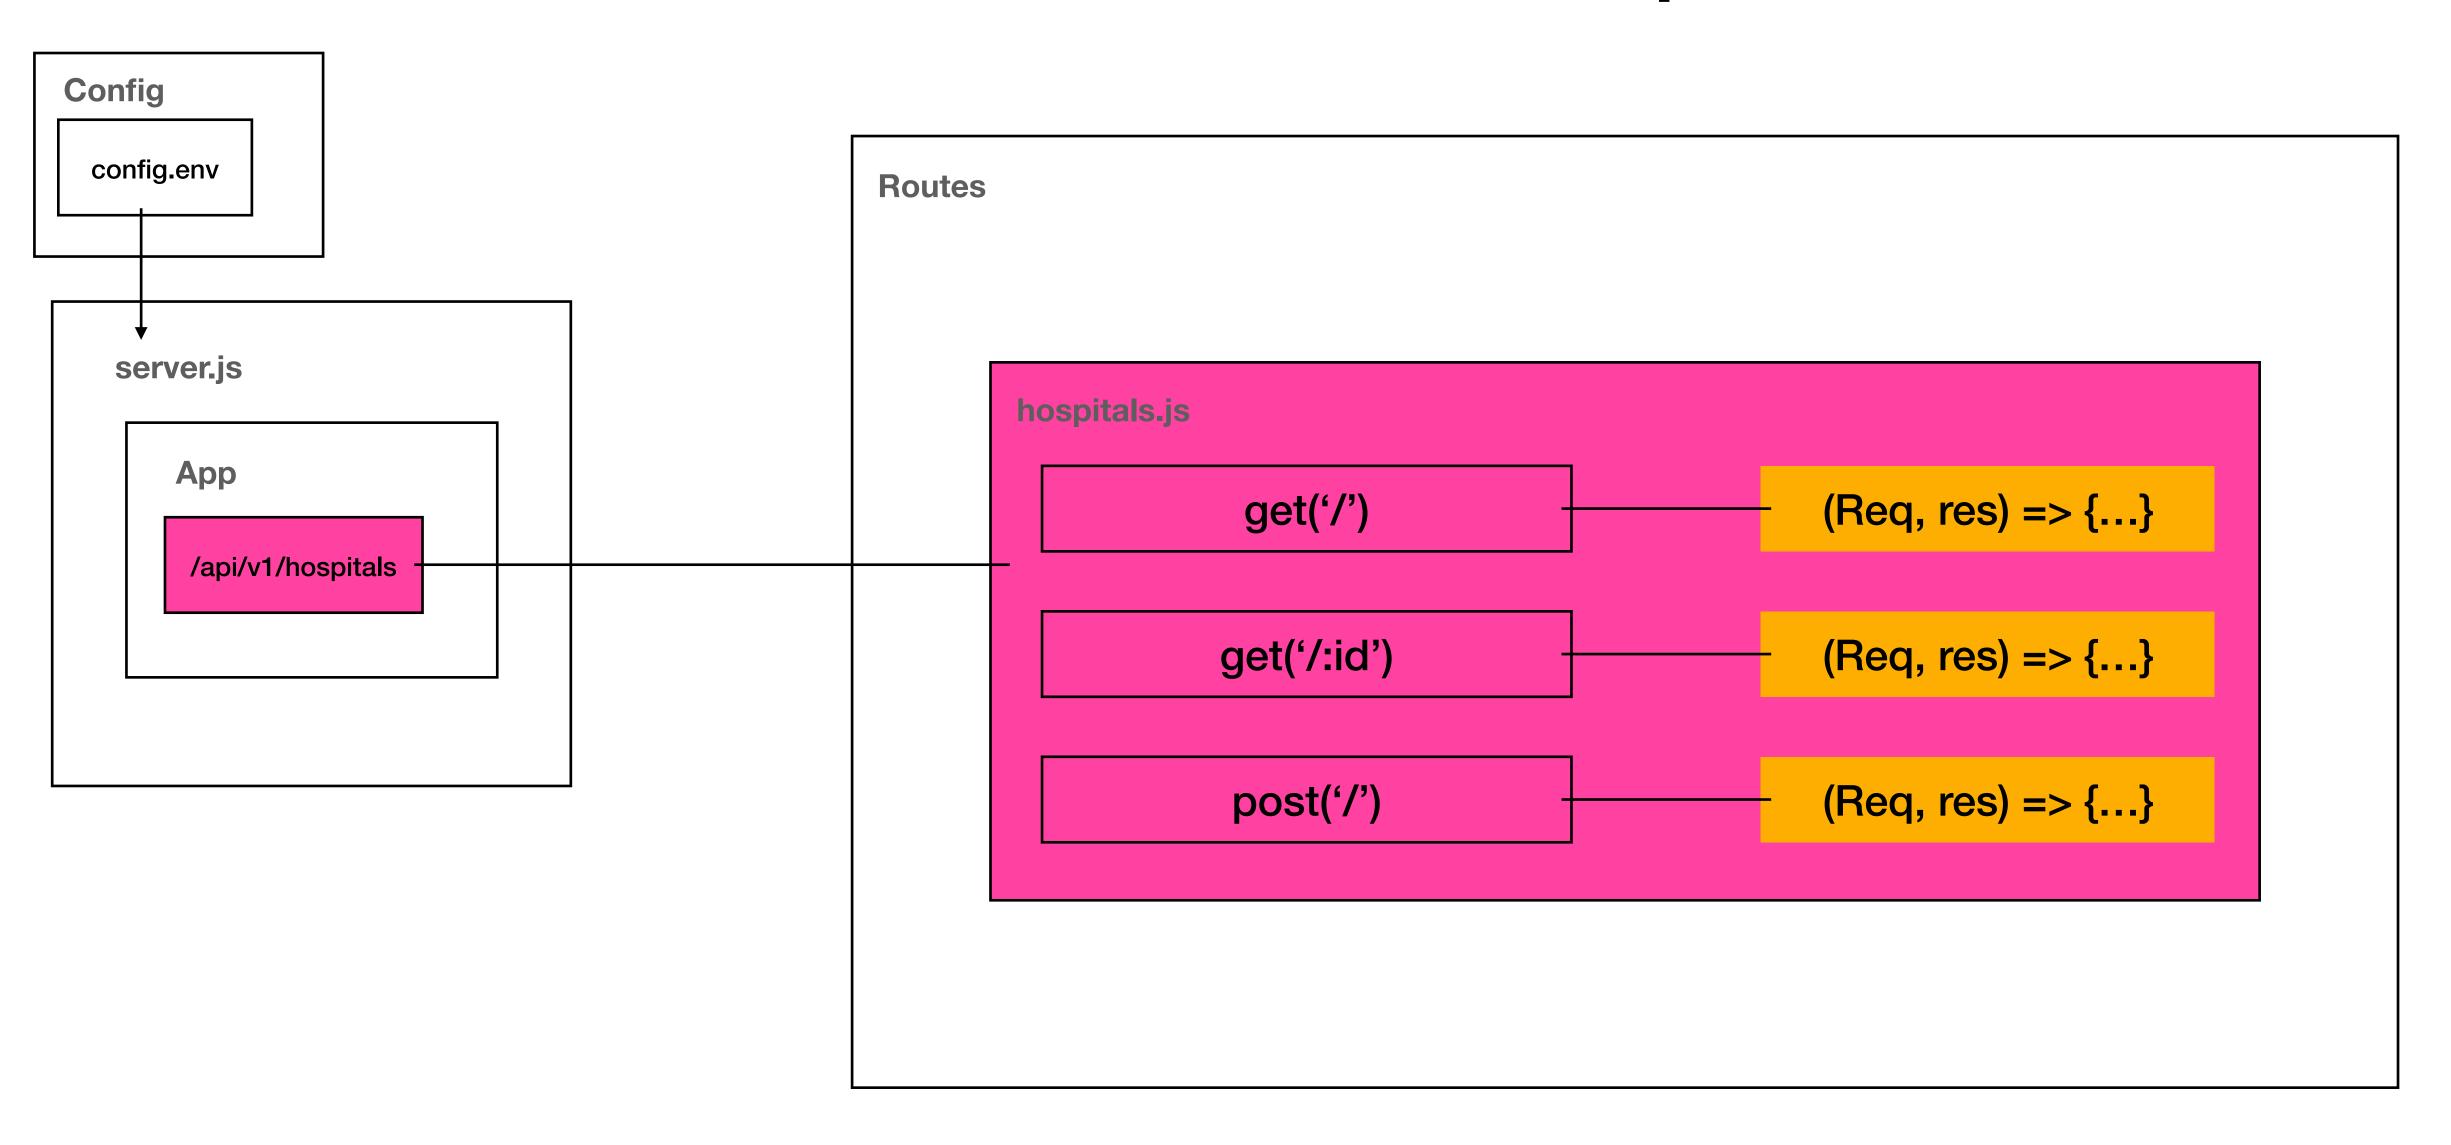


#### Extract the HTTP method handlers into a controller

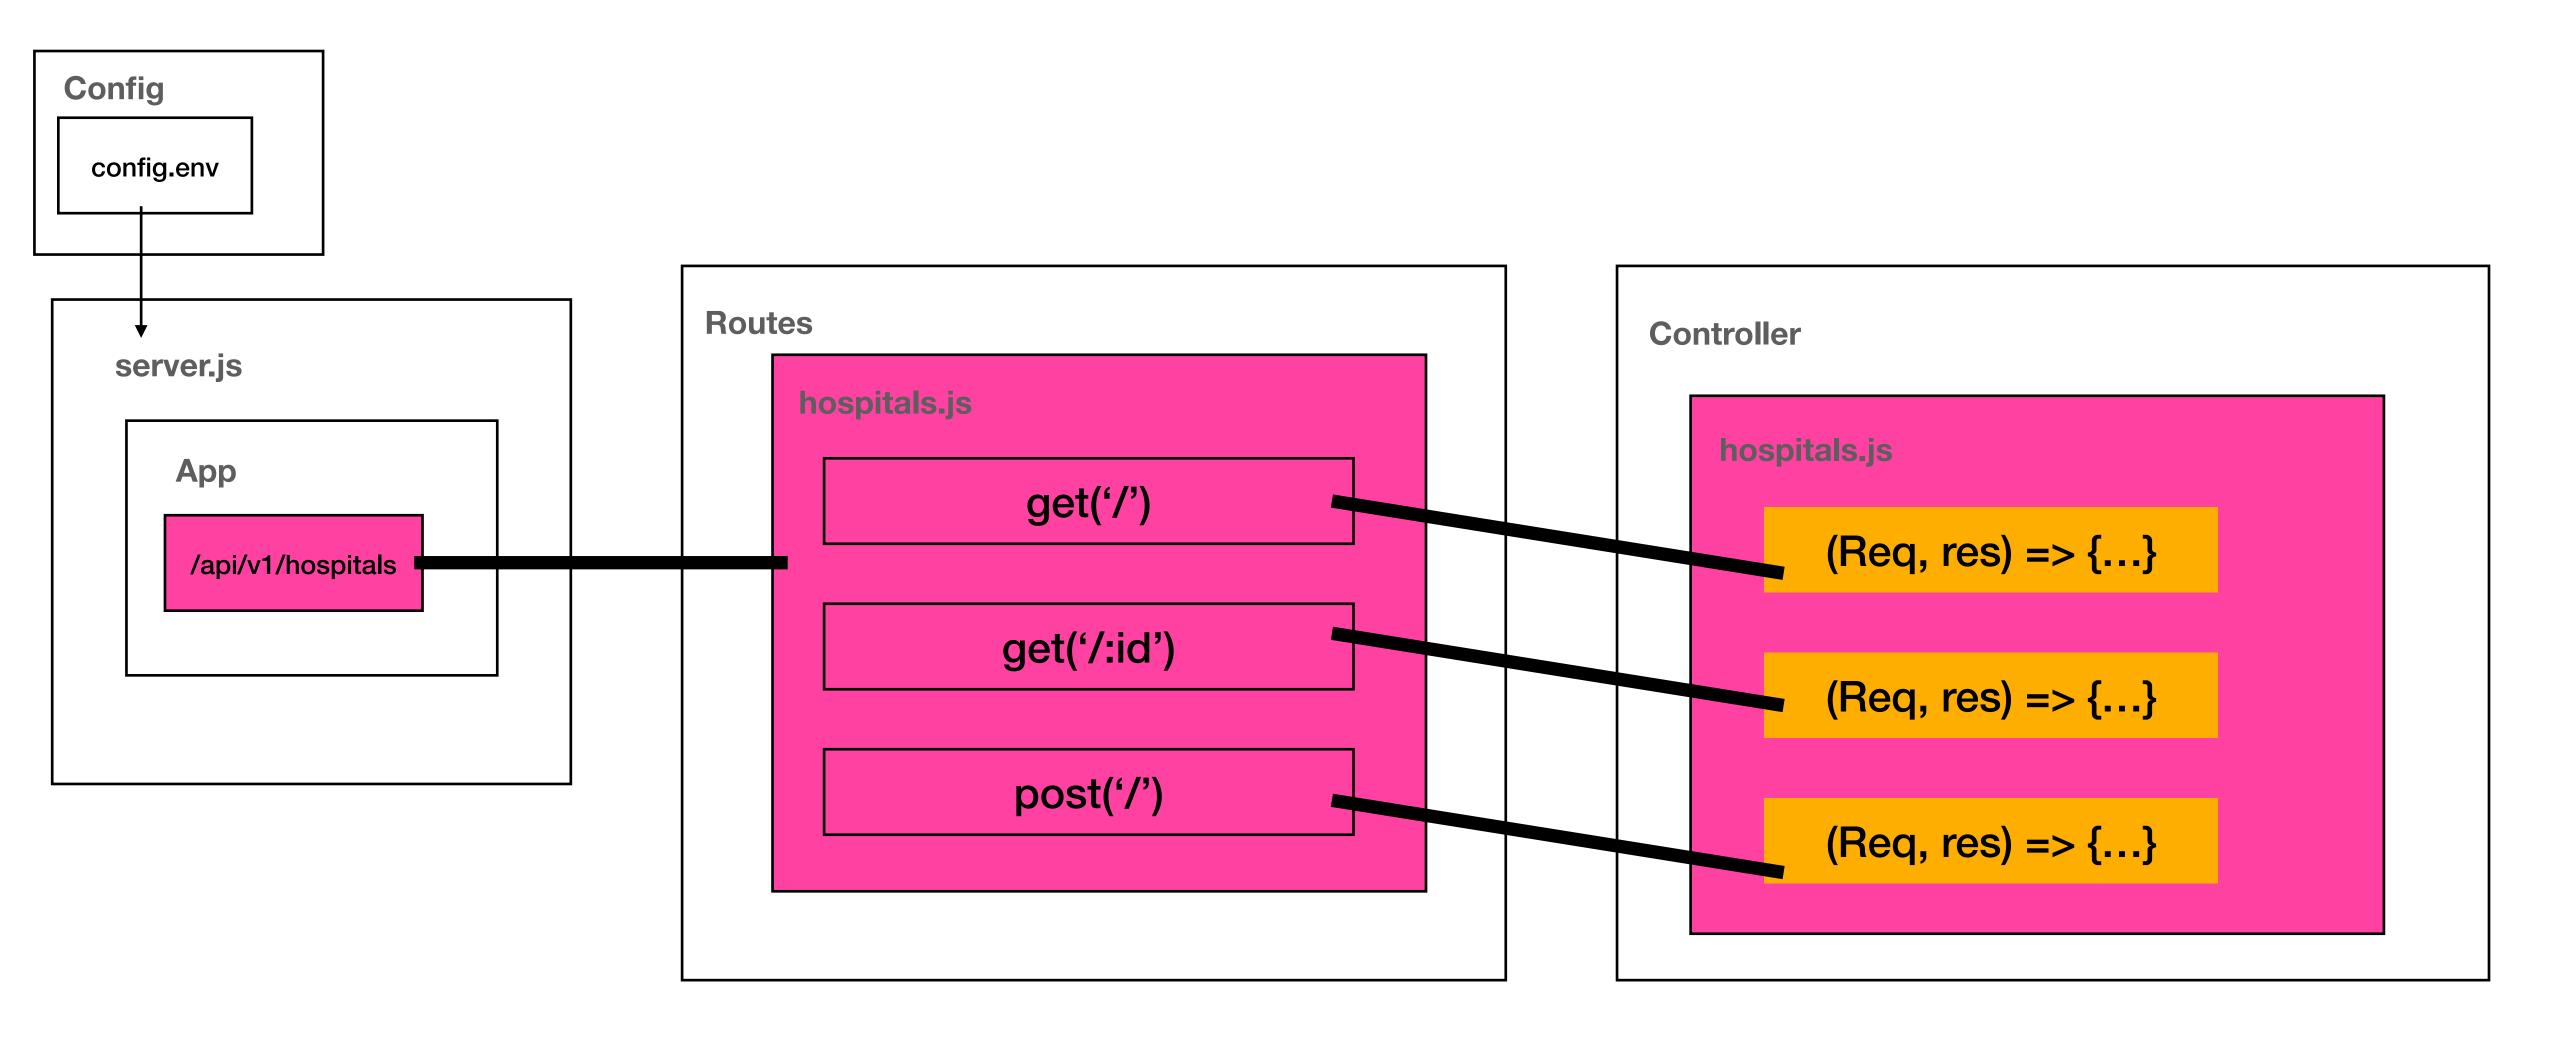



#### Connect to an external db Mongoldb cloud Config Mongoose db.js config.env Routes Controller Models server.js hospitals.js hospitals.js hospitals.js App /api/v1/hospitals HospitalSchema


#### **Add authentication Routes**

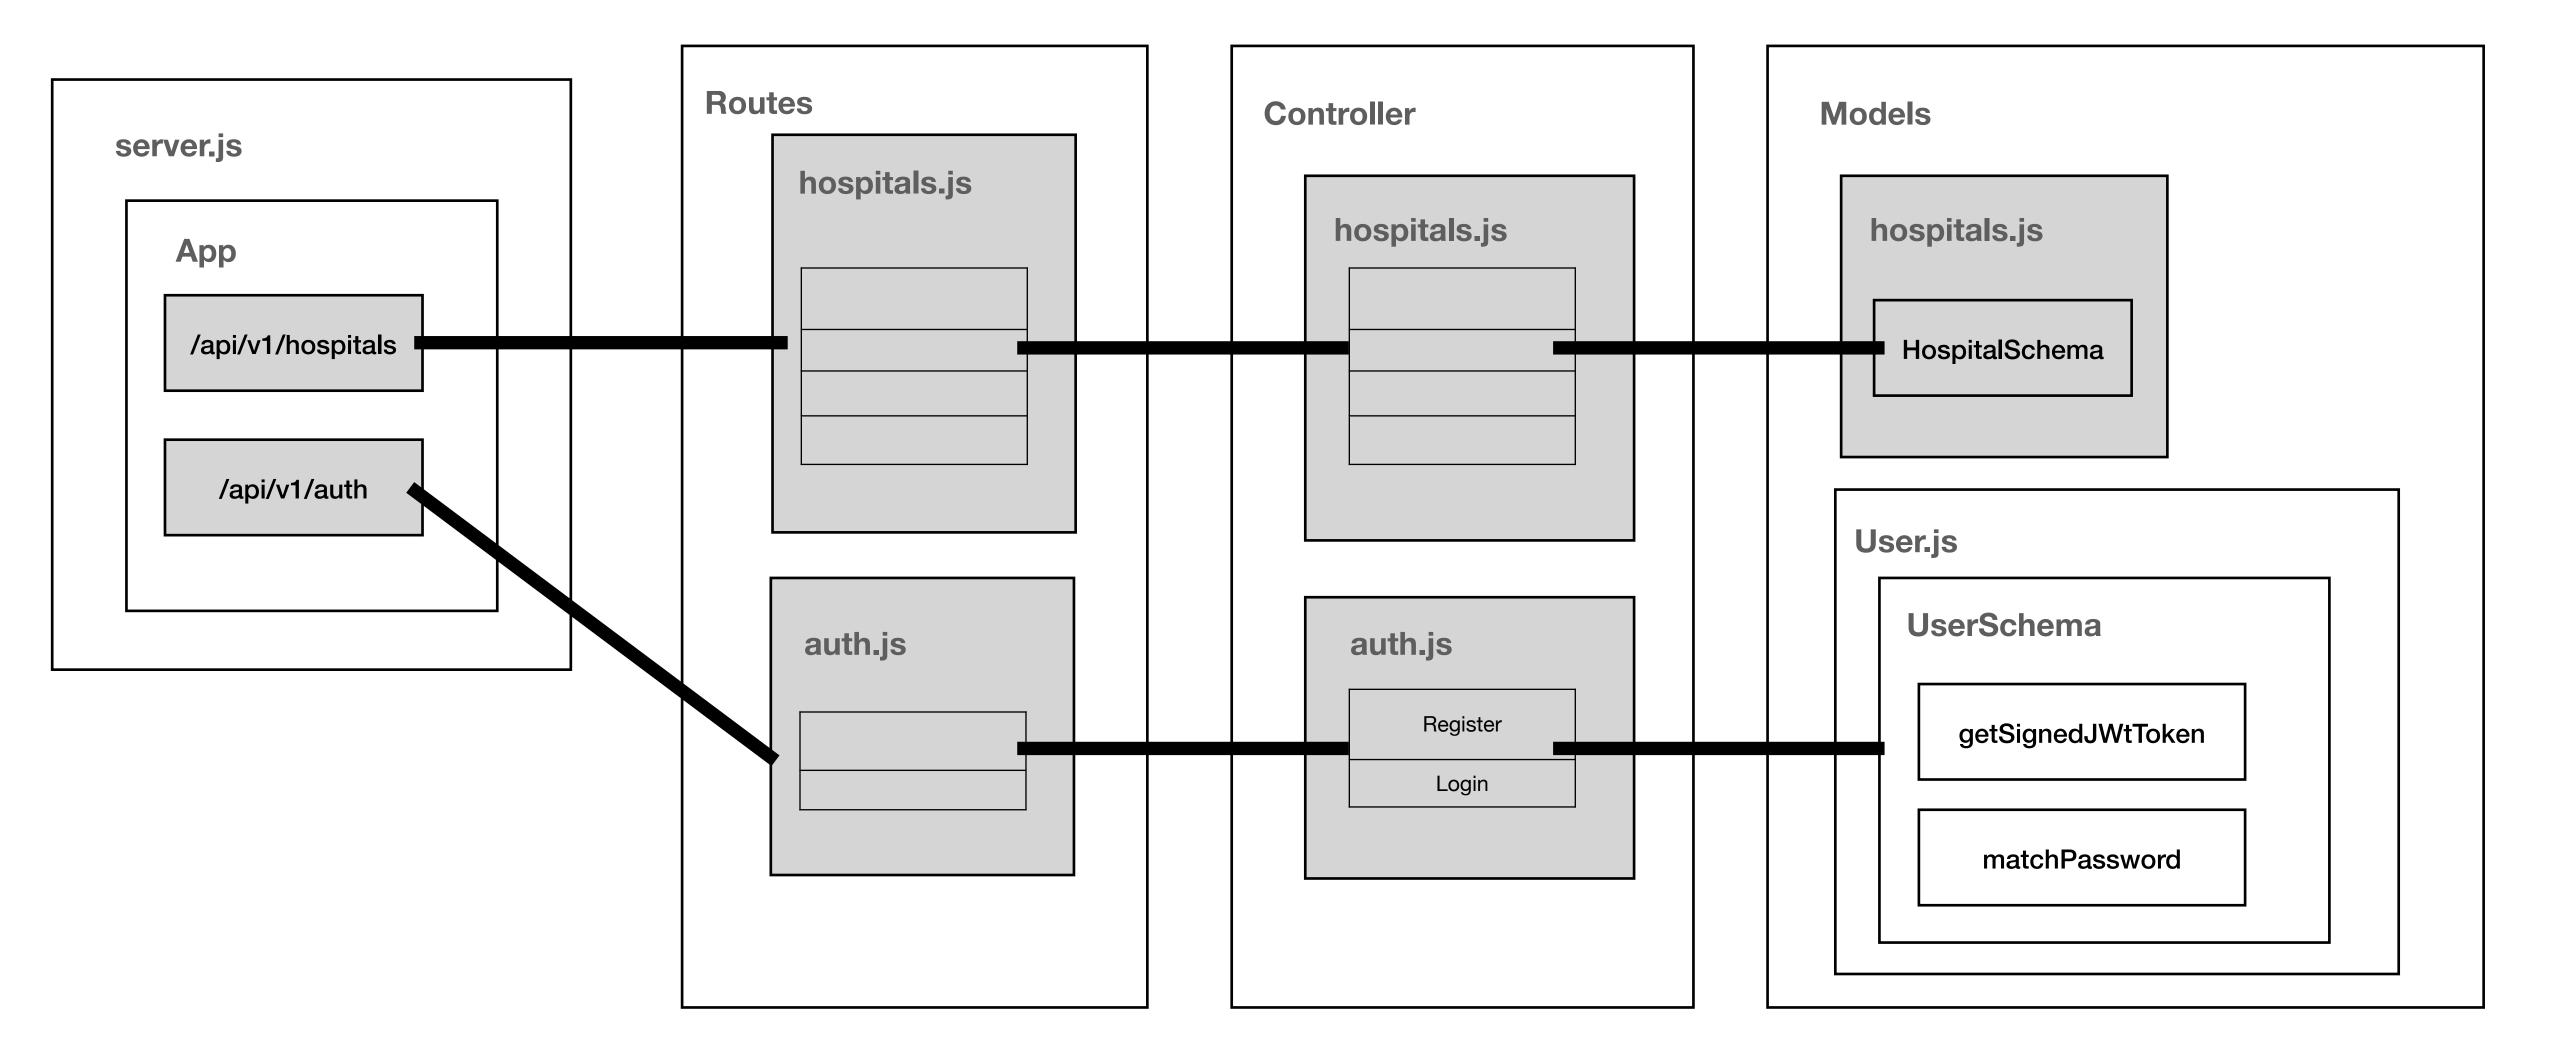

#### Pack JWT Tokens into cookie

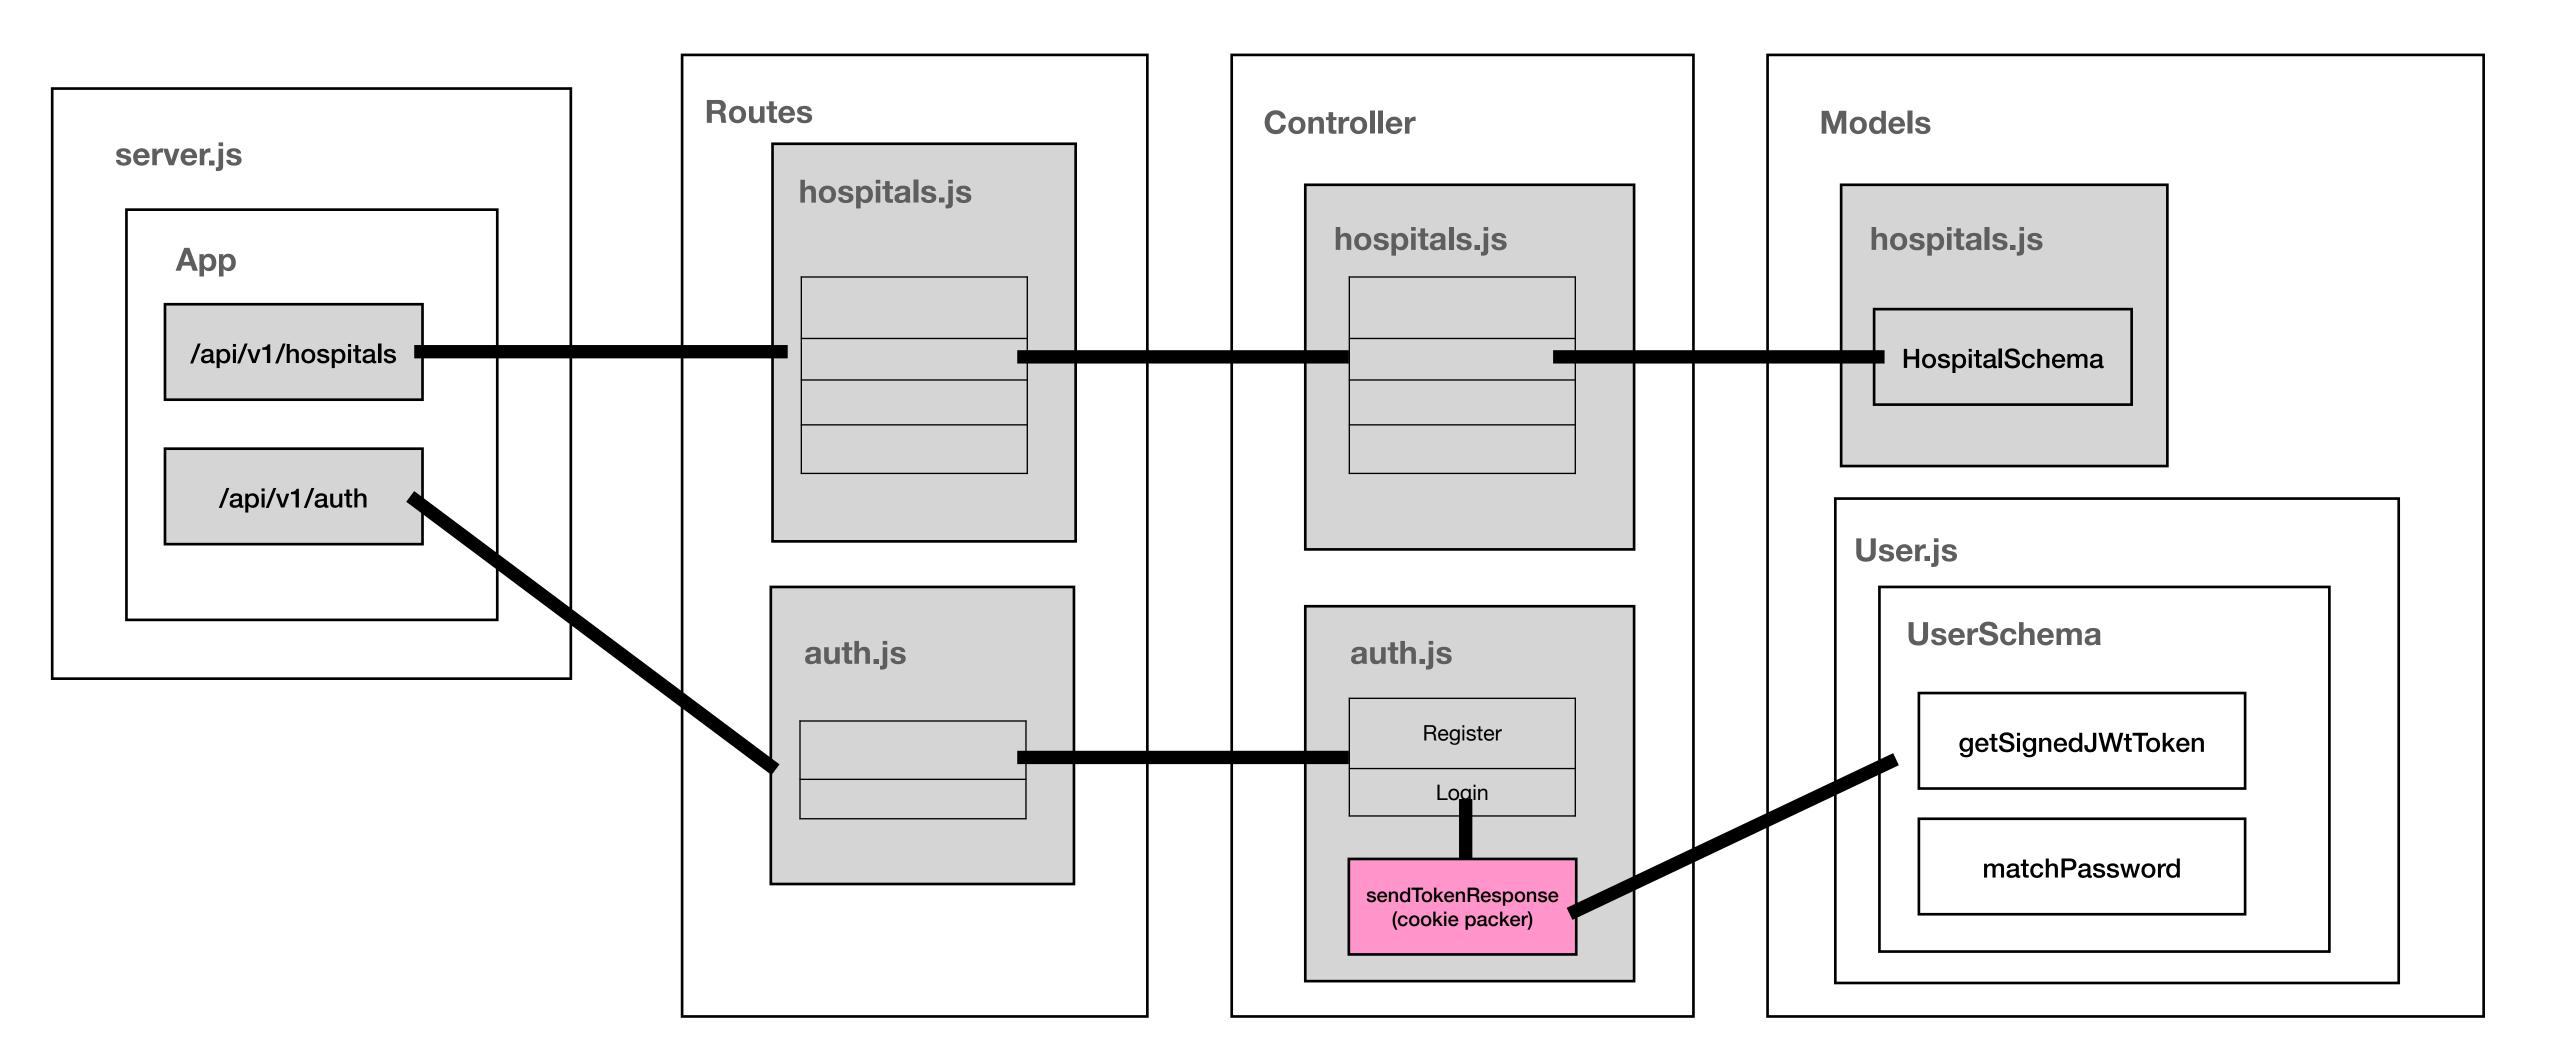

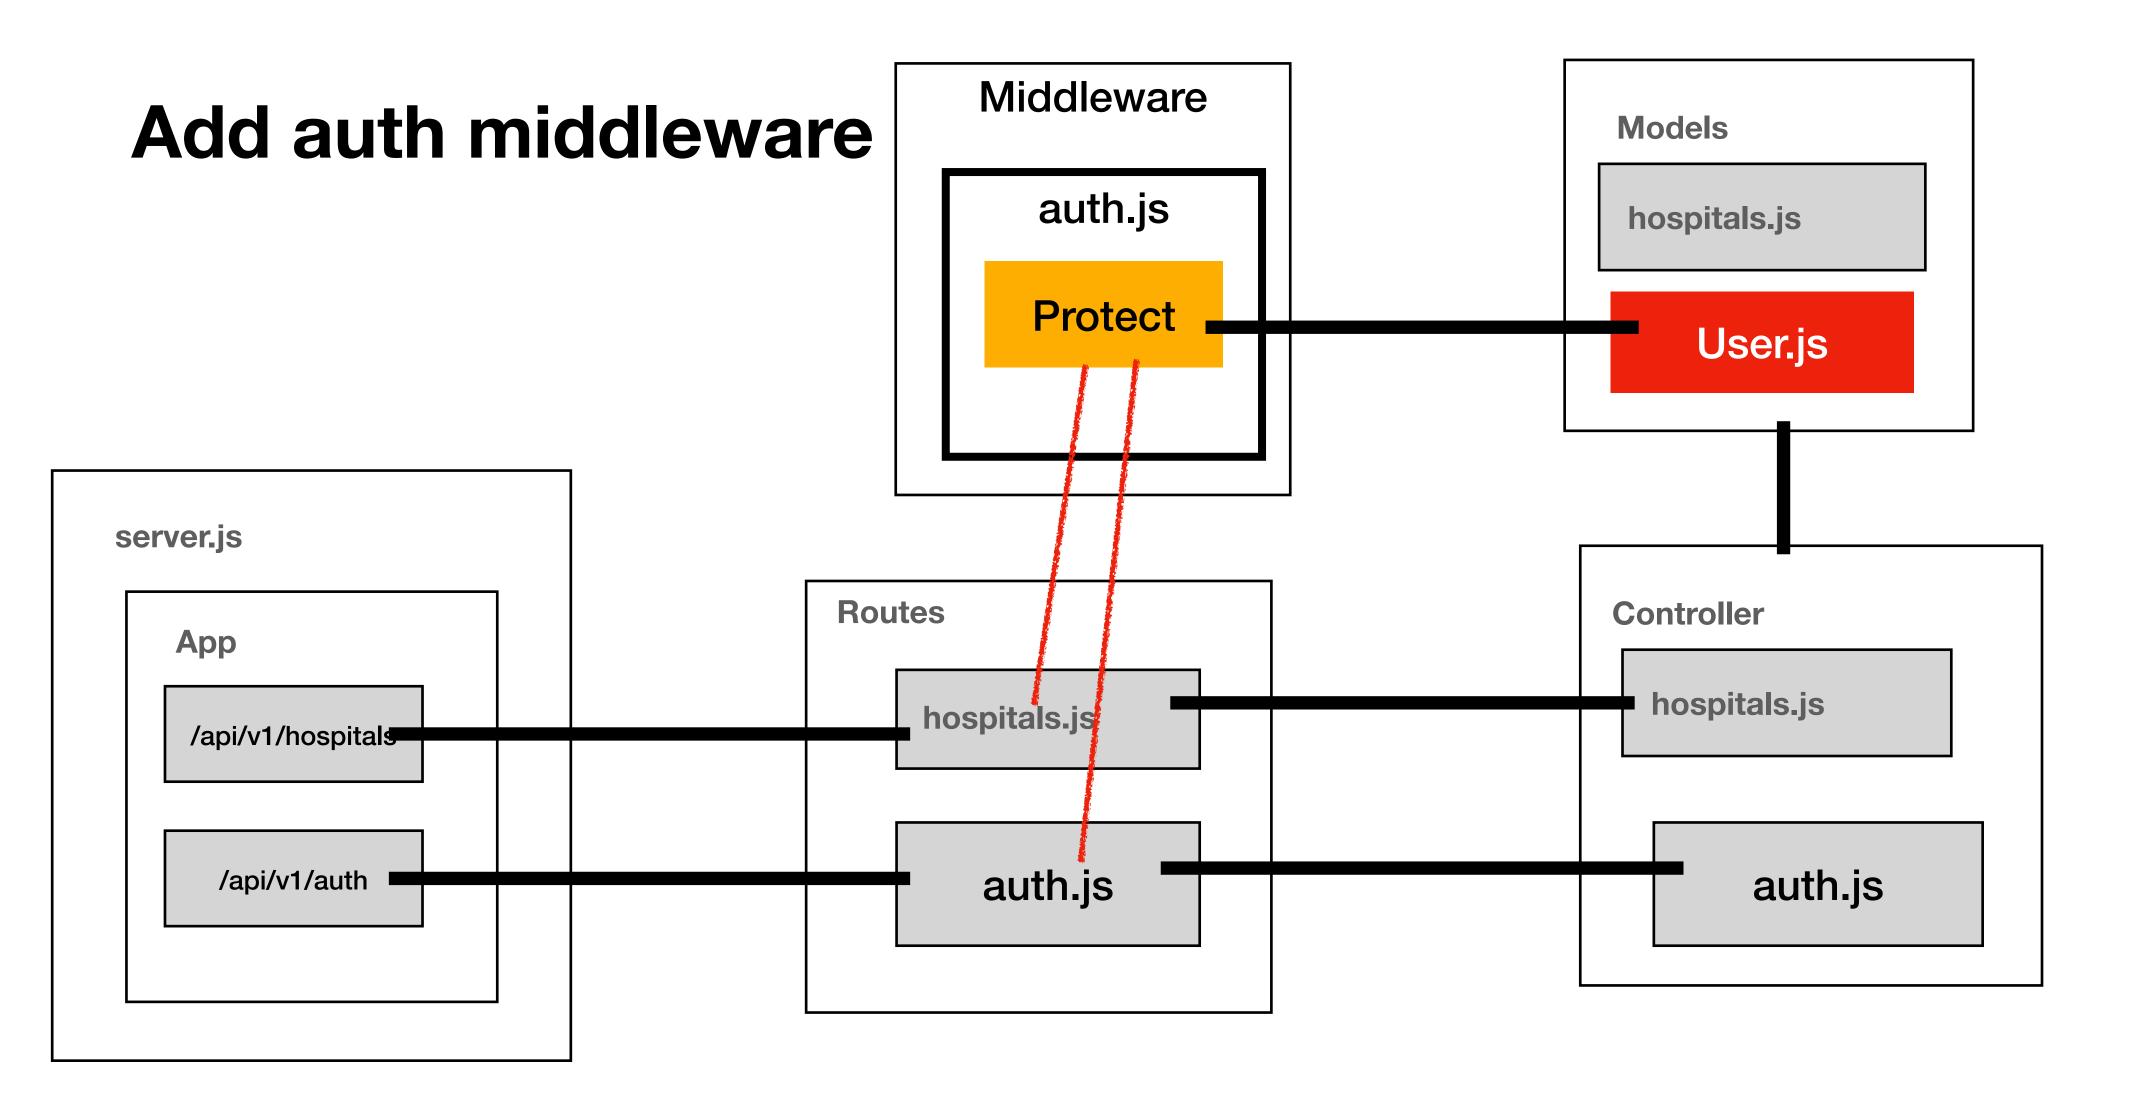

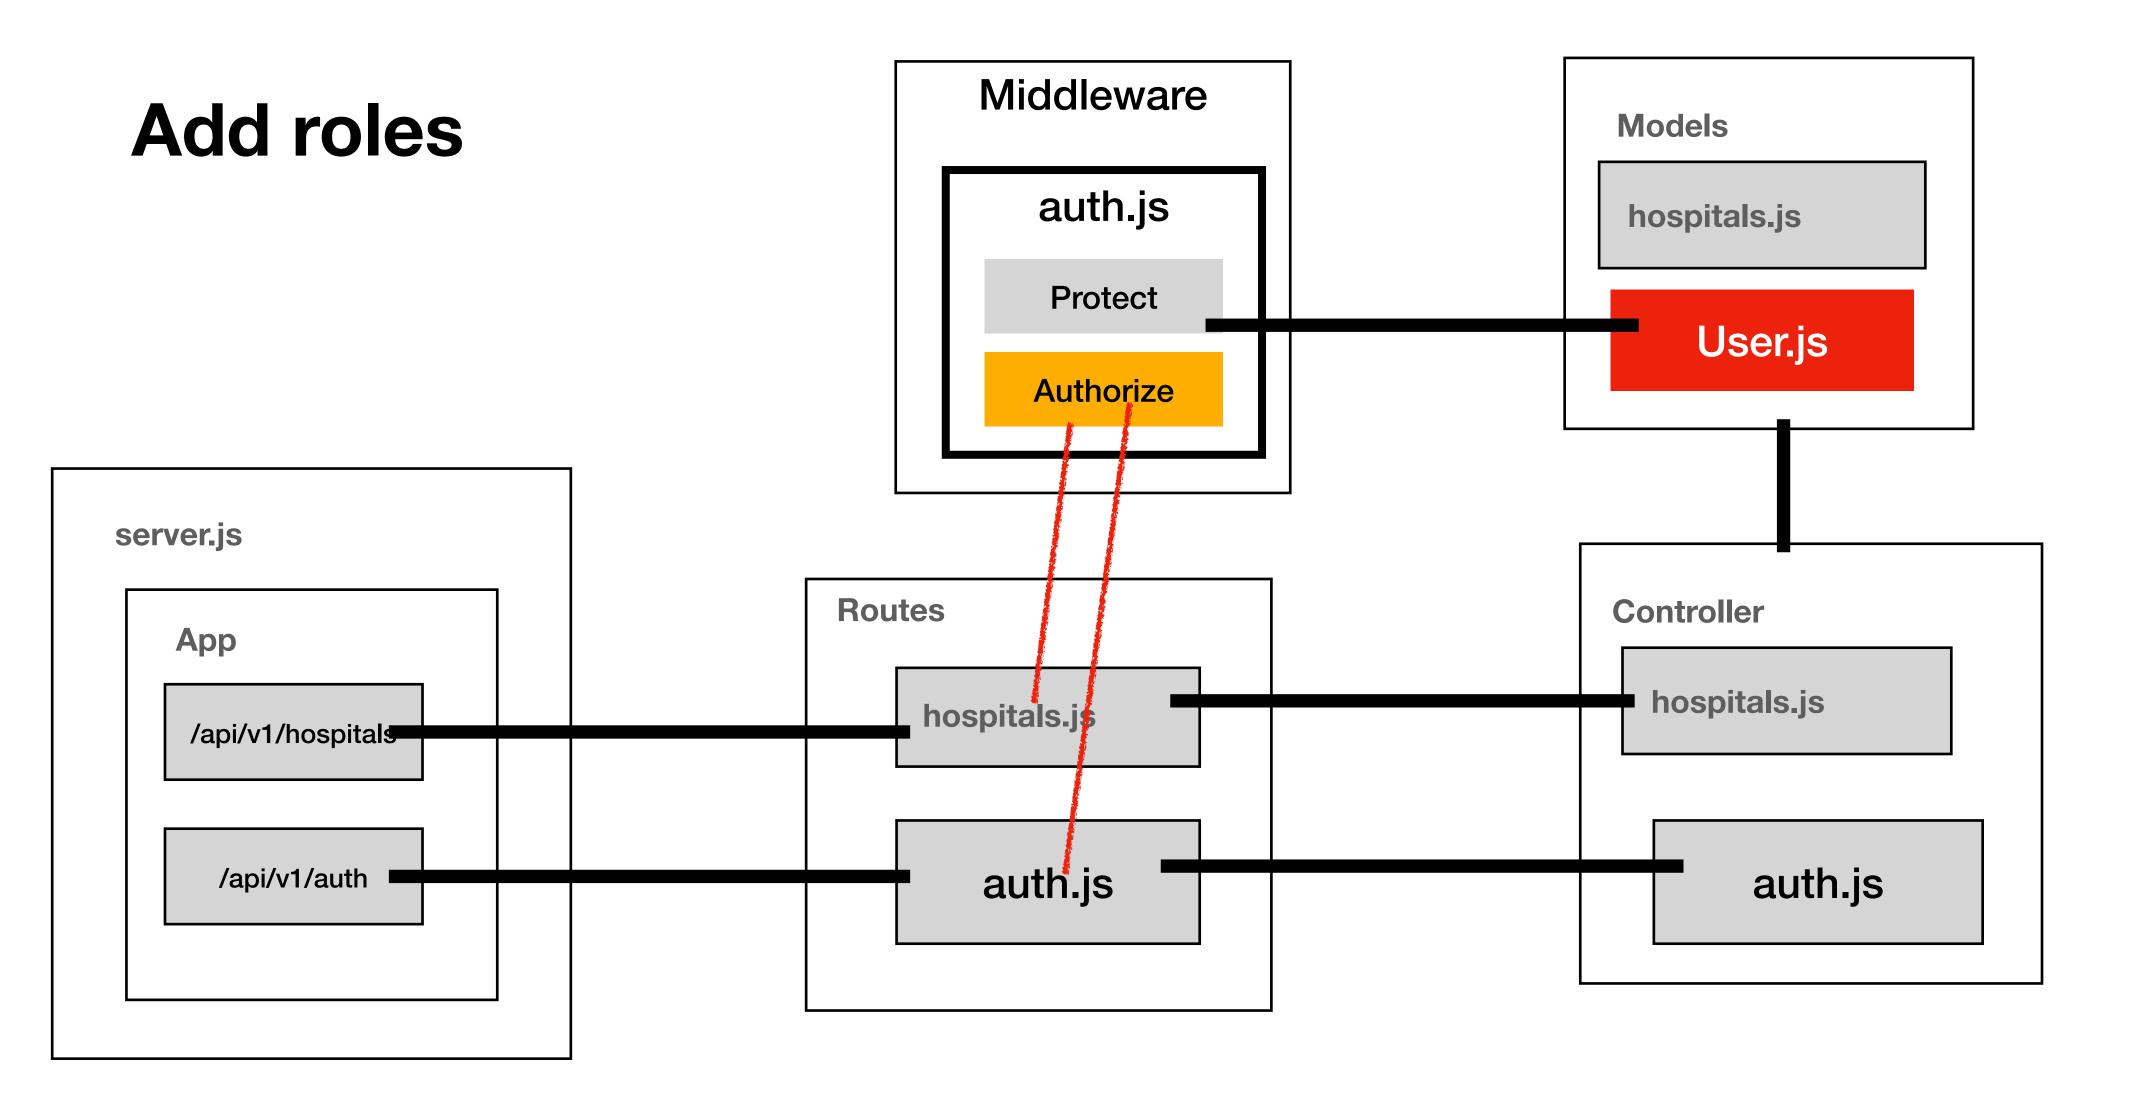

Note: 1) Unlike normal handler function, Authorize is a factory pattern function that returns a handler function (req, res, next) => {...} that depends on the roles,

2) So it will be used like authorize(["admin", "user"]), while protect could be used as protect

