


# Burp Repeater

The manual request editor: send one request, edit any part, resend, read the response — over and over. Where you hand-test a single endpoint for auth bypass, IDOR, injection, and logic flaws. Replace <placeholders> with your own values.

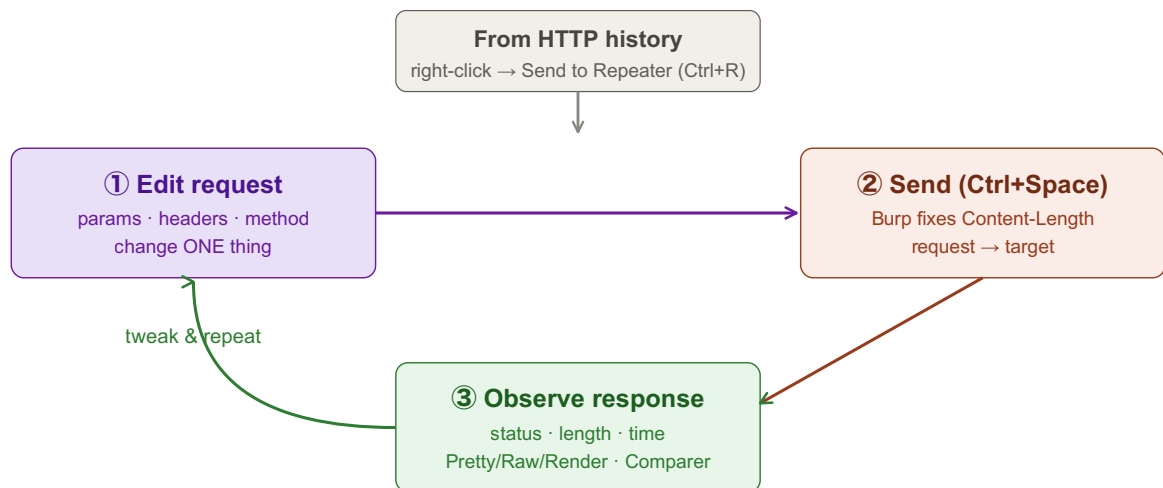

One request, infinite controlled edits. Change exactly one variable at a time.

Need to try MANY values automatically? → that's Intruder.

## ① Get a Request into Repeater

From Proxy HTTP history, Site map, or anywhere.

### Tab 1 · Burp

right-click request → "Send to Repeater" (Ctrl+R)  
→ switch to the Repeater tab

Each request gets its own numbered tab — double-click to rename (login-bypass, idor-orders...) so you don't lose track.

---

## ② Send & Read · ③ Edit & Resend

The whole point is a tight edit → send → observe loop.

### Tab 2 · Repeater

Send (Ctrl+Space) → response on the right  
response tabs: Pretty / Raw / Hex / Render (Render ≈ browser view)

edit then Send again — change one of:

- parameters (GET query, POST body, JSON fields)
- headers (Cookie, Authorization, User-Agent, Host, X-Forwarded-For)
- method (right-click → "Change request method", GET↔POST)

Watch the status / length / time columns — a length or timing change often reveals the bug before the body does.

---

## ④ Common Manual Tests

The bread-and-butter checks you run by hand here.

### Tab 3 · Probes

# Auth / session  
remove Cookie / Authorization header → still 200? broken auth  
swap your cookie for another user's → their data? broken authz

# IDOR  
id=1001 → id=1002 → another user's record returned?

# Injection probes (one at a time, watch the response)  
SQLi: ' → SQL error / changed response  
SSTI: {{7\*7}} → response shows 49  
Command: ;id | `id` → command output in response

# Header tricks  
X-Forwarded-For: 127.0.0.1 (IP allow-list bypass)  
Host: evil.tld (host-header injection / routing)

---

## ⑤ Compare & Iterate

Spot subtle true/false differences and keep your work organized.

### Tab 4 · Workflow

right-click response → "Send to Comparer" (diff two responses — blind bugs)  
history arrows < > → step through previous versions of THIS request  
right-click → "Copy as curl command" → for notes / report  
select payload → Ctrl+U URL-encode / Ctrl+Shift+U decode

*Burp auto-fixes Content-Length on Send by default — leave it on.*

---

Key idea: Repeater is the surgical tool — one request, infinite controlled edits. When you have a hunch about a single endpoint (a parameter, a header, a session check), Repeater lets you test it by hand, change exactly one thing, resend, and read the answer. When you need to try MANY values automatically, that's Intruder's job instead.