


Email Enumeration — cheat sheet

Generates corporate email permutations for a target and verifies them via SMTP — without sending a single email.

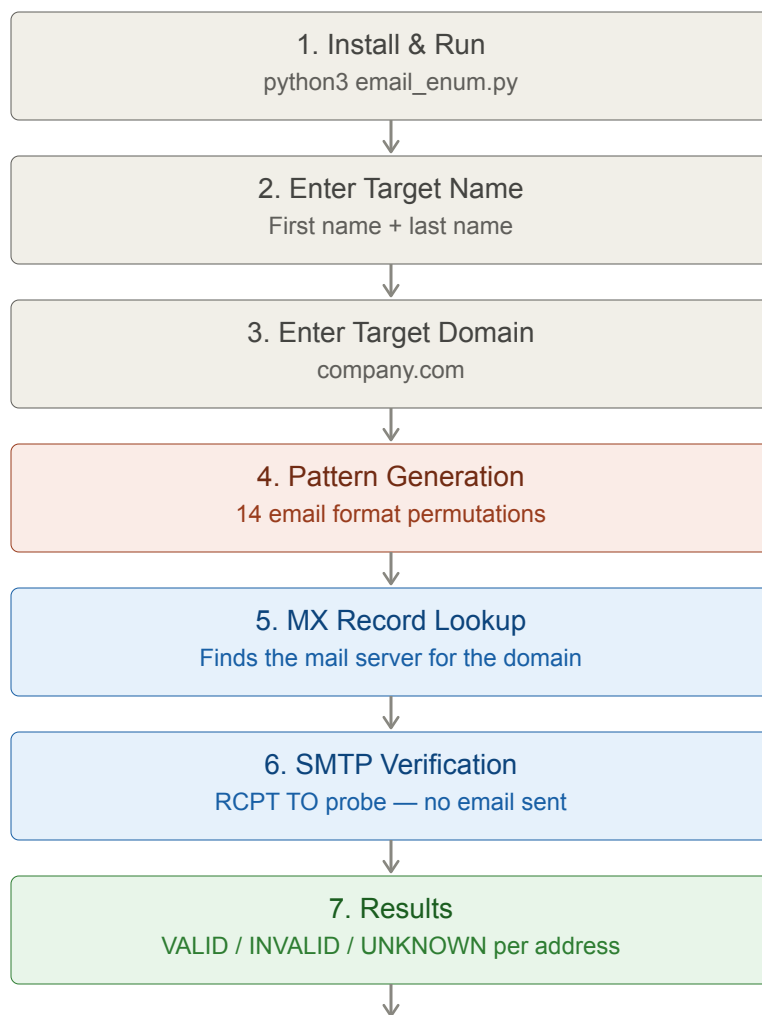

Step 1 — Install & Run

Install dependencies and launch the tool:

```
pip install -r requirements.txt
python3 email_enum.py
```

Runs interactively — no flags needed.

Step 2 & 3 — Enter Name and Domain

You will be prompted for:

First name:

john

Last name:

doe

Domain:

company.com

The tool generates all common corporate email patterns from these three inputs.

Step 4 — Pattern Generation

14 permutations are generated automatically:

Pattern	Example
first.last@domain	john.doe@company.com
firstlast@domain	johndoe@company.com
flast@domain	jdoe@company.com
firstl@domain	johnd@company.com
f.last@domain	j.doe@company.com
first@domain	john@company.com
last@domain	doe@company.com
last.first@domain	doe.john@company.com
first_last@domain	john_doe@company.com
first-last@domain	john-doe@company.com

Step 5 — MX Record Lookup

The tool resolves the domain's MX record to find its mail server before probing — no guessing.

Step 6 — SMTP Verification

Connects to the mail server and issues a RCPT TO command for each address. No email is ever sent.

Response	Meaning
250	VALID — address exists
550	INVALID — address does not exist
other	UNKNOWN — server is rate-limiting or greylisting

Step 7 — Reading Results

A summary table is printed at the end:

```
[+] VALID    john.doe@company.com
[-] INVALID  johndoe@company.com
[?] UNKNOWN  jdoe@company.com
```

Valid addresses are the primary output — use them for phishing simulation, recon, or access testing.

Key idea: some mail servers disable SMTP probing (catch-all domains always return 250). If most results are VALID or UNKNOWN, the domain likely uses a catch-all — treat results as unverified.