



19. Vulnerability scanning: SCAN01, Greenbone, and a least-privilege scan identity

Purpose: Records the deployment of the lab's network vulnerability scanner, `SCAN01`, running Greenbone Community Edition, the three failures met during the build and how each was recovered without losing data, and the design of the identity the scanner uses to log in to Windows targets. The identity work is the centre of the chapter: a scanner needs administrative access to read inside a machine, and the question answered here is how to give it that access without handing it the domain. Written so a reviewer can see what was built, why each decision was made, and which controls it supports.

Status: In progress. Sections 1 to 6 describe what exists as of 2026-09-11, including the policy proven on the first member workstation. Section 7 lists what remains before the first credentialed scan, and is completed as that work lands.

Related: `docs/14` section 4 (the Tier 0 classification rule), `docs/16` (Wazuh, which covers the domain controller where this scanner deliberately does not), `BACKLOG.md` (Vulnerability management).

1. Why a network scanner when Wazuh already finds CVEs

Wazuh already performs agent-based vulnerability detection: each agent reports its installed packages, and the manager matches them against CVE data. On PVE01 alone it reported 22 critical and 120 high findings. A network scanner is not a duplicate of that. The two look from opposite directions.

	Wazuh vulnerability detection	Greenbone network scanning
Viewpoint	Inside, from the agent's package inventory	Outside, from the network, and inside when given credentials
Sees	Vulnerable package versions on hosts that run an agent	Which ports actually answer, exposed services across VLANs, weak TLS, default credentials, and patch level when credentialed
Blind to	Anything without an agent; how a host looks to an attacker	Hosts it cannot route to; detail inside a host without credentials

An attacker meets the outside view first, so the lab needs both. CIS Controls v8 safeguard 7.5 asks for exactly this pairing: automated vulnerability scans of internal assets, both authenticated and unauthenticated. Together they implement NIST SP 800-53 `RA-5`, vulnerability monitoring and scanning.

2. Tool choice: Greenbone over Nessus Essentials

Nessus Essentials was the first choice, for the familiarity of the Tenable interface in job descriptions. Its terms, checked on 2026-09-08, rule it out: **5 IP addresses on a 30-day licence**. It once offered 16 addresses on a perpetual licence, and older write-ups still say so.

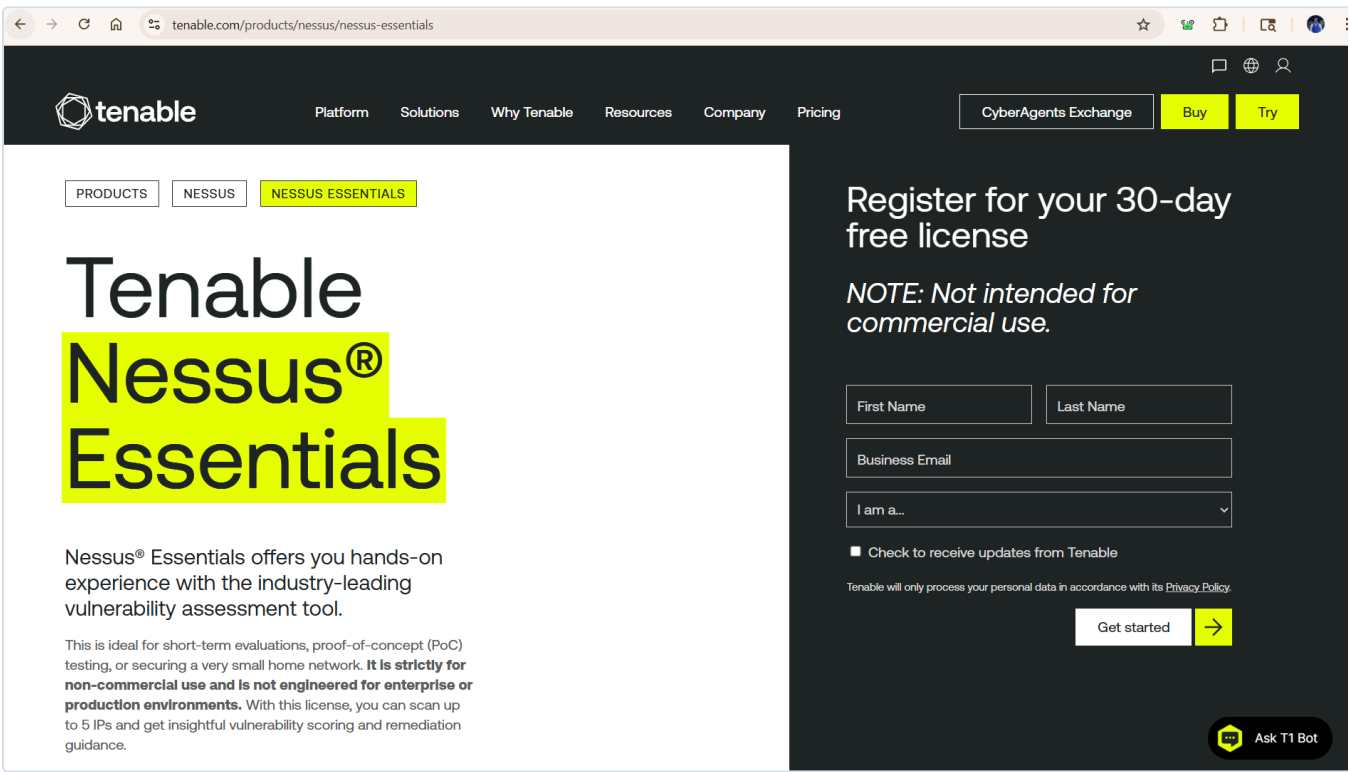


Figure 19.1: Tenable's own page on 2026-09-08: a 30-day licence, not for commercial use, scanning up to 5 IPs. The decision rests on the vendor's current terms, not on older write-ups.

Two problems follow. Five addresses cannot cover an estate of nine hosts, and coverage is the point of vulnerability management. And a licence that expires in a month cannot support a remediation loop, which depends on scanning, fixing, and scanning again to show the finding closed.

Greenbone Community Edition has no target limit, no expiry, and is fully open source. Its supported deployment route is the Greenbone Community Containers under Docker Compose, which is what runs on SCAN01. Tenable interface familiarity, if a particular role asks for it, is an afternoon on a trial licence and not worth structuring the lab around.

3. SCAN01: a VM, because it is a Tier 0 asset

Property	Value
Proxmox guest	VM 104, originally named <code>NESSUS01</code> , renamed <code>SCAN01</code> when the tool changed
Segment	VLAN 20 (BlueTeam). Installed on DHCP at <code>192.168.20.50</code> , then cut over to static <code>192.168.20.3</code> with netplan

Property	Value
Operating system	Ubuntu 26.04 LTS
Resources	2 vCPU, 8 GB RAM (built with 4 GB, raised for Greenbone), 100 GB virtual disk (see 4.1)
Web interface	Ports 443 and 9392 bound to <code>192.168.20.3</code> explicitly, not <code>0.0.0.0</code>

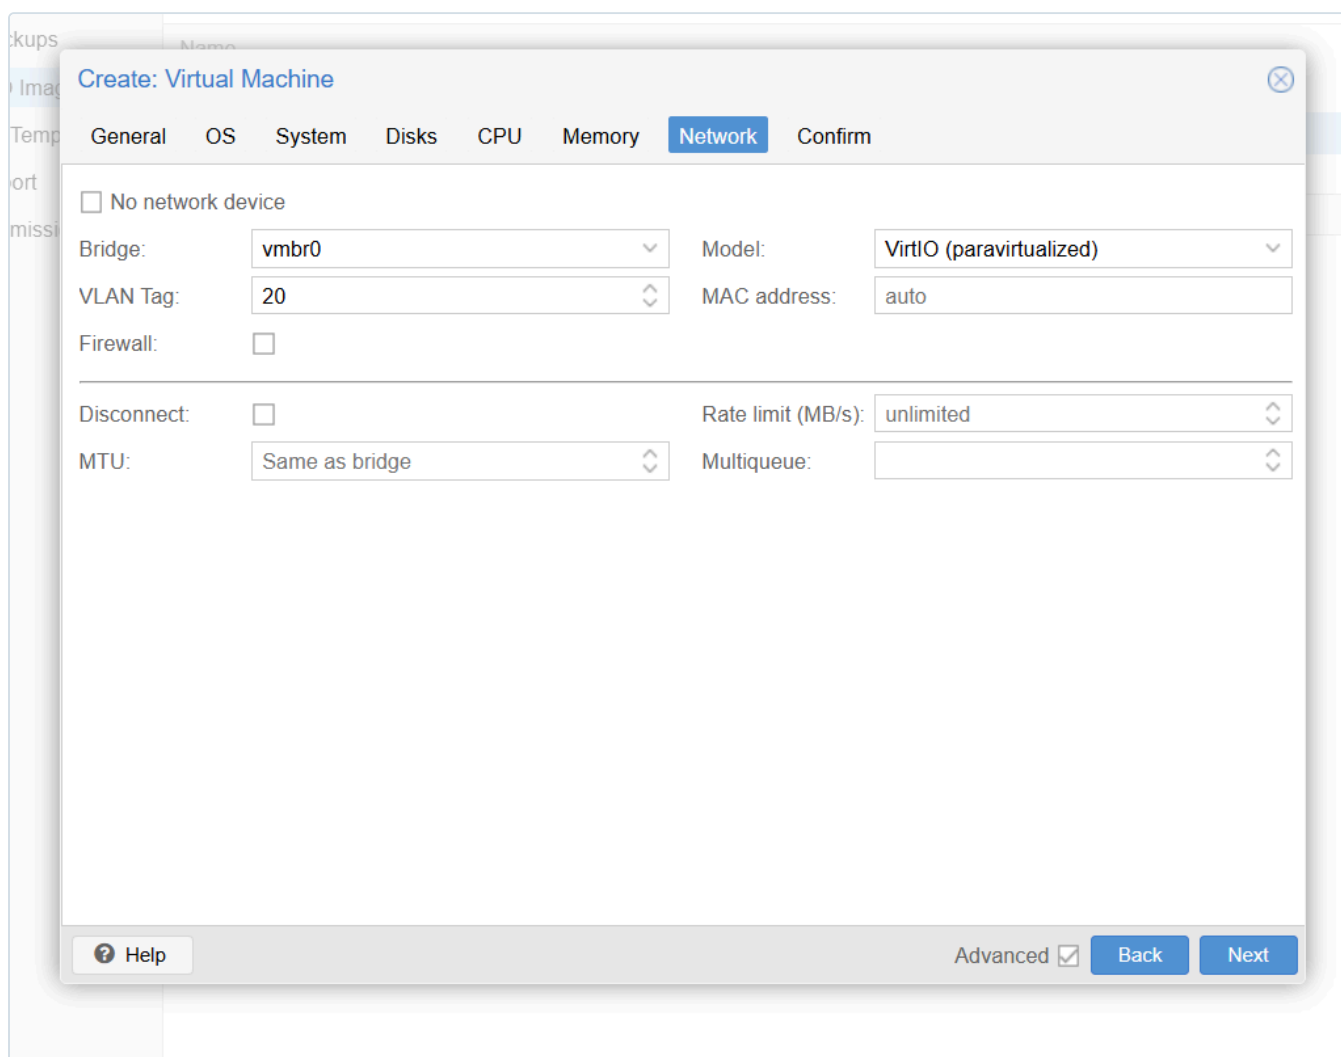


Figure 19.2: The VM's network interface at creation: bridge `vibr0`, VLAN tag 20. The guest is placed on the BlueTeam segment by the hypervisor, not by anything the guest itself configures.

The lab's placement rule (docs/14 section 4) runs Linux services as LXC containers by default. SCAN01 is the exception, because a scanner is a **Tier 0 asset**: it stores administrative credentials for every host it scans, so compromising it yields the estate. A VM gives it a hardware isolation boundary rather than a shared kernel with other containers.

Two further decisions on the host:

- **The web interface is bound to one address.** The default compose file listens on localhost only. The fix is to name the interface the service should listen on, not to open it to every interface.

- **Membership of the `docker` group is equivalent to `root`** on this host, because any container can mount the host filesystem. On a Tier 0 machine that is recorded as a decision, not left as a convenience default.

The hostname follows the lab convention of naming roles, not products (`docs/14` section 5.1). The machine was named after Nessus and was wrong within hours; `SCAN01` stays correct through any future change of tool.

4. Deployment, and three failures worth recording

Docker came from the Ubuntu archive (`docker.io` 29.1.3 with the Compose v2 plugin). The compose file URL given in many guides, `docker-compose-22.4.yml`, now returns 404; Greenbone publishes the current file as `compose.yaml`. Its two published ports were rebound from `127.0.0.1` to `192.168.20.3` before the first start.

```
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total       Spent    Left     Speed
0          0          0    0         0         0         0      0
curl: (22) The requested URL returned error: 404
nantwi@scan01:~/greenbone$ curl -f -L -O https://greenbone.github.io/docs/latest/_static/compose.yaml
% Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
           Dload  Upload   Total       Spent    Left     Speed
100    8697    100    8697    0         0    92619    0
nantwi@scan01:~/greenbone$ ls

nantwi@scan01:~/greenbone$ grep -n '127.0.0.1' compose.yaml
163: - 127.0.0.1:443:443
164: - 127.0.0.1:9392:9392
233: # - 127.0.0.1:3000:80
nantwi@scan01:~/greenbone$ sed -i 's/127\.\0\.\0\.\1:443:443/192.168.20.3:443:443/; s/127\.\0\.\0\.\1:9392:9392/192.168.20.3:9392:9392/' compose.yaml
&& grep -n '192.168.20.3' compose.yaml
163: - 192.168.20.3:443:443
164: - 192.168.20.3:9392:9392
nantwi@scan01:~/greenbone$ sudo docker compose up -d
[+] Running 139/171
  gvmd [#####] 122MB / 227.9MB Pulling 157.9s
  vulnerability-tests [#####] 155.2MB / 231.3MB Pulling 157.9s
  report-formats [#####] 395.9kB / 395.9kB Pulling 157.9s
  pg-gvm [#####] 121.8MB / 121.8MB Pulling 157.9s
  configure-opensvas Pulling 157.9s
  pg-gvm-migrator [#####] 225.3MB / 247.9MB Pulling 157.9s
  data-objects [#####] 2.194MB / 2.194MB Pulling 157.9s
  dfn-cert-data [#####] 6.894MB / 6.894MB Pulling 157.9s
  gsa [#####] 3.611MB / 3.611MB Pulling 157.9s
  nginx [#####] 66.26MB / 66.26MB Pulling 157.9s
  gvm-config [#####] 5.785MB / 5.785MB Pulling 157.9s
  opensvas [#####] 179MB / 179MB Pulling 157.9s
  notus-data [#####] 40.2MB / 40.2MB Pulling 157.9s
  scap-data [#####] 194MB / 1.548GB Pulling 157.9s
  gpg-data [#####] 2.228MB / 2.228MB Pulling 157.9s
  gsd [#####] 13.94MB / 13.94MB Pulling 157.9s
  ospd-opensvas [#####] 287.7MB / 287.7MB Pulling 157.9s
  cert-bund-data [#####] 16.98MB / 16.98MB Pulling 157.9s
  redis-server [#####] 53.02MB / 53.02MB Pulling 157.9s
  opensvas Pulling 157.9s
  gvm-tools [#####] 63.23MB / 63.23MB Pulling 157.9s
```

Figure 19.3: The 404 on the old file name, the current `compose.yaml` fetched, ports 443 and 9392 rebound from localhost to the SCAN01 address with `sed`, verified with `grep`, and the first image pull under way.

The containers deployed cleanly. Getting the feeds loaded did not. Each failure below was a different kind of problem, and each recovery kept the 11 GB of downloaded feed data intact.

4.1 The disk that was only half allocated

Ubuntu's installer, given a 60 GB disk with LVM, built a 58 GB volume group but created a logical volume of only **29 GB**, leaving the rest unallocated. That is the installer's default, not a fault. The Greenbone feeds filled the 29 GB to 100%.

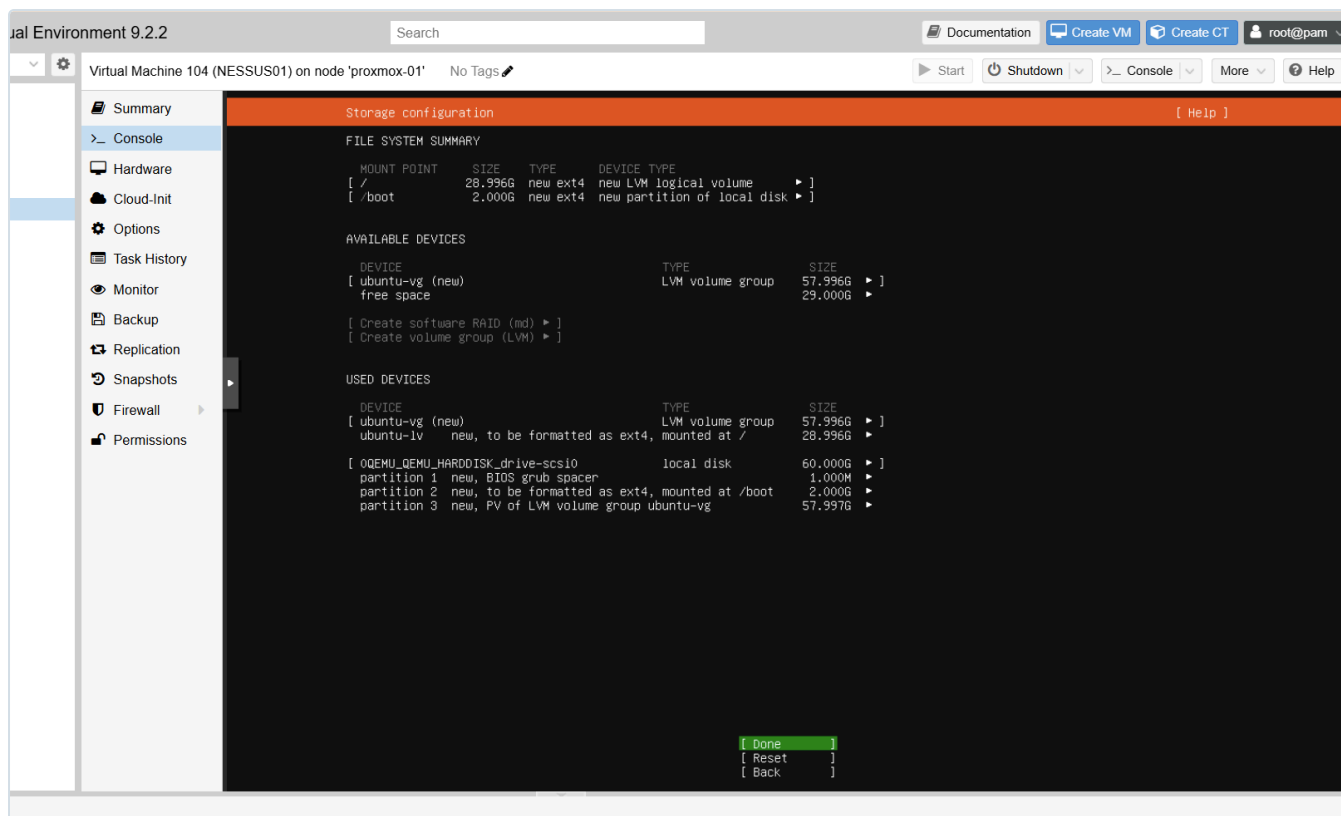


Figure 19.4: The root cause, visible at install time: / on a 28.996 GB logical volume inside a 57.996 GB volume group, with 29 GB left free. Accepting the default here produced the disk-full failure a day later.

Extending the volume taught a precise lesson. `lvextend` printed that the volume had changed from 29 GB to 58 GB, then failed a side task, writing its metadata backup to `/etc/lvm/archive`, because the disk had zero bytes free. On that failure LVM rolled the whole change back. The success message described the intent, not the result; `lvs` still reported 29 GB. Running the extend with automatic metadata backup turned off, `lvextend -A n -l +100%FREE`, succeeded, and `resize2fs` then grew the filesystem into the space.

During the overnight feed load the disk filled again, to **96%** with 2.7 GB free.

```
gvmc-1 | md manage: INFO:2026-09-09 23:40:36 utc:131: Updating /var/lib/gvm/scap-data/nvdCVE-2.0-2019.json.gz
gvmc-1 | md manage: INFO:2026-09-09 23:51:35 utc:131: update_epss_scores: EPSS scores file '/var/lib/gvm/scap-data/epss-scores-current.json' not found
gvmc-1 | md manage: INFO:2026-09-09 23:51:35 utc:131: Updating CVSS scores and CVE counts for CPEs
nantwi@scan01:~/greenbone$ sudo docker compose logs gvmc | grep -c nvdCVE
28
nantwi@scan01:~/greenbone$ df -h
Filesystem              Size  Used Avail Use% Mounted on
tmpfs                   1.4G  140M   1.3G   11% /run
/dev/mapper/ubuntu--vg-ubuntu--lv 57G   52G   2.7G   96% /
tmpfs                   3.4G   0  3.4G   0% /dev/shm
none                   1.0M   0  1.0M   0% /run/credentials/systemd-journald.service
tmpfs                   2.7G   0  2.7G   0% /tmp
none                   1.0M   0  1.0M   0% /run/credentials/systemd-resolved.service
/dev/sda2              2.0G  183M   1.7G   11% /boot
none                   1.0M   0  1.0M   0% /run/credentials/systemd-networkd.service
none                   1.0M   0  1.0M   0% /run/credentials/getty@tty1.service
tmpfs                  552M   8.0K  552M   1% /run/user/1000
nantwi@scan01:~/greenbone$ df -h/
df: invalid option -- '/'
Try 'df --help' for more information.
nantwi@scan01:~/greenbone$ df -h /
Filesystem              Size  Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv 57G   52G   2.7G   96% /
nantwi@scan01:~/greenbone$
```

Figure 19.5: SCAP loading its 28th CVE year file while the root volume stood at 52 GB of 57 GB. The same condition had corrupted the database the first time (4.2), so the extend happened before it filled.

This time the virtual disk itself was grown in Proxmox to 100 GB and the change carried up through every layer:

```
sudo growpart /dev/sda 3          # partition fills the larger disk
sudo pvresize /dev/sda3          # LVM physical volume notices
```

```
sudo lvextend -l +100%FREE /dev/ubuntu-vg/ubuntu-lv
sudo resize2fs /dev/ubuntu-vg/ubuntu-lv          # filesystem grows, online
```

Result: **97 GB, 57% used**. The finished installation uses about 52 GB.

```
sda                 8:0    0 100G 0 disk
├─sda1              8:1    0   1M 0 part
├─sda2              8:2    0   2G 0 part /boot
└─sda3              8:3    0  98G 0 part
   └─ubuntu--vg-ubuntu--lv 252:0 0  58G 0 lvm /
sr0                 11:0    1 1024M 1 rom
nantwi@scan01:~/greenbone$ lsblk
nantwi@scan01:~/greenbone$ lsblk
NAME                MAJ:MIN RM  SIZE RO TYPE MOUNTPOINTS
sda                  8:0    0 100G 0 disk
├─sda1              8:1    0   1M 0 part
├─sda2              8:2    0   2G 0 part /boot
└─sda3              8:3    0  98G 0 part
   └─ubuntu--vg-ubuntu--lv 252:0 0  58G 0 lvm /
sr0                 11:0    1 1024M 1 rom
nantwi@scan01:~/greenbone$ sudo pvresize /dev/sda3
Physical volume "/dev/sda3" changed
1 physical volume(s) resized or updated / 0 physical volume(s) not resized
nantwi@scan01:~/greenbone$ sudo lvextend -l +100%FREE /dev/ubuntu-vg/ubuntu-lv
Size of logical volume ubuntu-vg/ubuntu-lv changed from <58.00 GiB (14847 extents) to <98.00 GiB (25087 extents).
Logical volume ubuntu-vg/ubuntu-lv successfully resized.
nantwi@scan01:~/greenbone$ sudo resize2fs /dev/ubuntu-vg/ubuntu-lv && df -h /
resize2fs 1.47.2 (1-Jan-2025)
Filesystem at /dev/ubuntu-vg/ubuntu-lv is mounted on /; on-line resizing required
old_desc_blocks = 8, new_desc_blocks = 13
The filesystem on /dev/ubuntu-vg/ubuntu-lv is now 25689088 (4k) blocks long.

Filesystem                Size      Used Avail Use% Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv 97G   52G   41G  57% /
nantwi@scan01:~/greenbone$
```

Figure 19.6: Each layer confirmed in turn: `lsblk` showing the 100 GB disk and 98 GB partition, `pvresize`, `lvextend` from 58 GB to 98 GB, an online `resize2fs`, and `df` reporting 97 GB with 41 GB free. Done with the containers running and SCAP still loading.

The second extend did not need `-A n`, because 2.7 GB free was enough room for LVM to write its archive. Same command, different outcome, for a reason worth understanding.

4.2 The half-written database

When the disk first hit 100%, Postgres was part way through initialising its data directory. After the extend, the database migrator container failed on every start:

```
pg-gvm-migrator-1 | Detected current major: 13
pg-gvm-migrator-1 | Target major: 17
pg-gvm-migrator-1 | ERROR: could not start old cluster 13 for recovery.
pg-gvm-migrator-1 | but could not open file "/var/lib/postgresql/13/main/global/pg_control": No s
```

Because Greenbone's compose file starts each service only when its dependencies are healthy, the migrator's failure left `pg-gvm`, `gvmd`, `gsad` and `nginx` sitting at `Created`, never started. One broken piece of storage stopped the whole product.

```

antw@scan01: ~/greenbone
✓ Container greenbone-community-edition-gvm-tools-1 Removed
✓ Container greenbone-community-edition-opensvd-1 Removed
✓ Container greenbone-community-edition-nginx-1 Removed
✓ Container greenbone-community-edition-opensvd-1 Removed
✓ Container greenbone-community-edition-ospd-opensvd-1 Removed
✓ Container greenbone-community-edition-gvm-config-1 Removed
✓ Container greenbone-community-edition-gsa-1 Removed
✓ Container greenbone-community-edition-gsad-1 Removed
✓ Container greenbone-community-edition-redis-server-1 Removed
✓ Container greenbone-community-edition-gpg-data-1 Removed
✓ Container greenbone-community-edition-vulnerability-tests-1 Removed
✓ Container greenbone-community-edition-notus-data-1 Removed
✓ Container greenbone-community-edition-gvmd-1 Removed
✓ Container greenbone-community-edition-dfn-cert-data-1 Removed
✓ Container greenbone-community-edition-report-formats-1 Removed
✓ Container greenbone-community-edition-pg-gvm-1 Removed
✓ Container greenbone-community-edition-scap-data-1 Removed
✓ Container greenbone-community-edition-pg-gvm-migrator-1 Removed
✓ Container greenbone-community-edition-configure-opensvd-1 Removed
✓ Container greenbone-community-edition-cert-bund-data-1 Removed
✓ Container greenbone-community-edition-data-objects-1 Removed
✓ Network greenbone-community-edition_default Removed
+ Running 22/22
✓ Network greenbone-community-edition_default Created
✓ Container greenbone-community-edition-scap-data-1 Started
✗ Container greenbone-community-edition-pg-gvm-migrator-1 service "pg-gvm-migrator"...
✓ Container greenbone-community-edition-cert-bund-data-1 Healthy
✓ Container greenbone-community-edition-gpg-data-1 Exited
✓ Container greenbone-community-edition-gvm-config-1 Started
✓ Container greenbone-community-edition-vulnerability-tests-1 Healthy
✓ Container greenbone-community-edition-redis-server-1 Started
✓ Container greenbone-community-edition-gsa-1 Started
✓ Container greenbone-community-edition-notus-data-1 Healthy
✓ Container greenbone-community-edition-data-objects-1 Healthy
✓ Container greenbone-community-edition-configure-opensvd-1 Exited
✓ Container greenbone-community-edition-dfn-cert-data-1 Started
✓ Container greenbone-community-edition-report-formats-1 Started
✓ Container greenbone-community-edition-pg-gvm-1 Created
✓ Container greenbone-community-edition-opensvd-1 Started
✓ Container greenbone-community-edition-opensvd-1 Started
✓ Container greenbone-community-edition-ospd-opensvd-1 Started
✓ Container greenbone-community-edition-gvmd-1 Created
✓ Container greenbone-community-edition-gsad-1 Created
✓ Container greenbone-community-edition-gvm-tools-1 Created
✓ Container greenbone-community-edition-nginx-1 Created
service "pg-gvm-migrator" didn't complete successfully: exit 1
antw@scan01: ~/greenbone$

```

Figure 19.7: A full restart that changes nothing: the migrator fails, and `pg-gvm`, `gvmd`, `gsad`, `gvm-tools` and `nginx` stay at `Created`. Restarting could not fix a fault that lived in storage, not in a container.

The fix was to delete the broken volume and nothing else. Sizes were measured first, so the decision rested on evidence:

Volume	Size	Decision
scap_data_vol	10.02 GB	Keep
notus_data_vol	715 MB	Keep
vt_data_vol	502.7 MB	Keep
cert_data_vol	179.6 MB	Keep
psql_data_vol	82 MB	Delete

82 MB is the size of an empty Postgres catalogue, and `gvmd_data_vol` at 0 bytes confirmed the manager had never run. The volume was removed by name with `docker volume rm`. `docker volume prune` was deliberately not used, because it removes every unused volume, which at that moment included all the feeds. On the next `docker compose up -d` the migrator found no old cluster, initialised PostgreSQL 17, and Compose reported all 23 services started.


```

greenbone-community-edition_openvas_data_vol    0    1.116kB
nantwi@scan01:~/greenbone$ sudo docker volume rm greenbone-community-edition_psql_data_vol
greenbone-community-edition_psql_data_vol
nantwi@scan01:~/greenbone$ sudo docker compose up -d
[+] Running 23/23
 ✓ Network greenbone-community-edition_default    Created
 ✓ Volume greenbone-community-edition_psql_data_vol    Created
 ✓ Container greenbone-community-edition-gpg-data-1    Exited
 ✓ Container greenbone-community-edition-redis-server-1    Started
 ✓ Container greenbone-community-edition-gvm-config-1    Exited
 ✓ Container greenbone-community-edition-notus-data-1    Healthy
 ✓ Container greenbone-community-edition-gsa-1    Healthy
 ✓ Container greenbone-community-edition-pg-gvm-migrator-1    Exited
 ✓ Container greenbone-community-edition-pg-configure-openvas-1    Exited
 ✓ Container greenbone-community-edition-scap-data-1    Healthy
 ✓ Container greenbone-community-edition-cert-bund-data-1    Healthy
 ✓ Container greenbone-community-edition-data-objects-1    Healthy
 ✓ Container greenbone-community-edition-vulnerability-tests-1    Healthy
 ✓ Container greenbone-community-edition-dfn-cert-data-1    Healthy
 ✓ Container greenbone-community-edition-report-formats-1    Healthy
 ✓ Container greenbone-community-edition-pg-gvm-1    Started
 ✓ Container greenbone-community-edition-ospd-openvas-1    Started
 ✓ Container greenbone-community-edition-openvasd-1    Started
 ✓ Container greenbone-community-edition-openvas-1    Started
 ✓ Container greenbone-community-edition-gvmd-1    Started
 ✓ Container greenbone-community-edition-gsad-1    Started
 ✓ Container greenbone-community-edition-gvm-tools-1    Started
 ✓ Container greenbone-community-edition-nginx-1    Started

```

Figure 19.8: The single named volume removed, then `Running 23/23`: a fresh database volume created, the migrator exiting cleanly, and every previously blocked service started.

Because the database was new, the web administrator's password had to be set again. `gvmd` takes the password as a command-line argument, so it appears on screen and in shell history; the capture of that step is deliberately excluded from this evidence set.

Two things this made visible about containers: `docker compose down` removes containers but not named volumes, which is why the feeds survived it twice; and some containers are jobs rather than services, so `Exited` with code 0 is success for the migrator.

4.3 The manager that crashed when the interface was used

Opening the web interface while the SCAP feed was loading crashed `gvmd`:

```
sql_exec_internal: constraint violation: ERROR: duplicate key value violates unique constraint "se
```

The manager tried to insert a user setting that already existed, Postgres rejected it, and `gvmd` treats a SQL constraint error as fatal. Docker restarted the container, which resumed from the volumes and cleared stale feed-lock flags left by the abort. The operating rule since: **stay out of the web interface until the feeds report Current.**


```

nantiw@scan01:~/greenbone$
gsa-1 | done.
report-formats-1 | Using feed release 24.10
report-formats-1 | License information for Greenbone Community Feed - Data Objects
report-formats-1 | -----
report-formats-1 | The Greenbone Community Feed is a database licensed under the
report-formats-1 | Open Data Commons Open Database License version 1.0 (ODbLv1).
report-formats-1 |
report-formats-1 | The license for the Greenbone Vulnerability Manager daemon (gvmd) data objects of the
report-formats-1 | Greenbone Community Feed is the GNU Affero General Public License version 3 (GNU AGPLv3).
report-formats-1 |
report-formats-1 | ODbLv1: See file LICENSE.ODbLv1
report-formats-1 | AGPLv3: See file LICENSE.AGPLv3
report-formats-1 |
report-formats-1 | The following text will satisfy notice under ODbLv1 Section 4.3:
report-formats-1 |
report-formats-1 | Contains information from Greenbone Community Feed (GCF, https://www.greenbone.net/en/gcf-odbl-license/) which is
report-formats-1 | made available here under the Open Database License (ODbL, https://opendatacommons.org/licenses/odbl/odbl-1.0.txt).
report-formats-1 |
report-formats-1 | For more information please contact Greenbone AG:
report-formats-1 | https://www.greenbone.net or info@greenbone.net
report-formats-1 |
report-formats-1 | Copying report formats...
report-formats-1 | changed user permissions to 1001
report-formats-1 | changed group permissions to 1001
report-formats-1 | files copied.
nantiw@scan01:~/greenbone$ sudo docker compose logs gvmd -tail 20
gvmd-1 | md manage:WARNING: 2026-09-09 18h18.44 utc:1390: sql_exec_internal: SQL: INSERT INTO settings (uuid, owner, name, comment, value) VALUES ($1, (SELECT id FROM us
ers WHERE uuid = $2), (SELECT name FROM settings WHERE uuid = $1 AND owner IS NULL LIMIT 1), (SELECT comment FROM settings WHERE uuid = $1 AND owner IS NULL LIM
IT 1), $3);
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x150819) [0x5eafe653819]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: /lib/x86_64-linux-gnu/libc.so.6(+0x3f4f0) [0x7ecbad9b2df0]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: /lib/x86_64-linux-gnu/libc.so.6(+0x9495c) [0x7ecbad0795c]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: /lib/x86_64-linux-gnu/libc.so.6(gsignal+0x12) [0x7ecbad9b2cc2]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: /lib/x86_64-linux-gnu/libc.so.6(abort+0x22) [0x7ecbad99b4ac]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x5aa9c) [0x5eafe55da9c]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x13f83d) [0x5eafe64283d]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x85c7d) [0x5eafe588c7d]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: /lib/x86_64-linux-gnu/libglib-2.0.so.0(+0x62612) [0x7ecbadcae612]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: /lib/x86_64-linux-gnu/libglib-2.0.so.0(g_markup_parse_context_parse+0xed7) [0x7ecbadcaf5d7]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x95181) [0x5eafe590181]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x15619c) [0x5eafe65619c]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x150371) [0x5eafe653371]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x150a51) [0x5eafe653a51]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x1552c5) [0x5eafe6582c5]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: /lib/x86_64-linux-gnu/libc.so.6(+0x29ca8) [0x7ecbad99cca8]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: /lib/x86_64-linux-gnu/libc.so.6(__libc_start_main+0x85) [0x7ecbad99cd65]
gvmd-1 | md main:MESSAGE: 2026-09-09 18h18.44 utc:1390: BACKTRACE: gvmd(+0x5ab01) [0x5eafe55db01]
gvmd-1 | md manage:MESSAGE: 2026-09-09 18h18.44 utc:1390: Received Aborted signal
nantiw@scan01:~/greenbone$

```

Figure 19.9: The rejected `INSERT INTO` settings at 18:18:44 UTC, the backtrace, and `Received Aborted signal`. A constraint error handled as fatal, triggered by the interface, not by the feed.

4.4 Feed status

Feed	State
NVT (vulnerability tests)	186,567 tests loaded , 2026-09-09 18:39 UTC
CERT advisories	Loaded
SCAP (CVE and CPE data, about 10 GB)	Loaded, confirmed 2026-09-11
GVMD_DATA (scan configs, port lists)	Loaded, confirmed 2026-09-11

```

gvm@1 ~ % md manage: INFO:2026-09-09 18h30.55 utc:130: Finished all_vts table refresh
^C
nantwi@scan01:~/greenbone$ cd ~/greenbone && sudo docker compose logs gvm --tail 20
[sudo: authenticate] Password:
gvm@1 | md main:MESSAGE:2026-09-09 18h30.58 utc:100: Greenbone Vulnerability Manager version 26.38.0 (DB revision 281)
gvm@1 | md manage: INFO:2026-09-09 18h30.58 utc:100: Modifying setting.
gvm@1 | md manage:MESSAGE:2026-09-09 18h30.58 utc:100: No SCAP database found
gvm@1 | starting gvm
gvm@1 | md main:MESSAGE:2026-09-09 18h31.00 utc:101: Greenbone Vulnerability Manager version 26.38.0 (DB revision 281)
gvm@1 | md manage:MESSAGE:2026-09-09 18h31.00 utc:101: No SCAP database found
gvm@1 | md main: INFO:2026-09-09 18h31.03 utc:101: gvm is ready to accept GMP connections
gvm@1 | md manage: INFO:2026-09-09 18h31.03 utc:132: OSP service has different VT status (version 202609080600) from database (version (null), 0 VTs). Starting update
...
gvm@1 | md manage:WARNING:2026-09-09 18h31.03 utc:131: update_scap: No SCAP db present, rebuilding SCAP db from scratch
gvm@1 | md manage: INFO:2026-09-09 18h31.06 utc:131: update_scap: Updating data from feed
gvm@1 | md manage: INFO:2026-09-09 18h31.06 utc:131: Updating CPEs
gvm@1 | md manage: INFO:2026-09-09 18h31.06 utc:131: Updating /var/lib/gvm/scap-data/nvd-cpes.json.gz
gvm@1 | md manage: INFO:2026-09-09 18h32.54 utc:131: Updating CPE refs...
gvm@1 | md manage: INFO:2026-09-09 18h33.33 utc:131: Updating CPE match strings from /var/lib/gvm/scap-data/nvd-cpe-matches.json.gz
gvm@1 | md manage: INFO:2026-09-09 18h39.38 utc:132: Updating VTs in database ... 186567 new VTs, 0 changed VTs
gvm@1 | md manage: INFO:2026-09-09 18h39.50 utc:132: Updating VTs in database ... done (186567 VTs).
gvm@1 | md manage: INFO:2026-09-09 18h39.50 utc:130: manage_discovery_nvts: Updating Discovery NVTs
gvm@1 | md manage: INFO:2026-09-09 18h39.51 utc:130: manage_discovery_nvts: Updating Discovery NVTs done
gvm@1 | md manage: INFO:2026-09-09 18h39.51 utc:130: Refreshing all_vts table...
gvm@1 | md manage: INFO:2026-09-09 18h40.33 utc:130: Finished all_vts table refresh
nantwi@scan01:~/greenbone$

```

Figure 19.10: Greenbone Vulnerability Manager 26.38.0 ready for connections at 18:31 UTC, rebuilding SCAP from scratch, then **186567 new VTs** and the **all_vts** refresh complete at 18:40. This is the moment the scanner became capable of scanning.

Feed is currently syncing.

Please wait while the feed is syncing. Scans are not available during this time. For more information, visit the [Documentation](#).

Feed Status

Type	Content	Origin	Version	Status
NVT	NVTs	Greenbone Community Feed	20260908T0600	Current
SCAP	CVEs CPE CPEs	Greenbone SCAP Data Feed	20260908T0206	Update in progress...
CERT	CERT-Bund Advisories DFN-CERT Advisories	Greenbone CERT Data Feed	20260908T0425	Update in progress...
GVMD_DATA	Compliance Policies Port Lists Report Formats Scan Configs	Greenbone Data Objects Feed	20260908T0513	Update in progress...

Copyright © 2009-2026 by Greenbone AG, www.greenbone.net

Figure 19.11: Feed Status on `https://192.168.20.3`: NVT Current, the other three still updating, and scans disabled until they finish. The browser's bookmarks bar has been blanked in this capture.

The initial load took about four hours on 2 vCPU and 8 GB, bound by disk I/O rather than CPU.

Feed Status

Type	Content	Origin	Version	Status
NVT	NVTs	Greenbone Community Feed	20260908T0600	3 days old
SCAP	CVEs CPE CPEs	Greenbone SCAP Data Feed	20260908T0206	3 days old
CERT	CERT-Bund Advisories DFN-CERT Advisories	Greenbone CERT Data Feed	20260908T0425	3 days old
GVMD_DATA	Compliance Policies Port Lists Report Formats Scan Configs	Greenbone Data Objects Feed	20260908T0513	3 days old

Copyright © 2009-2026 by Greenbone AG, www.greenbone.net

Figure 19.12: Feed Status on 2026-09-11, 14:55 UTC: all four feeds loaded, no sync running, and scanning available. "3 days old" is the age of the feed release dated 2026-09-08, not a fault.

What "3 days old" means. The status column reports the age of the feed data, not the state of the load. In the Community Containers the feed does not update itself: each feed ships as a data container image, and newer data arrives only when those images are pulled and the containers restarted.

```
cd ~/greenbone
sudo docker compose pull notus-data vulnerability-tests scap-data dfn-cert-data cert-bund-data rep
sudo docker compose up -d notus-data vulnerability-tests scap-data dfn-cert-data cert-bund-data re
```

Every refresh makes `gvmd` reload the changed data, which on this disk means hours of I/O, so refreshes are scheduled rather than run ad hoc: weekly, outside scan windows, and never while the interface is in use (4.3). A scanner running week-old vulnerability tests misses what was published since, which is why the refresh cadence belongs in the chapter's control story ([RA-5\(2\)](#) , update vulnerabilities to be scanned).

A Proxmox snapshot named `greenbone-feeds-loaded` is taken now that all four are loaded, so the four-hour initial load never has to be repeated.

5. The scan identity

5.1 The design question

Greenbone can inspect a Windows machine from outside, or log in and inspect it from inside. Logging in is what turns "port 445 is open" into "this machine is missing a specific update". Reading the registry, installed software and patch level remotely requires membership of the target's local **Administrators** group.

So the question is how to give a scanner administrative rights inside many machines without giving it any power over the domain. NIST SP 800-53 has a control written for exactly this: [RA-5\(5\)](#) , **privileged access for vulnerability scanning**. The answer built here is a chain of four pieces, each doing one job.

```
svc-greenbone          the identity: who
  | member of
SG-Scanner-LocalAdmin  the role: a list of members
  | named in
SEC-Scanner-Access     policy item: add role to Administrators
  | linked to
OU=Computers,OU=BIIRA   Servers and Workstations inherit
  | applied by each machine to itself
WKS01 local Administrators now includes the role

Not linked: the Domain Controllers OU, so DC01 is never in scope
```

The scanner's access exists only while every link holds. Remove the account from the group, the group from Administrators, or the machine from scope, and the access is gone. That is the property a reviewer should look for in any privileged grant.

5.2 The account: `svc-greenbone`

A non-human identity: an account belonging to software, with one purpose and a named human owner.

Created 2026-09-09 in `OU=ServiceAccounts,OU=Users,OU=BIIRA`.

Setting	Value	Why
User must change password at next logon	Off	The scanner cannot answer an interactive prompt. Left on, every scan fails with a logon error that says nothing about the cause
User cannot change password	On	A service account never rotates its own credential. If it did, Greenbone's stored copy would go stale, and an attacker holding the credential could lock the owner out
Password never expires	On	Chosen for availability: a scan credential that expires silently stops scanning. Recorded as a debt under <code>CA-5</code> , closed when VAULT01 issues short-lived credentials (section 7)
Account is sensitive and cannot be delegated	On	This account authenticates to nearly every member host. Kerberos delegation would let a compromised host reuse its ticket to reach other systems as the scanner. The flag tells the domain controller never to permit that
Description	Purpose, the group that grants its rights, and the owner	An account nobody can explain is an account nobody dares remove. <code>AC-2</code> , <code>CM-8</code>

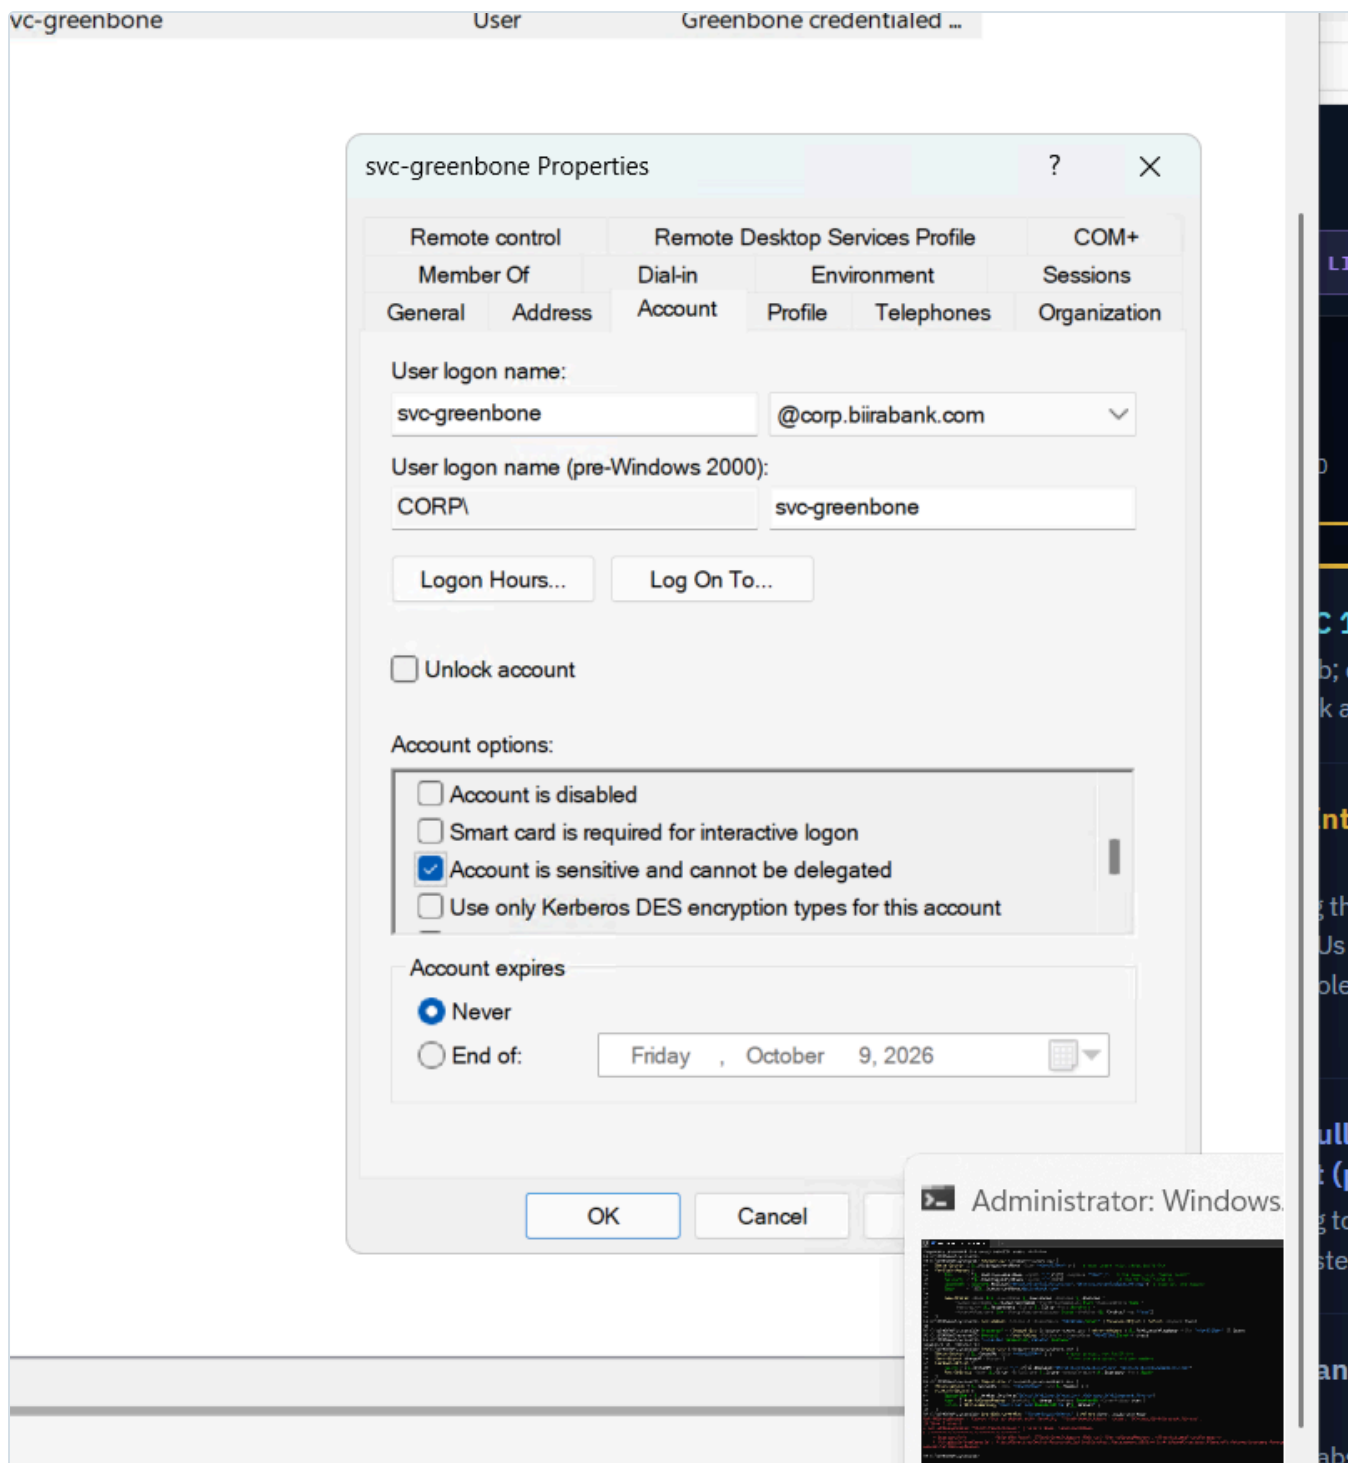


Figure 19.13: "Account is sensitive and cannot be delegated" set on the Account tab. The most important flag on this account, and one the creation wizard does not offer.

```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\WINDOWS\system32> Get-ADUser svc-greenbone -Properties AccountNotDelegated, CannotChangePassword, PasswordNeverExpires, Description | Format-List Name, AccountNotDelegated, CannotChangePassword, PasswordNeverExpires, Description

Name                           : svc-greenbone
AccountNotDelegated             : True
CannotChangePassword            : True
PasswordNeverExpires            : True
Description                     : Greenbone credentialed scanning. Local admin on scan targets via SG-Scanner-LocalAdmin. Noble.

PS C:\WINDOWS\system32>
```

Figure 19.14: The settings read back from the directory rather than assumed: `AccountNotDelegated`, `CannotChangePassword` and `PasswordNeverExpires` all True, and the description naming purpose, granting group and owner.

Why a domain account, not a local account on each host. Three reasons. A domain account is disabled, audited or rotated once, for every machine at the same moment. A local "scanner" account with the same password on every host is the classic lateral-movement setup: take the password hash from one machine and log in to all of them, which is the problem Microsoft's LAPS exists to solve. And Windows **UAC remote restrictions** filter the administrative token of *local* accounts connecting over the network, but not of domain accounts, so a local account could not scan properly without first weakening a security setting.

5.3 The role: `SG-Scanner-LocalAdmin`

A Global security group in `OU=SecurityGroups,OU=Groups,OU=BIIRA`, created 2026-09-09 with `svc-greenbone` as its only member.

Rights are granted to groups, never directly to accounts. The group can change its membership without the policy changing: when VAULT01 issues scanner accounts, or a second scanner is added, only the member list moves. The question "who can do this?" is answered by reading one list. And the name states what it grants: `SG` security group, `Scanner` who it is for, `LocalAdmin` what it confers.

The group grants nothing by itself. It is a list of members, and it only carries power because the policy in section 6 names it. Global scope follows Microsoft's standard pattern of accounts in Global groups, and Global groups placed in the group that sits on the resource. Here the resource-side group is each machine's own local Administrators group.

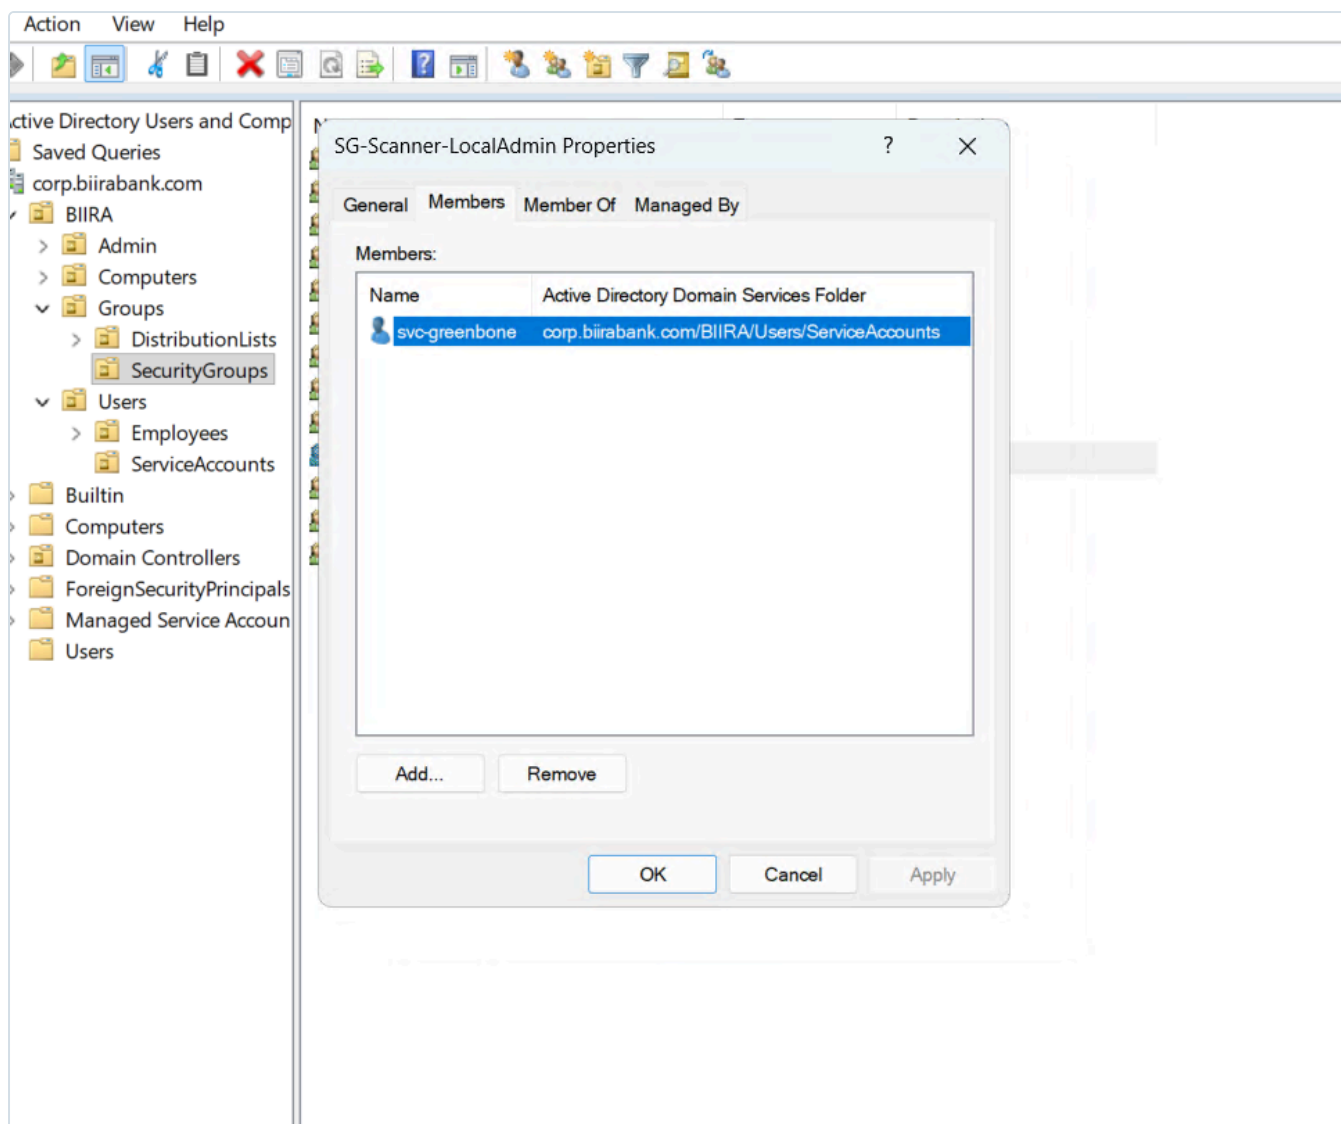


Figure 19.15: `SG-Scanner-LocalAdmin` with exactly one member, `svc-greenbone`, from the `ServiceAccounts` OU.

6. Delivering the right: the `SEC-Scanner-Access` policy

Each Windows machine keeps its own local account database, which Active Directory cannot edit directly. A Group Policy object is how one instruction, written centrally, is carried out by every machine on itself.

6.1 Scope: domain controllers are excluded by design

The policy is linked to `OU=Computers,OU=BIIRA`, whose `Servers` and `Workstations` OUs inherit it. It is not linked at the domain root, and never to the `Domain Controllers` OU.

The reason is what "local Administrators" means on each kind of machine. On a member server it governs that one machine. A domain controller has no local account database: its Administrators group is the domain's built-in Administrators, which is effectively control of the forest. The same instruction that makes the scanner an administrator of APP01 would, on DC01, make a never-expiring credential stored in a scanner's database one of the most privileged objects in the directory. Because DC01 lives in a separate container from the member OUs, linking to `BIIRA\Computers` excludes it structurally rather than by luck.

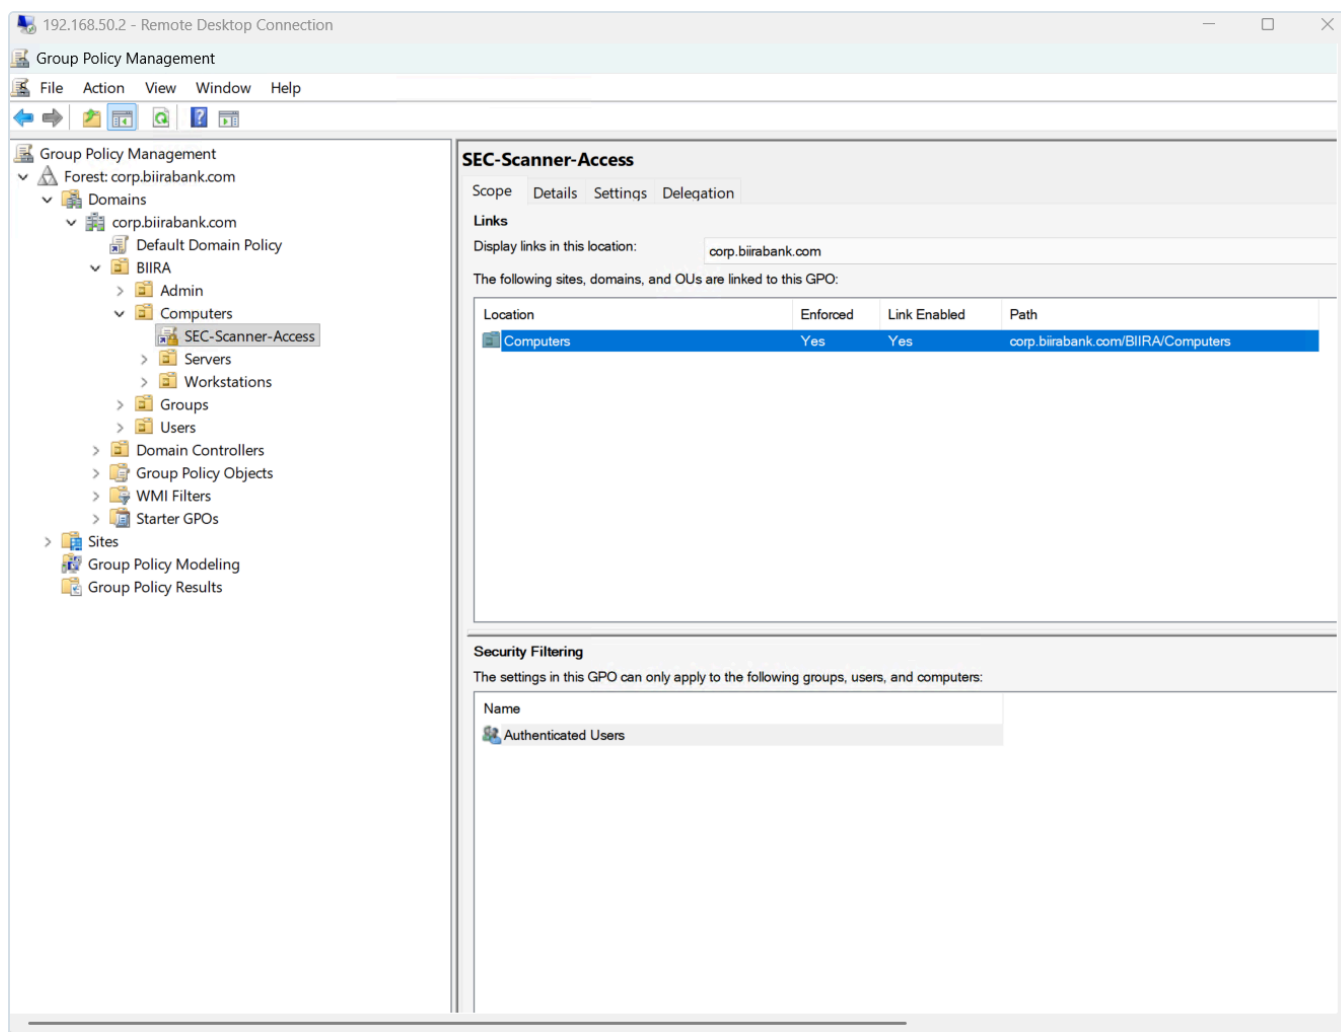


Figure 19.16: *SEC-Scanner-Access* linked at *corp.biiirabank.com/BIIRA/Computers* only, with *Authenticated Users* as the security filter. The *Domain ControlLers* OU sits outside the link. The link shows *Enforced*, which 6.5 records for correction.

There is a second layer behind the first. The Group Policy Preferences extension used below does not process on domain controllers at all, because they have no local groups. It is not relied on, because the logon-rights settings still to be added to this same policy are ordinary security policy and *would* apply to a domain controller. Where the policy is linked is the control.

That leaves the honest question of vulnerability coverage for DC01. There is no clean least-privilege answer to credentialed scanning of a domain controller, and the lab does not pretend otherwise. It is covered in layers instead:

- an **unauthenticated Greenbone scan**, which still finds exposed services, weak TLS and patches that announce themselves on the wire;
- **Wazuh Security Configuration Assessment**, already running on DC01, which performs CIS benchmark checks locally through an agent that already has the access, so no new privilege is created ([docs/16](#));
- a **separate, vaulted account** later, if full credentialed scanning of domain controllers becomes a requirement, used only in a scheduled window with an alert on every use.

6.2 The membership item

Configured under *Computer Configuration, Preferences, Control Panel Settings, Local Users and Groups*, as a Local Group item.

Field	Value	Why
Action	Update	Adds the specified member and leaves every other member alone. <i>Replace</i> deletes and rebuilds the group; <i>Create</i> acts only if the group is missing
Group name	Administrators (built-in), chosen from the list	Stores the well-known SID S-1-5-32-544 , identical on every Windows installation in any language. A typed name breaks on a non-English build
Delete all member users / groups	Both clear	Ticking either removes every existing administrator on every machine in scope, the failure mode of the older Restricted Groups mechanism
Member	CORP\SG-Scanner-LocalAdmin , Add to this group	Selected by browsing, so the editor resolved and stored the group's SID. Renaming the group later would not break the policy
Remove this item when it is no longer applied	No	Ticking it silently switches the action to <i>Replace</i> . Its consequence for retirement is covered in 6.4

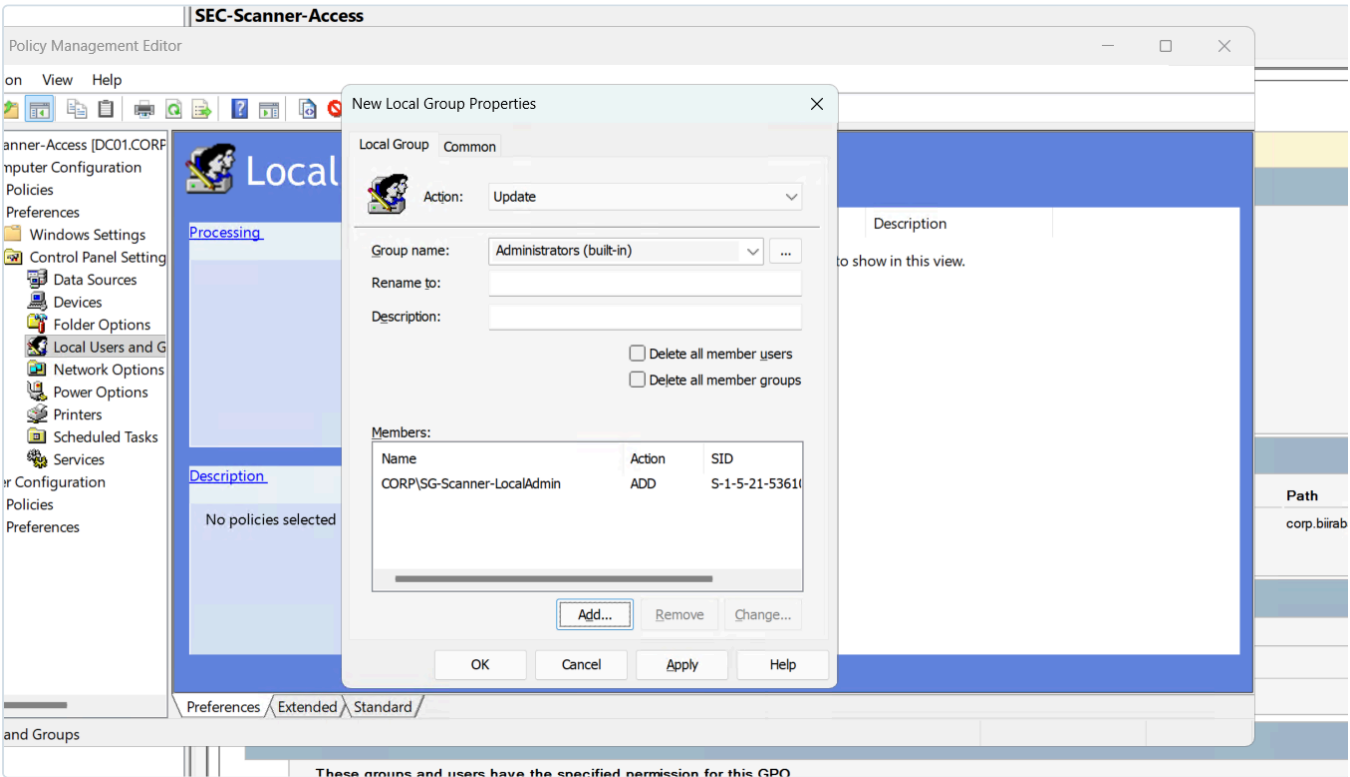


Figure 19.17: The item as built: action Update, Administrators (built-in), both delete boxes clear, and the member stored with its SID. The single clearest piece of evidence for the least-privilege grant.

Preferences are used rather than Restricted Groups because Preferences can **add** a member. Restricted Groups replaces the whole membership list, which on a real estate removes administrators nobody meant to remove.

Machines in scope read the policy at startup and roughly every 90 minutes. If the entry is removed by hand, the next refresh restores it, which is what central enforcement of a configuration setting means in practice (CM-6).

6.3 Finding: the OU the policy targets was empty

Before building further, the directory was checked for the machines the policy would reach:

```
Get-ADComputer -Filter * | Select-Object Name, DistinguishedName
```

It returned **one computer, DC01**. Every member machine had been joined to the retired forest and lost its membership in the 2026-09-07 migration (docs/17), and none had rejoined. The policy was linked correctly and applied to nothing, silently. A policy is only a control once it is proven on a real machine.

```
PS C:\WINDOWS\system32> Get-ADComputer -Filter * | Select-Object Name, DistinguishedName
Name DistinguishedName
----
DC01 CN=DC01,OU=Domain Controllers,DC=corp,DC=biirabank,DC=com

PS C:\WINDOWS\system32>
```

Figure 19.18: `Get-ADComputer` on 2026-09-11 returns one object, DC01 in the Domain Controllers OU. The policy's target OU held no computers.

The first member, WKS01, was **pre-staged**: its computer account was created in the target OU before the machine joins.

```
New-ADComputer -Name "WKS01" -Path "OU=Workstations,OU=Computers,OU=BIIRA,DC=corp,DC=biirabank,DC=
```

At join time the domain controller looks for an existing computer account with the joining machine's name. If it finds one it uses it, wherever it sits; if not, it creates one in the default `CN=Computers` container, which is a container rather than an OU and cannot receive a policy link. Two consequences follow. The machine must be named `WKS01` before or during the join, since a fresh install's `DESKTOP-` name would miss the reserved

account and land in the default container. And the join must be performed by a Domain Admin: since Microsoft's 2022 domain-join hardening (KB5020276), reuse of an existing computer account is blocked unless the account's creator, or a member of Domain Admins, performs the join.

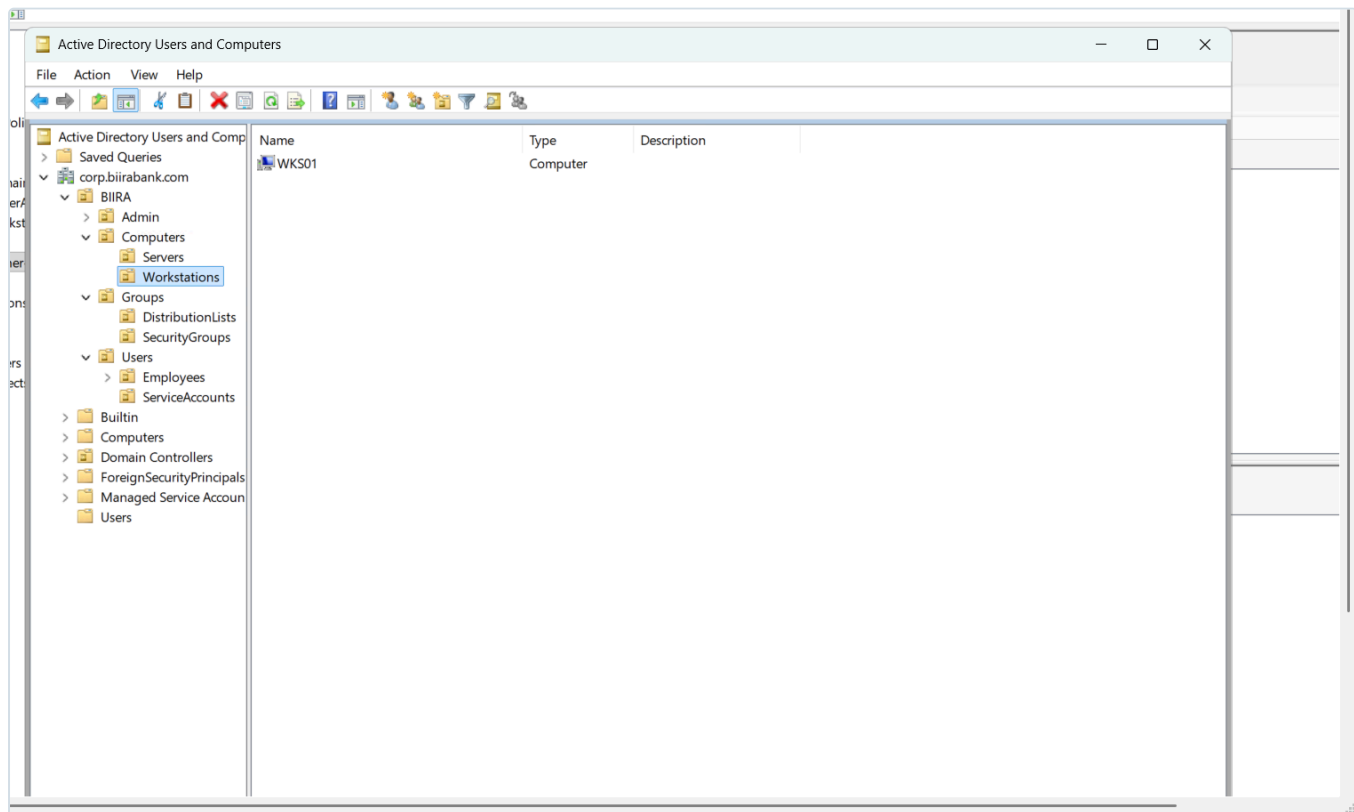


Figure 19.19: The pre-staged **WKS01** computer account in **BIIRA\Computers\Workstations**, waiting for the machine to join. Inside the policy's scope from the moment the machine first boots on the domain.

Finding: the Enterprise LAN handed out public DNS. Before joining, WKS01's network settings were checked. DHCP on VLAN 50 had given it an address, **192.168.50.56**, but DNS servers of **8.8.8.8** and **1.1.1.1** and a connection suffix of **duckdns.org**. A domain join finds its domain controller through DNS, so against public resolvers it cannot find **corp.biirabank.com** at all. Every Windows machine placed on the Enterprise LAN would have failed the same way.

```

PS C:\Users\nantwi> ipconfig /all

Windows IP Configuration

Host Name . . . . . : pc1
Primary Dns Suffix . . . . . :
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No

Ethernet adapter Ethernet:

Connection-specific DNS Suffix . : duckdns.org
Description . . . . . : Red Hat VirtIO Ethernet Adapter
Physical Address. . . . . : BC-24-11-33-D4-C7
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
Link-local IPv6 Address . . . . . : fe80::b3a0:2084:a25c:9e56%14(Preferred)
IPv4 Address. . . . . : 192.168.50.56(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Lease Obtained. . . . . : Friday, September 11, 2026 1:29:14 PM
Lease Expires . . . . . : Friday, September 11, 2026 3:29:15 PM
Default Gateway . . . . . : 192.168.50.1
DHCP Server . . . . . : 192.168.50.1
DHCPv6 IAID . . . . . : 347874321
DHCPv6 Client DUID. . . . . : 00-01-01-00-31-A8-1D-44-BC-24-11-33-D4-C7
DNS Servers . . . . . : 8.8.8.8
                       1.1.1.1
NetBIOS over Tcpip. . . . . : Enabled
PS C:\Users\nantwi>

```

Figure 19.20: WKS01 as DHCP configured it: public resolvers and a **duckdns.org** suffix. Correct for a home network, wrong for a domain member.

For this machine the DNS server was set to DC01 directly, and the domain's own locator record was queried to prove the machine could now find a controller:

```

Set-DnsClientServerAddress -InterfaceAlias "Ethernet" -ServerAddresses 192.168.50.2
Resolve-DnsName -Type SRV _ldap._tcp.dc._msdcs.corp.biirabank.com

```

```

NetBIOS over Tcpip. . . . . : 1.1.1.1
                             : Enabled
PS C:\Users\nantwi> Set-DnsClientServerAddress -InterfaceAlias "Ethernet" -ServerAddresses 192.168.50.2
PS C:\Users\nantwi> ipconfig /flushdns^C
PS C:\Users\nantwi> ipconfig /all

Windows IP Configuration

Host Name . . . . . : pc1
Primary Dns Suffix . . . . . :
Node Type . . . . . : Hybrid
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No

Ethernet adapter Ethernet:

Connection-specific DNS Suffix . : duckdns.org
Description . . . . . : Red Hat VirtIO Ethernet Adapter
Physical Address. . . . . : BC-24-11-33-D4-C7
DHCP Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
Link-local IPv6 Address . . . . . : fe80::b3a0:2084:a25c:9e56%14(Preferred)
IPv4 Address. . . . . : 192.168.50.56(Preferred)
Subnet Mask . . . . . : 255.255.255.0
Lease Obtained. . . . . : Friday, September 11, 2026 1:29:14 PM
Lease Expires . . . . . : Friday, September 11, 2026 3:29:14 PM
Default Gateway . . . . . : 192.168.50.1
DHCP Server . . . . . : 192.168.50.1
DHCPv6 IAID . . . . . : 347874321
DHCPv6 Client DUID. . . . . : 00-01-01-00-31-A8-1D-44-BC-24-11-33-D4-C7
DNS Servers . . . . . : 192.168.50.2
NetBIOS over Tcpip. . . . . : Enabled

```

Figure 19.21: The DNS server changed to **192.168.50.2** on the interface, confirmed in **ipconfig /all**.

```

NetBIOS over Tcpip. . . . . : Enabled
PS C:\Users\nantwi> Resolve-DnsName -Type SRV _ldap._tcp.dc._msdcs.corp.biirabank.com

Name                                     Type      TTL      Section  NameTarget                               Priority Weight Port
----
_ldap._tcp.dc._msdcs.corp.biirabank.com SRV        600      Answer   dc01.corp.biirabank.com                 0      100   389

Name       : dc01.corp.biirabank.com
QueryType  : A
TTL        : 3600
Section    : Additional
IPAddress  : 192.168.50.2

PS C:\Users\nantwi> |

```

Figure 19.22: The SRV record every domain join relies on, answered by DC01: `dc01.corp.biirabank.com` on port 389 at `192.168.50.2`. The pre-join test that separates a DNS problem from a credentials problem.

The durable fix belongs in pfSense rather than on each machine: the VLAN 50 DHCP scope should hand out `192.168.50.2` as its DNS server and `corp.biirabank.com` as its domain, and WKS01 should receive a reserved address so a scan target does not move between scans. Tracked in section 7.

One misstep is worth recording. `New-ADComputer` was also tried on WKS01 and failed as an unrecognised command. It belongs to the Active Directory PowerShell module, which is part of RSAT and installed automatically on domain controllers only. It was not needed: the account had already been pre-staged on DC01. Installing RSAT on the workstation to make the command work would have been the wrong fix, because it places directory administration tools on a Tier 2 machine. Joining the domain needs no such tools. `Add-Computer` is built into Windows, and the domain controller does the work using the credentials supplied.

The join. The machine was renamed from `pc1` to `WKS01` first, then joined. The first three attempts failed with *Access is denied*.

```

+ FullyQualifiedErrorId : FailToJoinDomainFromWorkgroup,Microsoft.PowerShell.Commands.AddComputerCommand

PS C:\Users\nantwi> Add-Computer -DomainName corp.biirabank.com -Credential CORP\Administrator -Restart
Add-Computer : Computer 'WKS01' failed to join domain 'corp.biirabank.com' from its current workgroup 'WORKGROUP' with
following error message: Access is denied.
At line:1 char:1
+ Add-Computer -DomainName corp.biirabank.com -Credential CORP\Administ ...
+ ~~~~~
+ CategoryInfo          : OperationStopped: (WKS01:String) [Add-Computer], InvalidOperationException
+ FullyQualifiedErrorId : FailToJoinDomainFromWorkgroup,Microsoft.PowerShell.Commands.AddComputerCommand

PS C:\Users\nantwi> Add-Computer -DomainName corp.biirabank.com -Credential CORP\Administrator -Restart
Add-Computer : Computer 'WKS01' failed to join domain 'corp.biirabank.com' from its current workgroup 'WORKGROUP' with
following error message: Access is denied.
At line:1 char:1
+ Add-Computer -DomainName corp.biirabank.com -Credential CORP\Administ ...
+ ~~~~~
+ CategoryInfo          : OperationStopped: (WKS01:String) [Add-Computer], InvalidOperationException
+ FullyQualifiedErrorId : FailToJoinDomainFromWorkgroup,Microsoft.PowerShell.Commands.AddComputerCommand


PS C:\Users\nantwi> Add-Computer -DomainName corp.biirabank.com -Credential CORP\Administrator -Restart
Add-Computer : Computer 'WKS01' failed to join domain 'corp.biirabank.com' from its current workgroup 'WORKGROUP' with
following error message: Access is denied.
At line:1 char:1
+ Add-Computer -DomainName corp.biirabank.com -Credential CORP\Administ ...
+ ~~~~~
+ CategoryInfo          : OperationStopped: (WKS01:String) [Add-Computer], InvalidOperationException
+ FullyQualifiedErrorId : FailToJoinDomainFromWorkgroup,Microsoft.PowerShell.Commands.AddComputerCommand

PS C:\Users\nantwi> |

```

Figure 19.23: Three identical refusals. Not a wrong password, which Windows reports as "The user name or password is incorrect", and not the account-reuse block, which has its own message. The window title shows the cause: a PowerShell session that is not elevated.

A domain join needs two separate permissions. The domain must allow the supplied account to use the computer account, which `CORP\Administrator` satisfied. The local machine must allow the session to change its own membership, which requires an **elevated** administrator session. User Account Control runs even members of the local Administrators group with a filtered token until they elevate. The same mechanism, applied to network logons, is why section 5.2 uses a domain account for scanning rather than a local one. Run from an elevated session, the same command succeeded.

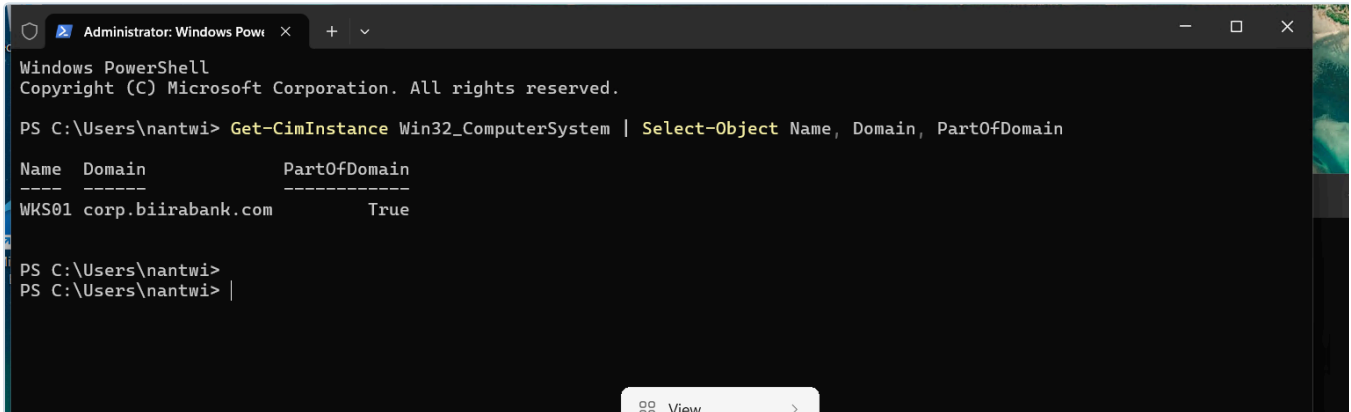

```
Administrator: Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.


PS C:\Users\nantwi> Get-CimInstance Win32_ComputerSystem | Select-Object Name, Domain, PartOfDomain

Name      Domain              PartOfDomain
-----
WKS01     corp.biiirabank.com True

PS C:\Users\nantwi>
```

Figure 19.24: From the workstation's side, in an elevated session: `WKS01`, domain `corp.biiirabank.com`, `PartOfDomain` `True`.

The directory gives an independent check. A pre-staged computer account that no machine has used has an empty `OperatingSystem` attribute; a machine writes its own version into its account after it joins. Queried before the join, the attribute was blank. Queried after:

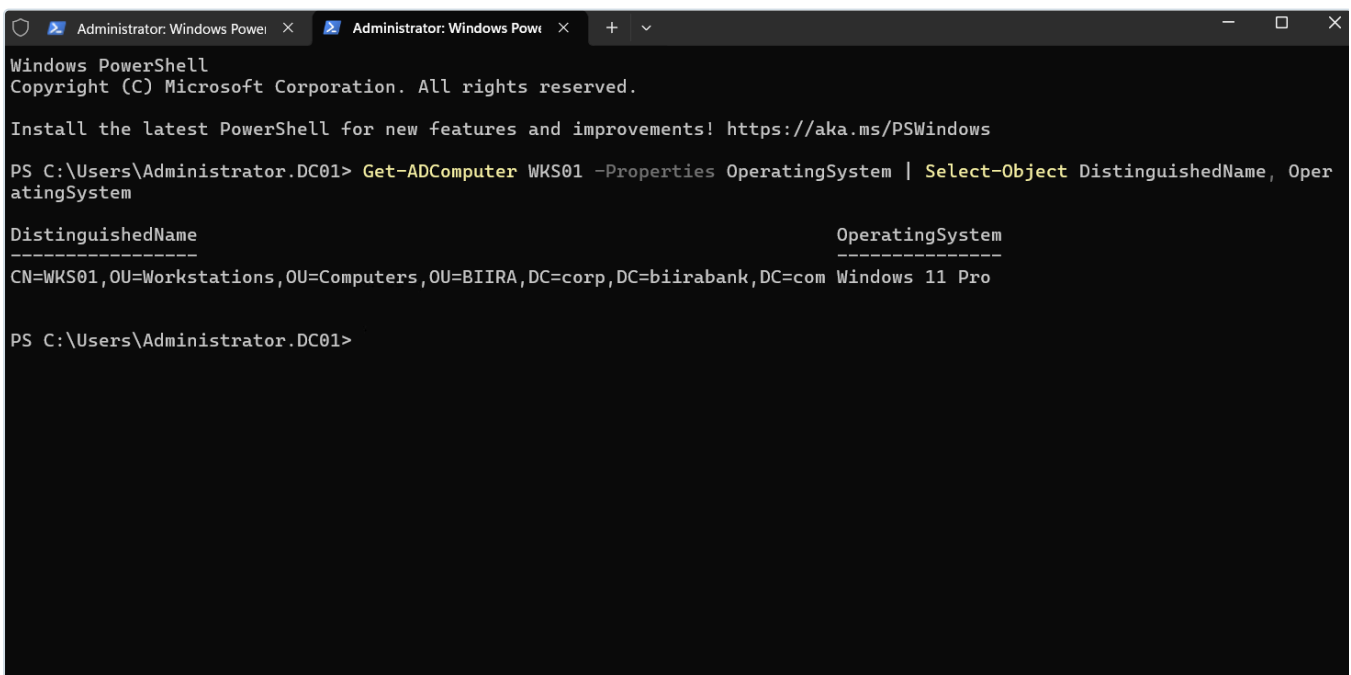

```
Administrator: Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Install the latest PowerShell for new features and improvements! https://aka.ms/PSWindows

PS C:\Users\Administrator.DC01> Get-ADComputer WKS01 -Properties OperatingSystem | Select-Object DistinguishedName, OperatingSystem

DistinguishedName                                OperatingSystem
-----
CN=WKS01,OU=Workstations,OU=Computers,OU=BIIRA,DC=corp,DC=biiirabank,DC=com Windows 11 Pro

PS C:\Users\Administrator.DC01>
```

Figure 19.25: The same account, still in `OU=Workstations`, now reporting `Windows 11 Pro`. Proof from the directory's side that the real machine took over the reserved account, rather than a second account appearing somewhere else.

One exposure is recorded honestly. The join was authorised with `CORP\Administrator`, a Tier 0 credential, typed on a Tier 2 workstation. That is common in labs and wrong in the tiered model this estate claims (docs/17 section 2): a compromised workstation could capture it. The fix is delegation, granting a Tier 2

group the right to join computers to the Workstations OU, and it belongs with the tier-enforcement work in the backlog.

6.4 Retiring the scanner

Because the membership item leaves its change behind when the policy stops applying, unlinking the policy does **not** remove the scanner's access. The group would remain in every machine's Administrators list, and any account later added to it would become an administrator everywhere. Retirement is therefore an ordered procedure:

1. **Disable `svc-greenbone`**. Every machine verifies the account with the domain controller at logon, so this single change stops all new access immediately.
2. **Delete the credential** from Greenbone.
3. **Change the item's member action** from *Add to this group* to *Remove from this group*, and leave it applied long enough for every machine to refresh. The mechanism that added the entry removes it.
4. **Then** unlink and delete the policy, and delete the account and group. In that order: deleting the group first leaves an unresolvable SID in every machine's Administrators list, which an auditor rightly flags as an unknown principal.

6.5 Housekeeping on the policy

Both items below were corrected on 2026-09-11.

- The link was created with **Enforced** set. This policy does not need to override lower policies or break through blocked inheritance, and an enforced link should always carry a justification. **Cleared.**
- The policy uses only Computer Configuration. Its status is now **User configuration settings disabled**, so machines skip the empty half and anyone reading the policy later can see the intent.

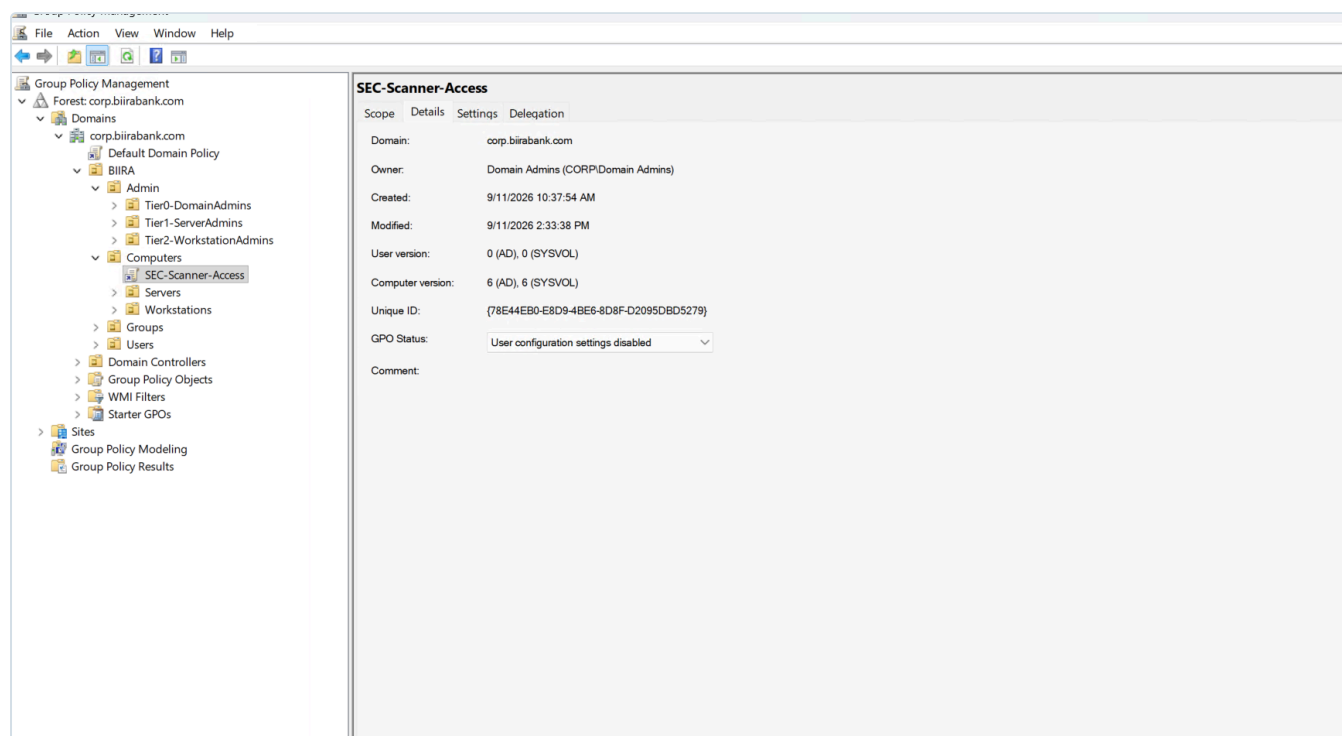


Figure 19.26: User configuration disabled, and the computer version reading 6 in Active Directory and 6 in SYSVOL. A policy lives in two places, an object in the directory and a folder of files in SYSVOL, and matching numbers show the two halves agree. A mismatch is the first thing to check when a policy refuses to apply.

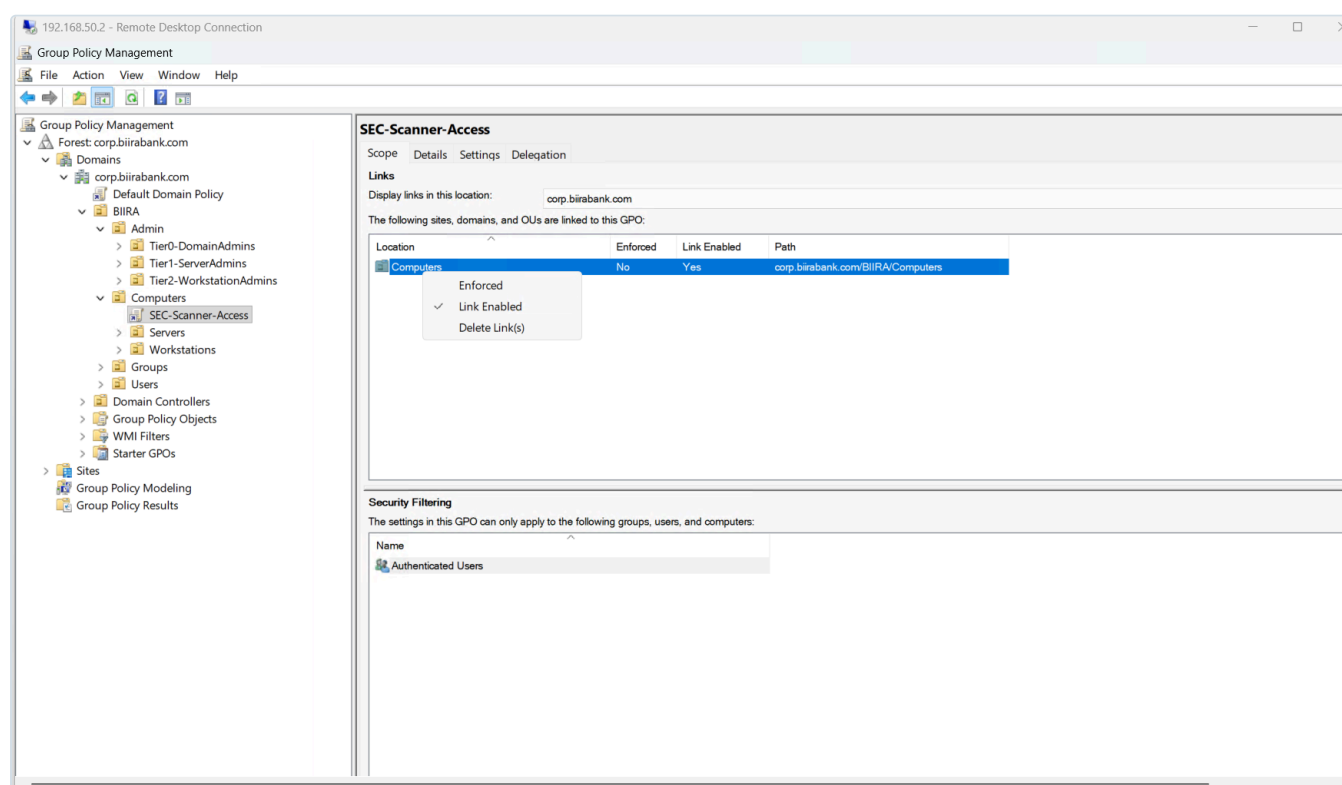


Figure 19.27: The link on **BIIRA/Computers** with Enforced now No and the link still enabled.

One lesson from getting here: the Settings tab in Group Policy Management is a report generated once and cached. Two captures taken hours apart both read "collected 10:39:46" with zero revisions, long after the item had been saved. Its "Data collected on" time must be checked, and the view refreshed, before a report is taken as evidence.

6.6 Proof on a real machine

Everything above shows intent: a policy configured correctly in a console. The control is proven only when a machine in scope reports that it received the policy and the resulting state is visible on that machine. Both were checked on WKS01 on 2026-09-11, from an elevated session.

```
Administrator: Windows Powe x + v
The command completed successfully.
PS C:\Users\nantwi> gpresult /r /scope computer

Microsoft (R) Windows (R) Operating System Group Policy Result tool v2.0
© Microsoft Corporation. All rights reserved.

Created on 9/11/2026 at 1:13:04 PM

RSOP data for on WKS01 : Logging Mode
-----

OS Configuration:          Member Workstation
OS Version:                10.0.26200
Site Name:                 Default-First-Site-Name
Roaming Profile:
Local Profile:
Connected over a slow link?: No

COMPUTER SETTINGS
-----

Last time Group Policy was applied: 9/11/2026 at 3:01:00 PM
Group Policy was applied from: DC01.corp.biiirabank.com
Group Policy slow link threshold: 500 kbps
Domain Name:               CORP
Domain Type:               Windows 2008 or later

Applied Group Policy Objects
-----
SEC-Scanner-Access
Default Domain Policy

The following GPOs were not applied because they were filtered out
-----
Local Group Policy
Filtering: Not Applied (Empty)

The computer is a part of the following security groups
-----
BUILTIN\Administrators
Everyone
BUILTIN\Users
NT AUTHORITY\NETWORK
NT AUTHORITY\Authenticated Users
This Organization
WKS01$
Domain Computers
Authentication authority asserted identity
System Mandatory Level
```

Figure 19.28: WKS01's own account of its policy: a member workstation, policy applied from `DC01.corp.biiirabank.com`, and `SEC-Scanner-Access` listed under Applied Group Policy Objects. `WKS01$` in its security groups is the machine's own computer account, the one pre-staged in 6.3.

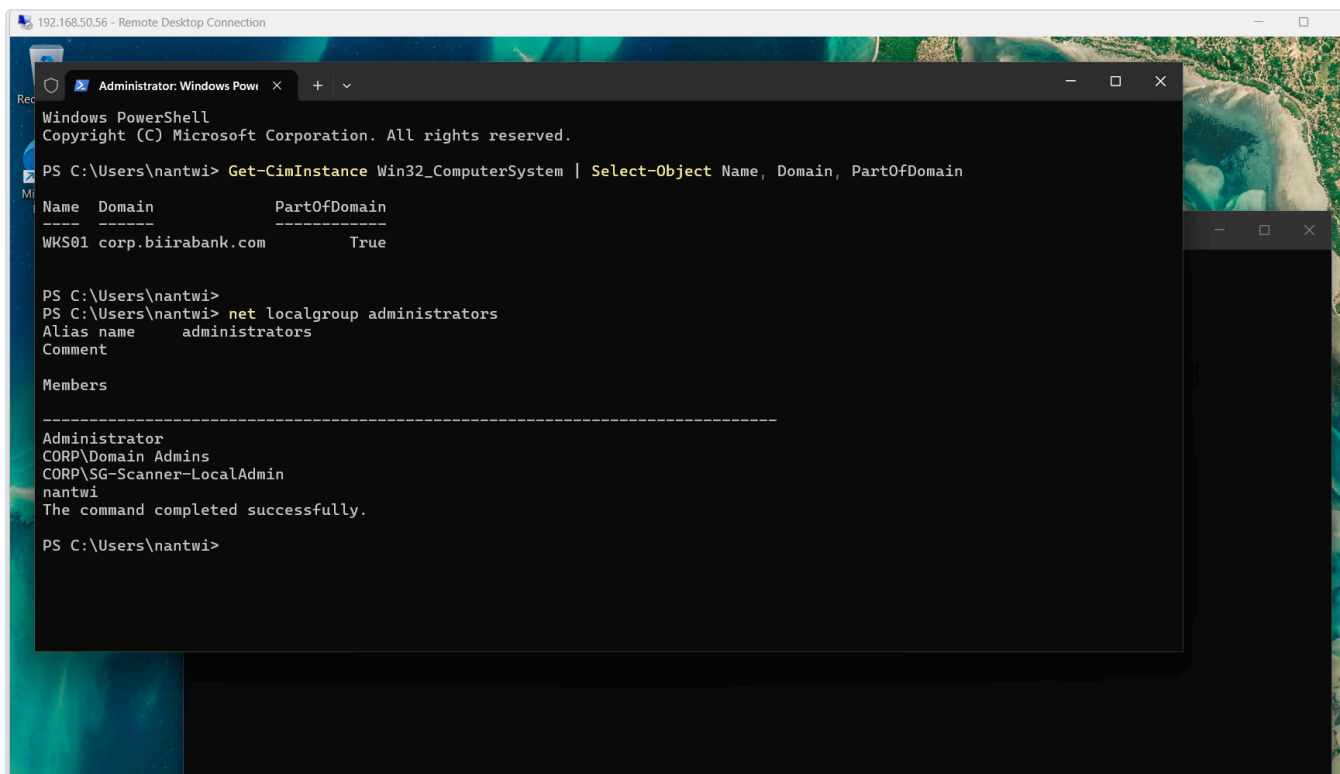


Figure 19.29: The result, on the machine: `CORP\SG-Scanner-LocalAdmin` in the local Administrators group, placed there by the policy and not by hand. Through it, `svc-greenbone` is an administrator of WKS01 and of nothing it has not been scoped to.

The list holds four entries, and one was not added by anyone in this lab. `CORP\Domain Admins` is inserted into every member's local Administrators group automatically at the moment of joining. That is how domain administrators manage every member machine, and it is the reason the tiered model exists: any Domain Admin who signs in to a workstation leaves a credential on it that controls the whole domain, so compromising one workstation where that happened compromises the forest. The standard countermeasure is to deny Domain Admins every kind of logon to member workstations and servers through Group Policy, as Microsoft's guidance on securing Active Directory administrative groups describes. It belongs with the tier-enforcement work in the backlog, alongside the delegated join right noted in 6.3.

7. Outstanding before the first credentialed scan

Item	Detail	Control
Fix VLAN 50 DHCP	pfSense DHCP for the Enterprise LAN: DNS server <code>192.168.50.2</code> , domain <code>corp.biiirabank.com</code> , and a static mapping for WKS01	CM-6 , SC-22
Logon rights	Deny <code>svc-greenbone</code> interactive, Remote Desktop, batch and service logon, leaving network logon only. User Rights Assignment replaces each list on the target, so WKS01's existing entries are read first and carried into the policy	AC-6 , AC-17
Snapshot SCAN01	All four feeds confirmed loaded on 2026-09-11 (4.4); snapshot <code>greenbone-feeds-loaded</code>	CP-9
Schedule feed refresh	Weekly pull of the feed data containers, outside scan windows	RA-5(2)

Item	Detail	Control
First scans	Credentialed against WKS01; unauthenticated against DC01, alongside its Wazuh SCA result	RA-5 , RA-5(5)
BLUETEAM ruleset	Written from the traffic the scanner actually needs. A scanner has to cross every boundary the firewall exists to enforce	SC-7 , AC-4
Monitor the identity	Wazuh alert on any <code>svc-greenbone</code> logon outside a scan window	AU-6 , AC-6(9)
Close the password debt	VAULT01 issues a short-lived credential per scan, retiring <i>password never expires</i>	IA-5 , CA-5

8. Control mapping

Control	How it is met here	Evidence
NIST SP 800-53 RA-5	Network scanner deployed with 186,567 vulnerability tests and all four feeds loaded	Section 4.4
RA-5(2) Update vulnerabilities to be scanned	Feed refresh procedure defined; weekly schedule outstanding	4.4, 7
RA-5(5) Privileged access	A dedicated identity with administrative access to member systems only, granted through a group and a scoped policy	Figures in 5 and 6
AC-6 , AC-6(5) Least privilege	Local administrator on members, never Domain Admin; domain controllers excluded by the link	Section 6.1
AC-2 Account management	Named owner and purpose on the account; retirement procedure defined	5.2, 6.4
IA-5 with CA-5	Non-expiring password recorded as a tracked debt with a closure plan	5.2, 7
CM-6 Configuration settings	Membership enforced centrally, restored at every refresh, and proven on WKS01	6.2, 6.6
CM-8 Inventory	SCAN01 classified and named by role; WKS01 pre-staged in its OU	3, 6.3
CP-10 Recovery	Corrupted database rebuilt without losing 11 GB of feed data	4.2
CIS Controls v8 7.5	Authenticated and unauthenticated internal scanning	1, 7
CIS Controls v8 5.4	Administrative rights held by a dedicated account, not a general one	5.2
PCI DSS 11.3	Internal vulnerability scanning with a remediation loop the licence can sustain	2

9. Lessons

- **A success message describes intent; the system's own state is the truth.** `lvextend` said 58 GB while `lvs` said 29 GB.
- **Measure before deleting.** Sizing every volume turned "delete the database volume" from a guess into a certainty, and naming it avoided the prune that would have taken the feeds.
- **Rights go to groups, and every right should be explainable as a chain.** The scanner's access exists only while the account is in the group, the group is in Administrators, and the machine is in scope. Break any link and it is gone.
- **A policy linked to an empty OU is not a control.** Prove it on a real machine.
- **Preferences leave their changes behind.** Plan the removal when you plan the grant.