


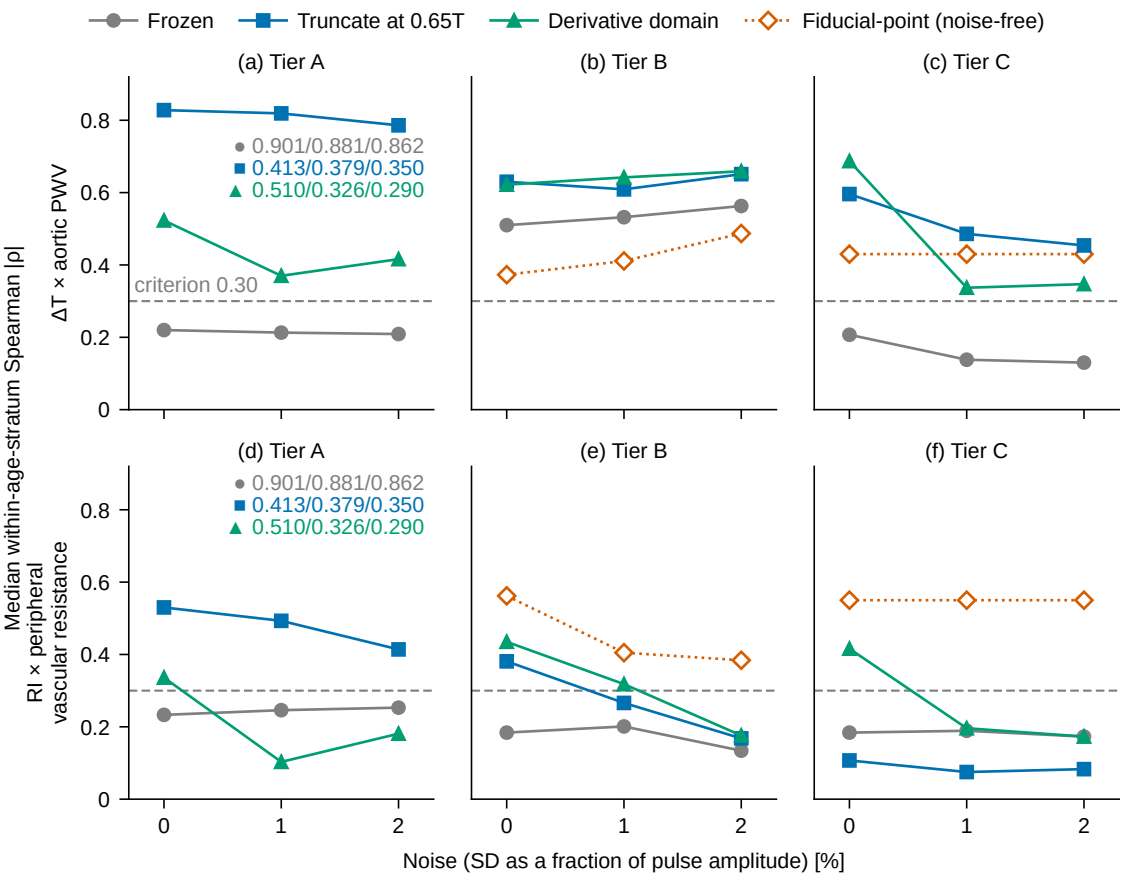

Grey dashed line, criterion 0.30. Fiducial-point values (database-supplied; dotted) are from noise-free beats, so the noise columns are not a like-for-like comparison (its tier-B value moves with noise only because the common subset changes). Numbers in the tier-A panels, pass rate (remaining in tier A) at noise 0 / 1 / 2 %. Tier A, subjects accepted by the method itself; tier B, subjects accepted by every compared method; tier C, all subjects regardless of acceptance

Tier B, 732 subjects (388 at 1 %, 323 at 2 %): the intersection of the subjects accepted by all three fits, a subset favourable to the decomposition. Tier C, 3,378 type-3 subjects. Table 6c of 02_tables.md.

Exploratory, post hoc analysis; not used for the prespecified decision. Using an improved fit as a primary analysis would require a new preregistration.