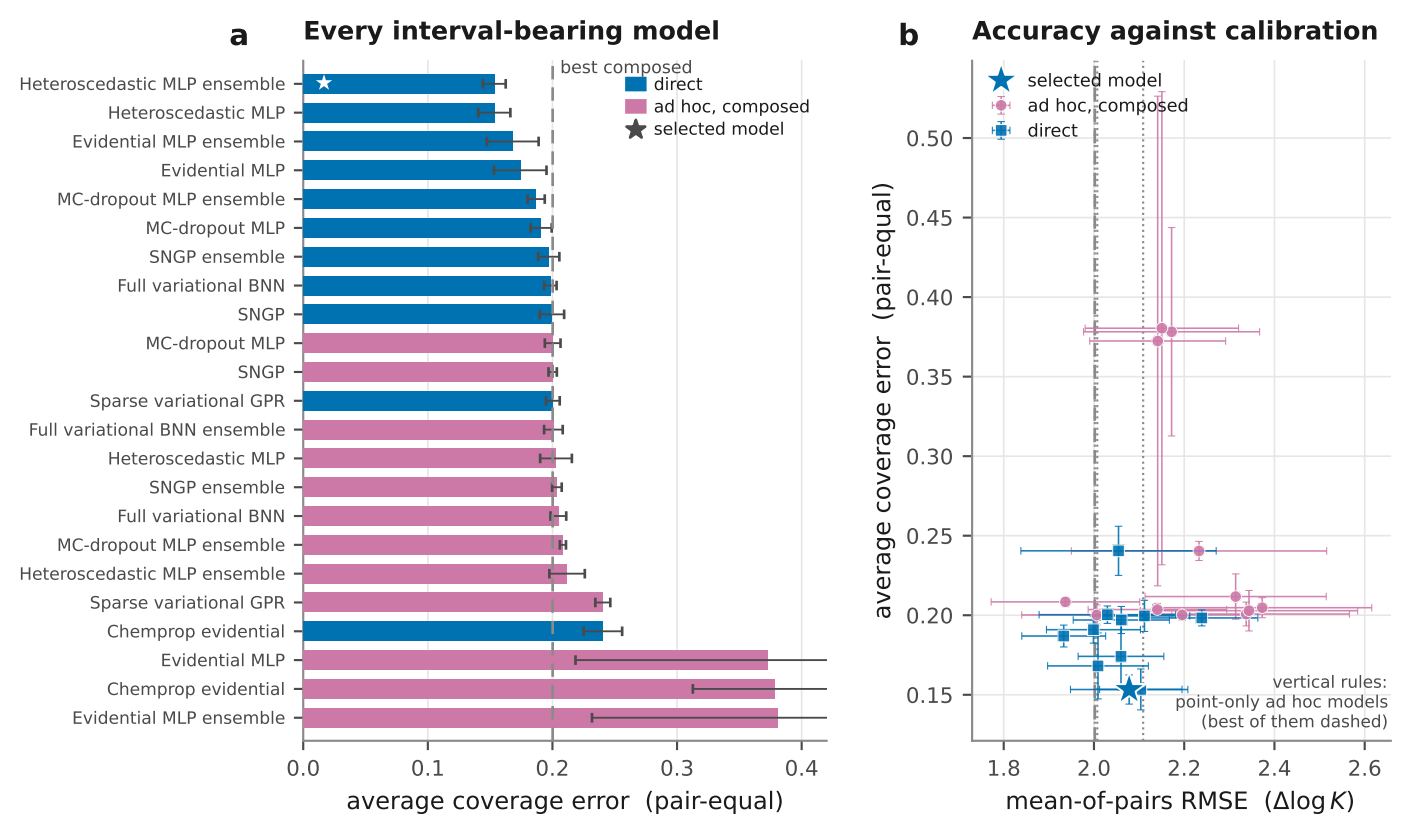
a
Every interval-bearing model
best composed
direct
ad hoc, composed
selected model
Heteroscedastic MLP ensemble
Heteroscedastic MLP
Evidential MLP ensemble
Evidential MLP
MC-dropout MLP ensemble
MC-dropout MLP
SNGP ensemble
Full variational BNN
SNGP
MC-dropout MLP
SNGP
Sparse variational GPR
Full variational BNN ensemble
Heteroscedastic MLP
SNGP ensemble
Full variational BNN
MC-dropout MLP ensemble
Heteroscedastic MLP ensemble
Sparse variational GPR
Chemprop evidential
Evidential MLP
Chemprop evidential
Evidential MLP ensemble
0.0
0.1
0.2
0.3
0.4
average coverage error (pair-equal)
b
Accuracy against calibration
selected model
ad hoc, composed
direct
0.50
0.45
0.40
0.35
0.30
0.25
0.20
0.15
average coverage error (pair-equal)
vertical rules:
point-only ad hoc models
(best of them dashed)
1.8
2.0
2.2
2.4
2.6
mean-of-pairs RMSE (Δlog K)