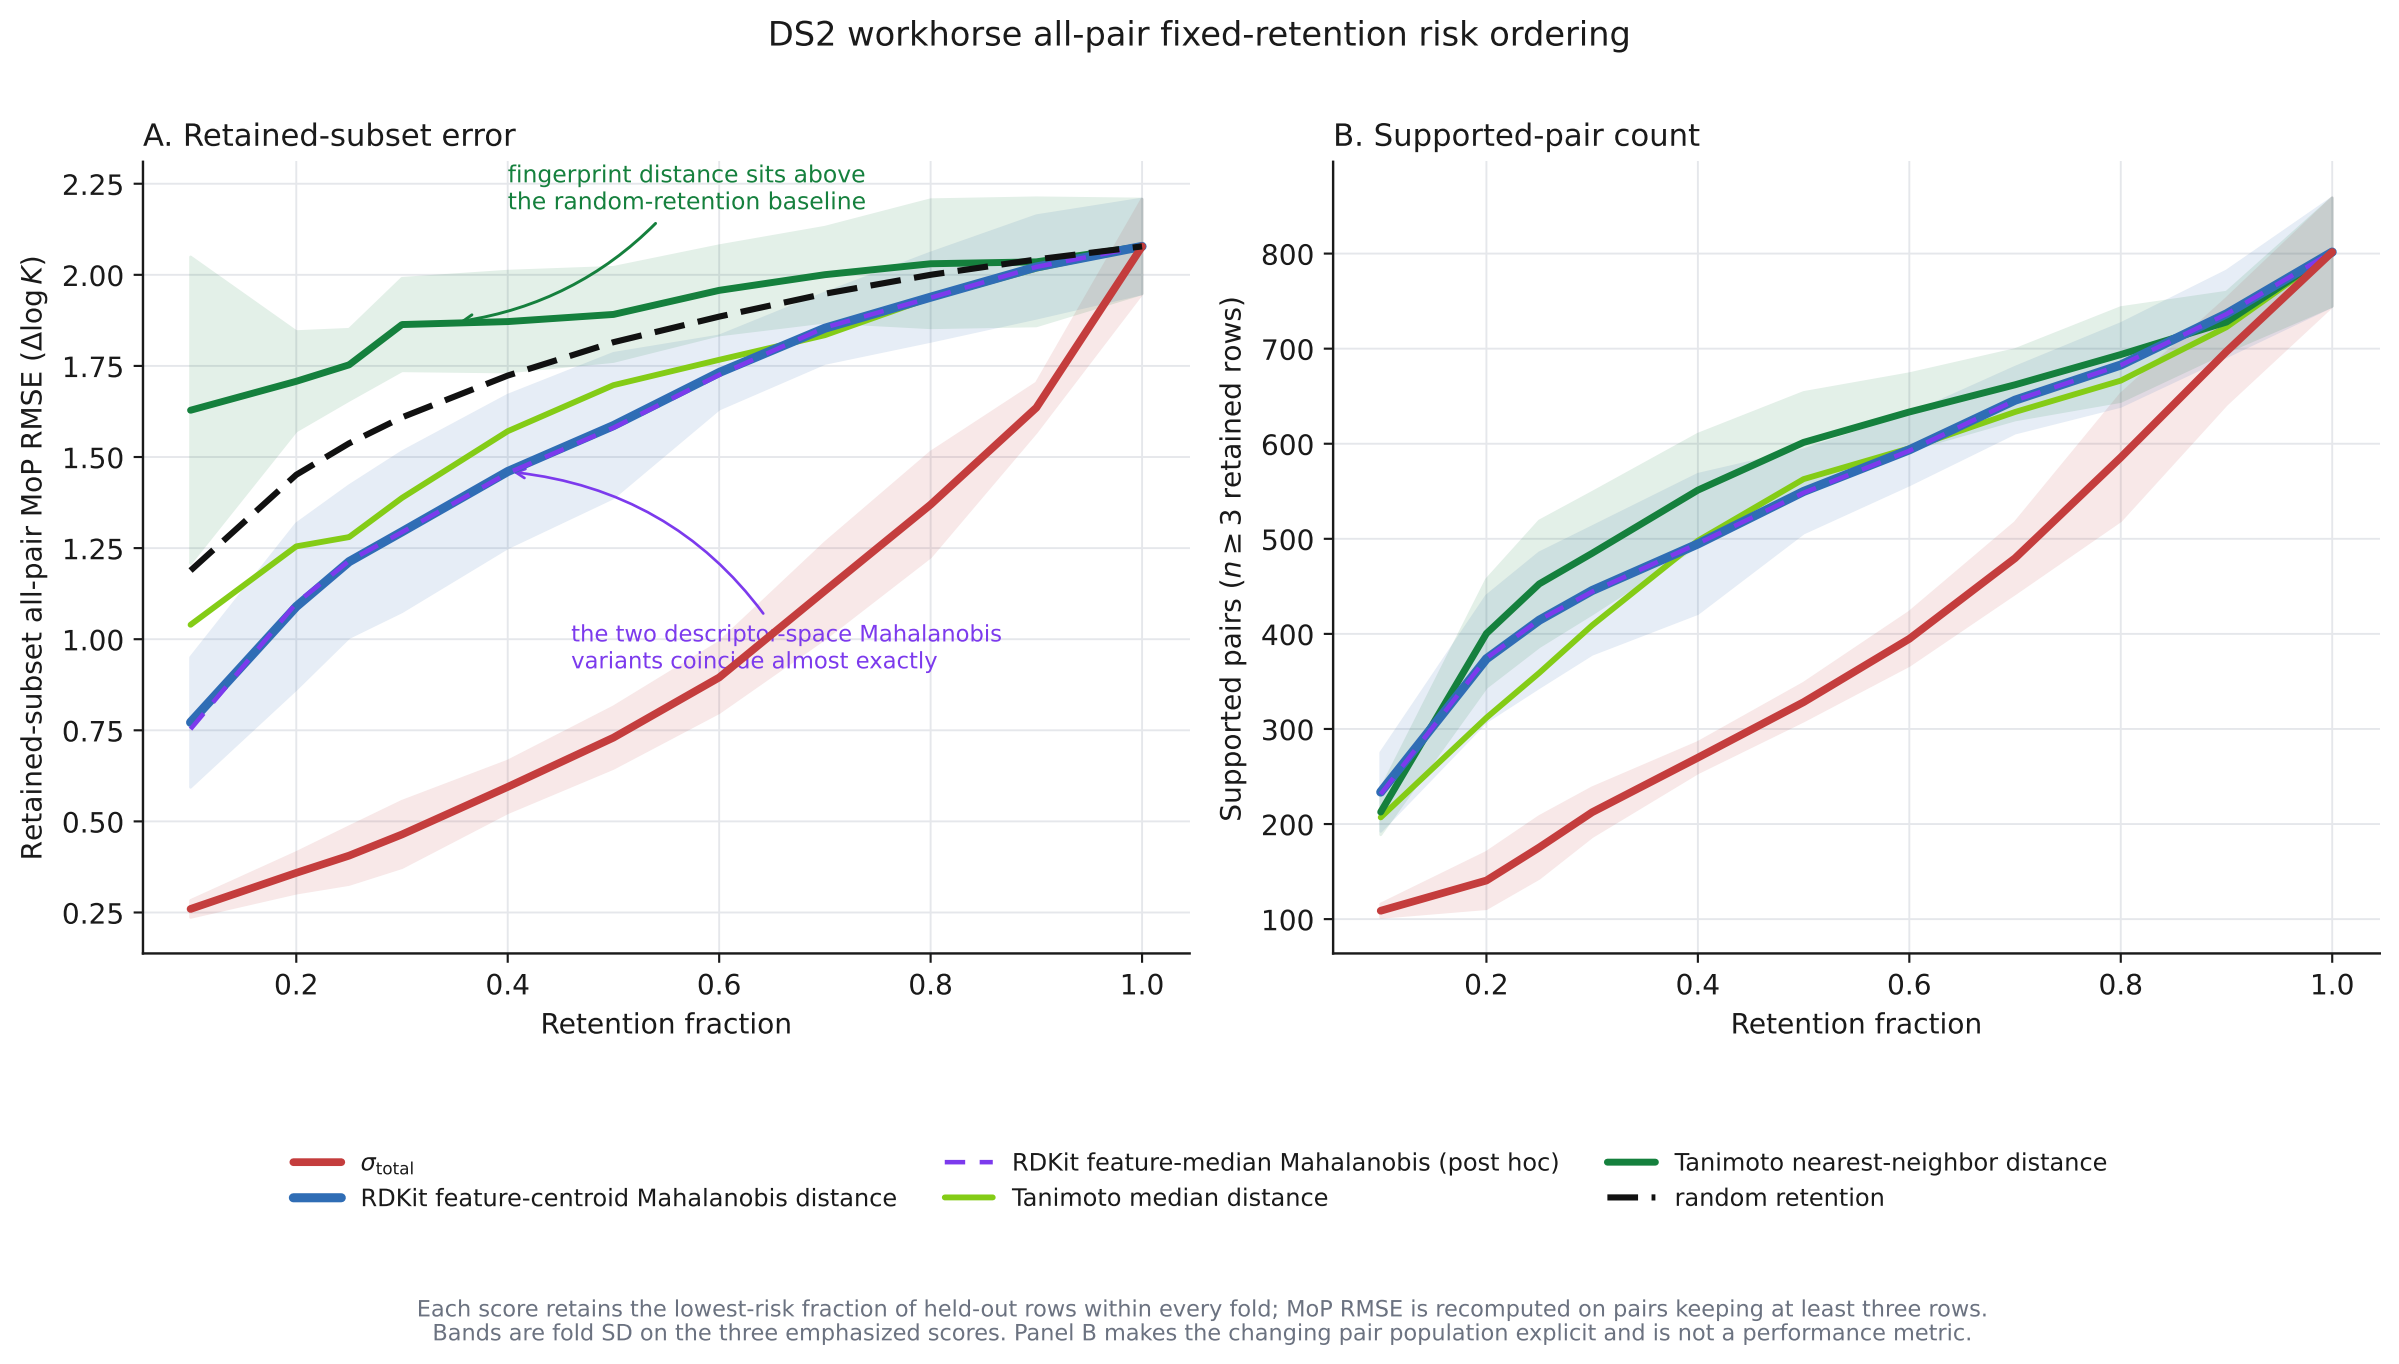
DS2 workhorse all-pair fixed-retention risk ordering
A. Retained-subset error
B. Supported-pair count
fingerprint distance sits above
the random-retention baseline
the two descriptor-space Mahalanobis
variants coincide almost exactly
Retained-subset all-pair MoP RMSE (Δlog K)
Supported pairs (n ≥ 3 retained rows)
Retention fraction
Retention fraction
σtotal
RDKit feature-centroid Mahalanobis distance
RDKit feature-median Mahalanobis (post hoc)
Tanimoto median distance
Tanimoto nearest-neighbor distance
random retention
Each score retains the lowest-risk fraction of held-out rows within every fold; MoP RMSE is recomputed on pairs keeping at least three rows.
Bands are fold SD on the three emphasized scores. Panel B makes the changing pair population explicit and is not a performance metric.