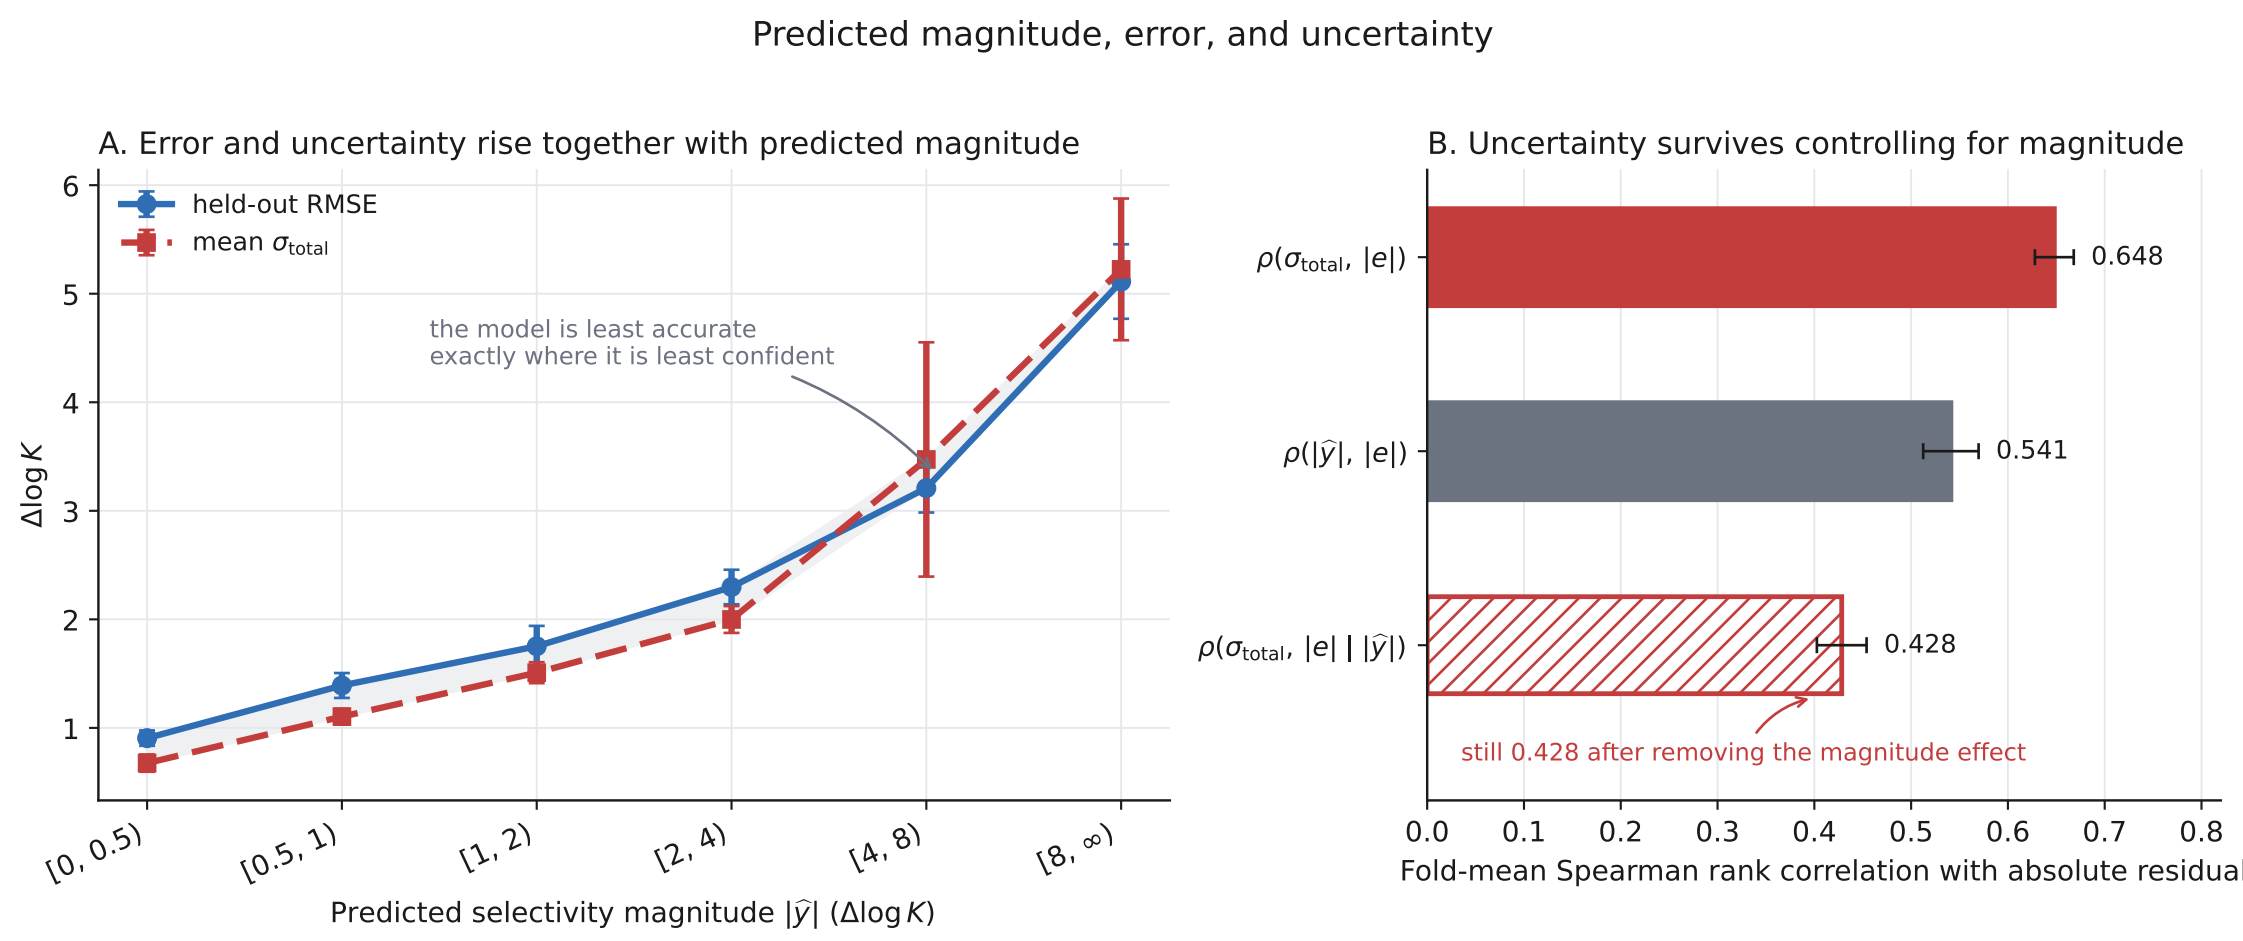

Points and bars are fold means; error bars are fold SD ($n = 5$). Panel A is a within-bin row-level RMSE, not pair-level MoP RMSE.
Panel B: solid bars are raw rank correlations, the hatched bar is the fold-local partial correlation controlling for $|\hat{y}|$.