

SVD Implementation on MNIST Image Classification Based on CNN

Satrya Budi Pratama
Institut Teknologi Bandung
Sekolah Teknik Elektro dan Informatika
Bandung, Indonesia
satrya@zeroinside.net

Abstract—In recent years, many development has been made in the field of image classification. Deep learning has proven to be powerful for classification, one of them is convolutional neural networks (CNN). In image classification one of the challenge is to recognized the handwritten digit. CNN architecture which has high precision for that problem is Lenet-5.

In this paper, we recognized the handwritten of MNIST dataset and implement SVD for feature extraction as preprocessing method. We build LeNet-5 model and evaluate the model.

Index Terms—CNN, LeNet-5, SVD, MNIST

I. INTRODUCTION

Handwriting recognition is the recognition of handwritten letters, numbers and symbols by computer systems [1]. The problem is every handwritten has different style. Every person has their style of writting a character, word and symbol. The computer try to assign the digitilzed character to its symbolic class. In the case of a print image, this is referred to as optical character recognition (OCR) meanwhile in the case of handprint, it is loosely referred to as intelligent character recognition (ICR) [2]. This has been a topic of research for decades. Some of the research areas include signature verification, bank check processing, postal address interpretation from envelopes, and get the digits on test letter for recurrence.

In recent years, the rise of artificial intelligent (AI) and big data especially in machine learning has brought a rapid development in the handwriting recognition application. Google has been developed Vision AI ¹ that can be used for reading printed and handwritten text. Some mobile application also has the OCR features such as Pen to Print ², Notes Plus ³, and Photomath ⁴. The web application such as i2OCR ⁵, OnlineOCR ⁶, and Convertio⁷. All of these technologies are use machine learning for the recognition or classificaion model.

Deep learning is one of the popular method on machine learning. It has been highly and widely implemented in various research fields especially in image recognition. The most important property of deep learning methods is that it can

automatically learn feature representations thus avoiding a lot of time-consuming engineering [3]. Betterchip processing abilities, considerable advances in the machine learning algorithms, and affordable cost of computing hardware are primarily crucial reasons for the booming of deep learning [4].

One of them is Convolutional Neural Network (CNN). CNN was firstly introduced by Kunihiko Fukushima [5]. It was later proposed by Yann LeCun. He combined CNN with back-propagation theory to recognize handwritten digits and document recognition [6], [7]. His system called LeNet-5, it was eventually used to read hand-written checks and zip codes. CNN is a powerful technique for image processing as well as natural language processing. The main advantage of CNN is the high accuracy in its results. However, it requires high computational cost. In addition, it needs a lot of data to be trained. The complexity of the CNN slows down the training process thus it is necessary to use a good GPU to overcome this problem [8]. Beside the hardware, another approach to reduce computational cost by eliminating the features as input to the model. Liu et al. [9] claim that training classifiers using MNIST dataset without using feature extraction methods shows inferior performance. This motivates us to use SVD as feature extraction and compare the performance to its original features from MNIST dataset using LeNet-5 model.

II. DATASET AND SVD

A. MNIST Dataset

In this paper, we use Modified National Institute of Standards and Technology (MNIST) dataset. The MNIST is a dataset developed by LeCun, Cortes, and Burges for evaluating machine learning models on the handwritten digit classification problem [7]. It has been widely used in research and to design novel handwritten digit recognition systems. It contains 60,000 training cases and 10,000 test cases of handwritten digits (0 to 9). Each digit is normalized and centered in a gray-scale (0 - 255) image with dimension 28×28 . Each image consists of 784 pixels that represent the features of the digits. An example of a digit can be shown in 1 and a example of dataset in 2.

¹<https://developers.google.com/ml-kit/vision>

²<https://www.pen-to-print.com>

³<https://new.notesplusapp.com/>

⁴<https://photomath.net>

⁵<http://www.i2ocr.com/about>

⁶<https://www.onlineocr.net/>

⁷<https://convertio.co/ocr/>

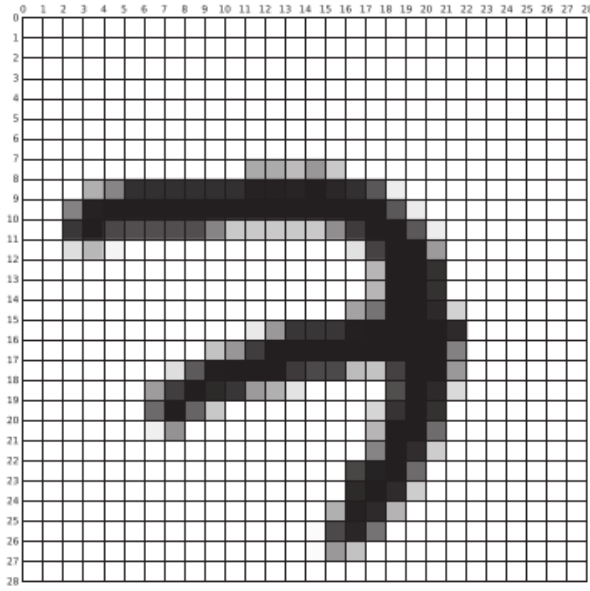


Fig. 1. MNIST sample belonging to the digit 7 adopted from [10]



Fig. 2. 100 digit example of a MNIST dataset adopted from [10]

B. SVD

Singular Value Decomposition or SVD intimately related to the familiar theory of diagonalizing a symmetric matrix [11]. SVD says that rectangular matrix A can be broken down into the product of three matrices : an orthogonal matrix U , a diagonal matrix Σ , and the transpose of an orthogonal matrix V as equation 1 below.

$$A_{m \times n} = U_{m \times m} \Sigma_{m \times n} V_{n \times n}^T \quad (1)$$

where :

$U^T U$: Identity Matrix (I)

$V^T V$: Identity Matrix (I)

U : orthonormal eigenvectors of AA^T

V : orthonormal eigenvectors of $A^T A$

Σ : diagonal matrix containing the square roots of eigen values from U or V in descending order.

SVD is a method for identifying and ordering the dimensions along which data points exhibit the most variation. This ties in to the third way of viewing SVD, which is that once we have identified where the most variation is, its possible to find the best approximation of the original data points using fewer dimensions. Hence, SVD can be seen as a method for data reduction. Also the SVD applied on linear squares optimization and data compression with reduced rank approximation on [11].

III. IMPLEMENTATION

We use LeNet-5 architecture to train model on MNIST dataset using TensorFlow. The architecture of the networks shown in 3. It has 7 layers exclude the input layer, it's

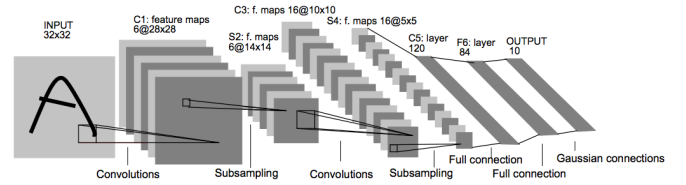


Fig. 3. LeNet-5 Architecture adopted from [7]

basically consist of convolutional layer, pooling layer, and fully connection layer.

1) Convolution

This layer has input dimension $32 \times 32 \times 1$ and the output is $28 \times 28 \times 6$. We will use ReLu activation function since it's better than sigmoid [12].

2) Subsampling or Pooling

This layer has input dimension $28 \times 28 \times 6$ and the output is $14 \times 14 \times 6$.

3) Convolution

This layer has input dimension $14 \times 14 \times 6$ and the output is $10 \times 10 \times 16$. Also has ReLu activation function.

4) Subsampling or Pooling

This layer has input dimension $10 \times 10 \times 16$ and the output is $5 \times 5 \times 16$.

5) Fully Connected

This layer has input dimension $5 \times 5 \times 16$ and the output is 120.

6) Fully Connected

This layer has input dimension 120 and the output is 84.

7) Output

This layer has input dimension 84 and the output is 10.

First step is download the MNIST dataset that available at <http://yann.lecun.com/exdb/mnist/>. There are 4 main file for training data and testing data. The training data contains 60,000 examples, and the testing data 10,000 examples. Before train the model, we applied SVD as feature extraction

to the input images which has 784 total features on each images. However, the LeNet-5 architecture only accepts $32 \times 32 \times C$ images, where C is the number of color channels. In order to reformat the MNIST data into a shape that LeNet-5 will accept, we pad the data with n rows of zeros on the top and bottom, and n columns of zeros on the left and right. The number of n is a half of subtraction between 32 and feature extraction dimension. The original MNIST has 28×28 so we pad 2 rows at top and bottom, then 2 columns on left and right.

ACKNOWLEDGMENT

The preferred spelling of the word “acknowledgment” in America is without an “e” after the “g”. Avoid the stilted expression “one of us (R. B. G.) thanks ...”. Instead, try “R. B. G. thanks...”. Put sponsor acknowledgments in the unnumbered footnote on the first page. [12]

REFERENCES

- [1] M. Mijwil, “Handwriting recognition methods,” 09 2015.
- [2] R. Plamondon and S. N. Srihari, “Online and off-line handwriting recognition: a comprehensive survey,” *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 22, no. 1, pp. 63–84, 2000.
- [3] M. Cokun, . yldrm, A. Uar, and Y. Demir, “An overview of popular deep learning methods,” *European Journal of Technic*, vol. 7, pp. 165–176, 12 2017.
- [4] Y. LeCun, Y. Bengio, and G. Hinton, “Deep learning,” *nature*, vol. 521, no. 7553, pp. 436–444, 2015.
- [5] K. Fukushima, “Neocognitron: A self-organizing neural network model for a mechanism of pattern recognition unaffected by shift in position,” *Biological cybernetics*, vol. 36, no. 4, pp. 193–202, 1980.
- [6] Y. LeCun, B. E. Boser, J. S. Denker, D. Henderson, R. E. Howard, W. E. Hubbard, and L. D. Jackel, “Handwritten digit recognition with a back-propagation network,” in *Advances in neural information processing systems*, 1990, pp. 396–404.
- [7] Y. Lecun, L. Bottou, Y. Bengio, and P. Haffner, “Gradient-based learning applied to document recognition,” *Proceedings of the IEEE*, vol. 86, no. 11, pp. 2278–2324, 1998.
- [8] A. Alsaafin and A. Elnagar, “A minimal subset of features using feature selection for handwritten digit recognition,” *Journal of Intelligent Learning Systems and Applications*, vol. 9, no. 4, pp. 55–68, 2017.
- [9] C.-L. Liu and H. Fujisawa, “Classification and learning methods for character recognition: Advances and remaining problems,” in *Machine learning in document analysis and recognition*. Springer, 2008, pp. 139–161.
- [10] A. Baldominos, Y. Saez, and P. Isasi, “A survey of handwritten character recognition with mnist and emnist,” *Applied Sciences*, vol. 9, no. 15, p. 3169, 2019.
- [11] D. Kalman, “A singularly valuable decomposition: the svd of a matrix,” *The college mathematics journal*, vol. 27, no. 1, pp. 2–23, 1996.
- [12] Y. Wang, F. Li, H. Sun, W. Li, C. Zhong, X. Wu, H. Wang, and P. Wang, “Improvement of mnist image recognition based on cnn,” in *IOP Conference Series: Earth and Environmental Science*, vol. 428, no. 1. IOP Publishing, 2020, p. 012097.