

Care Commons EHR

ONC Health IT Certification Readiness
Software Manual

CY2026 Base EHR Definition

<https://github.com/node-on-fhir/core>

July 21, 2026

Copyright © 2026 The Node on FHIR Project

Certification Status

This manual documents **certification readiness**, not an issued certification. Care Commons EHR has *not* been certified under the ONC Health IT Certification Program, and no certification is claimed or implied. This document exists to initiate that process: it records the system’s self-assessment against the CY2026 Base EHR criteria (45 CFR 170.315), backed by a behavioral test suite, real test-run screenshots, reproducible build coordinates, and a lockfile-derived SBOM in the chapters that follow.

The (g)(10) Standardized API surface has been exercised against the ONC-approved Inferno test suite with passing results; those results will be re-run and formally recorded as part of an ACB submission. Formal certification requires testing and issuance by an ONC-Authorized Certification Body (ONC-ACB); engaging one is the next step this document supports.

Contents

Certification Status	1
0 Installation, Runtime Environment, and Configuration	5
0.1 System Requirements	5
0.2 Package Inventory	5
0.3 Installation	6
0.4 Environment Variables	7
0.5 Canonical Certification Configuration	8
0.6 Test Execution	8
0.7 Reproducibility	8
I Base EHR Certification	10
Overview	11
1 § 170.315(a)(1) - CPOE Medications	13
1.1 Criterion Information	13
1.1.1 Maturity Level	13
1.1.2 Regulatory Text	13
1.2 Behavior-Driven Development Specification	13
1.3 Screenshots	14
2 § 170.315(a)(2) - CPOE Laboratory	16
2.1 Criterion Information	16
2.1.1 Maturity Level	16
2.1.2 Regulatory Text	16
2.2 Behavior-Driven Development Specification	16

2.3	Screenshots	17
3	§ 170.315(a)(3) - CPOE Diagnostic Imaging	19
3.1	Criterion Information	19
3.1.1	Maturity Level	19
3.1.2	Regulatory Text	19
3.2	Behavior-Driven Development Specification	19
3.3	Screenshots	21
4	§ 170.315(a)(4) - Drug Interaction Checks	22
4.1	Criterion Information	22
4.1.1	Maturity Level	22
4.1.2	Regulatory Text	22
4.2	Behavior-Driven Development Specification	22
5	§ 170.315(a)(5) - Demographics	25
5.1	Criterion Information	25
5.1.1	Maturity Level	25
5.1.2	Regulatory Text	25
5.1.3	Implementation	25
5.2	Behavior-Driven Development Specification	26
5.3	Screenshots	31
6	§ 170.315(a)(9) - Clinical Decision Support (EXPIRED)	33
6.1	Criterion Information	33
6.1.1	Maturity Level	33
6.1.2	Expiration Notice	33
6.1.3	Regulatory Text	33
6.2	Behavior-Driven Development Specification	33
7	§ 170.315(b)(1) - Transitions of Care	39
7.1	Criterion Information	39
7.1.1	Maturity Level	39
7.1.2	Regulatory Text	39
7.1.3	Implementation	39
7.2	Behavior-Driven Development Specification	40
7.3	Screenshots	48
8	§ 170.315(b)(4) - Real-Time Prescription Benefit	50
8.1	Criterion Information	50
8.1.1	Maturity Level	50
8.1.2	Regulatory Text	50
8.1.3	Implementation Status	50
8.2	Behavior-Driven Development Specification	50
8.3	Screenshots	51
9	§ 170.315(b)(11) - Decision Support Interventions	52
9.1	Criterion Information	52
9.1.1	Maturity Level	52

9.1.2	Replacement Notice	52
9.1.3	Regulatory Text	52
9.2	Behavior-Driven Development Specification	52
9.3	Screenshots	57
10	§ 170.315(a)(14) - Implantable Device List	59
10.1	Criterion Information	59
10.1.1	Maturity Level	59
10.1.2	Regulatory Text	59
10.2	Behavior-Driven Development Specification	59
10.3	Screenshots	63
11	§ 170.315(e)(1) - View, Download, Transmit	65
11.1	Criterion Information	65
11.1.1	Maturity Level	65
11.1.2	Regulatory Text	65
11.2	Behavior-Driven Development Specification	65
12	§ 170.315(g)(7) - Application Access - Patient Selection	67
12.1	Criterion Information	67
12.1.1	Maturity Level	67
12.1.2	Regulatory Text	67
12.2	Behavior-Driven Development Specification	67
13	§ 170.315(g)(9) - Application Access - All Data	69
13.1	Criterion Information	69
13.1.1	Maturity Level	69
13.1.2	Regulatory Text	69
13.2	Behavior-Driven Development Specification	69
14	§ 170.315(g)(10) - Standardized API	71
14.1	Criterion Information	71
14.1.1	Maturity Level	71
14.1.2	Regulatory Text	71
14.1.3	Inferno Validation Status	71
14.2	Behavior-Driven Development Specification	71
15	§ 170.315(c)(1) - Clinical Quality Measures - Record and Export	73
15.1	Criterion Information	73
15.1.1	Maturity Level	73
15.1.2	Regulatory Text	73
15.1.3	Implementation	73
15.2	Behavior-Driven Development Specification	74
15.3	Screenshots	75
16	§ 170.315(h)(1) - Direct Project	77
16.1	Criterion Information	77
16.1.1	Maturity Level	77
16.1.2	Regulatory Text	77

16.1.3 Documented Gap	77
16.2 Behavior-Driven Development Specification	78
16.3 Screenshots	78
A Acronyms and Abbreviations	80
B References	82
C Certification Testing Notes	83
C.1 Behavioral Test Suite Status	83
C.2 Inferno Testing	83
C.3 Test Execution	84
D Software Bill of Materials (SBOM)	85
D.1 SBOM Metadata	85
D.2 Key Components	86
D.3 License Distribution (raw)	86
E License Compliance Report	88
E.1 The Application's Own License	88
E.2 License Families and Obligations	88
E.3 Attribution and Notice Obligations	89
E.4 Source Availability	89
E.5 Findings	90
E.6 Open-Source Provenance	90
E.7 Reproducible Build	91
F ONC (g)(10) Inferno Test Report	92

Chapter 0

Installation, Runtime Environment, and Configuration

This chapter records the exact environment, dependencies, and configuration used to build the system and generate the certification test results in this manual. Version numbers are drawn from the repository as of the commit cited in the [Reproducibility](#) section; treat that commit plus `package-lock.json` as the authoritative build inputs.

0.1 System Requirements

Component	Requirement
Operating system	macOS (Apple Silicon or Intel) for development; Linux (Debian/Ubuntu) for CI and production; Windows via WSL2
Meteor	3.4 (<code>.meteor/release = METEOR@3.4</code>)
Node.js	22.22.0 — bundled by Meteor 3.4 as the app runtime; a system Node ≥ 20 (CI uses 20.11.0) for npm / CLI tooling
MongoDB	6.0 or newer — Meteor’s bundled development Mongo is 7.0.16; CI runs the <code>mongo:6.0</code> image
Browser (E2E)	Google Chrome / Chrome for Testing, with a version-matched ChromeDriver (the runs in this manual used 149.x)
Browser (app)	Any modern evergreen browser (Chrome, Edge, Firefox, Safari)
Desktop (opt.)	Electron via <code>npmPackages/desktop-lattice</code> — not required for certification testing

Table 1: System requirements

0.2 Package Inventory

Major dependencies, grouped by purpose. Versions are the declared ranges in `package.json`; exact resolved versions are pinned in `package-lock.json`.

Purpose	Package	Version
FHIR server	(in-repo) <code>server/FhirEndpoints.js</code> , <code>SearchParametersEngine</code>	—
	<code>@node-on-fhir/us-core</code> (US Core 7.0 profiles)	7.0.0
	<code>fhirpath</code>	4.8.0
SMART / Auth	<code>@node-oauth/express-oauth-server</code>	4.1.5
	<code>jsonwebtoken</code>	9.0.2
	<code>pkijjs</code> + <code>asn1js</code> (X.509 / Backend Services)	3.2.4 / 3.0.5
	<code>bcrypt</code>	6.0.0
Data / Mongo	Meteor Mongo (server + Minimongo)	(Meteor 3.4)
	<code>simpl-schema</code> , <code>ajv</code> (FHIR JSON Schema)	— / 8.20.0
	<code>lodash</code> , <code>moment</code>	4.18.1 / 2.29.4
Testing	<code>nightwatch</code> (E2E)	3.12.1
	<code>chromedriver</code>	146.0.6
	<code>meteortesting:mocha</code> (unit)	(Meteor)
UI	<code>react</code> / <code>react-dom</code>	18.2.0
	<code>@mui/material</code> / <code>@mui/icons-material</code>	5.16.7
C-CDA / QRDA	<code>@node-on-fhir/ccda-export</code> (C-CDA gen + receive)	(in-repo)
	<code>@node-on-fhir/quality-measures</code> (QRDA I export)	(in-repo)
	<code>fqm-execution</code> (FHIR measure engine)	1.8.5
	<code>xml2js</code> (XML parse / build)	0.6.2
Terminology	<code>CodeSystems</code> / <code>ValueSets</code> collections + US Core profiles	—
	code systems: CDCREC, LOINC, SNOMED CT, RxNorm (by reference)	—
DICOM	<code>@cornerstonejs/core</code>	1.78.0
	<code>@cornerstonejs/dicom-image-loader</code> / <code>tools</code>	1.78.0
Build tooling	Meteor 3.4 bundler	3.4
	<code>@rspack/core</code> (Rspack)	1.7.1
	<code>tectonic</code> (LaTeX — this manual only)	0.16.x

0.3 Installation

Meteor is the prerequisite; it provisions the bundled Node and MongoDB.

```
# 1. Install Meteor 3.x (once, system-wide)
curl https://install.meteor.com/ | sh

# 2. Clone and install
git clone https://github.com/node-on-fhir/core.git
cd core
npm install # installs npm workspaces + symlinks workflow packages

# 3. Run (starts the app + bundled MongoDB on http://localhost:3000)
npm start # equivalent to: meteor run
```

There is no separate `npm run dev` script; `npm start` maps to `meteor run`. A first run compiles the bundle and may take several minutes.

0.4 Environment Variables

The following variables configure the runtime; use safe placeholders in shared environments and never commit real secrets. Development / test values:

```
NODE_ENV=development # hard gate for dev auto-login
DEV_AUTO_LOGIN=true # enable dev auto-login
DEV_AUTO_USERNAME=demouser # dev account username
DEV_AUTO_PASSWORD=<dev-password> # dev account password (server-side only)
DEV_AUTO_PATIENT_ID=<fhir-id> # optional: bind dev user to a Patient
TEST_RUN=1 # gates destructive test-only operations
ENABLE_AUTO_PUBLISH=true # enable autopublish.* publications
INITIALIZE_SEARCH_PARAMETERS=true # compile the FHIR SearchParametersEngine
                                # (REQUIRED for (g)(7)/(g)(9) search)
EXTRA_WORKFLOWS=@node-on-fhir/... # comma-separated workflow packages to load
MONGO_URL=mongodb://localhost:27017/meteor # override bundled dev Mongo
                                # (CI: mongodb://mongo:27017/meteor_test)
CHROMEDRIVER_PATH=/path/to/chromedriver # match your local Chrome version
```

Server configuration that is not an environment variable is supplied via a Meteor settings JSON file (`-settings`). Public keys land in `Meteor.settings.public` (client-visible); private keys stay server-side. Relevant fields (safe placeholders):

```
{
  "public": {
    "title": "Care Commons",
    "fhirVersion": "R4",
    "devAutoLoginEnabled": true,
    "modules": {
      "patientDemographics": { "raceEthnicity": true }
    }
  },
  "private": {
    "fhir": {
      "rest": {
        "Patient": { "interactions": ["read","create","update","delete","search"],
          "search": true, "publication": true }
      },
      "disableOAuth": true
    },
    "accessControl": {
      "enableBasicAuth": false,
      "systemSecret": "<CHANGE-ME-do-not-commit>"
    }
  }
}
```

Security note. The certification/TDD settings file ships with `disableOAuth: true` so unauthenticated REST calls are granted a `noauth` role — convenient for a self-contained test run, but never a production posture. Production deployments must enable OAuth / SMART, set a real `systemSecret` (or migrate to JWT/JWK Backend Services), and keep settings files containing secrets out of version control.

0.5 Canonical Certification Configuration

The certification test run in this manual was launched with the following exact command — environment variables, the workflow-package set, and the settings file. This is the reproducible entry point for the whole suite:

```
TEST_RUN=1 \
ENABLE_AUTOPUBLISH=true \
DEV_AUTO_LOGIN=true \
DEV_AUTO_USERNAME=demouser \
DEV_AUTO_PASSWORD=<dev-password> \
INITIALIZE_SEARCH_PARAMETERS=true \
EXTRA_WORKFLOWS=@node-on-fhir/order-catalog,@node-on-fhir/implantable-devices,@node-on-fhir/ccda-export,@node-on-fhir/prescription-benefit,@node-on-fhir/decision-support,
    @node-on-fhir/quality-measures,@node-on-fhir/secure-messaging \
meteor run --settings settings/settings.honeycomb.tdd.json
```

The settings file `settings/settings.honeycomb.tdd.json` enables dev auto-login, the per-resource FHIR REST interactions (`private.fhir.rest.*`), and the race/ethnicity demographics gate (`public.modules.patientDemographics.raceEthnicity = true`, required for the (a)(5) test). Meteor reads `-settings` into `Meteor.settings` at boot. The seven `EXTRA_WORKFLOWS` packages supply the CPOE catalog, implantable-device registry, C-CDA export/receive, real-time prescription benefit, decision support, quality measures, and secure messaging surfaces exercised by the criteria chapters.

0.6 Test Execution

Run the full Base EHR suite against a running server with the aggregate runner:

```
./certification/tdd/base_ehr/run-base-ehr-tests.sh
```

Or run a single criterion directly (the form used to capture the per-chapter results and screenshots in this manual):

```
CHROMEDRIVER_PATH=/path/to/chromedriver \
npx nightwatch --config nightwatch.circle.conf.js \
certification/tdd/base_ehr/170.315.<x>.<y>.test.js
```

Each behavioral test drives real record / change / access behaviors against FHIR resources per the ONC test procedures; a criterion is **Verified** when its test passes green and a **Gap** when a test deliberately fails on a documented missing capability. See the Certification Testing Notes appendix for the full suite status and the relationship to Inferno.

0.7 Reproducibility

The results, screenshots, and status table in this manual were generated with:

To reproduce, check out the commit above, restore dependencies from `package-lock.json` with `npm ci`, launch with the [Canonical Certification Configuration](#), and run the test-execution commands above.

Input	Value
Repository	github.com/node-on-fhir/core (branch baseehr-testcoverage)
Commit SHA	c4ad354131cea9801a585b76ff04a629939eab24 (documentation-only changes may follow this commit)
package-lock.json	lockfileVersion 3; SHA-256 a1a97949761c95fcde77784cc2a4c647ed9748443744c31965f7d3fd4a73782b (4,121 locked packages, excluding the root project entry)
Node.js	22.22.0 (Meteor 3.4 runtime); 20.11.0 (CI tooling)
MongoDB	7.0.16 (bundled dev); 6.0 (CI)
Meteor	3.4
Browser	Chrome for Testing with version-matched ChromeDriver (149.x)

Table 3: Reproducibility inputs

Part I

Base EHR Certification

Overview

This Part documents the Base EHR certification criteria per the ONC Health IT Certification Program, updated for the **CY2026 Base EHR definition** (45 CFR 170.102, as revised by the HTI final rules). The CPOE family (a)(1)–(a)(3) requires at least one member; the remaining rows are each required (some with future compliance dates, noted below).

Certification Criteria Summary

The **Status** column reflects the outcome of the behavioral Nightwatch test suite under `certification/tdd/base_e` (one test file per criterion). **Verified** = the capability is built and its behavioral tests pass green. **Gap** = a behavioral test exists and deliberately fails on a documented missing capability (the suite is a live certification punch-list — see the per-criterion chapters and the Certification Testing Notes appendix). **Inferno** = validated with the ONC-approved Inferno tool (passing session report reproduced in Appendix F), not by this suite.

Scope of the BDD feature files: the embedded Gherkin features are the *complete* behavioral specification for each criterion, and deliberately include forward-looking scenarios beyond the current regulatory floor (for example, the pronoun and inpatient mortality-data scenarios in (a)(5)). A criterion’s **Verified** status attests to the scenarios exercised by its behavioral Nightwatch test, which may be a subset of the full feature file; the feature files are the specification, the tests are the evidence.

Criterion	Title	Status
§ 170.315(a)(1)	CPOE - Medications	Verified
§ 170.315(a)(2)	CPOE - Laboratory	Verified
§ 170.315(a)(3)	CPOE - Diagnostic Imaging	Verified
§ 170.315(a)(5)	Demographics	Verified
§ 170.315(a)(14)	Implantable Device List	Verified
§ 170.315(b)(1)	Transitions of Care (C-CDA)	Verified
§ 170.315(b)(4)	Real-Time Prescription Benefit	Verified
§ 170.315(b)(11)	Decision Support Interventions	Verified
§ 170.315(c)(1)	Clinical Quality Measures - Record & Export	Verified
§ 170.315(g)(7)	Application Access - Patient Selection	Verified
§ 170.315(g)(9)	Application Access - All Data Request	Verified
§ 170.315(g)(10)	Standardized API	Inferno
§ 170.315(h)(1)	Direct Project (or (h)(2))	Gap

Table 4: CY2026 Base EHR Certification Criteria — test-verified status (11 verified, 1 documented gap, 1 external/Inferno)

The remaining documented gap is (h)(1) Direct messaging, which has no operational transport (SMTP/S-MIME/HISP) and uses simulated certificate trust; it is detailed in its chapter and tracked in the project's engineering ledger. The former (a)(5), (b)(1), and (c)(1) gaps have since been remediated: (a)(5) now records race/ethnicity per CDCREC as US Core extensions (settings-gated — see that chapter); (b)(1) now populates the C-CDA from the real patient record and adds an inbound receive/validate/display path; and (c)(1) now exports a QRDA Category I document per § 170.205(h)(2).

Note on future compliance dates: (b)(4) Real-Time Prescription Benefit is an HTI-4 criterion required by 1/1/2028, and (b)(11) Decision Support Interventions has a Privacy & Security update due 12/31/2027. Both are tested at their current baseline; absent future-dated portions are treated as informational, not gaps.

Legacy / non-core criteria documented separately: § 170.315(a)(4) Drug Interaction Checks, § 170.315(a)(9) Clinical Decision Support (**expired** 1/1/2025, replaced by (b)(11)), and § 170.315(e)(1) View, Download, Transmit are retained as reference chapters below but are not part of the CY2026 Base EHR core set above.

Chapter 1

§ 170.315(a)(1) - CPOE Medications

1.1 Criterion Information

1.1.1 Maturity Level

VERIFIED (behavioral tests green)

1.1.2 Regulatory Text

From 45 CFR § 170.315(a)(1):

- (1) **Computerized provider order entry—medications.**
 - (i) Enable a user to record, change, and access medication orders.
 - (ii) Optional. Include a “reason for order” field.

1.2 Behavior-Driven Development Specification

Listing 1.1: 170.315(a)(1) - CPOE Medications

```
# certification/bdd/170.315-a-1-cpoe-medications.feature
# §170.315(a)(1) - Computerized Provider Order Entry - Medications

# REGULATORY TEXT FROM 45 CFR §170.315(a)(1)
#
# (1) Computerized provider order entry--medications.
#
# (i) Enable a user to record, change, and access medication orders.
#
# (ii) Optional. Include a "reason for order" field.

@170.315-a-1 @cpoe @medications @clinical
Feature: Computerized Provider Order Entry - Medications
  As a provider
  I want to create and manage medication orders

  Background:
    Given I am authenticated as a provider
    And a patient record is selected
```

And I am on /order-catalog

Scenario: Record a new medication order

Given the patient requires "Metformin_500_MG_Oral_Tablet"

When I open the OrderCatalog and select the medications order type

And select the medication from the catalog

And provide an optional "reason_for_order" of "Type_2_diabetes_mellitus"

And submit the order

Then the system shall create a FHIR MedicationRequest with status "active" and intent "order"

And the MedicationRequest shall carry the RxNorm-coded medication, requester, and dosage instructions

And the MedicationRequest shall be inserted into the MedicationRequests collection

And an AuditEvent shall record the order creation

Scenario: Change an existing medication order

Given the patient has a pending MedicationRequest

When I change the MedicationRequest status to "on-hold" and priority to "urgent"

Then the modified values shall be persisted in the MedicationRequests collection

And the change shall be retrievable via the medication orders API

Scenario: Access existing medication orders

Given the patient has one or more MedicationRequests

When I navigate to /medication-requests

Then the system shall update the MedicationRequests subscription by patientId

And the MedicationRequestsTable shall display the patient's medication orders

And I shall be able to open a MedicationRequest to view its details

1.3 Screenshots

Honeycomb

 CLEAR PATIENT demouser LOGOUT

BaseEHR CpoeMeds

ID: baseehr-a1-1783151151392 Birth Date: May 05, 1985 Gender: other Phone: Unknown

Computerized Provider Order Entry (CPOE)
ONC §170.315(a)(1) Medications | §170.315(a)(2) Laboratory | §170.315(a)(3) Diagnostic Imaging

VIEW SERVICE REQUESTS

Order Catalog
Browse medications

LABORATORY **MEDICATION** RADIOLOGY

Search medication orders...

All Categories Antibiotic Analgesic NSAID Opioid Beta Blocker ACE Inhibitor Diuretic Antidiabetic

Code	Description	Route	Strength	Action
308182	Amoxicillin 500 MG Oral Capsule Antibiotic	PO	500 mg	+
308459	Azithromycin 250 MG Oral Tablet Antibiotic	PO	250 mg	+
308745	Ceftriaxone 1 GM Injection Antibiotic	IM/IV	1 g	+
313782	Acetaminophen 325 MG Oral Tablet Analgesic	PO	325 mg	+

Active Orders
1 items pending submission

Default Priority
☒ Routine ☐ Urgent ☐ STAT

routine Metformin 500 MG Oral Tablet

CLEAR ALL SUBMIT ORDERS (1)

ONC Requirement: All orders must include priority level and clinical indication when applicable.

Figure 1.1: CPOE Medications - Order Entry Interface

Chapter 2

§ 170.315(a)(2) - CPOE Laboratory

2.1 Criterion Information

2.1.1 Maturity Level

VERIFIED (behavioral tests green)

2.1.2 Regulatory Text

From 45 CFR § 170.315(a)(2):

(2) Computerized provider order entry—laboratory.

(i) Enable a user to record, change, and access laboratory orders.

(ii) Optional. Include a “reason for order” field.

2.2 Behavior-Driven Development Specification

Listing 2.1: 170.315(a)(2) - CPOE Laboratory

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-a-2-cpoe-
  laboratory.feature
# §170.315(a)(2) - Computerized Provider Order Entry - Laboratory

# REGULATORY TEXT FROM 45 CFR §170.315(a)(2)
#
# (2) Computerized provider order entry--laboratory.
#
# (i) Enable a user to record, change, and access laboratory orders.
#
# (ii) Optional. Include a "reason for order" field.

@170.315-a-2 @cpoe @laboratory @clinical
Feature: Computerized Provider Order Entry - Laboratory
  As a provider
  I want to create and manage laboratory orders

Background:
  Given I am authenticated as a provider
```

And a patient record is selected
And I am on /order-catalog/laboratory

Scenario: Create a new laboratory order

Given the patient requires a "Complete_Blood_Count"
When I open the OrderCatalog on /order-catalog
And select a PlanDefinition for "CBC_with_differential"
Then the system shall reference the PlanDefinition.id of "CBC_with_differential"
And look up the associated actions and ActivityDefinitions
And create a new resource based on ActivityDefinition.kind (typically a
ServiceRequest)
And the ServiceRequest shall include all necessary details for specimen collection
And the ServiceRequest shall be inserted into the ServiceRequests collection

Scenario: Change an existing laboratory order

Given the patient has a pending ServiceRequest for "Basic_Metabolic_Panel"
When I change the ServiceRequest to "Comprehensive_Metabolic_Panel"
And the modified ServiceRequest shall be saved in the ServiceRequests collection

Scenario: Access existing laboratory orders

Given the patient has multiple ServiceRequests in various states
When I request to view the patient's ServiceRequests
Then the system shall update the ServiceRequests subscription by patientId
And the ServiceRequestsTable shall show current status (pending, completed, cancelled
) for each request
And I shall be able to view results for completed orders

Background:

Given I am authenticated as a lab tech

Scenario: Access workqueue

Given no patient record is selected
And I am on /service-requests
Then the system shall enable access to all ServiceRequests of type "laboratory"
And the orders shall show current status
And I shall be able to open the ServiceRequest records
And update their status and other fields

2.3 Screenshots

☰ Honeycomb

baseEHR Cpoelab

ID
baseehr-a2-1783151186638

Birth Date
May 05, 1985

Gender
other

Phone
Unknown

☀️ 📄 CLEAR PATIENT demouser LOGOUT

Computerized Provider Order Entry (CPOE)
ONC §170.315(a)(1) Medications | §170.315(a)(2) Laboratory | §170.315(a)(3) Diagnostic Imaging

VIEW SERVICE REQUESTS

Order Catalog
Browse laboratory tests

LABORATORY MEDICATION RADIOLOGY

🔍 Search laboratory orders...

All Categories Chemistry Hematology Coagulation Microbiology Urinalysis

Code	Description	Specimen	TAT	Action
2823-3	Potassium [Moles/volume] in Serum or Plasma Chemistry	Serum/Plasma	⌚ 4 hours	+
2345-7	Glucose [Mass/volume] in Serum or Plasma Chemistry	Serum/Plasma	⌚ 4 hours	+
2160-0	Creatinine [Mass/volume] in Serum or Plasma Chemistry	Serum/Plasma	⌚ 4 hours	+

Active Orders
1 items pending submission

Default Priority
☒ Routine ☐ Urgent ☐ STAT

routine CBC panel - Blood by Automated count

CLEAR ALL SUBMIT ORDERS (1)

ⓘ **ONC Requirement:** All orders must include priority level and clinical indication when applicable. ✕

Figure 2.1: CPOE Laboratory - Order Entry Interface

Chapter 3

§ 170.315(a)(3) - CPOE Diagnostic Imaging

3.1 Criterion Information

3.1.1 Maturity Level

VERIFIED (behavioral tests green)

3.1.2 Regulatory Text

From 45 CFR § 170.315(a)(3):

- (3) Computerized provider order entry—diagnostic imaging.
 - (i) Enable a user to record, change, and access diagnostic imaging orders.
 - (ii) Optional. Include a “reason for order” field.

3.2 Behavior-Driven Development Specification

Listing 3.1: 170.315(a)(3) - CPOE Diagnostic Imaging

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-a-3-cpoe-  
  diagnostic-imaging.feature  
# §170.315(a)(3) - Computerized Provider Order Entry - Diagnostic Imaging  
  
# REGULATORY TEXT FROM 45 CFR §170.315(a)(3)  
#  
# (3) Computerized provider order entry--diagnostic imaging.  
#  
# (i) Enable a user to record, change, and access diagnostic imaging orders.  
#  
# (ii) Optional. Include a "reason for order" field.  
  
@170.315-a-3 @cpoe @diagnostic-imaging @clinical  
Feature: Computerized Provider Order Entry - Diagnostic Imaging  
  As an ordering provider  
  I want to electronically create and manage diagnostic imaging orders  
  So that I can order appropriate imaging studies efficiently
```

Background:

Given I am authenticated as a physician
And a patient record is selected
And I am on /order-catalog/diagnostic-imaging

Scenario: Create a new diagnostic imaging order

Given the patient requires a chest X-ray
When I search the PlanDefinitions collection for "Chest_X-ray_PA_and_lateral"
Then the system shall open a new ServiceRequest
And the ServiceRequest shall include imaging modality and anatomical location
And the new record will be inserted into the ServiceRequests collection

Scenario: Change an existing diagnostic imaging order

Given the patient has a pending ServiceRequest for "Chest_X-ray_PA_and_lateral"
When I open the ServiceRequest and change it to "CT_abdomen_and_pelvis_with_contrast"
and save
Then the system shall update the record in the ServiceRequests collection
And it will be viewable at /service-requests

Scenario: Optionally include reason for diagnostic imaging order

Given I am creating a new ServiceRequest for "MRI_lumbar_spine"
Then the system may include a "reason_for_order" field

Scenario: Access existing diagnostic imaging

Given a patient record is selected
And I am on /imaging-studies
And the patient has multiple imaging orders and completed studies (CT abdomen pelvis;
MRI lumbar)
Then the system shall enable access to all ImagingStudies for the selected patient
And the orders shall show current status
And I shall be able to access imaging reports and images (DocumentReferences)

Background:

Given I am authenticated as a rad tech

Scenario: Access workqueue

Given no patient record is selected
And I am on /service-requests
Then the system shall enable access to all ServiceRequests of type "imaging"
And the orders shall show current status
And I shall be able to open the ServiceRequest records
And update their status and other fields

Scenario: Access existing diagnostic imaging

Given a patient record is selected
And I am on /imaging-studies
And the patient has multiple imaging orders and completed studies (CT abdomen pelvis;
MRI lumbar)
Then the system shall enable access to all ImagingStudies for the selected patient
And the orders shall show current status
And I shall be able to access imaging reports and images (DocumentReferences)

3.3 Screenshots

The screenshot displays the Honeycomb BaseEHR CPOE Imaging interface. The top navigation bar includes the Honeycomb logo, a menu icon, and links for CLEAR PATIENT, demouser, and LOGOUT. Below the navigation bar, the patient information section shows the ID (baseehr-a3-1783151215465), Birth Date (Jan 01, 1970), Gender (female), and Phone (Unknown).

The main content area is titled "Computerized Provider Order Entry (CPOE)" and includes a link to "VIEW SERVICE REQUESTS". The interface is divided into two main sections: "Order Catalog" and "Active Orders".

Order Catalog: This section allows users to browse radiology procedures. It features a search bar and tabs for LABORATORY, MEDICATION, and RADIOLOGY. The RADIOLOGY tab is selected, showing a list of procedures with columns for Code, Description, Modality, Body Part, TAT, and Action.

Code	Description	Modality	Body Part	TAT	Action
36643-5	XR Chest 1 View X-Ray	XR	Chest	2 hours	+
30746-2	XR Chest 2 Views X-Ray	XR	Chest	2 hours	+
24627-2	XR Chest PA and Lateral X-Ray	XR	Chest	2 hours	+
29252-4	CT Chest without contrast CT	CT	Chest	4 hours	+

Active Orders: This section shows 1 item pending submission. It includes a "Default Priority" section with radio buttons for Routine (selected), Urgent, and STAT. Below this, there is a dropdown menu showing "routine" and "XR Chest 2 Views". At the bottom, there are buttons for "CLEAR ALL" and "SUBMIT ORDERS (1)".

A notification banner at the bottom of the Active Orders section states: "ONC Requirement: All orders must include priority level and clinical indication when applicable."

Figure 3.1: CPOE Diagnostic Imaging - Order Entry Interface

Chapter 4

§ 170.315(a)(4) - Drug Interaction Checks

4.1 Criterion Information

4.1.1 Maturity Level

IMPLEMENTED

4.1.2 Regulatory Text

From 45 CFR § 170.315(a)(4):

(4) Drug-drug, drug-allergy interaction checks for CPOE —

(i) Interventions. Before a medication order is completed and acted upon during computerized provider order entry (CPOE), interventions must automatically indicate to a user drug-drug and drug-allergy contraindications based on a patient's medication list and medication allergy list.

(ii) Adjustments.

(A) Enable the severity level of interventions provided for drug-drug interaction checks to be adjusted.

(B) Limit the ability to adjust severity levels in at least one of these two ways:

(1) To a specific set of identified users.

(2) As a system administrative function.

4.2 Behavior-Driven Development Specification

Listing 4.1: 170.315(a)(4) - Drug Interaction Checks

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-a-4-drug-
interactions.feature
# §170.315(a)(4) - Drug-Drug, Drug-Allergy Interaction Checks for CPOE

# REGULATORY TEXT FROM 45 CFR §170.315(a)(4)
#
# (4) Drug-drug, drug-allergy interaction checks for CPOE --
#
```

```

# (i) Interventions. Before a medication order is completed and acted upon during
  computerized provider order entry (CPOE), interventions must automatically indicate
  to a user drug-drug and drug-allergy contraindications based on a patient's
  medication list and medication allergy list.
#
# (ii) Adjustments.
#
# (A) Enable the severity level of interventions provided for drug-drug interaction
  checks to be adjusted.
#
# (B) Limit the ability to adjust severity levels in at least one of these two ways:
#
# (1) To a specific set of identified users.
#
# (2) As a system administrative function.

@170.315-a-4 @cpoe @drug-interactions @safety @clinical
Feature: Drug-Drug and Drug-Allergy Interaction Checks for CPOE
  As a prescribing provider
  I want automatic alerts for potential drug interactions
  So that I can prevent adverse drug events and improve patient safety

Background:
  Given I am authenticated as a provider
  And a patient record is selected
  And the patient has an active medication list
  And the patient has a medication allergy list
  And I am on /order-catalog/medications

Scenario: Automatic drug-drug interaction checking during CPOE
  Given the patient is currently taking "Warfarin_5mg_daily"
  When I am on /order-catalog/medications
  Then an RxNorm search bar will display, with RxNorm accordion table underneath with
    top-10 records
  When I select the medication request for "Aspirin_325mg_daily"
  Then the row will expand, with action buttons
  And the system shall automatically indicate drug-drug contraindications with an alert
  And the alert shall describe the interaction between Warfarin and Aspirin

Scenario: Automatic drug-allergy interaction checking during CPOE
  Given the patient has a documented allergy to "Penicillin"
  When I am on /order-catalog/medications
  Then an RxNorm search bar will display, with RxNorm accordion table underneath with
    top-10 records
  When I complete the medication request for "Amoxicillin_500mg"
  Then the row will expand, with action buttons
  Then the system shall automatically indicate drug-allergy contraindications with an
    alert
  And the alert shall identify the cross-reactivity concern

Scenario: Display interventions based on active medication list
  Given the patient's active medication list contains multiple medications
  When I search for medications

```


Then the system shall check against all medications in the active medication list
And all drug-drug interactions shall be displayed as chips or icons in the accordion table

Scenario: Display interventions based on medication allergy list

Given the patient's allergy list contains documented allergies

When I search for medications

Then the system shall check against all allergies in the medication allergy list

And all relevant drug-allergy contraindications shall be displayed as chips or icons in the accordion table

Scenario: Enable severity level adjustment for drug-drug interactions

Given I am a system administrator

When I access the /drug-drug-interaction-settings

Then the system shall enable adjustment of severity levels

And severity levels shall control which interactions trigger alerts

Scenario: Display high-severity drug-drug interaction

Given the interaction checking system is configured with severity levels

And the patient is taking "MAO_oInhibitor"

When I attempt to order "SSRI_oantidepressant"

Then the system shall display high-severity interaction alert

And the alert shall require acknowledgment

Scenario: Display moderate-severity drug-drug interaction

Given the interaction checking system is configured with severity levels

And the patient is taking "Atorvastatin"

When I attempt to order "Clarithromycin"

Then the system shall display moderate-severity interaction alert

And the alert shall provide clinical guidance

Scenario: Provider override of drug interaction alert

Given a drug-drug interaction alert is displayed

When I review the alert and determine the benefit outweighs risk

Then the system shall allow me to 'override' the alert

And the override shall expand a collapsed clinical reasoning input

And the override shall be recorded in the audit log

Scenario: Multiple simultaneous interaction alerts

Given the patient has complex medication regimen

When I select a medication that interacts with multiple existing medications or allergies

Then the system shall display all relevant interactions in the expansion panel

And interactions shall be prioritized by severity

Chapter 5

§ 170.315(a)(5) - Demographics

5.1 Criterion Information

5.1.1 Maturity Level

VERIFIED (behavioral tests green)

5.1.2 Regulatory Text

From *45 CFR § 170.315(a)(5)*:

(5) Patient demographics and observations.

(i) Enable a user to record, change, and access patient demographic and observations data including race, ethnicity, preferred language, sex, sex parameter for clinical use, sexual orientation, gender identity, name to use, pronouns, and date of birth.

(Full regulatory text abbreviated for brevity. See BDD specification for complete requirements.)

5.1.3 Implementation

The behavioral test records, changes, and accesses name, date of birth, sex (US Core birth-sex, with a decline-to-specify option), and preferred language (RFC 5646), and now **race and ethnicity** per the CDCREC code system aggregated to OMB categories, with a declined-to-specify option. The patient form provides multi-select Race and Ethnicity fields, and the patient-write methods preserve the complex (nested sub-extension) US Core **us-core-race** / **us-core-ethnicity** extensions.

Settings gate (international deployments): collecting race/ethnicity is legally forbidden in some jurisdictions, so it is opt-in — the fields render, and the extensions persist, only when `settings.public.modules.patientDemographics.raceEthnicity` is enabled; when disabled the fields are hidden and the server strips the extensions defensively. US certification builds enable the flag.

Regulatory note (CCG v1.3, updated 05/2026): consistent with Executive Order 14168 and OPM guidance, sexual orientation, gender identity, sex parameter for clinical use, name to use, and pronouns are *not* required for (a)(5); the sex requirement reduces to recording Female or Male (plus decline).

5.2 Behavior-Driven Development Specification

Listing 5.1: 170.315(a)(5) - Demographics

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-a-5-
# demographics-observations.feature
# §170.315(a)(5) - Patient Demographics and Observations

# REGULATORY TEXT FROM 45 CFR §170.315(a)(5)
#
# (5) Patient demographics and observations.
#
# (i) Enable a user to record, change, and access patient demographic and observations
# data including race, ethnicity, preferred language, sex, sex parameter for clinical
# use, sexual orientation, gender identity, name to use, pronouns, and date of birth.
#
# (A) Race and ethnicity.
#
# (1) Enable each one of a patient's races to be recorded in accordance with, at a
# minimum, the standard specified in §170.207(f)(3) and whether a patient declines to
# specify race.
#
# (2) Enable each one of a patient's ethnicities to be recorded in accordance with, at a
# minimum, the standard specified in §170.207(f)(3) and whether a patient declines to
# specify ethnicity.
#
# (3) Aggregate each one of the patient's races and ethnicities recorded in accordance
# with paragraphs (a)(5)(i)(A)(1) and (2) of this section to the categories in the
# standard specified in §170.207(f)(1).
#
# (B) Preferred language. Enable preferred language to be recorded in accordance with the
# standard specified in §170.207(g)(2) and whether a patient declines to specify a
# preferred language.
#
# (C) Sex. Enable sex to be recorded in accordance with the standard specified in §
# 170.207(n)(1) for the period up to and including December 31, 2025; or §170.207(n)(2)
# .
#
# (D) Sexual orientation. Enable sexual orientation to be recorded in accordance with, at
# a minimum, the version of the standard specified in §170.207(o)(1) for the period up
# to and including December 31, 2025; or §170.207(o)(3), as well as whether a patient
# declines to specify sexual orientation.
#
# (E) Gender identity. Enable gender identity to be recorded in accordance with, at a
# minimum, the version of the standard specified in §170.207(o)(2) for the period up to
# and including December 31, 2025; or §170.207(o)(3), as well as whether a patient
# declines to specify gender identity.
#
# (F) Sex Parameter for Clinical Use. Enable at least one sex parameter for clinical use
# to be recorded in accordance with, at a minimum, the version of the standard
# specified in §170.207(n)(3). Conformance with this paragraph is required by January
# 1, 2026.
#
```

(G) Name to Use. Enable at least one preferred name to use to be recorded. Conformance with this paragraph is required by January 1, 2026.

#

(H) Pronouns. Enable at least one pronoun to be recorded in accordance with, at a minimum, the version of the standard specified in §170.207(o)(4). Conformance with this paragraph is required by January 1, 2026.

#

(ii) Inpatient setting only. Enable a user to record, change, and access the preliminary cause of death and date of death in the event of mortality.

@170.315-a-5 @demographics @patient-data @clinical

Feature: Patient Demographics and Observations

As a healthcare provider

I want to record comprehensive patient demographic and observation data

So that I can provide culturally competent and personalized care

Background:

Given I am authenticated as a provider

And a patient record is selected

----- Race and Ethnicity -----

Scenario: Record patient's race using standard vocabulary

Given I am recording patient demographics

When I record the patient's race

Then the system shall enable recording per §170.207(f)(3) standard

And the system shall support granular race categories

And the system shall enable recording multiple races

Scenario: Record multiple races for a patient

Given a patient identifies with multiple racial categories

When I record the patient's races

Then the system shall enable each one of the patient's races to be recorded

And each race shall be stored as discrete data element

And all recorded races shall be retrievable

Scenario: Record patient decline to specify race

Given I am recording patient demographics

When the patient declines to specify their race

Then the system shall enable recording that patient declines to specify race

And this shall be stored as distinct from missing data

Scenario: Record patient's ethnicity using standard vocabulary

Given I am recording patient demographics

When I record the patient's ethnicity

Then the system shall enable recording per §170.207(f)(3) standard

And the system shall support Hispanic/Latino ethnicity categories

Scenario: Record multiple ethnicities for a patient

Given a patient identifies with multiple ethnic categories

When I record the patient's ethnicities

Then the system shall enable each one of the patient's ethnicities to be recorded

And each ethnicity shall be stored as discrete data element

Scenario: Record patient decline to specify ethnicity
Given I am recording patient demographics
When the patient declines to specify their ethnicity
Then the system shall enable recording that patient declines to specify ethnicity
And this shall be stored as distinct from missing data

Scenario: Aggregate race and ethnicity to standard categories
Given granular race and ethnicity data has been recorded
When aggregating for reporting purposes
Then the system shall aggregate to categories per §170.207(f)(1)
And aggregation shall maintain data integrity
And original granular data shall be preserved

----- *Preferred Language* -----

Scenario: Record patient's preferred language
Given I am recording patient demographics
When I record the patient's preferred language
Then the system shall enable recording per §170.207(g)(2) standard
And the system shall use ISO 639-2 language codes

Scenario: Record patient decline to specify preferred language
Given I am recording patient demographics
When the patient declines to specify preferred language
Then the system shall enable recording that patient declines to specify
And this shall be stored as distinct from missing data

----- *Sex* -----

Scenario: Record patient's sex (until December 31, 2025)
Given the current date is before December 31, 2025
When I record the patient's sex
Then the system shall enable recording per §170.207(n)(1) standard
And the system shall support administrative sex categories

Scenario: Record patient's sex (after December 31, 2025)
Given the current date is after December 31, 2025
When I record the patient's sex
Then the system shall enable recording per §170.207(n)(2) standard
And the system shall support updated sex categories

----- *Sex Parameter for Clinical Use (Required by January 1, 2026)* -----

Scenario: Record sex parameter for clinical use
Given the current date is on or after January 1, 2026
When I record clinical observations requiring sex parameter
Then the system shall enable recording at least one sex parameter for clinical use
And the recording shall be per §170.207(n)(3) standard
And the parameter shall be context-specific for clinical use

Scenario: Support multiple sex parameters for clinical use
Given the current date is on or after January 1, 2026
And different clinical contexts require different parameters
When I record sex parameters for various clinical purposes

Then the system shall enable recording multiple sex parameters
And each parameter shall be associated with its clinical context

----- *Sexual Orientation* -----

Scenario: Record patient's sexual orientation (until December 31, 2025)

Given the current date is before December 31, 2025

When I record the patient's sexual orientation

Then the system shall enable recording per §170.207(o)(1) standard

And the system shall use LOINC and SNOMED CT codes

Scenario: Record patient's sexual orientation (after December 31, 2025)

Given the current date is after December 31, 2025

When I record the patient's sexual orientation

Then the system shall enable recording per §170.207(o)(3) standard

And the system shall support updated vocabulary

Scenario: Record patient decline to specify sexual orientation

Given I am recording patient demographics

When the patient declines to specify sexual orientation

Then the system shall enable recording that patient declines to specify

And this shall be stored as distinct from missing data

----- *Gender Identity* -----

Scenario: Record patient's gender identity (until December 31, 2025)

Given the current date is before December 31, 2025

When I record the patient's gender identity

Then the system shall enable recording per §170.207(o)(2) standard

And the system shall use standard gender identity vocabulary

Scenario: Record patient's gender identity (after December 31, 2025)

Given the current date is after December 31, 2025

When I record the patient's gender identity

Then the system shall enable recording per §170.207(o)(3) standard

And the system shall support updated vocabulary

Scenario: Record patient decline to specify gender identity

Given I am recording patient demographics

When the patient declines to specify gender identity

Then the system shall enable recording that patient declines to specify

And this shall be stored as distinct from missing data

----- *Name to Use (Required by January 1, 2026)* -----

Scenario: Record patient's preferred name to use

Given the current date is on or after January 1, 2026

When I record the patient's preferred name

Then the system shall enable recording at least one preferred name to use

And the preferred name shall be distinct from legal name

And the preferred name shall be usable in clinical workflows

Scenario: Display patient's preferred name in user interface

Given the current date is on or after January 1, 2026

And the patient has a preferred name recorded
When displaying patient information
Then the system should prominently display the preferred name
And the legal name shall remain accessible when needed

----- *Pronouns (Required by January 1, 2026)* -----

Scenario: Record patient's pronouns
Given the current date is on or after January 1, 2026
When I record the patient's pronouns
Then the system shall enable recording at least one pronoun
And the recording shall be per §170.207(o)(4) standard
And the pronouns shall use standard vocabulary

Scenario: Support multiple pronoun sets
Given the current date is on or after January 1, 2026
And a patient uses different pronouns in different contexts
When I record the patient's pronouns
Then the system shall enable recording multiple pronoun sets
And each pronoun set shall be stored and retrievable

----- *Date of Birth* -----

Scenario: Record patient's complete date of birth
Given I am recording patient demographics
When I record the patient's date of birth
Then the system shall enable recording year, month, and day
And the date shall be stored in standard format
And the date shall be used for age calculations

Scenario: Handle unknown date of birth
Given the patient's exact date of birth is unknown
When I record demographic information
Then the system shall enable recording null value for unknown date of birth
And the system shall distinguish unknown from missing data

----- *Change and Access Demographics* -----

Scenario: Change patient demographic data
Given patient demographic data has been recorded
When demographic information changes or needs correction
Then the system shall enable changing all demographic data elements
And changes shall be audited with timestamp and user
And history of changes shall be maintained

Scenario: Access patient demographic data
Given patient demographic data has been recorded
When I need to view patient demographics
Then the system shall enable access to all demographic data elements
And demographic data shall be displayed clearly
And demographic data shall be available throughout clinical workflows

----- *Inpatient-Only: Mortality Data* -----

@inpatient-only

Scenario: Record preliminary cause of death in inpatient setting

Given I am authenticated in an inpatient setting

And a patient mortality has occurred

When I record mortality information

Then the system shall enable recording preliminary cause of death

And the cause shall be coded appropriately

And the information shall be available for death certificate

@inpatient-only

Scenario: Record date of death in inpatient setting

Given I am authenticated in an inpatient setting

And a patient mortality has occurred

When I record mortality information

Then the system shall enable recording date of death

And the date shall include date and time

And the date shall be stored in standard format

@inpatient-only

Scenario: Change mortality data in inpatient setting

Given mortality data has been recorded

When corrections are needed to mortality information

Then the system shall enable changing preliminary cause of death

And the system shall enable changing date of death

And all changes shall be audited

@inpatient-only

Scenario: Access mortality data in inpatient setting

Given mortality data has been recorded

When generating death certificate or reports

Then the system shall enable access to preliminary cause of death

And the system shall enable access to date of death

And the data shall be formatted appropriately for reporting

5.3 Screenshots

The screenshot displays the Honeycomb Patient Demographics Data Entry Interface. The header bar includes the Honeycomb logo, a hamburger menu icon, and user information (demouser) and a LOGOUT link. The main form area contains a barcode at the top left, followed by a list of actions (EDIT, DELETE). The form is divided into three sections: Name, Identifier, and Demographics. The Name section has fields for Given Name(s) (Demo) and Family Name (GraphicsChanged). The Identifier section has a field for Medical Record Number (baseehr-a5-1783149582995). The Demographics section has fields for Birth Date (02/29/1980), Birth Sex (Female), Language (Spanish (Mexico)), Karyotype, Race (Asian), and Ethnicity.

Honeycomb

demouser LOGOUT

Name

Given Name(s) * Demo

Family Name * GraphicsChanged

Identifier

Medical Record Number baseehr-a5-1783149582995

Medical record number or other identifier

Demographics

Birth Date 02/29/1980

Birth Sex Female

Language Spanish (Mexico)

Karyotype

Race Asian

Ethnicity

Figure 5.1: Patient Demographics - Data Entry Interface

Chapter 6

§ 170.315(a)(9) - Clinical Decision Support (EXPIRED)

6.1 Criterion Information

6.1.1 Maturity Level

IMPLEMENTED (EXPIRED)

6.1.2 Expiration Notice

CRITICAL: This criterion EXPIRED on January 1, 2025 per 45 CFR § 170.315(a)(9)(vi).

This criterion has been replaced by § 170.315(b)(11) - Decision Support Interventions (see Chapter 9).

Due to government website unavailability as of January 2025, it is unclear whether Base EHR certifications issued before the expiration date can still use this criterion (grandfathered), or if all certifications must now use § 170.315(b)(11).

6.1.3 Regulatory Text

From 45 CFR § 170.315(a)(9):

(9) **Clinical decision support (CDS)** —

(i) **CDS intervention interaction.** Interventions provided to a user must occur when a user is interacting with technology.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

(vi) **Expiration of criterion.** The adoption of this criterion for purposes of the ONC Health IT Certification Program expires on January 1, 2025.

6.2 Behavior-Driven Development Specification

Listing 6.1: 170.315(a)(9) - Clinical Decision Support

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-a-9-  
clinical-decision-support.feature  
# §170.315(a)(9) - Clinical Decision Support (CDS)
```

```

# NOTE: This criterion expires January 1, 2025

# REGULATORY TEXT FROM 45 CFR §170.315(a)(9)
#
# (9) Clinical decision support (CDS) --
#
# (i) CDS intervention interaction. Interventions provided to a user must occur when a
#     user is interacting with technology.
#
# (ii) CDS configuration.
#
# (A) Enable interventions and reference resources specified in paragraphs (a)(9)(iii)
#     and (iv) of this section to be configured by a limited set of identified users (e.g.,
#     system administrator) based on a user's role.
#
# (B) Enable interventions:
#
# (1) Based on the following data:
#
# (i) Problem list;
#
# (ii) Medication list;
#
# (iii) Allergy and intolerance list;
#
# (iv) At least one demographic specified in paragraph (a)(5)(i) of this section;
#
# (v) Laboratory tests; and
#
# (vi) Vital signs.
#
# (2) When a patient's medications, allergies and intolerance, and problems are
#     incorporated from a transition of care/referral summary received and pursuant to
#     paragraph (b)(2)(iii)(D) of this section.
#
# (iii) Evidence-based decision support interventions. Enable a limited set of identified
#     users to select (i.e., activate) electronic CDS interventions (in addition to drug-
#     drug and drug-allergy contraindication checking) based on each one and at least one
#     combination of the data referenced in paragraphs (a)(9)(ii)(B)(1)(i) through (vi) of
#     this section.
#
# (iv) Linked referential CDS.
#
# (A) Identify for a user diagnostic and therapeutic reference information in accordance
#     at least one of the following standards and implementation specifications:
#
# (1) The standard and implementation specifications specified in §170.204(b)(3).
#
# (2) The standard and implementation specifications specified in §170.204(b)(4).
#
# (B) For paragraph (a)(9)(iv)(A) of this section, technology must be able to identify
#     for a user diagnostic or therapeutic reference information based on each one and at
#     least one combination of the data referenced in paragraphs (a)(9)(ii)(B)(1)(i), (ii),
#     and (iv) of this section.

```

```

#
# (v) Source attributes. Enable a user to review the attributes as indicated for all CDS
#   resources:
#
# (A) For evidence-based decision support interventions under paragraph (a)(9)(iii) of
#   this section:
#
# (1) Bibliographic citation of the intervention (clinical research/guideline);
#
# (2) Developer of the intervention (translation from clinical research/guideline);
#
# (3) Funding source of the intervention development technical implementation; and
#
# (4) Release and, if applicable, revision date(s) of the intervention or reference
#   source.
#
# (B) For linked referential CDS in paragraph (a)(9)(iv) of this section and drug-drug,
#   drug-allergy interaction checks in paragraph (a)(4) of this section, the developer of
#   the intervention, and where clinically indicated, the bibliographic citation of the
#   intervention (clinical research/guideline).
#
# (vi) Expiration of criterion. The adoption of this criterion for purposes of the ONC
#   Health IT Certification Program expires on January 1, 2025.

@170.315-a-9 @cds @clinical-decision-support @expires-2025 @clinical
Feature: Clinical Decision Support (CDS)
  As a healthcare provider
  I want evidence-based clinical decision support
  So that I can make informed treatment decisions

Background:
  Given I am authenticated as a provider
  And a patient record is selected

# ----- CDS Intervention Interaction -----

Scenario: CDS interventions occur during user interaction
  Given I am actively interacting with the health IT system
  When clinical decision support is triggered
  Then interventions shall be provided during my interaction with technology
  And interventions shall not be delayed until after interaction ends

# ----- CDS Configuration -----

Scenario: Configure CDS interventions based on user role
  Given I am a system administrator or authorized configurator
  When I configure clinical decision support interventions
  Then the system shall enable configuration by limited set of identified users
  And configuration shall be based on user role
  And configuration capabilities shall be restricted appropriately

Scenario: Configure CDS reference resources based on user role
  Given I am a system administrator or authorized configurator
  When I configure reference resources for CDS

```

Then the system shall enable configuration by limited set of identified users
And configuration shall be based on user role

----- CDS Based on Patient Data -----

Scenario: Enable interventions based on problem list

Given the patient has documented problems

When CDS evaluates patient data

Then the system shall enable interventions based on problem list data

Scenario: Enable interventions based on medication list

Given the patient has active medications

When CDS evaluates patient data

Then the system shall enable interventions based on medication list data

Scenario: Enable interventions based on allergy and intolerance list

Given the patient has documented allergies and intolerances

When CDS evaluates patient data

Then the system shall enable interventions based on allergy and intolerance list

Scenario: Enable interventions based on demographics

Given the patient has demographic data recorded

When CDS evaluates patient data

Then the system shall enable interventions based on at least one demographic
And demographic data may include age, sex, race, ethnicity, etc.

Scenario: Enable interventions based on laboratory tests

Given the patient has laboratory test results

When CDS evaluates patient data

Then the system shall enable interventions based on laboratory test data

Scenario: Enable interventions based on vital signs

Given the patient has vital signs recorded

When CDS evaluates patient data

Then the system shall enable interventions based on vital signs data

Scenario: Enable interventions from incorporated transition of care data

Given medications, allergies, and problems are incorporated from transition of care
summary

When the data is incorporated per §170.315(b)(2)(iii)(D)

Then the system shall enable interventions based on incorporated data

And interventions shall trigger automatically upon incorporation

----- Evidence-Based Decision Support Interventions -----

Scenario: Select evidence-based CDS interventions

Given I am an authorized user selecting CDS interventions

When I activate electronic CDS interventions

Then the system shall enable selection based on each individual data element

And the system shall enable selection based on combinations of data elements

And data elements include problem list, medication list, allergies, demographics, lab
tests, and vital signs

Scenario: Activate CDS intervention based on problem list

Given I am selecting CDS interventions
 When I activate an intervention based on problem list
 Then the intervention shall utilize problem list data
 And the intervention shall provide evidence-based guidance

Scenario: Activate CDS intervention based on multiple data elements

Given I am selecting CDS interventions
 When I activate an intervention based on combination of data elements
 Then the intervention shall utilize all specified data elements
 And the intervention shall provide integrated clinical guidance

----- *Linked Referential CDS* -----

Scenario: Identify diagnostic reference information via Infobutton

Given I need diagnostic reference information
 When I access linked referential CDS
 Then the system shall identify information per §170.204(b)(3) standard
 And information shall be context-specific to clinical scenario

Scenario: Identify therapeutic reference information via Infobutton

Given I need therapeutic reference information
 When I access linked referential CDS
 Then the system shall identify information per §170.204(b)(4) standard
 And information shall be context-specific to clinical scenario

Scenario: Identify reference information based on problem list

Given the patient has documented problems
 When I access linked referential CDS
 Then the system shall identify information based on problem list data

Scenario: Identify reference information based on medication list

Given the patient has active medications
 When I access linked referential CDS
 Then the system shall identify information based on medication list data

Scenario: Identify reference information based on demographics

Given the patient has demographic data
 When I access linked referential CDS
 Then the system shall identify information based on demographic data

Scenario: Identify reference information based on combination of data

Given multiple types of patient data are available
 When I access linked referential CDS
 Then the system shall identify information based on combinations of data
 And combinations may include problem list, medications, and demographics

----- *Source Attributes for CDS* -----

Scenario: Display source attributes for evidence-based interventions

Given an evidence-based CDS intervention is active
 When I review the intervention source information
 Then the system shall enable review of bibliographic citation
 And the system shall display developer of the intervention
 And the system shall display funding source of intervention development

And the system shall display release and revision dates

Scenario: Display source attributes for drug interaction checks

Given drug-drug or drug-allergy interaction check is displayed

When I review the intervention source information

Then the system shall display developer of the intervention

And where clinically indicated, the system shall display bibliographic citation

Scenario: Display source attributes for linked referential CDS

Given linked referential CDS is being utilized

When I review the reference source information

Then the system shall display developer of the intervention

And where clinically indicated, the system shall display bibliographic citation

Scenario: Access complete source attribute information

Given CDS interventions are configured in the system

When I need to review source attributes

Then all source attributes shall be accessible

And source attributes shall be displayed in user-friendly format

And source attributes shall support evidence-based decision making

Chapter 7

§ 170.315(b)(1) - Transitions of Care

7.1 Criterion Information

7.1.1 Maturity Level

VERIFIED (behavioral tests green)

7.1.2 Regulatory Text

From *45 CFR § 170.315(b)(1)*:

(1) Transitions of care.

(i) Send and receive via Edge Protocol. Send and receive transition-of-care/referral summaries formatted per the Consolidated CDA (C-CDA) Release 2.1, using an Edge Protocol.

(ii) Validate and display. Validate received C-CDA documents against the standard and display their contents.

(iii) Create. Create a transition-of-care/referral summary as a C-CDA document, populated from the patient's record per the Common Clinical Data Set / USCDI.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

7.1.3 Implementation

The behavioral test verifies create, validate, access, and receive: a C-CDA R2.1-enveloped transition-of-care document (Transfer Summary, LOINC 18761-7) is generated with the US Realm header, CCD template identifiers, and LOINC-coded Allergies/Medications/Problems sections, **populated from the real patient record** (the document gathers Patients, AllergyIntolerances, Medication-Requests/Statements, Conditions, Observations, and Procedures for the patient); it is persisted as a FHIR `DocumentReference` with the XML as a base64 attachment plus an `AuditEvent`; and a malformed document is rejected by the validator.

An **inbound receive** path (`clinicalDocuments.receiveCCDA`) parses an externally-authored C-CDA (via XML parsing), validates the envelope, extracts patient demographics and the section list, and stores it for display in the Clinical Documents list/detail; a Receive C-CDA upload control is provided on the export page. Structured-entry *incorporation* (creating Conditions/etc. from parsed sections) and schematron-grade validation are flagged follow-ons.

7.2 Behavior-Driven Development Specification

Listing 7.1: 170.315(b)(1) - Transitions of Care

```
# certification/bdd/170.315-b-1-transitions-of-care.feature
# §170.315(b)(1) - Transitions of Care
# BDD Format using Cucumber/Gherkin Syntax

# REGULATORY TEXT FROM 45 CFR §170.315(b)(1)
#
# (1) Transitions of care --
#
# (i) Send and receive via edge protocol.
#
# (A) Send transition of care/referral summaries through a method that conforms to the
#       standard specified in §170.202(d) and that leads to such summaries being processed by
#       a service that has implemented the standard specified in §170.202(a)(2); and
#
# (B) Receive transition of care/referral summaries through a method that conforms to the
#       standard specified in §170.202(d) from a service that has implemented the standard
#       specified in §170.202(a)(2).
#
# (C) XDM processing. Receive and make available the contents of a XDM package formatted
#       in accordance with the standard adopted in §170.205(p)(1) when the technology is also
#       being certified using an SMTP-based edge protocol.
#
# (ii) Validate and display --
#
# (A) Validate C-CDA conformance--system performance. Demonstrate the ability to detect
#       valid and invalid transition of care/referral summaries received and formatted in
#       accordance with the standards specified in §170.205(a)(3), (4), and (5) for the
#       Continuity of Care Document, Referral Note, and (inpatient setting only) Discharge
#       Summary document templates. This includes the ability to:
#
# (1) Parse each of the document types.
#
# (2) Detect errors in corresponding "document-templates," "section-templates," and "
#       entry-templates," including invalid vocabulary standards and codes not specified in
#       the standards adopted in §170.205(a)(3), (4), and (5).
#
# (3) Identify valid document-templates and process the data elements required in the
#       corresponding section-templates and entry-templates from the standards adopted in §
#       170.205(a)(3), (4), and (5).
#
# (4) Correctly interpret empty sections and null combinations.
#
# (5) Record errors encountered and allow a user through at least one of the following
#       ways to:
#
# (i) Be notified of the errors produced.
#
# (ii) Review the errors produced.
#
```

```

# (B) Display. Display in human readable format the data included in transition of care/
# referral summaries received and formatted according to the standards specified in §
# 170.205(a)(3), (4), and (5).
#
# (C) Display section views. Allow for the individual display of each section (and the
# accompanying document header information) that is included in a transition of care/
# referral summary received and formatted in accordance with the standards adopted in §
# 170.205(a)(3), (4), and (5) in a manner that enables the user to:
#
# (1) Directly display only the data within a particular section;
#
# (2) Set a preference for the display order of specific sections; and
#
# (3) Set the initial quantity of sections to be displayed.
#
# (iii) Create. Enable a user to create a transition of care/referral summary formatted
# in accordance with the standard specified in §170.205(a)(3), (4), and (5) using the
# Continuity of Care Document, Referral Note, and (inpatient setting only) Discharge
# Summary document templates that includes, at a minimum:
#
# (A)
#
# (1) The data classes expressed in the standards in §170.213 and in accordance with §
# 170.205(a)(4), (5), and paragraphs (b)(1)(iii)(A)(3)(i) through (iii) of this section
# for the time period up to and including December 31, 2025, or
#
# (2) The data classes expressed in the standards in §170.213 and in accordance with §
# 170.205(a)(4), (6), and paragraphs (b)(1)(iii)(A)(3)(i) through (iii) of this section
# , and
#
# (3) The following data classes:
#
# (i) Assessment and plan of treatment. In accordance with the "Assessment and Plan
# Section (V2)" of the standard specified in §170.205(a)(4); or in accordance with the
# "Assessment Section (V2)" and "Plan of Treatment Section (V2)" of the standard
# specified in §170.205(a)(4).
#
# (ii) Goals. In accordance with the "Goals Section" of the standard specified in §
# 170.205(a)(4).
#
# (iii) Health concerns. In accordance with the "Health Concerns Section" of the standard
# specified in §170.205(a)(4).
#
# (iv) Unique device identifier(s) for a patient's implantable device(s). In accordance
# with the "Product Instance" in the "Procedure Activity Procedure Section" of the
# standard specified in §170.205(a)(4).
#
# (B) Encounter diagnoses. Formatted according to at least one of the following standards
# :
#
# (1) The standard specified in §170.207(i).
#
# (2) At a minimum, the version of the standard specified in §170.207(a)(1).
#

```

```

# (C) Cognitive status.
#
# (D) Functional status.
#
# (E) Ambulatory setting only. The reason for referral; and referring or transitioning
#       provider's name and office contact information.
#
# (F) Inpatient setting only. Discharge instructions.
#
# (G) Patient matching data. First name, last name, previous name, middle name (including
#       middle initial), suffix, date of birth, current address, phone number, and sex. The
#       following constraints apply:
#
# (1) Date of birth constraint.
#
# (i) The year, month and day of birth must be present for a date of birth. The
#       technology must include a null value when the date of birth is unknown.
#
# (ii) Optional. When the hour, minute, and second are associated with a date of birth
#       the technology must demonstrate that the correct time zone offset is included.
#
# (2) Phone number constraint. Represent phone number (home, business, cell) in
#       accordance with the standards adopted in §170.207(q)(1). All phone numbers must be
#       included when multiple phone numbers are present.
#
# (3) Sex Constraint: Represent sex with the standard adopted in §170.207(n)(1) up to and
#       including December 31, 2025; or with the standard adopted in §170.207(n)(2).

@170.315-b-1 @transitions-of-care @toc @care-coordination
Feature: Transitions of Care
  As a healthcare provider
  I want to send and receive comprehensive transition of care summaries
  So that I can ensure care continuity when patients move between care settings

Background:
  Given I am authenticated as a provider
  And a patient record is selected

# ----- Send Transition of Care Summary via Edge Protocol -----

Scenario: Send transition of care summary via Direct
  Given a patient is being transitioned to another provider
  When I create and send a transition of care summary
  Then the system shall send through method conforming to §170.202(d)
  And the summary shall be processed by service implementing §170.202(a)(2)
  And the transmission shall use secure messaging

Scenario: Receive transition of care summary via Direct
  Given another provider is sending a transition of care summary for my patient
  When the summary is transmitted
  Then the system shall receive through method conforming to §170.202(d)
  And the system shall receive from service implementing §170.202(a)(2)
  And the received summary shall be available for processing

```

```

Scenario: Process XDM package when using SMTP-based edge protocol
  Given the technology uses SMTP-based edge protocol for Direct messaging
  When receiving an XDM package
  Then the system shall receive XDM package formatted per §170.205(p)(1)
  And the system shall make available the contents of the XDM package
  And contents shall be accessible for clinical review

# ----- Validate C-CDA Conformance -----

Scenario: Detect valid transition of care summary
  Given a transition of care summary is received
  When the system validates the document
  Then the system shall detect valid summaries formatted per §170.205(a)(3), (4), (5)
  And valid documents shall be processed for display and reconciliation

Scenario: Detect invalid transition of care summary
  Given a malformed transition of care summary is received
  When the system validates the document
  Then the system shall detect invalid summaries
  And errors shall be identified and reported

Scenario: Parse CCD document template
  Given a Continuity of Care Document is received
  When the system processes the document
  Then the system shall parse the CCD template
  And all sections shall be accessible

Scenario: Parse Referral Note document template
  Given a Referral Note is received
  When the system processes the document
  Then the system shall parse the Referral Note template
  And all sections shall be accessible

@inpatient-only
Scenario: Parse Discharge Summary document template
  Given I am in an inpatient setting
  And a Discharge Summary is received
  When the system processes the document
  Then the system shall parse the Discharge Summary template
  And all sections shall be accessible

Scenario: Detect errors in document-templates
  Given a transition of care summary with template errors is received
  When the system validates document structure
  Then the system shall detect errors in document-templates
  And specific template errors shall be identified

Scenario: Detect errors in section-templates
  Given a transition of care summary with section errors is received
  When the system validates document structure
  Then the system shall detect errors in section-templates
  And specific section errors shall be identified

Scenario: Detect errors in entry-templates

```

Given a transition of care summary with entry errors is received
When the system validates document structure
Then the system shall detect errors in entry-templates
And specific entry errors shall be identified

Scenario: Detect invalid vocabulary standards

Given a transition of care summary with invalid codes is received
When the system validates vocabulary
Then the system shall detect invalid vocabulary standards
And invalid codes shall be identified

Scenario: Detect codes not specified in standards

Given a transition of care summary with non-standard codes is received
When the system validates vocabulary
Then the system shall detect codes not specified in §170.205(a)(3), (4), (5)
And non-standard codes shall be reported

Scenario: Identify valid document-templates

Given a properly formatted transition of care summary is received
When the system validates the document
Then the system shall identify valid document-templates
And valid templates shall be processed successfully

Scenario: Process required data elements

Given a valid transition of care summary is received
When the system extracts data elements
Then the system shall process data elements required in corresponding section-templates
And the system shall process data elements required in corresponding entry-templates
And all required data per §170.205(a)(3), (4), (5) shall be extracted

Scenario: Correctly interpret empty sections

Given a transition of care summary with empty sections is received
When the system processes the document
Then the system shall correctly interpret empty sections
And empty sections shall not cause processing errors

Scenario: Correctly interpret null combinations

Given a transition of care summary with null values is received
When the system processes the document
Then the system shall correctly interpret null combinations
And null values shall be handled appropriately

Scenario: Record errors encountered during validation

Given a transition of care summary with multiple errors is received
When the system validates the document
Then the system shall record errors encountered
And errors shall be stored for review

Scenario: Notify user of validation errors

Given validation errors have been recorded
When errors are detected
Then the system shall enable user notification of errors produced
And notifications shall be timely and clear

Scenario: Enable user to review validation errors

Given validation errors have been recorded

When a user needs to review errors

Then the system shall enable user to review errors produced

And error details shall be accessible

And errors shall be presented in actionable format

----- *Display Received Transition of Care Summary* -----

Scenario: Display transition of care summary in human readable format

Given a valid transition of care summary is received

When I view the summary

Then the system shall display data in human readable format

And the display shall be formatted per §170.205(a)(3), (4), (5)

And all included data shall be viewable

Scenario: Display CCD in human readable format

Given a Continuity of Care Document is received

When I view the document

Then all data shall be displayed in human readable format

And the display shall be clinically useful

Scenario: Display Referral Note in human readable format

Given a Referral Note is received

When I view the document

Then all data shall be displayed in human readable format

And referral information shall be prominent

@inpatient-only

Scenario: Display Discharge Summary in human readable format

Given I am in an inpatient setting

And a Discharge Summary is received

When I view the document

Then all data shall be displayed in human readable format

And discharge information shall be prominent

----- *Display Individual Sections* -----

Scenario: Display individual section from transition summary

Given a transition of care summary is received

When I want to view a specific section

Then the system shall allow individual display of each section

And accompanying document header information shall be displayed

Scenario: Directly display only data within particular section

Given a transition of care summary with multiple sections is received

When I select a specific section to view

Then the system shall enable direct display of only that section's data

And other sections shall be hidden from view

Scenario: Set preference for display order of sections

Given I have specific workflow preferences

When I configure section display settings

Then the system shall enable setting preference for display order of sections
And my preferences shall be saved and applied

Scenario: Set initial quantity of sections displayed

Given I want to control information density

When I configure section display settings

Then the system shall enable setting initial quantity of sections displayed

And I shall be able to expand to view additional sections

----- Create Transition of Care Summary -----

Scenario: Create CCD document template

Given I need to send a transition of care summary

When I create a Continuity of Care Document

Then the system shall format per §170.205(a)(3), (4), (5)

And the CCD shall include all required USCDI data classes per §170.213

Scenario: Create Referral Note document template

Given I need to send a referral

When I create a Referral Note

Then the system shall format per §170.205(a)(3), (4), (5)

And the Referral Note shall include all required USCDI data classes per §170.213

@inpatient-only

Scenario: Create Discharge Summary document template

Given I am in an inpatient setting

And a patient is being discharged

When I create a Discharge Summary

Then the system shall format per §170.205(a)(3), (4), (5)

And the Discharge Summary shall include all required USCDI data classes per §170.213

Scenario: Include all USCDI data classes in transition summary

Given I am creating a transition of care summary

When I generate the summary

Then the system shall include all data classes per §170.213

And data shall be formatted per §170.205(a)(4), (5) or (6) based on date

And all mandatory data elements shall be included

Scenario: Include assessment and plan of treatment

Given I am creating a transition of care summary

When I generate the summary

Then the system shall include assessment and plan per "Assessment_and_Plan_Section_(V2)"

Or the system shall include separate "Assessment_Section_(V2)" and "Plan_of_Treatment_Section_(V2)"

And content shall conform to §170.205(a)(4)

Scenario: Include goals in transition summary

Given I am creating a transition of care summary

When I generate the summary

Then the system shall include goals per "Goals_Section"

And goals shall conform to §170.205(a)(4)

Scenario: Include health concerns in transition summary

```
Given I am creating a transition of care summary
When I generate the summary
Then the system shall include health concerns per "Health_Concerns_Section"
And health concerns shall conform to §170.205(a)(4)
```

```
Scenario: Include unique device identifiers in transition summary
Given the patient has implantable devices
When I create a transition of care summary
Then the system shall include UDIs per "Product_Instance" in "Procedure_Activity_
  Procedure_Section"
And UDIs shall conform to §170.205(a)(4)
```

```
Scenario: Include encounter diagnoses in transition summary
Given I am creating a transition of care summary
When I generate the summary
Then the system shall include encounter diagnoses
And diagnoses shall be formatted per §170.207(i) or §170.207(a)(1)
```

```
Scenario: Include cognitive status in transition summary
Given I am creating a transition of care summary
When I generate the summary
Then the system shall include cognitive status
And cognitive status shall be appropriately coded
```

```
Scenario: Include functional status in transition summary
Given I am creating a transition of care summary
When I generate the summary
Then the system shall include functional status
And functional status shall be appropriately coded
```

----- Patient Matching Data -----

```
Scenario: Include patient matching data in transition summary
Given I am creating a transition of care summary
When I generate the summary
Then the system shall include first name, last name, previous name, middle name,
  suffix
And the system shall include date of birth
And the system shall include current address
And the system shall include phone number
And the system shall include sex
```

```
Scenario: Include complete date of birth with null for unknown
Given I am creating a transition of care summary
When including date of birth
Then year, month, and day must be present for date of birth
And the system shall include null value when date of birth is unknown
```

```
Scenario: Optionally include time zone with date of birth
Given I am creating a transition of care summary
When date of birth includes time components
Then the system may include hour, minute, and second
And if time is included, correct time zone offset must be included
```



```

Scenario: Represent phone numbers per standard
  Given I am creating a transition of care summary
  When including phone numbers
  Then phone numbers shall be represented per §170.207(q)(1)
  And all phone numbers (home, business, cell) must be included when multiple are
    present

Scenario: Represent sex per standard until December 31, 2025
  Given the current date is before December 31, 2025
  When including sex in transition summary
  Then sex shall be represented per §170.207(n)(1)

Scenario: Represent sex per updated standard after December 31, 2025
  Given the current date is after December 31, 2025
  When including sex in transition summary
  Then sex shall be represented per §170.207(n)(2)

# ----- Ambulatory Setting Specific -----

@ambulatory-only
Scenario: Include reason for referral in ambulatory setting
  Given I am in an ambulatory setting
  When I create a transition of care summary
  Then the system shall include reason for referral
  And the reason shall be clinically meaningful

@ambulatory-only
Scenario: Include referring provider information in ambulatory setting
  Given I am in an ambulatory setting
  When I create a transition of care summary
  Then the system shall include referring provider's name
  And the system shall include referring provider's office contact information

# ----- Inpatient Setting Specific -----

@inpatient-only
Scenario: Include discharge instructions in inpatient setting
  Given I am in an inpatient setting
  When I create a transition of care summary
  Then the system shall include discharge instructions
  And discharge instructions shall be comprehensive

```

7.3 Screenshots

The screenshot displays the 'C-CDA Document Export - ONC §170.315(b)(1)' interface. At the top, a dark header bar contains the 'Honeycomb' logo, a settings icon, a 'CLEAR PATIENT' button, a 'demouser' label, and a 'LOGOUT' button. Below the header, a patient information bar shows 'BaseEHR CodaTransition' and fields for ID (baseehr-b1-1783149619115), Birth Date (Mar 03, 1962), Gender (female), and Phone (Unknown).

The main content area is divided into three columns:

- Patient Selection:** Lists three patients: John Doe (MRN: 12345 | DOB: 1970-01-15), Jane Smith (MRN: 67890 | DOB: 1985-06-20), and Robert Johnson (MRN: 11223 | DOB: 1955-11-30).
- Document Configuration:** Includes a 'Document Type' dropdown set to 'CCD Summary of Episode Note (CCD)' with '14 sections' and an 'Export Format' field.
- Document Sections:** A list of 10 sections, with the first five visible: Allergies (Required), Medications (Required), Problems (Required), Procedures (Required), and Results (Required). Each section has a checkbox and a 'Required' label.
- ONC Compliance:** A summary box showing four compliance checks, all marked with green checkmarks: §170.315(b)(1) - Transitions of Care, C-CDA R2.1 Compliant, Vocabulary Standards (LOINC, SNOMED, RxNorm), and Schematron Validation.

Figure 7.1: Transitions of Care - C-CDA Generation

Chapter 8

§ 170.315(b)(4) - Real-Time Prescription Benefit

8.1 Criterion Information

8.1.1 Maturity Level

VERIFIED (behavioral tests green)

8.1.2 Regulatory Text

From *45 CFR § 170.315(b)(4)*:

(4) Real-time prescription benefit (RTPB).

Enable a user, for a prescribed drug, to request and receive real-time prescription benefit information — including patient cost, formulary/coverage status, and any therapeutic alternatives — from a benefit source.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

8.1.3 Implementation Status

The behavioral test drives the full RTPB round-trip: it composes an `RTPBRequest` for a prescribed product, transacts it against a benefit responder (a formulary/PBM responder from the responder registry), and receives an `RTPBResponse` carrying the patient's cost and cheaper therapeutic alternatives (a brand statin returns generic substitutions). Both request and response XML are rendered and persisted with request/response linkage, and the completed check appears in the transaction history. A configurable live endpoint is supported alongside the built-in certification-evidence responders.

Future compliance date: (b)(4) is an HTI-4 criterion required by 1/1/2028. The current baseline (request/response, patient cost, alternatives, live-endpoint capability) is verified; the final standard-version binding is treated as informational until closer to the compliance date, not a gap.

8.2 Behavior-Driven Development Specification

A dedicated Gherkin feature file for (b)(4) is not yet authored; the executable specification is the behavioral Nightwatch test `certification/tdd/base_ehr/170.315.b.4.test.js`, which drives the

request/response round-trip, patient-cost and therapeutic-alternative assertions, and the transaction-history retrieval described above.

8.3 Screenshots

The screenshot displays the Honeycomb BaseEHR RtpbCheck interface. At the top, a dark blue header bar contains the Honeycomb logo, a menu icon, and user controls including 'CLEAR PATIENT', 'demouser', and 'LOGOUT'. Below the header, a patient information bar shows the ID 'baseehr-b4-1783135893772', Birth Date 'Aug 08, 1948', Gender 'male', and Phone 'Unknown'. The main content area features a 'Prescription Benefit' section with a 'Formulary' button and a status message 'Sending RTPBRequest to local://responders/mock-pbm'. A 'Responder' dropdown menu is set to 'Sample PBM Plan'. Below this, a 'Transaction History' section shows '1 transaction(s)'. A table lists the transaction details:

Date	Product	Out-of-pocket	Alternatives	Mode	Status
2026-07-04 03:31:43	Lipitor 20 MG Oral Tablet	\$96.10	3	mock	completed

Figure 8.1: Real-Time Prescription Benefit - Cost and Alternatives

Chapter 9

§ 170.315(b)(11) - Decision Support Interventions

9.1 Criterion Information

9.1.1 Maturity Level

VERIFIED (behavioral tests green)

9.1.2 Replacement Notice

This criterion REPLACES § 170.315(a)(9) which expired January 1, 2025.

Decision Support Interventions (DSI) is an enhanced version of the legacy Clinical Decision Support criterion, adding requirements for:

- Predictive decision support interventions (AI/ML algorithms)
- Demographic data usage transparency
- Electronic intervention feedback mechanism
- Enhanced risk and fairness disclosures for predictive DSI

9.1.3 Regulatory Text

From *45 CFR § 170.315(b)(11)*:

(11) Decision Support Interventions.

(Full regulatory text includes all requirements from a-9 plus enhanced requirements for predictive interventions, demographic transparency, feedback mechanisms, and algorithm governance. See BDD specification for complete requirements.)

9.2 Behavior-Driven Development Specification

Listing 9.1: 170.315(b)(11) - Decision Support Interventions

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-b-11-  
decision-support-interventions.feature
```

```

# §170.315(b)(11) - Decision Support Interventions

# REGULATORY TEXT FROM 45 CFR §170.315(b)(11)
#
# (11) Use of date of birth as expressed in the standards in §170.213;

@170.315-b-11 @dsi @predictive-ai @algorithm-transparency @care-coordination
Feature: Decision Support Interventions
  As a healthcare provider
  I want transparent and fair decision support interventions
  So that I can make evidence-based decisions while understanding AI/algorithm influences

Background:
  Given I am authenticated as a provider
  And I have a patient record open
  And decision support interventions are configured

# ----- Intervention Interaction -----

Scenario: Interventions occur during user interaction
  Given I am actively interacting with health IT
  When decision support is triggered
  Then interventions shall be provided during my interaction with technology
  And interventions shall occur at clinically appropriate times

# ----- Configuration -----

Scenario: Configure DSI interventions based on user role
  Given I am authorized to configure decision support
  When configuring interventions
  Then the system shall enable configuration by limited set of identified users
  And configuration shall be based on user role
  And configuration capabilities shall be appropriately restricted

Scenario: Enable interventions when data incorporated from transition of care
  Given medications, allergies, and problems are incorporated from transition summary
  When data is incorporated per §170.315(b)(2)(iii)(D)
  Then interventions shall be enabled based on incorporated data
  And interventions shall trigger appropriately

Scenario: Provide electronic feedback capability for interventions
  Given I am using evidence-based decision support interventions
  When I want to provide feedback on intervention
  Then the system shall enable me to provide electronic feedback data
  And feedback shall be collectible for selected interventions
  And limited set of users shall be able to export feedback in computable format

Scenario: Export intervention feedback data
  Given electronic feedback has been collected
  When authorized users need to analyze feedback
  Then feedback data shall be exportable in computable format
  And export shall include intervention, action taken, user feedback, user, date, and
    location
  And feedback analysis shall support intervention improvement

```

----- Evidence-Based Decision Support Intervention Selection -----

Scenario: Select evidence-based interventions using USCDI data

Given I am authorized to select decision support interventions

When activating evidence-based interventions

Then interventions may use problems per §170.213

And interventions may use medications per §170.213

And interventions may use allergies and intolerances per §170.213

And interventions may use demographics per §170.213

And interventions may use laboratory data per §170.213

And interventions may use vital signs per §170.213

And interventions may use unique device identifiers per §170.213

And interventions may use procedures per §170.213

----- Predictive Decision Support Intervention Selection -----

Scenario: Select predictive interventions using any USCDI data

Given I am authorized to select decision support interventions

When activating predictive decision support interventions

Then interventions may use any data expressed in §170.213

And predictive algorithms shall utilize appropriate data elements

And data inputs shall be transparent

----- Source Attributes for Evidence-Based Interventions -----

Scenario: Display evidence-based intervention source attributes

Given an evidence-based intervention is active

When I review intervention source information

Then the system shall support display of bibliographic citation

And the system shall support display of intervention developer

And the system shall support display of funding source for development

And the system shall support display of release and revision dates

Scenario: Display demographic data usage in evidence-based intervention

Given an evidence-based intervention uses demographic data

When I review intervention details

Then the system shall indicate use of race per §170.213

And the system shall indicate use of ethnicity per §170.213

And the system shall indicate use of language per §170.213

And the system shall indicate use of sexual orientation per §170.213

And the system shall indicate use of gender identity per §170.213

And the system shall indicate use of sex per §170.213

And the system shall indicate use of date of birth per §170.213

Scenario: Display SDOH and health status data usage

Given an evidence-based intervention uses SDOH data

When I review intervention details

Then the system shall indicate use of SDOH data per §170.213

And the system shall indicate use of health status assessments data per §170.213

----- Source Attributes for Predictive Interventions (EXTENSIVE) -----

Scenario: Display predictive intervention details and output

Given a predictive decision support intervention is active
When I review intervention details
Then the system shall display name and contact information for developer
And the system shall display funding source of technical implementation
And the system shall display description of value produced as output
And the system shall display whether output is prediction, classification, recommendation, evaluation, analysis, or other type

Scenario: Display predictive intervention purpose

Given a predictive intervention is active
When I review intervention purpose
Then the system shall display intended use of intervention
And the system shall display intended patient population(s)
And the system shall display intended user(s)
And the system shall display intended decision-making role (informs, augments, replaces clinical management)

Scenario: Display cautioned out-of-scope use

Given a predictive intervention has usage limitations
When I review intervention limitations
Then the system shall display description of cautioned tasks, situations, or populations
And the system shall display known risks, inappropriate settings, inappropriate uses, or limitations

Scenario: Display intervention development details and input features

Given a predictive intervention is active
When I review development details
Then the system shall display exclusion and inclusion criteria for training data
And the system shall display use of demographic variables as input features
And the system shall display description of demographic representativeness in training data
And the system shall display description of relevance of training data to deployed setting

Scenario: Display fairness process for intervention development

Given a predictive intervention is active
When I review fairness information
Then the system shall display description of approach to ensure intervention output is fair
And the system shall display description of approaches to manage, reduce, or eliminate bias

Scenario: Display external validation process

Given a predictive intervention has been externally validated
When I review validation information
Then the system shall display description of data source, setting, or environment for validation
And the system shall display party that conducted external testing
And the system shall display demographic representativeness of external data
And the system shall display description of external validation process

Scenario: Display quantitative performance measures

Given a predictive intervention is active

When I review performance metrics

Then the system shall display validity in test data from training source

And the system shall display fairness in test data from training source

And the system shall display validity in external data

And the system shall display fairness in external data

And the system shall display references to evaluation of outcomes impact

Scenario: Display ongoing maintenance information

Given a predictive intervention is deployed

When I review maintenance information

Then the system shall display process and frequency for monitoring validity over time

And the system shall display validity in local data

And the system shall display process and frequency for monitoring fairness over time

And the system shall display fairness in local data

Scenario: Display update and validation schedule

Given a predictive intervention is in use

When I review update information

Then the system shall display process and frequency for intervention updates

And the system shall display frequency for performance correction when risks identified

Scenario: Indicate when optional information not available

Given a predictive intervention source attributes

When certain information is not available for review

Then the system shall indicate when information not available for external validation

And the system shall indicate when information not available for external validity metrics

And the system shall indicate when information not available for external fairness metrics

And the system shall indicate when information not available for outcome evaluations

And the system shall indicate when information not available for local validity

And the system shall indicate when information not available for local fairness

And the system shall indicate when information not available for update schedule details

----- Access and Modify Source Attributes -----

Scenario: Access complete plain language descriptions for developer-supplied interventions

Given interventions are supplied by health IT developer

When authorized users need to review source attributes

Then limited set of identified users shall be able to access complete descriptions

And descriptions shall be in plain language

And descriptions shall be up-to-date

Scenario: Modify source attributes for interventions

Given intervention source attributes need updating

When authorized users modify attributes

Then limited set of identified users shall record, change, and access source attributes

And modifications shall be tracked with audit trail

And all users shall see updated information

Scenario: Record additional attributes for predictive interventions
Given predictive interventions may have additional relevant attributes
When documenting intervention characteristics
Then limited set of users shall record, change, and access additional attributes
And additional attributes supplement required attributes
And comprehensive documentation shall be maintained

----- *Intervention Risk Management for Predictive DSI* -----

Scenario: Conduct risk analysis for predictive intervention
Given a predictive decision support intervention is implemented
When assessing intervention risks
Then intervention shall be subject to analysis of potential risks and adverse impacts
And analysis shall assess validity, reliability, robustness, fairness
And analysis shall assess intelligibility, safety, security, and privacy

Scenario: Implement risk mitigation for predictive intervention
Given risks have been identified for predictive intervention
When implementing risk controls
Then intervention shall be subject to practices to mitigate identified risks
And mitigation shall address all significant risk categories
And mitigation effectiveness shall be monitored

Scenario: Apply governance to predictive intervention
Given a predictive intervention is in production use
When managing intervention lifecycle
Then intervention shall be subject to policies and implemented controls for governance
And governance shall include how data are acquired, managed, and used
And governance shall ensure ongoing oversight and accountability

9.3 Screenshots

Honeycomb CLEAR PATIENT demouser LOGOUT

BaseEHR DsiFire ID: baseehr-b11-1783144034121 Birth Date: Apr 04, 1948 Gender: male Phone: Unknown

Decision Support
Decision Support Interventions - § 170.315(b)(11)

CATALOG (5) FIRING LOG (0) FEEDBACK (1)

Intervention Catalog + NEW

Active	Title	Data categories	Source attributes used	Trigger	
☒	Contrast allergy contraindication	AllergiesIntolerances, Procedures	none	imaging	EDIT
☒	Duplicate imaging advisory	Procedures	none	imaging	EDIT
☒	Colorectal cancer screening reminder (USPSTF)	Demographics	dateOfBirth	any	EDIT
☐	CT contrast caution in patients 50+ (BaseEHR test DSI)	demographics	none	imaging	EDIT
☐	CT contrast caution in patients 50+ (BaseEHR test DSI)	demographics	none	imaging	EDIT

Figure 9.1: Decision Support Interventions - Configuration Interface

Chapter 10

§ 170.315(a)(14) - Implantable Device List

10.1 Criterion Information

10.1.1 Maturity Level

VERIFIED (behavioral tests green)

10.1.2 Regulatory Text

From 45 CFR § 170.315(a)(14):

(14) **Implantable device list.**

(i) Record Unique Device Identifiers associated with a patient's Implantable Devices.

(ii) Parse the following identifiers from a Unique Device Identifier.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

10.2 Behavior-Driven Development Specification

Listing 10.1: 170.315(a)(14) - Implantable Device List

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-a-14-  
  implantable-device-list.feature  
# §170.315(a)(14) - Implantable Device List  
  
# REGULATORY TEXT FROM 45 CFR §170.315(a)(14)  
#  
# (14) Implantable device list.  
#  
# (i) Record Unique Device Identifiers associated with a patient's Implantable Devices.  
#  
# (ii) Parse the following identifiers from a Unique Device Identifier:  
#  
# (A) Device Identifier; and  
#  
# (B) The following identifiers that compose the Production Identifier:  
#
```

```

# (1) The lot or batch within which a device was manufactured;
#
# (2) The serial number of a specific device;
#
# (3) The expiration date of a specific device;
#
# (4) The date a specific device was manufactured; and
#
# (5) For an HCT/P regulated as a device, the distinct identification code required by 21
    CFR 1271.290(c).
#
# (iii) Obtain and associate with each Unique Device Identifier:
#
# (A) A description of the implantable device referenced by at least one of the following
    :
#
# (1) The "GMDN PT Name" attribute associated with the Device Identifier in the Global
    Unique Device Identification Database.
#
# (2) The "SNOMED CT Description" mapped to the attribute referenced in in paragraph (a)
    (14)(iii)(A)(1) of this section.
#
# (B) The following Global Unique Device Identification Database attributes:
#
# (1) "Brand Name";
#
# (2) "Version or Model";
#
# (3) "Company Name";
#
# (4) "What MRI safety information does the labeling contain?"; and
#
# (5) "Device required to be labeled as containing natural rubber latex or dry natural
    rubber (21 CFR 801.437)."
#
# (iv) Display to a user an implantable device list consisting of:
#
# (A) The active Unique Device Identifiers recorded for the patient;
#
# (B) For each active Unique Device Identifier recorded for a patient, the description of
    the implantable device specified by paragraph (a)(14)(iii)(A) of this section; and
#
# (C) A method to access all Unique Device Identifiers recorded for a patient.
#
# (v) For each Unique Device Identifier recorded for a patient, enable a user to access:
#
# (A) The Unique Device Identifier;
#
# (B) The description of the implantable device specified by paragraph (a)(14)(iii)(A) of
    this section;
#
# (C) The identifiers associated with the Unique Device Identifier, as specified by
    paragraph (a)(14)(ii) of this section; and
#

```

```

# (D) The attributes associated with the Unique Device Identifier, as specified by
    paragraph (a)(14)(iii)(B) of this section.
#
# (vi) Enable a user to change the status of a Unique Device Identifier recorded for a
    patient.

@170.315-a-14 @udi @implantable-devices @clinical
Feature: Implantable Device List
  As a healthcare provider
  I want to record and track implantable devices using Unique Device Identifiers
  So that I can ensure patient safety, support recall management, and provide accurate
    device information

Background:
  Given I am authenticated as a provider
  And a patient record is selected

# ----- Record UDI -----

Scenario: Record Unique Device Identifier for implantable device
  Given a patient has received an implantable device
  When I record the device information
  Then the system shall enable recording of Unique Device Identifiers
  And the UDI shall be associated with the patient record
  And the UDI shall be stored in structured format

# ----- Parse UDI Components -----

Scenario: Parse Device Identifier from UDI
  Given a Unique Device Identifier has been recorded
  When the system processes the UDI
  Then the system shall parse the Device Identifier (DI)
  And the DI shall be stored as separate data element

Scenario: Parse Production Identifier components from UDI
  Given a Unique Device Identifier has been recorded
  When the system processes the UDI
  Then the system shall parse lot or batch number
  And the system shall parse serial number
  And the system shall parse expiration date
  And the system shall parse manufacture date
  And all production identifiers shall be stored as separate data elements

Scenario: Parse HCT/P distinct identification code from UDI
  Given a Unique Device Identifier for HCT/P regulated device has been recorded
  When the system processes the UDI
  Then the system shall parse distinct identification code per 21 CFR 1271.290(c)
  And the code shall be stored appropriately

# ----- Obtain Device Information from GUDID -----

Scenario: Obtain device description from GUDID
  Given a Unique Device Identifier has been entered
  When the system queries the Global Unique Device Identification Database

```

Then the system shall obtain device description
And description may be "GMDN_PT_Name" from GUDID
Or description may be "SNOMED_CT_Description" mapped to GMDN PT Name

Scenario: Obtain device brand name from GUDID
Given a Unique Device Identifier has been entered
When the system queries GUDID
Then the system shall obtain "Brand_Name" attribute
And the brand name shall be associated with the UDI

Scenario: Obtain device version or model from GUDID
Given a Unique Device Identifier has been entered
When the system queries GUDID
Then the system shall obtain "Version_or_Model" attribute
And the version/model shall be associated with the UDI

Scenario: Obtain device company name from GUDID
Given a Unique Device Identifier has been entered
When the system queries GUDID
Then the system shall obtain "Company_Name" attribute
And the manufacturer information shall be associated with the UDI

Scenario: Obtain MRI safety information from GUDID
Given a Unique Device Identifier has been entered
When the system queries GUDID
Then the system shall obtain MRI safety information
And the information shall indicate MRI labeling content
And MRI safety information shall be prominently available

Scenario: Obtain latex allergy information from GUDID
Given a Unique Device Identifier has been entered
When the system queries GUDID
Then the system shall obtain latex labeling information per 21 CFR 801.437
And latex information shall be prominently available for patient safety

----- Display Implantable Device List -----

Scenario: Display patient's implantable device list
Given a patient has recorded Unique Device Identifiers
When I view the implantable device list
Then the system shall display active Unique Device Identifiers
And the system shall display device descriptions
And the display shall be organized and easily reviewable

Scenario: Display device description for each active UDI
Given a patient has multiple active implantable devices
When I view the implantable device list
Then for each active UDI the system shall display device description
And description shall be from GUDID per requirements
And description shall be clinically meaningful

Scenario: Provide method to access all UDIs for patient
Given a patient has both active and inactive device records
When I need to view complete device history

Then the system shall provide method to access all UDIs
And I shall be able to distinguish active from inactive devices
And complete device history shall be accessible

----- *Access Individual UDI Details* -----

Scenario: Access complete UDI information

Given a patient has a recorded Unique Device Identifier
When I select a specific UDI to review
Then the system shall enable access to the complete UDI
And the system shall display the device description
And the system shall display parsed production identifiers
And the system shall display GUDID attributes

Scenario: Access parsed identifiers for UDI

Given a patient has a recorded Unique Device Identifier
When I access the UDI details
Then the system shall display lot/batch number
And the system shall display serial number
And the system shall display expiration date
And the system shall display manufacture date
And the system shall display HCT/P code if applicable

Scenario: Access GUDID attributes for UDI

Given a patient has a recorded Unique Device Identifier
When I access the UDI details
Then the system shall display brand name
And the system shall display version or model
And the system shall display company name
And the system shall display MRI safety information
And the system shall display latex information

----- *Change UDI Status* -----

Scenario: Change status of implantable device

Given a patient has a recorded Unique Device Identifier
When the device is explanted or status changes
Then the system shall enable changing the status of the UDI
And status change shall be recorded with date and reason
And device shall move from active to inactive list

10.3 Screenshots

Honeycomb

CLEAR PATIENT
demouser
LOGOUT

BaseEHR DeviceList
ID: baseehr-a14-1783131518899
Birth Date: Nov 11, 1955
Gender: male
Phone: Unknown

Implantable Device Registry - ONC §170.315(g)(7)

Category
All Categories

Class
All Classes

CATALOG

AUGMENTATIONS

SCAN UDI

Device	Cyber	Type	Manufacturer	Class	Status	Battery	Implant Date	Actions
NeuroPulse™ Pacemaker v3.0 NP-3000	CYBER	Dual-chamber pacemaker	Arasaka Medical	Class III	active	85%	2023-06-15	VIEW
CardioGuard™ Defibrillator CG-500X	CYBER	Implantable Cardioverter Defibrillator	Militech Biotech	Class III	active	92%	2023-08-22	VIEW
VentiFlow™ Left Ventricular Assist Device VF-HM3		Left ventricular assist device (LVAD)	Trauma Team International	Class III	active	External controller (rechargeable)	2024-03-12	VIEW
RhythmWatch™ Insertable Loop Recorder RW-ILR		Implantable cardiac monitor	Dynalar Technologies	Class II	active	88%	2023-10-02	VIEW
CortexLink™ Neural Bridge CLB-2.1	CYBER	Brain-Computer Interface	Raven Microcyber	Class III	active	Wireless charging	2024-01-10	VIEW

Figure 10.1: Implantable Device List - Patient View

Chapter 11

§ 170.315(e)(1) - View, Download, Transmit

11.1 Criterion Information

11.1.1 Maturity Level

IMPLEMENTED

11.1.2 Regulatory Text

From 45 CFR § 170.315(e)(1):

(1) View, download, and transmit to 3rd party.

The technology must enable patients to view, download, and transmit their health information.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

11.2 Behavior-Driven Development Specification

Listing 11.1: 170.315(e)(1) - View, Download, Transmit

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-e-1-view-
  download-transmit.feature
# §170.315(e)(1) - View, Download, and Transmit to 3rd Party

# REGULATORY TEXT FROM 45 CFR §170.315(e)(1)
#
# (1) The action(s) (i.e., view, download, transmission) that occurred;

@170.315-e-1 @vdt @patient-access @patient-engagement
Feature: View, Download, and Transmit to 3rd Party
  As a patient
  I want to view, download, and transmit my health information
  So that I can access my data and share it with others

Background:
  Given I am authenticated as a patient
```

And my health information is available in the system

Scenario: View health information online

Given I am accessing my patient portal

When I view my health information

Then the system shall display my data in human readable format

And all available USCDI data shall be viewable

And the information shall be current and accurate

Scenario: Download health information

Given I am viewing my health information

When I choose to download my data

Then the system shall enable download

And download shall be in machine-readable format

And download shall include all requested data

Scenario: Transmit to third party via encrypted email

Given I want to share my health information

When I transmit to a third party email address

Then the system shall transmit encrypted

And transmission shall be secure

And third party shall be able to receive the data

Scenario: Transmit to third party unencrypted with patient consent

Given I want to share my health information

And I accept the risks of unencrypted transmission

When I choose unencrypted transmission

Then the system shall warn me of risks

And system shall transmit unencrypted only with my consent

And my choice shall be documented

Scenario: Access activity history log

Given I have viewed, downloaded, or transmitted my data

When I check my activity history

Then the system shall display activity log

And log shall show what data was accessed

And log shall show when data was accessed

And log shall show to whom data was transmitted

Chapter 12

§ 170.315(g)(7) - Application Access - Patient Selection

12.1 Criterion Information

12.1.1 Maturity Level

VERIFIED (behavioral tests green)

12.1.2 Regulatory Text

From 45 CFR § 170.315(g)(7):

(7) Application access—patient selection.

The technology must be able to receive a request with sufficient information to uniquely identify a patient and return an ID or other token.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

12.2 Behavior-Driven Development Specification

Listing 12.1: 170.315(g)(7) - Application Access

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-g-7-10-apis
# .feature
# §170.315(g)(7)-(g)(10) - Application Programming Interfaces

# REGULATORY TEXT FROM 45 CFR §170.315(g)(7)
#
# (7) Application access--patient selection. The following technical outcome and
# conditions must be met through the demonstration of an application programming
# interface (API).
# (i) Functional requirement. The technology must be able to receive a request with
# sufficient information to uniquely identify a patient and return an ID or other token
# that can be used by an application to subsequently execute requests for that patient
# 's data.
# (ii) Documentation.
# (A) The API must include accompanying documentation that contains, at a minimum:
```

@170.315-g-7-10 @api @fhir @design-performance

Feature: Application Programming Interfaces

As a health IT developer

I want to provide standardized APIs

So that applications can access health information

Background:

Given the Health IT Module provides APIs

And API access is required

Scenario: Provide patient selection API (g)(7)

Given applications need to select patients

When application requests patient selection

Then API shall enable patient selection

And API shall conform to standards

And API shall be properly documented

Scenario: Provide data category request API (g)(8)

Given applications need specific data categories

When application requests data by category

Then API shall provide data category request capability

And API shall return requested data

And API shall conform to USCDI

Scenario: Provide all data request API (g)(9)

Given applications need complete patient data

When application requests all patient data

Then API shall provide all available data

And data shall include all USCDI elements

And API shall conform to standards

Scenario: Provide standardized API for patient and population services (g)(10)

Given applications need patient and population data

When application uses FHIR API

Then API shall conform to §170.215(a) standard

And API shall support SMART App Launch

And API shall support bulk data access

And API shall provide comprehensive functionality

Chapter 13

§ 170.315(g)(9) - Application Access - All Data

13.1 Criterion Information

13.1.1 Maturity Level

VERIFIED (behavioral tests green)

13.1.2 Regulatory Text

From 45 CFR § 170.315(g)(9):

(9) Application access—all data request.

Provide an application programming interface (API) that can return all available data for a specific patient in a single request.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

13.2 Behavior-Driven Development Specification

Listing 13.1: 170.315(g)(9) - Application Access

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-g-7-10-apis
.feature
# §170.315(g)(7)-(g)(10) - Application Programming Interfaces

# REGULATORY TEXT FROM 45 CFR §170.315(g)(7)
#
# (7) Application access--patient selection. The following technical outcome and
    conditions must be met through the demonstration of an application programming
    interface (API).
# (i) Functional requirement. The technology must be able to receive a request with
    sufficient information to uniquely identify a patient and return an ID or other token
    that can be used by an application to subsequently execute requests for that patient
    's data.
# (ii) Documentation.
# (A) The API must include accompanying documentation that contains, at a minimum:
```

@170.315-g-7-10 @api @fhir @design-performance

Feature: Application Programming Interfaces

As a health IT developer

I want to provide standardized APIs

So that applications can access health information

Background:

Given the Health IT Module provides APIs

And API access is required

Scenario: Provide patient selection API (g)(7)

Given applications need to select patients

When application requests patient selection

Then API shall enable patient selection

And API shall conform to standards

And API shall be properly documented

Scenario: Provide data category request API (g)(8)

Given applications need specific data categories

When application requests data by category

Then API shall provide data category request capability

And API shall return requested data

And API shall conform to USCDI

Scenario: Provide all data request API (g)(9)

Given applications need complete patient data

When application requests all patient data

Then API shall provide all available data

And data shall include all USCDI elements

And API shall conform to standards

Scenario: Provide standardized API for patient and population services (g)(10)

Given applications need patient and population data

When application uses FHIR API

Then API shall conform to §170.215(a) standard

And API shall support SMART App Launch

And API shall support bulk data access

And API shall provide comprehensive functionality

Chapter 14

§ 170.315(g)(10) - Standardized API

14.1 Criterion Information

14.1.1 Maturity Level

IMPLEMENTED

14.1.2 Regulatory Text

From 45 CFR § 170.315(g)(10):

(10) Standardized API for patient and population services.

The technology must implement a standardized API that conforms to FHIR R4, US Core, SMART App Launch, OpenID Connect, and SMART Backend Services.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

14.1.3 Inferno Validation Status

Conformance for this criterion is established by the ONC-approved **Inferno** testing tool, not by the in-repo behavioral suite. The Inferno (g)(10) Standardized API test suite has been run against this system with a passing final result; the official summary report from the most recent session is reproduced in Appendix F, and the session PDFs are archived under `certification/inferno-reports/`. Until certification is issued by an ONC-ACB, this status represents validation evidence, not a certification claim.

14.2 Behavior-Driven Development Specification

Listing 14.1: 170.315(g)(10) - Standardized API

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-g-7-10-apis
# .feature
# §170.315(g)(7)-(g)(10) - Application Programming Interfaces

# REGULATORY TEXT FROM 45 CFR §170.315(g)(7)
#
# (7) Application access--patient selection. The following technical outcome and
# conditions must be met through the demonstration of an application programming
# interface (API).
```



```

# (i) Functional requirement. The technology must be able to receive a request with
    sufficient information to uniquely identify a patient and return an ID or other token
    that can be used by an application to subsequently execute requests for that patient
    's data.
# (ii) Documentation.
# (A) The API must include accompanying documentation that contains, at a minimum:

@170.315-g-7-10 @api @fhir @design-performance
Feature: Application Programming Interfaces
  As a health IT developer
  I want to provide standardized APIs
  So that applications can access health information

Background:
  Given the Health IT Module provides APIs
  And API access is required

Scenario: Provide patient selection API (g)(7)
  Given applications need to select patients
  When application requests patient selection
  Then API shall enable patient selection
  And API shall conform to standards
  And API shall be properly documented

Scenario: Provide data category request API (g)(8)
  Given applications need specific data categories
  When application requests data by category
  Then API shall provide data category request capability
  And API shall return requested data
  And API shall conform to USCDI

Scenario: Provide all data request API (g)(9)
  Given applications need complete patient data
  When application requests all patient data
  Then API shall provide all available data
  And data shall include all USCDI elements
  And API shall conform to standards

Scenario: Provide standardized API for patient and population services (g)(10)
  Given applications need patient and population data
  When application uses FHIR API
  Then API shall conform to §170.215(a) standard
  And API shall support SMART App Launch
  And API shall support bulk data access
  And API shall provide comprehensive functionality

```

Chapter 15

§ 170.315(c)(1) - Clinical Quality Measures - Record and Export

15.1 Criterion Information

15.1.1 Maturity Level

VERIFIED (behavioral tests green)

15.1.2 Regulatory Text

From *45 CFR § 170.315(c)(1)*:

(1) Clinical quality measures — record and export.

(i) Record. For each clinical quality measure (CQM) presented for certification, record all of the data identified in the standard necessary to calculate the measure.

(ii) Export. Enable a user to electronically export a data file, for one or more patients, formatted per the QRDA Category I standard (45 CFR 170.205(h)(2)), that includes all of the recorded CQM data.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

15.1.3 Implementation

The behavioral test verifies the record-calculate-export pipeline: the measures catalog is populated (seeded CMS/PACIO measures); a numerator event is recorded as a measure-observation-profiled FHIR **Observation**; an individual FHIR **MeasureReport** is calculated (fqm-execution / PACIO evaluators) with initial-population, denominator, and numerator groups and persisted; and the captured reports export as a FHIR Bundle, CSV, JSON, **and QRDA Category I** (§ 170.205(h)(2)). The QRDA I export produces a patient-level CDA document with the QRDA Category I template identifiers and Measure, Reporting Parameters, and Patient Data sections, built from the patient's real demographics and the measure's population results.

Scope: the QRDA I document is real and standards-shaped (correct envelope, template identifiers, and sections). Full per-measure QDM data-criteria entry coverage validated by the Cypress tool is the remaining external certification work; QRDA Category III (for (c)(3)) is a follow-on.

15.2 Behavior-Driven Development Specification

Listing 15.1: 170.315(c)(1) - CQM Record and Export

```
# /Volumes/SonicMagic/Code/honeycomb-public-release/certification/bdd/170.315-c-1-cqm-
  record-export.feature
# §170.315(c)(1) - Clinical Quality Measures - Record and Export

# REGULATORY TEXT FROM 45 CFR §170.315(c)(1)
#
# (1) Clinical quality measures--record and export --
# (i) Record. For each and every CQM for which the technology is presented for
    certification, the technology must be able to record all of the data that would be
    necessary to calculate each CQM. Data required for CQM exclusions or exceptions must
    be codified entries, which may include specific terms as defined by each CQM, or may
    include codified expressions of "patient reason," "system reason," or "medical reason
    ."
# (ii) Export. A user must be able to export a data file at any time the user chooses and
    without subsequent developer assistance to operate:
# (A) Formatted in accordance with the standard specified in §170.205(h)(2);
# (B) Ranging from one to multiple patients; and
# (C) That includes all of the data captured for each and every CQM to which technology
    was certified under paragraph (c)(1)(i) of this section.

@170.315-c-1 @cqm-record-export @clinical-quality-measures @cqm
Feature: Clinical Quality Measures - Record and Export
  As a healthcare provider
  I want to record and export clinical quality measure data
  So that I can track quality metrics and submit quality reports

Background:
  Given I am authenticated as a provider
  And the application has the clinics:quality-measures package installed

Scenario: Record all data necessary for CQM calculation
  Given I am documenting patient care for a certified CQM
  When I record clinical data elements
  Then the system shall enable recording of all data necessary to calculate each CQM
  And all required data elements for the CQM shall be capturable
  And the data shall be stored in structured format

Scenario: Record codified CQM exclusion data
  Given I am documenting a CQM exclusion
  When I enter the exclusion reason
  Then the system shall accept codified entries for exclusions
  And codified entries may include specific terms defined by the CQM
  And codified entries may include "patient_reason" expression
  And codified entries may include "system_reason" expression
  And codified entries may include "medical_reason" expression

Scenario: Record codified CQM exception data
  Given I am documenting a CQM exception
  When I enter the exception reason
  Then the system shall accept codified entries for exceptions
```

And codified entries may include specific terms defined by the CQM
And codified entries may include reason expressions per CQM requirements

Scenario: Export CQM data at user's discretion

Given CQM data has been recorded for patients

When I choose to export CQM data

Then the system shall enable export at any time I choose

And export shall not require subsequent developer assistance

And I shall be able to initiate export independently

Scenario: Export CQM data in QRPP format

Given CQM data has been recorded

When I export the data

Then the export shall be formatted per §170.205(h)(2)

And the format shall be Quality Reporting Document Architecture QRPP

Scenario: Export CQM data for single or multiple patients

Given CQM data exists for multiple patients

When I configure the export

Then the system shall enable export ranging from one to multiple patients

And I shall be able to select specific patients

Or I shall be able to export data for patient populations

Scenario: Export includes all captured CQM data

Given data has been captured for certified CQMs

When I export CQM data

Then the export shall include all data captured for each certified CQM

And no required data elements shall be omitted from export

And the export shall be complete and accurate

15.3 Screenshots

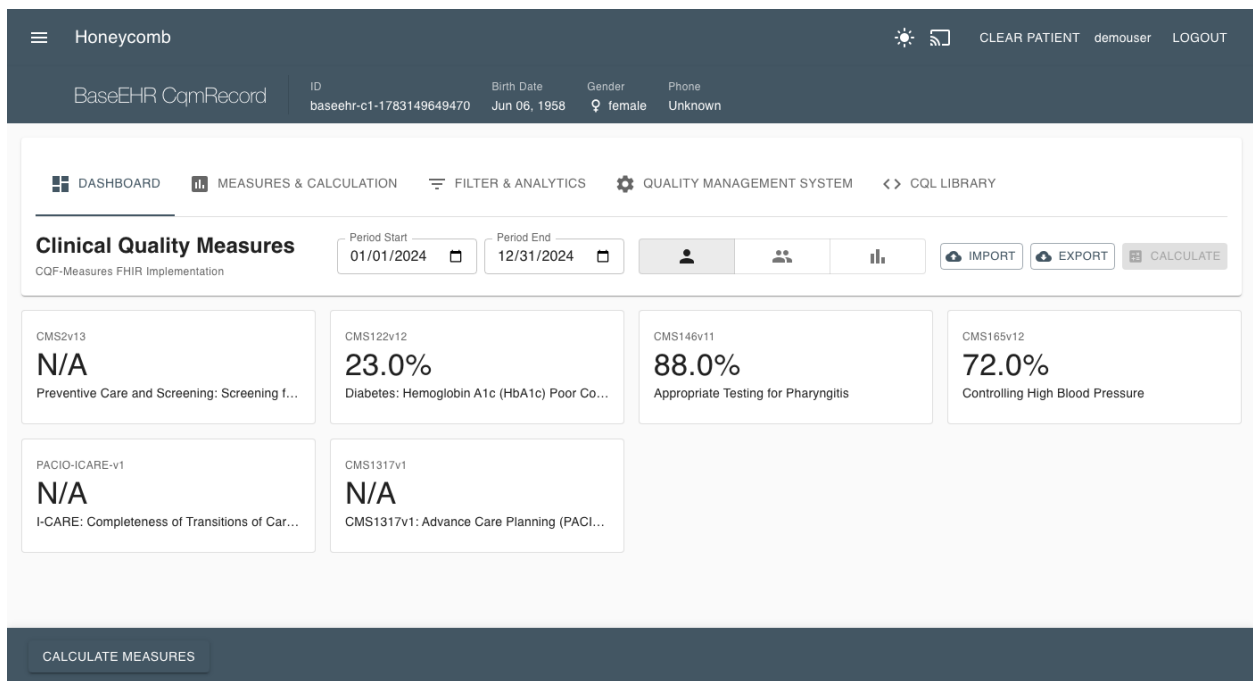


Figure 15.1: Clinical Quality Measures - Record and Export

Chapter 16

§ 170.315(h)(1) - Direct Project

16.1 Criterion Information

16.1.1 Maturity Level

GAP (documented, behavioral tests red)

16.1.2 Regulatory Text

From 45 CFR § 170.315(h)(1):

(1) Direct Project.

Send and receive health information using the Direct Standard (Applicability Statement for Secure Health Transport), including SMTP with S/MIME message signing and encryption, message disposition notifications, and trust anchored in X.509 certificates. Criterion (h)(2) additionally requires the Edge Protocols (XDR/XDM) alongside Direct.

(Full regulatory text abbreviated. See BDD specification for complete requirements.)

16.1.3 Documented Gap

The behavioral test verifies the messaging scaffold: the Direct messaging routes render; a Direct address is format-validated (and a malformed address is rejected); and a sent Direct message is persisted as a FHIR **Communication** with the Direct-Message category and an encryption extension, retrievable afterward. These pass green.

Two capabilities are **gaps**, and this is the expected headline Base-EHR gap: (1) there is **no operational Direct transport** — no SMTP+S/MIME send/receive through a Health Information Service Provider (HISP); the configured relay, when present, is plain SMTP, not the Direct Applicability Statement stack (S/MIME signing/encryption, message disposition notifications, DNS CERT / LDAP certificate discovery), and messages persist only as FHIR resources; and (2) **trust verification is simulated** — a placeholder “Demo Certificate Authority” certificate is returned for any well-formed address, with no real X.509 chain validation or DirectTrust bundle. The Edge Protocols (XDR/XDM) required by (h)(2) have no implementation.

Remediation: integrate a real Direct/HISP stack (SMTP + S/MIME per the Applicability Statement, MDN handling, trust-bundle-based certificate validation), and add XDR/XDM for

(h)(2). Certification testing uses the ONC Direct Transmission Testing (DTT) tool against a live HISP.

16.2 Behavior-Driven Development Specification

Listing 16.1: 170.315(h)(1) - Direct Project

```
# certification/bdd/170.315-h-1-direct-project.feature
# REGULATORY TEXT FROM 45 CFR §170.315(h)(1)
#
# (1) Direct Project --
# (i) Applicability Statement for Secure Health Transport. Able to send and receive
#     health information in accordance with the standard specified in §170.202(a)(2),
#     including formatted only as a "wrapped" message.
# (ii) Delivery Notification in Direct. Able to send and receive health information in
#     accordance with the standard specified in §170.202(e)(1).

@170.315-h-1 @direct @transport
Feature: Direct Project
  As a healthcare provider
  I want to send and receive health information via Direct messaging
  So that I can securely exchange patient information with other providers

Background:
  Given the system supports Direct Project messaging
  And I have appropriate Direct addressing

Scenario: Send health information via Direct with wrapped message
  Given I have health information to send
  When I send information via Direct messaging
  Then the system shall send per §170.202(a)(2)
  And the message shall be formatted as a wrapped message

Scenario: Receive health information via Direct with wrapped message
  Given health information is being sent to me
  When I receive the Direct message
  Then the system shall receive per §170.202(a)(2)
  And the system shall process the wrapped message

Scenario: Send delivery notification in Direct
  Given I have sent health information via Direct
  When delivery notification is enabled
  Then the system shall send delivery notification per §170.202(e)(1)

Scenario: Receive delivery notification in Direct
  Given I sent health information via Direct
  When a delivery notification is sent back
  Then the system shall receive delivery notification per §170.202(e)(1)
```

16.3 Screenshots

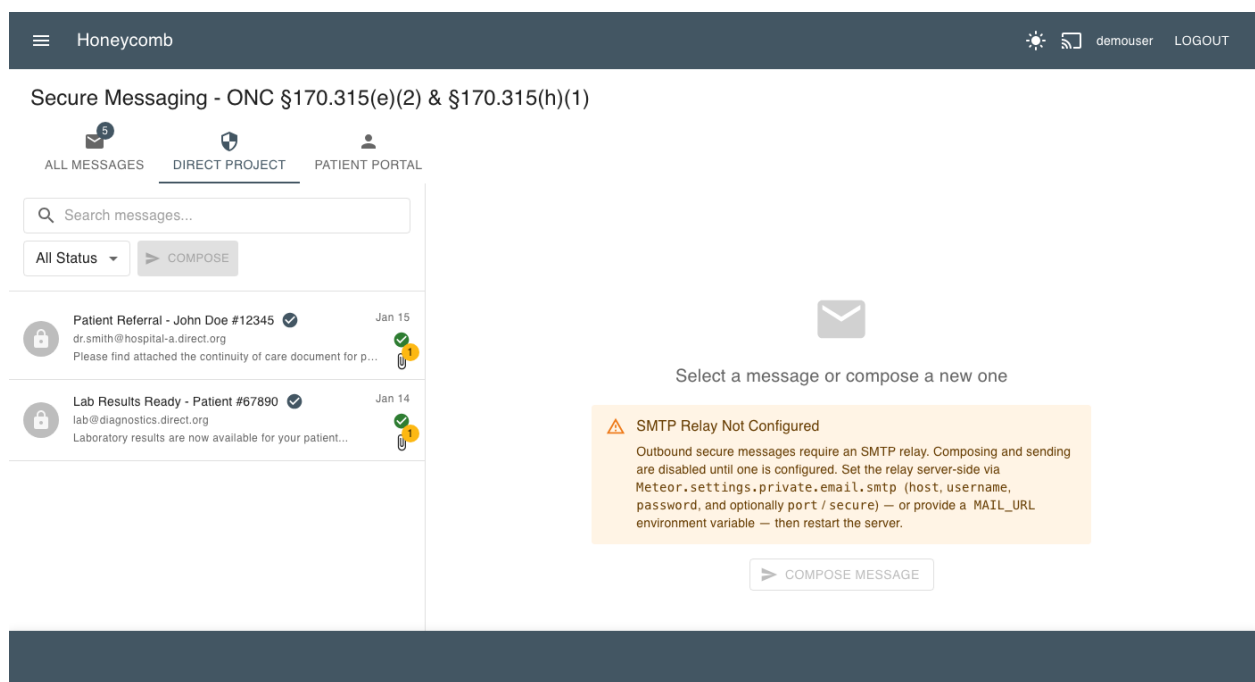


Figure 16.1: Direct Project - Secure Messaging

Appendix A

Acronyms and Abbreviations

API

Application Programming Interface

BDD

Behavior-Driven Development

C-CDA

Consolidated Clinical Document Architecture

CDS

Clinical Decision Support

CFR

Code of Federal Regulations

CPOE

Computerized Provider Order Entry

DI Device Identifier

DSI Decision Support Interventions

EHR

Electronic Health Record

FHIR

Fast Healthcare Interoperability Resources

GMDN

Global Medical Device Nomenclature

GUDID

Global Unique Device Identification Database

HCT/P

Human Cells, Tissues, and Cellular and Tissue-Based Products

HL7

Health Level Seven

MRI

Magnetic Resonance Imaging

OAuth

Open Authorization

ONC

Office of the National Coordinator for Health Information Technology

PI Production Identifier**SMART**

Substitutable Medical Applications, Reusable Technologies

SNOMED CT

Systematized Nomenclature of Medicine - Clinical Terms

SPCU

Sex Parameter for Clinical Use

UDI

Unique Device Identifier

USCDI

United States Core Data for Interoperability

VDT

View, Download, Transmit

Appendix B

References

1. Office of the National Coordinator for Health Information Technology. *2015 Edition Health IT Certification Criteria, 2015 Edition Base EHR Definition, and ONC Health IT Certification Program Modifications*. 45 CFR Part 170. Federal Register, 2015.
2. Office of the National Coordinator for Health Information Technology. *21st Century Cures Act: Interoperability, Information Blocking, and the ONC Health IT Certification Program*. 45 CFR Part 170. Federal Register, 2020.
3. HL7 International. *FHIR R4 Specification*. <http://hl7.org/fhir/R4/>
4. HL7 International. *US Core Implementation Guide*. <http://hl7.org/fhir/us/core/>
5. SMART Health IT. *SMART App Launch Framework*. <http://hl7.org/fhir/smart-app-launch/>
6. Office of the National Coordinator for Health Information Technology. *United States Core Data for Interoperability (USCDI) Version 5*. 2024.
7. FDA. *Unique Device Identification System (UDI System)*. 21 CFR Part 801.
8. FDA. *Global Unique Device Identification Database (GUDID)*. <https://accessgudid.nlm.nih.gov/>

Appendix C

Certification Testing Notes

C.1 Behavioral Test Suite Status

Each Base EHR criterion in Part I has a behavioral Nightwatch test under `certification/tdd/base_ehr/` (one file per criterion, `170.315.<x>.<y>.test.js`). The suite drives real record/change/access behaviors against FHIR resources per the ONC test procedures, not mere page presence, and is run against a live server. As of this revision the outcome is **11 verified** (green) and **1 documented gap** (red): (a)(1), (a)(2), (a)(3), (a)(5), (a)(14), (b)(1), (b)(4), (b)(11), (c)(1), (g)(7), and (g)(9) verify; only (h)(1) Direct Project carries a documented gap. Any remaining gaps use explicit `GAP(170.315.x.y)` annotations that fail deliberately, so the suite functions as a live certification punch-list; the Status column in the Overview and the per-criterion chapters reflect these results. Criterion (g)(10) is covered externally by Inferno (below), not by this suite.

C.2 Inferno Testing

For comprehensive certification testing of the standardized API criterion (g)(10) — and to authoritatively validate the API surfaces exercised by (g)(7) and (g)(9) — the official ONC-approved Inferno testing tool must be used. The Inferno (g)(10) suite has been run against this system with passing results; a refreshed run will be executed and formally recorded as part of an ACB submission.

Inferno Website: <https://inferno.healthit.gov>

Inferno provides authoritative test suites that validate:

- FHIR R4 conformance
- US Core Implementation Guide compliance
- SMART App Launch OAuth 2.0 flows
- OpenID Connect Core
- SMART Backend Services (Bulk FHIR)
- USCDI data completeness
- Token management and revocation
- All mandatory and must-support elements

The Nightwatch tests in this system provide basic endpoint verification for development and CI/CD purposes. They are **not** a replacement for Inferno certification testing.

C.3 Test Execution

To run the complete Base EHR test suite:

```
cd /path/to/core
chmod +x certification/tdd/base_ehr/run-base-ehr-tests.sh
./certification/tdd/base_ehr/run-base-ehr-tests.sh
```

Or run a single criterion directly against a running server:

```
npx nightwatch --config nightwatch.circle.conf.js
  certification/tdd/base_ehr/170.315.<x>.<y>.test.js
```

The suite covers the twelve in-scope CY2026 Base EHR criteria (one test file each); (g)(10) is intentionally excluded and left to Inferno.

Appendix D

Software Bill of Materials (SBOM)

This appendix is the machine-derived Software Bill of Materials for Care Commons EHR. It is generated from the committed `package-lock.json` (`lockfileVersion 3`) — the exact dependency graph resolved for the certification-candidate build — so it documents the software as *actually assembled*, not as aspirationally specified. A complete supply-chain manifest is a deliberate design output: it lets a reviewer, integrator, or downstream deployer reason about provenance, patch exposure, and license obligation without treating the system as a black box.

D.1 SBOM Metadata

Field	Value
Document format	Dependency manifest (npm <code>lockfileVersion 3</code>)
Enumerated on	2026-07-04
Source of truth	<code>package-lock.json</code> at the certification commit
Certification commit	see Reproducibility (§0.7)
Build runtime (Node)	22.22.0 (Meteor bundled)
Lockfile tooling (npm)	11.12.1
Framework	Meteor 3.4
Total resolved packages	4,121
Direct dependencies (runtime)	108
Direct dependencies (dev)	12
First-party workspace packages	70
Third-party with SPDX metadata	4,003
Packages without SPDX metadata	118

Methodology note. Versions below are reported *exactly as resolved* in the lockfile. Because Care Commons pins several transitive dependencies through explicit **overrides** (for security backports) and runs on the bundled Meteor toolchain, a resolved version may differ from a package’s latest public-registry release. This is expected: the SBOM records the shipped artifact, which is the artifact put forward for certification.

D.2 Key Components

The following are the load-bearing third-party components — the packages a reviewer most needs to understand. The full transitive set (4,121 entries) lives in `package-lock.json`; its integrity hash is recorded in the Reproducibility table (§0.7).

Package	Version	Purpose	License
react / react-dom	18.3.1	UI rendering	MIT
@mui/material	5.18.0	Component / design system	MIT
@mui/icons-material	5.18.0	Icon set	MIT
mongoose	6.21.0	FHIR resource persistence	Apache-2.0
express	4.22.1	HTTP / REST routing (FHIR server)	MIT
@node-oauth/express-oauth-server	1.0.5	OAuth2 authorization server (SMART)	MIT
jsonwebtoken	9.0.3	JWT signing / verification	MIT
jose	6.2.3	JWK / JWS / JWE (Backend Services)	MIT
pkij	3.3.3	X.509 / PKI (Direct, key material)	BSD-3-Clause
asn1js	3.0.7	ASN.1 encoding (certificates)	BSD-3-Clause
dcmjs	0.38.3	DICOM parse / serialize	MIT
@cornerstonejs/core	1.86.1	Diagnostic image viewing	MIT
@cornerstonejs/dicom-image-loader	1.86.1	DICOM image loader	MIT
fqm-execution	1.8.5	FHIR quality-measure engine (c.1)	Apache-2.0
xml2js	0.6.2	C-CDA / QRDA XML parse (b.1, c.1)	MIT
fhirpath	4.8.2	FHIRPath evaluation (search, validation)	Apache-2.0
simpl-schema	3.4.6	FHIR resource schema validation	MIT
lodash	4.18.1	Defensive get/set circuit breaker	MIT
moment	2.30.1	Date / time handling	MIT
nightwatch	3.14.0	Behavioral certification E2E tests	MIT
chromedriver	146.0.6	Headless browser driver (E2E)	Apache-2.0
@rspack/core	1.7.1	Workflow-package bundler	MIT

D.3 License Distribution (raw)

The following is the verbatim SPDX-identifier distribution across all 4,003 third-party packages that declare license metadata, as scanned from the lockfile. It is presented un-normalized for full transparency; the normalized compliance analysis is in Appendix E.

Count	SPDX identifier
2919	MIT
283	Apache-2.0 OR MIT
273	ISC
171	BSD-3-Clause
129	Apache-2.0
70	UNLICENSED (first-party workspace)
40	0BSD
35	BSD-2-Clause
23	BlueOak-1.0.0
13	MPL-2.0
5	(MIT OR CC0-1.0)
5	(Apache-2.0 OR MIT)
4	Unlicense
4	(MIT AND Zlib)
3	(MIT OR Apache-2.0)
3	(WTFPL OR MIT)
2	SEE LICENSE IN LICENSE.md
2	SEE LICENSE IN LICENSE
2	WTFPL OR ISC
2	(MIT AND BSD-3-Clause)
1	Artistic-2.0
1	MIT-0
1	(Unlicense OR Apache-2.0)
1	Python-2.0
1	CC-BY-4.0
1	(MIT OR WTFPL)
1	CC0-1.0
1	(MIT OR GPL-3.0-or-later)
1	LGPL-3.0
1	(BSD-3-Clause OR GPL-2.0)
1	(BSD-2-Clause OR MIT OR Apache-2.0)
1	WTFPL

Appendix E

License Compliance Report

This appendix normalizes the raw distribution in Appendix D into license *families*, states the obligation each family imposes, and records how those obligations interact with Care Commons EHR’s own distribution license. The headline finding: the dependency tree is overwhelmingly permissive (roughly 96% MIT / ISC / BSD / Apache / public-domain-equivalent), carries no imported strong-copyleft (GPL/AGPL) obligation, and every copyleft component present is either file-level (MPL-2.0) or weak (LGPL-3.0) and used in a compatible way.

E.1 The Application’s Own License

The Care Commons EHR application code is licensed **AGPL-3.0** (see `LICENSE.md`). This is an intentional network-copyleft posture: an operator running a modified Care Commons EHR as a network service must offer that modified source to its users. AGPL-3.0 is the *outbound* license of the first-party application; it is not imposed by any dependency. The workflow packages under `npmPackages/` are individually MIT (or Apache-2.0 for the core subset); private packages under `extensions/` are UNLICENSED and are not distributed with the open-source release.

E.2 License Families and Obligations

Family	Count	Obligation	Compat.
MIT / ISC / 0BSD / BSD-2 / BSD-3 / BlueOak	3462	Preserve copyright + license text (attribution)	✓
Apache-2.0 (incl. Apache/MIT dual)	420	Preserve NOTICE; explicit patent grant	✓
Public-domain-equivalent (Unlicense, CC0, MIT-0)	12	None	✓
Other permissive dual/com-bos (Zlib, WTFPL, Python-2.0, ...)	16	Attribution where applicable	✓
MPL-2.0	14	File-level source disclosure for <i>modified</i> MPL files only	✓
LGPL-3.0	1	Allow relinking; provide LGPL source (dynamic use)	✓

Family	Count	Obligation	Compat.
Dual-with-GPL (resolve to permissive side)	2	Elect the non-GPL option (MIT / BSD)	✓
CC-BY-4.0	1	Attribution (asset / data, not code)	✓
Artistic-2.0	2	Attribution; state changes	✓
Custom (“SEE LICENSE IN...”)	5	Manual review of bundled LICENSE file	review
UNLICENSED (first-party workspace)	70	N/A — own code (AGPL / MIT / private)	—
No SPDX metadata	118	Mostly @types stubs + first-party; reviewed	low

E.3 Attribution and Notice Obligations

- **Permissive attribution (MIT/BSD/ISC).** The largest obligation by count is simple attribution: the copyright notice and license text of each package must travel with any redistribution. These are preserved in each package’s own `LICENSE` file within `node_modules` and are reproduced in binary/desktop distributions.
- **Apache-2.0 NOTICE.** Apache-2.0 packages that ship a `NOTICE` file require that file to be preserved and passed through; Apache-2.0 also grants an explicit patent license, which is favorable for a regulated deployment.
- **MPL-2.0 (file-level copyleft).** MPL is per-file: only if a specific MPL-licensed *source file* is modified must that file’s source be offered. Care Commons consumes these packages unmodified, so the only obligation is to preserve their license headers. MPL-2.0 §3.3 is explicitly compatible with (A)GPL distribution.
- **LGPL-3.0 (weak copyleft).** The single LGPL component is used as a dynamically-resolved library, satisfying the relinking allowance; its source is available upstream.
- **Dual-licensed with a GPL option.** Two packages offer a choice that includes a GPL variant; Care Commons elects the permissive alternative (MIT / BSD-3-Clause), so no GPL obligation attaches.

E.4 Source Availability

Because the application is AGPL-3.0, corresponding source for the first-party code is made available with every network deployment. Third-party source is obtainable from each package’s public repository (recorded in `package-lock.json` resolved URLs); nothing in the tree is a proprietary binary blob requiring a separate source-offer letter.

E.5 Findings

1. **No imported strong copyleft.** There is no GPL-2.0-only or GPL-3.0-only or AGPL *dependency* in the tree. The only AGPL in the system is Care Commons EHR's own outbound license.
2. **No external UNLICENSED risk.** All 70 UNLICENSED entries are first-party workspace packages (verified: every one resolves to `npmPackages/`, `extensions/`, or `core/` via a workspace symlink). None is an unlicensed third-party import.
3. **Copyleft is bounded.** The 14 MPL-2.0 and 1 LGPL-3.0 components impose only file-level / relinking obligations, all satisfied by unmodified dynamic use.
4. **Flagged for periodic manual review.** 5 “SEE LICENSE” custom declarations and 118 metadata-absent packages (predominantly `@types` stubs, which are non-executable) should be re-examined on each major dependency bump. None is currently believed to impose a restrictive obligation.

E.6 Open-Source Provenance

Beyond “which licenses,” the more useful transparency question is *why each major component exists*. The table below turns the dependency list into an architectural map, so a reviewer can see the system as an intentional assembly of well-understood parts.

Component	Reason it is in the system
Meteor 3.4 (runtime)	Full-stack framework: DDP transport, reactive data, build toolchain
React + React-DOM	Client UI rendering
Material-UI (MUI)	Component library and light/dark design system
MongoDB driver	Document persistence for FHIR resources
Express	HTTP surface for the FHIR REST API
@node-oauth/express-oauth-server	OAuth2 authorization server for SMART App Launch
jsonwebtoken + jose	JWT / JWK handling for SMART and Backend Services
pkij + asn1js	X.509 / certificate handling for the Direct transport and key material
dcmjs	DICOM parsing and serialization
Cornerstone3D	Diagnostic image viewing
fqm-execution	FHIR Clinical Quality Measure calculation (§170.315(c)(1))
xml2js	C-CDA and QRDA XML parsing (§170.315(b)(1), (c)(1))
fhirpath	FHIRPath evaluation for search and validation
simpl-schema	FHIR resource schema validation
Nightwatch	Behavioral compliance (E2E) testing
Inferno (external)	ONC-approved standardized-API conformance testing (§170.315(g)(10))

E.7 Reproducible Build

So that another engineer can recreate the exact tree audited above, the canonical build coordinates are recorded once in the Reproducibility table (§0.7) and summarized here: Git commit SHA, `package-lock.json` SHA-256 integrity hash, Node 22.22.0, npm 11.12.1, Meteor 3.4, MongoDB 7.0.16 (dev) / 6.0 (CI), on macOS / Linux. Restoring that lockfile with `npm ci` yields a byte-identical dependency graph, and therefore an SBOM identical to this one.

Appendix F

ONC (g)(10) Inferno Test Report

Conformance to 45 CFR § 170.315(g)(10) — FHIR R4, US Core, SMART App Launch, OpenID Connect, SMART Backend Services, and Bulk Data — is validated externally with the ONC-approved **Inferno** testing tool (<https://inferno.healthit.gov>). This appendix reproduces the official summary report from the most recent test session, dated **July 21, 2026**. Both report editions exported from that session are archived in `certification/inferno-reports/`:

- (g)(10) Standardized API Test Session - 20260721.pdf — the summary report reproduced on the following pages;
- (g)(10) Standardized API Test Session - Detailed - 20260721.pdf — the detailed edition, with per-test request/response logs, retained in the repository rather than reproduced here.

To refresh this appendix after a new Inferno session, export both report PDFs with their default (session-dated) filenames into `certification/inferno-reports/` and rebuild the manual; the build stages the newest summary automatically.

	1.7.03 Access to AllergyIntolerance resources granted	Access expected to be granted and request properly returned 200									
	1.7.04 Access to CarePlan resources granted	Access expected to be granted and request properly returned 200									
	1.7.05 Access to CareTeam resources granted	Access expected to be granted and request properly returned 200									
	1.7.06 Access to Condition resources granted	Access expected to be granted and request properly returned 200									
	1.7.07 Access to Device resources granted	Access expected to be granted and request properly returned 200									
	1.7.08 Access to DiagnosticReport resources granted	Access expected to be granted and request properly returned 200									
	1.7.09 Access to DocumentReference resources granted	Access expected to be granted and request properly returned 200									
	1.7.10 Access to Goal resources granted	Access expected to be granted and request properly returned 200									
	1.7.11 Access to Immunization resources granted	Access expected to be granted and request properly returned 200									
	1.7.12 Access to MedicationRequest resources granted	Access expected to be granted and request properly returned 200									
	1.7.13 Access to Observation resources granted	Access expected to be granted and request properly returned 200									
	1.7.14 Access to Procedure resources granted	Access expected to be granted and request properly returned 200									
	1.7.21 Access to Encounter resources granted	Access expected to be granted and request properly returned 200									
	1.7.22 Access to ServiceRequest resources granted	Access expected to be granted and request properly returned 200									
	1.7.23 Access to Coverage resources granted	Access expected to be granted and request properly returned 200									
	1.7.24 Access to MedicationDispense resources granted	Access expected to be granted and request properly returned 200									
	2 Standalone Patient App - Limited Access										
<table><tr><th>INPUT</th><th>VALUE</th></tr><tr><td>expected_resources</td><td>patient, condition, observation</td></tr><tr><td>url</td><td>https://care-commons.app/baseR4</td></tr><tr><td>standalone_smart_auth_info</td><td>{ "auth_type": "symmetric", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authenticate", "patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/Encounter.rs patient/Immunization.rs patient/MedicationRequest.rs patient/MedicationDispense.rs patient/Procedure.rs patient/Provenance.rs patient/PractitionerRole.rs patient/RelatedPerson.rs patient/Specimen.rs patient/Task.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTP83pEYwNdFpJorfAJMWXLNR", "pkce_support": "enabled", "pkce_challenge": "S256", "expires_in": 3600, "name": "standalone_smart_auth_info" }</td></tr></table>				INPUT	VALUE	expected_resources	patient, condition, observation	url	https://care-commons.app/baseR4	standalone_smart_auth_info	{ "auth_type": "symmetric", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authenticate", "patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/Encounter.rs patient/Immunization.rs patient/MedicationRequest.rs patient/MedicationDispense.rs patient/Procedure.rs patient/Provenance.rs patient/PractitionerRole.rs patient/RelatedPerson.rs patient/Specimen.rs patient/Task.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTP83pEYwNdFpJorfAJMWXLNR", "pkce_support": "enabled", "pkce_challenge": "S256", "expires_in": 3600, "name": "standalone_smart_auth_info" }
INPUT	VALUE										
expected_resources	patient, condition, observation										
url	https://care-commons.app/baseR4										
standalone_smart_auth_info	{ "auth_type": "symmetric", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authenticate", "patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/Encounter.rs patient/Immunization.rs patient/MedicationRequest.rs patient/MedicationDispense.rs patient/Procedure.rs patient/Provenance.rs patient/PractitionerRole.rs patient/RelatedPerson.rs patient/Specimen.rs patient/Task.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTP83pEYwNdFpJorfAJMWXLNR", "pkce_support": "enabled", "pkce_challenge": "S256", "expires_in": 3600, "name": "standalone_smart_auth_info" }										
	2.4 Standalone Launch With Limited Scope										
	2.4.01 OAuth 2.0 authorize endpoint secured by transport layer security										
	2.4.02 OAuth server redirects client browser to app redirect URI										
	2.4.03 OAuth server sends code parameter										
	2.4.04 OAuth 2.0 token endpoint secured by transport layer security										
	2.4.05 OAuth token exchange request succeeds when supplied correct information										
	2.4.06 Token exchange response body contains required information encoded in JSON										
	2.4.07 Response includes correct HTTP Cache-Control and Pragma headers										
	2.4.08 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS)	Client type is not public, Cross-Origin Resource Sharing (CORS) is not required to be supported for non-public client types									
	2.4.09 Patient from launch context can be retrieved										
	2.4.10 OAuth token exchange response grants scope that is limited to those selected by user	Resources to be denied: AllergyIntolerance, CarePlan, CareTeam, Device, DiagnosticReport, DocumentReference, Goal, Immunization, MedicationRequest, Procedure, Encounter, ServiceRequest, Specimen, Coverage, MedicationDispense, Location									
	2.3 Restricted Resource Type Access										
	2.3.01 Access to Patient resources are restricted properly based on patient-selected scope	Access expected to be granted and request properly returned 200									
	2.3.02 Access to AllergyIntolerance resources are restricted properly based on patient-selected scope										
	2.3.03 Access to CarePlan resources are restricted properly based on patient-selected scope										
	2.3.04 Access to CareTeam resources are restricted properly based on patient-selected scope										
	2.3.05 Access to Condition resources are restricted properly based on patient-selected scope	Access expected to be granted and request properly returned 200									
	2.3.06 Access to Device resources are restricted properly based on patient-selected scope										
	2.3.07 Access to DiagnosticReport resources are restricted properly based on patient-selected scope										

✓	2.3.08 Access to DocumentReference resources are restricted properly based on patient-selected scope	
✓	2.3.09 Access to Goal resources are restricted properly based on patient-selected scope	
✓	2.3.10 Access to Immunization resources are restricted properly based on patient-selected scope	
✓	2.3.11 Access to MedicationRequest resources are restricted properly based on patient-selected scope	
✓	2.3.12 Access to Observation resources are restricted properly based on patient-selected scope Access expected to be granted and request properly returned 200	
✓	2.3.13 Access to Procedure resources are restricted properly based on patient-selected scope	
✓	2.3.20 Access to Encounter resources are restricted properly based on patient-selected scope	
✓	2.3.21 Access to ServiceRequest resources are restricted properly based on patient-selected scope	
✓	2.3.22 Access to Coverage resources are restricted properly based on patient-selected scope	
✓	2.3.23 Access to MedicationDispense resources are restricted properly based on patient-selected scope	
3 EHR Practitioner App		
INPUT		
VALUE		
url	https://care-commons.app/baseR4	
ehr_smart_auth_info	{ "auth_type": "symmetric", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authorize", "user/Condition.rs user/Coverage.rs user/Device.rs user/DiagnosticReport.rs user/DocumentReference.rs user/Encounter.rs user/Goal.rs user/Immunization.rs user/Procedure.rs user/Provenance.rs user/PractitionerRole.rs user/RelatedPerson.rs user/ServiceRequest.rs user/Specimen.rs user/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTPp83pEYwvNdFpJorIJMWXLNR", "pkce_support": "enabled", "pkce_code_challenge": "07-21T18:22:24+00:00", "expires_in": 86400, "name": "ehr_smart_auth_info"}	
3.7 SMART on FHIR Discovery		
✓	3.7.01 FHIR server makes SMART configuration available from well-known endpoint	
✓	3.7.02 Well-known configuration contains required fields	
✓	3.7.03 Optional SMART .well-known/smart-configuration Endpoint Enables Cross-Origin Resource Sharing (CORS)	
✓	3.7.04 Optional SMART metadata Endpoint Enables Cross-Origin Resource Sharing (CORS)	
✓	3.7.05 Well-known configuration declares support for required capabilities	
3.8 EHR Launch With Practitioner Scope		
✓	3.8.01 EHR server redirects client browser to Inferno app launch URI	
✓	3.8.02 EHR server sends launch parameter	
✓	3.8.03 OAuth 2.0 authorize endpoint secured by transport layer security	
✓	3.8.04 OAuth server redirects client browser to app redirect URI	
✓	3.8.05 OAuth server sends code parameter	
✓	3.8.06 OAuth 2.0 token endpoint secured by transport layer security	
✓	3.8.07 OAuth token exchange request succeeds when supplied correct information	
✓	3.8.08 Token exchange response body contains required information encoded in JSON	
✓	3.8.09 Response includes correct HTTP Cache-Control and Pragma headers	
⚪	3.8.10 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS) Client type is not public, Cross-Origin Resource Sharing (CORS) is not required to be supported for non-public client types	
✓	3.8.11 User-level access with OpenID Connect and Refresh Token scopes used.	
✓	3.8.12 Server rejects unauthorized access	
✓	3.8.13 Patient from launch context can be retrieved	
✓	3.8.16 OAuth token exchange response body contains encounter context and encounter resource can be retrieved	
✓	3.8.17 Launch context contains smart_style_url which links to valid JSON	
✓	3.8.18 Launch context contains need_patient_banner	
3.10 OpenID Connect		
✓	3.10.01 ID token can be decoded	
✓	3.10.02 OpenID Connect well-known configuration can be retrieved	
✓	3.10.03 OpenID Connect well-known configuration contains all required fields	
✓	3.10.04 JWKS can be retrieved	
✓	3.10.05 ID token header contains required information	
✓	3.10.06 ID token payload has required claims and a valid signature	
✓	3.10.07 FHIR resource representing the current user can be retrieved	
✗	3.10.08 Optional SMART FHIR User REST API Endpoint Enables Cross-Origin Resource Sharing (CORS) No Access-Control-Allow-Origin header received.	
3.6 Token Refresh		
✓	3.6.01 Server successfully refreshes the access token when optional scope parameter omitted	
✓	3.6.02 Token refresh response contains all required fields	
✓	3.6.03 Server successfully refreshes the access token when optional scope parameter provided	

✓ 3.6.04 Token refresh response contains all required fields	1
✓ 3.6.05 Patient from launch context can be retrieved	2
✓ 3.6.06 Refresh token exchange fails when supplied an invalid refresh token	1
✓ 12 Single Patient API (US Core 7.0.0)	
INPUT	VALUE
url	https://care-commons.app/baseR4
patient_id	958c63b0-4a7f-2ee7-ef6a-e04df5931b4c
additional_patient_ids	
implantable_device_codes	
smart_auth_info	{ "auth_type": "symmetric", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authorize", "user/Condition.rs user/Coverage.rs user/Device.rs user/DiagnosticReport.rs user/DocumentReference.rs user/Encounter.rs user/Goal.rs user/ImmunizationProcedure.rs user/Provenance.rs user/PractitionerRole.rs user/RelatedPerson.rs user/ServiceRequest.rs user/Specimen.rs user/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTP83pEYwvNdFpJorAJMWXLNR", "pkce_support": "enabled", "pkce_challenge": "S256", "expires_in": 86400, "name": "ehr_smart_auth_info" }
✓ 12.1 Capability Statement	
✓ 12.1.01 FHIR server secured by transport layer security	
✓ 12.1.02 FHIR Server supports the conformance interaction	1
✓ 12.1.03 Server is using FHIR R4	
✓ 12.1.04 FHIR server capability states JSON support	1
✓ 12.1.05 Capability Statement lists support for required US Core Profiles	1
✓ 12.2 Patient Tests	
✓ 12.2.01 Server returns valid results for Patient search by _id	2
✓ 12.2.02 Server returns valid results for Patient search by identifier	2
✓ 12.2.03 Server returns valid results for Patient search by name	1
✓ 12.2.04 Server returns valid results for Patient search by birthdate + name	1
✓ 12.2.05 Server returns valid results for Patient search by gender + name	1
✓ 12.2.06 Server returns correct Patient resource from Patient read interaction	1
✓ 12.2.07 Server returns Provenance resources from Patient search by _id + revInclude:Provenance:target	1
✓ 12.2.08 Patient resources returned during previous tests conform to the US Core Patient Profile	
✓ 12.2.09 All must support elements are provided in the Patient resources returned	
✓ 12.3 AllergyIntolerance Tests	
✓ 12.3.01 Server returns valid results for AllergyIntolerance search by patient	3
✓ 12.3.02 Server returns correct AllergyIntolerance resource from AllergyIntolerance read interaction	1
✓ 12.3.03 Server returns Provenance resources from AllergyIntolerance search by patient + revInclude:Provenance:target	1
✓ 12.3.04 AllergyIntolerance resources returned during previous tests conform to the US Core AllergyIntolerance Profile	
✓ 12.3.05 All must support elements are provided in the AllergyIntolerance resources returned	
✓ 12.3.06 MustSupport references within AllergyIntolerance resources are valid	1
✓ 12.4 CarePlan Tests	
✓ 12.4.01 Server returns valid results for CarePlan search by patient + category	4
✓ 12.4.02 Server returns correct CarePlan resource from CarePlan read interaction	1
✓ 12.4.03 Server returns Provenance resources from CarePlan search by patient + category + revInclude:Provenance:target	1
✓ 12.4.04 CarePlan resources returned during previous tests conform to the US Core CarePlan Profile	
✓ 12.4.05 All must support elements are provided in the CarePlan resources returned	
✓ 12.4.06 MustSupport references within CarePlan resources are valid	
✓ 12.5 CareTeam Tests	
✓ 12.5.01 Server returns valid results for CareTeam search by patient + status	7
✓ 12.5.02 Server returns correct CareTeam resource from CareTeam read interaction	1
✓ 12.5.03 Server returns Provenance resources from CareTeam search by patient + status + revInclude:Provenance:target	5
✓ 12.5.04 CareTeam resources returned during previous tests conform to the US Core CareTeam Profile	
✓ 12.5.05 All must support elements are provided in the CareTeam resources returned	
✓ 12.5.06 MustSupport references within CareTeam resources are valid	9+
✓ 12.6 Condition Encounter Diagnosis Tests	
✓ 12.6.01 Server returns valid results for Condition search by patient + category	4
✓ 12.6.02 Server returns valid results for Condition search by patient	1
✓ 12.6.03 Server returns correct Condition resource from Condition read interaction	1
✓ 12.6.04 Server returns Provenance resources from Condition search by patient + category + revInclude:Provenance:target	1

✓ 12.6.05 Condition resources returned during previous tests conform to the US Core Condition Encounter Diagnosis Profile ✓ 12.6.06 All must support elements are provided in the Condition resources returned ✓ 12.6.07 MustSupport references within Condition resources are valid	1
✓ 12.7 Condition Problems and Health Concerns Tests	
✓ 12.7.01 Server returns valid results for Condition search by patient + category ✓ 12.7.02 Server returns valid results for Condition search by patient ✓ 12.7.03 Server returns correct Condition resource from Condition read interaction ✓ 12.7.04 Server returns Provenance resources from Condition search by patient + category + revInclude:Provenance:target ✓ 12.7.05 Condition resources returned during previous tests conform to the US Core Condition Problems and Health Concerns Profile ✓ 12.7.06 All must support elements are provided in the Condition resources returned ✓ 12.7.07 MustSupport references within Condition resources are valid	5 1 1 2
✓ 12.8 Coverage Tests	
✓ 12.8.01 Server returns valid results for Coverage search by patient ✓ 12.8.02 Server returns correct Coverage resource from Coverage read interaction ✓ 12.8.03 Server returns Provenance resources from Coverage search by patient + revInclude:Provenance:target ✓ 12.8.04 Coverage resources returned during previous tests conform to the US Core Coverage Profile ✓ 12.8.05 All must support elements are provided in the Coverage resources returned ✓ 12.8.06 MustSupport references within Coverage resources are valid	3 1 1 1
✓ 12.9 Implantable Device Tests	
✓ 12.9.01 Server returns valid results for Device search by patient ✓ 12.9.02 Server returns correct Device resource from Device read interaction ✓ 12.9.03 Server returns Provenance resources from Device search by patient + revInclude:Provenance:target ✓ 12.9.04 Device resources returned during previous tests conform to the US Core Implantable Device Profile ✓ 12.9.05 All must support elements are provided in the Device resources returned ✓ 12.9.06 MustSupport references within Device resources are valid	3 1 1
✓ 12.10 DiagnosticReport for Report and Note Exchange Tests	
✓ 12.10.01 Server returns valid results for DiagnosticReport search by patient + category ✓ 12.10.02 Server returns valid results for DiagnosticReport search by patient ✓ 12.10.03 Server returns valid results for DiagnosticReport search by patient + code ✓ 12.10.04 Server returns valid results for DiagnosticReport search by patient + category + date ✓ 12.10.05 Server returns correct DiagnosticReport resource from DiagnosticReport read interaction ✓ 12.10.06 Server returns Provenance resources from DiagnosticReport search by patient + category + revInclude:Provenance:target ✓ 12.10.07 DiagnosticReport resources returned during previous tests conform to the US Core DiagnosticReport Profile for Report and Note Exchange ✓ 12.10.08 All must support elements are provided in the DiagnosticReport resources returned ✓ 12.10.09 MustSupport references within DiagnosticReport resources are valid	6 1 2 6 1 3 6
✓ 12.11 DiagnosticReport for Laboratory Results Reporting Tests	
✓ 12.11.01 Server returns valid results for DiagnosticReport search by patient + category ✓ 12.11.02 Server returns valid results for DiagnosticReport search by patient ✓ 12.11.03 Server returns valid results for DiagnosticReport search by patient + code ✓ 12.11.04 Server returns valid results for DiagnosticReport search by patient + category + date ✓ 12.11.05 Server returns correct DiagnosticReport resource from DiagnosticReport read interaction ✓ 12.11.06 Server returns Provenance resources from DiagnosticReport search by patient + category + revInclude:Provenance:target ✓ 12.11.07 DiagnosticReport resources returned during previous tests conform to the US Core DiagnosticReport Profile for Laboratory Results Reporting ✓ 12.11.08 All must support elements are provided in the DiagnosticReport resources returned ✓ 12.11.09 MustSupport references within DiagnosticReport resources are valid	4 1 2 6 1 1 1
✓ 12.12 DocumentReference Tests	
✓ 12.12.01 Server returns valid results for DocumentReference search by patient ✓ 12.12.02 Server returns valid results for DocumentReference search by _id ✓ 12.12.03 Server returns valid results for DocumentReference search by patient + type ✓ 12.12.04 Server returns valid results for DocumentReference search by patient + category + date ✓ 12.12.05 Server returns valid results for DocumentReference search by patient + category ✓ 12.12.06 Server returns correct DocumentReference resource from DocumentReference read interaction	3 1 2 6 2 1

✓ 12.12.07 Server returns Provenance resources from DocumentReference search by patient + revInclude:Provenance:target ✓ 12.12.08 DocumentReference resources returned during previous tests conform to the US Core DocumentReference Profile ✓ 12.12.09 All must support elements are provided in the DocumentReference resources returned ✓ 12.12.10 MustSupport references within DocumentReference resources are valid ✓ 12.12.11 DocumentReference resources returned during previous tests have custodian	 1
✓ 12.13 Encounter Tests	
✓ 12.13.01 Server returns valid results for Encounter search by patient ✓ 12.13.02 Server returns valid results for Encounter search by _id ✓ 12.13.03 Server returns valid results for Encounter search by date + patient ✓ 12.13.04 Server returns correct Encounter resource from Encounter read interaction ✓ 12.13.05 Server returns Provenance resources from Encounter search by patient + revInclude:Provenance:target ✓ 12.13.06 Encounter resources returned during previous tests conform to the US Core Encounter Profile ✓ 12.13.07 All must support elements are provided in the Encounter resources returned ✓ 12.13.08 MustSupport references within Encounter resources are valid	 3  1  5  1  1  2
✓ 12.14 Goal Tests	
✓ 12.14.01 Server returns valid results for Goal search by patient ✓ 12.14.02 Server returns correct Goal resource from Goal read interaction ✓ 12.14.03 Server returns Provenance resources from Goal search by patient + revInclude:Provenance:target ✓ 12.14.04 Goal resources returned during previous tests conform to the US Core Goal Profile ✓ 12.14.05 All must support elements are provided in the Goal resources returned ✓ 12.14.06 MustSupport references within Goal resources are valid	 3  1  1
✓ 12.15 Immunization Tests	
✓ 12.15.01 Server returns valid results for Immunization search by patient ✓ 12.15.02 Server returns correct Immunization resource from Immunization read interaction ✓ 12.15.03 Server returns Provenance resources from Immunization search by patient + revInclude:Provenance:target ✓ 12.15.04 Immunization resources returned during previous tests conform to the US Core Immunization Profile ✓ 12.15.05 All must support elements are provided in the Immunization resources returned ✓ 12.15.06 MustSupport references within Immunization resources are valid	 3  1  1  1
✓ 12.16 MedicationDispense Tests	
✓ 12.16.01 Server returns valid results for MedicationDispense search by patient ✓ 12.16.02 Server returns correct MedicationDispense resource from MedicationDispense read interaction ✓ 12.16.03 Server returns Provenance resources from MedicationDispense search by patient + revInclude:Provenance:target ✓ 12.16.04 MedicationDispense resources returned during previous tests conform to the US Core MedicationDispense Profile ✓ 12.16.05 All must support elements are provided in the MedicationDispense resources returned ✓ 12.16.06 MustSupport references within MedicationDispense resources are valid	 3  1  1  2
✓ 12.17 MedicationRequest Tests	
✓ 12.17.01 Server returns valid results for MedicationRequest search by patient + intent ✓ 12.17.02 Server returns valid results for MedicationRequest search by patient + intent + status ✓ 12.17.03 Server returns correct MedicationRequest resource from MedicationRequest read interaction ✓ 12.17.04 Server returns Provenance resources from MedicationRequest search by patient + intent + revInclude:Provenance:target ✓ 12.17.05 MedicationRequest resources returned during previous tests conform to the US Core MedicationRequest Profile ✓ 12.17.06 Medication resources returned during previous tests conform to the US Core Medication Profile ✓ 12.17.07 All must support elements are provided in the MedicationRequest resources returned ✓ 12.17.08 MustSupport references within MedicationRequest resources are valid	 9+  2  1  8  2
✓ 12.18 Observation Laboratory Result Tests	
✓ 12.18.01 Server returns valid results for Observation search by patient + category ✓ 12.18.02 Server returns valid results for Observation search by patient + code ✓ 12.18.03 Server returns valid results for Observation search by patient + category + date ✓ 12.18.04 Server returns correct Observation resource from Observation read interaction ✓ 12.18.05 Server returns Provenance resources from Observation search by patient + category + revInclude:Provenance:target ✓ 12.18.06 Observation resources returned during previous tests conform to the US Core Laboratory Result Observation Profile ✓ 12.18.07 All must support elements are provided in the Observation resources returned ✓ 12.18.08 MustSupport references within Observation resources are valid	 4  2  6  1  1  1

12.19 Observation Pregnancy Status Tests	
12.19.01 Server returns valid results for Observation search by patient + code	4
12.19.02 Server returns valid results for Observation search by patient + category + date	6
12.19.03 Server returns valid results for Observation search by patient + category	2
12.19.04 Server returns correct Observation resource from Observation read interaction	1
12.19.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
12.19.06 Observation resources returned during previous tests conform to the US Core Observation Pregnancy Status Profile	
12.19.07 All must support elements are provided in the Observation resources returned	
12.19.08 MustSupport references within Observation resources are valid	
12.20 Observation Pregnancy Intent Tests	
12.20.01 Server returns valid results for Observation search by patient + code	4
12.20.02 Server returns valid results for Observation search by patient + category + date	6
12.20.03 Server returns valid results for Observation search by patient + category	2
12.20.04 Server returns correct Observation resource from Observation read interaction	1
12.20.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
12.20.06 Observation resources returned during previous tests conform to the US Core Observation Pregnancy Intent Profile	
12.20.07 All must support elements are provided in the Observation resources returned	
12.20.08 MustSupport references within Observation resources are valid	
12.21 Observation Occupation Tests	
12.21.01 Server returns valid results for Observation search by patient + code	4
12.21.02 Server returns valid results for Observation search by patient + category + date	6
12.21.03 Server returns valid results for Observation search by patient + category	2
12.21.04 Server returns correct Observation resource from Observation read interaction	1
12.21.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
12.21.06 Observation resources returned during previous tests conform to the US Core Observation Occupation Profile	
12.21.07 All must support elements are provided in the Observation resources returned	
12.21.08 MustSupport references within Observation resources are valid	
12.22 Observation Respiratory Rate Tests	
12.22.01 Server returns valid results for Observation search by patient + code	4
12.22.02 Server returns valid results for Observation search by patient + category + date	6
12.22.03 Server returns valid results for Observation search by patient + category	2
12.22.04 Server returns correct Observation resource from Observation read interaction	1
12.22.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
12.22.06 Observation resources returned during previous tests conform to the US Core Respiratory Rate Profile	
12.22.07 All must support elements are provided in the Observation resources returned	
12.22.08 MustSupport references within Observation resources are valid	
12.23 Observation Treatment Intervention Preference Tests	
12.23.01 Server returns valid results for Observation search by patient + code	4
12.23.02 Server returns valid results for Observation search by patient + category + date	6
12.23.03 Server returns valid results for Observation search by patient + category	2
12.23.04 Server returns correct Observation resource from Observation read interaction	1
12.23.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
12.23.06 Observation resources returned during previous tests conform to the US Core Treatment Intervention Preference Profile	
12.23.07 All must support elements are provided in the Observation resources returned	
12.23.08 MustSupport references within Observation resources are valid	
12.24 Observation Care Experience Preference Tests	
12.24.01 Server returns valid results for Observation search by patient + code	4
12.24.02 Server returns valid results for Observation search by patient + category + date	6
12.24.03 Server returns valid results for Observation search by patient + category	2
12.24.04 Server returns correct Observation resource from Observation read interaction	1
12.24.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
12.24.06 Observation resources returned during previous tests conform to the US Core Care Experience Preference Profile	
12.24.07 All must support elements are provided in the Observation resources returned	

✓ 12.24.08 MustSupport references within Observation resources are valid	
✓ 12.25 Observation Heart Rate Tests	
✓ 12.25.01 Server returns valid results for Observation search by patient + code	4
✓ 12.25.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.25.03 Server returns valid results for Observation search by patient + category	2
✓ 12.25.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.25.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
✓ 12.25.06 Observation resources returned during previous tests conform to the US Core Heart Rate Profile	
✓ 12.25.07 All must support elements are provided in the Observation resources returned	
✓ 12.25.08 MustSupport references within Observation resources are valid	
✓ 12.26 Observation Body Temperature Tests	
✓ 12.26.01 Server returns valid results for Observation search by patient + code	4
✓ 12.26.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.26.03 Server returns valid results for Observation search by patient + category	2
✓ 12.26.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.26.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
✓ 12.26.06 Observation resources returned during previous tests conform to the US Core Body Temperature Profile	
✓ 12.26.07 All must support elements are provided in the Observation resources returned	
✓ 12.26.08 MustSupport references within Observation resources are valid	
✓ 12.27 Observation Pediatric Weight for Height Tests	
✓ 12.27.01 Server returns valid results for Observation search by patient + code	4
✓ 12.27.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.27.03 Server returns valid results for Observation search by patient + category	2
✓ 12.27.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.27.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
✓ 12.27.06 Observation resources returned during previous tests conform to the US Core Pediatric Weight for Height Observation Profile	
✓ 12.27.07 All must support elements are provided in the Observation resources returned	
✓ 12.27.08 MustSupport references within Observation resources are valid	
✓ 12.28 Observation Pulse Oximetry Tests	
✓ 12.28.01 Server returns valid results for Observation search by patient + code	5
✓ 12.28.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.28.03 Server returns valid results for Observation search by patient + category	2
✓ 12.28.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.28.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	2
✓ 12.28.06 Observation resources returned during previous tests conform to the US Core Pulse Oximetry Profile	
✓ 12.28.07 All must support elements are provided in the Observation resources returned	
✓ 12.28.08 MustSupport references within Observation resources are valid	
✓ 12.29 Observation Smoking Status Tests	
✓ 12.29.01 Server returns valid results for Observation search by patient + code	7
✓ 12.29.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.29.03 Server returns valid results for Observation search by patient + category	2
✓ 12.29.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.29.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	4
✓ 12.29.06 Observation resources returned during previous tests conform to the US Core Smoking Status Observation Profile	
✓ 12.29.07 All must support elements are provided in the Observation resources returned	
✓ 12.29.08 MustSupport references within Observation resources are valid	
✓ 12.31 Observation Head Circumference Tests	
✓ 12.31.01 Server returns valid results for Observation search by patient + code	4
✓ 12.31.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.31.03 Server returns valid results for Observation search by patient + category	2
✓ 12.31.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.31.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
✓ 12.31.06 Observation resources returned during previous tests conform to the US Core Head Circumference Profile	

✓ 12.31.07 All must support elements are provided in the Observation resources returned ✓ 12.31.08 MustSupport references within Observation resources are valid	
✓ 12.32 Observation Body Height Tests ✓ 12.32.01 Server returns valid results for Observation search by patient + code ✓ 12.32.02 Server returns valid results for Observation search by patient + category + date ✓ 12.32.03 Server returns valid results for Observation search by patient + category ✓ 12.32.04 Server returns correct Observation resource from Observation read interaction ✓ 12.32.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target ✓ 12.32.06 Observation resources returned during previous tests conform to the US Core Body Height Profile ✓ 12.32.07 All must support elements are provided in the Observation resources returned ✓ 12.32.08 MustSupport references within Observation resources are valid	4 6 2 1 1
✓ 12.33 Observation BMI Tests ✓ 12.33.01 Server returns valid results for Observation search by patient + code ✓ 12.33.02 Server returns valid results for Observation search by patient + category + date ✓ 12.33.03 Server returns valid results for Observation search by patient + category ✓ 12.33.04 Server returns correct Observation resource from Observation read interaction ✓ 12.33.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target ✓ 12.33.06 Observation resources returned during previous tests conform to the US Core BMI Profile ✓ 12.33.07 All must support elements are provided in the Observation resources returned ✓ 12.33.08 MustSupport references within Observation resources are valid	4 6 2 1 1
✓ 12.34 Observation Screening Assessment Tests ✓ 12.34.01 Server returns valid results for Observation search by patient + category ✓ 12.34.02 Server returns valid results for Observation search by patient + code ✓ 12.34.03 Server returns valid results for Observation search by patient + category + date ✓ 12.34.04 Server returns correct Observation resource from Observation read interaction ✓ 12.34.05 Server returns Provenance resources from Observation search by patient + category + revInclude:Provenance:target ✓ 12.34.06 Observation resources returned during previous tests conform to the US Core Observation Screening Assessment Profile ✓ 12.34.07 All must support elements are provided in the Observation resources returned ✓ 12.34.08 MustSupport references within Observation resources are valid	4 2 6 1 1 5
✓ 12.35 Observation Average Blood Pressure Tests ✓ 12.35.01 Server returns valid results for Observation search by patient + code ✓ 12.35.02 Server returns valid results for Observation search by patient + category + date ✓ 12.35.03 Server returns valid results for Observation search by patient + category ✓ 12.35.04 Server returns correct Observation resource from Observation read interaction ✓ 12.35.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target ✓ 12.35.06 Observation resources returned during previous tests conform to the US Core Average Blood Pressure Profile ✓ 12.35.07 All must support elements are provided in the Observation resources returned ✓ 12.35.08 MustSupport references within Observation resources are valid	4 6 2 1 1
✓ 12.36 Observation Blood Pressure Tests ✓ 12.36.01 Server returns valid results for Observation search by patient + code ✓ 12.36.02 Server returns valid results for Observation search by patient + category + date ✓ 12.36.03 Server returns valid results for Observation search by patient + category ✓ 12.36.04 Server returns correct Observation resource from Observation read interaction ✓ 12.36.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target ✓ 12.36.06 Observation resources returned during previous tests conform to the US Core Blood Pressure Profile ✓ 12.36.07 All must support elements are provided in the Observation resources returned ✓ 12.36.08 MustSupport references within Observation resources are valid	4 6 2 1 1
✓ 12.37 Observation Clinical Result Tests ✓ 12.37.01 Server returns valid results for Observation search by patient + category ✓ 12.37.02 Server returns valid results for Observation search by patient + code ✓ 12.37.03 Server returns valid results for Observation search by patient + category + date ✓ 12.37.04 Server returns correct Observation resource from Observation read interaction ✓ 12.37.05 Server returns Provenance resources from Observation search by patient + category + revInclude:Provenance:target	9+ 2 6 1 7

✓ 12.37.06 Observation resources returned during previous tests conform to the US Core Observation Clinical Result Profile	
✓ 12.37.07 All must support elements are provided in the Observation resources returned	
✓ 12.37.08 MustSupport references within Observation resources are valid	
✓ 12.38 Observation Pediatric BMI for Age Tests	
✓ 12.38.01 Server returns valid results for Observation search by patient + code	4
✓ 12.38.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.38.03 Server returns valid results for Observation search by patient + category	2
✓ 12.38.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.38.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
✓ 12.38.06 Observation resources returned during previous tests conform to the US Core Pediatric BMI for Age Observation Profile	
✓ 12.38.07 All must support elements are provided in the Observation resources returned	
✓ 12.38.08 MustSupport references within Observation resources are valid	
✓ 12.39 Observation Pediatric Head Occipital Frontal Circumference Percentile Tests	
✓ 12.39.01 Server returns valid results for Observation search by patient + code	4
✓ 12.39.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.39.03 Server returns valid results for Observation search by patient + category	2
✓ 12.39.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.39.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
✓ 12.39.06 Observation resources returned during previous tests conform to the US Core Pediatric Head Occipital Frontal Circumference Percentile Profile	
✓ 12.39.07 All must support elements are provided in the Observation resources returned	
✓ 12.39.08 MustSupport references within Observation resources are valid	
✓ 12.40 Observation Body Weight Tests	
✓ 12.40.01 Server returns valid results for Observation search by patient + code	4
✓ 12.40.02 Server returns valid results for Observation search by patient + category + date	6
✓ 12.40.03 Server returns valid results for Observation search by patient + category	2
✓ 12.40.04 Server returns correct Observation resource from Observation read interaction	1
✓ 12.40.05 Server returns Provenance resources from Observation search by patient + code + revInclude:Provenance:target	1
✓ 12.40.06 Observation resources returned during previous tests conform to the US Core Body Weight Profile	
✓ 12.40.07 All must support elements are provided in the Observation resources returned	
✓ 12.40.08 MustSupport references within Observation resources are valid	
✓ 12.41 Procedure Tests	
✓ 12.41.01 Server returns valid results for Procedure search by patient	3
✓ 12.41.02 Server returns valid results for Procedure search by patient + date	5
✓ 12.41.03 Server returns correct Procedure resource from Procedure read interaction	1
✓ 12.41.04 Server returns Provenance resources from Procedure search by patient + revInclude:Provenance:target	1
✓ 12.41.05 Procedure resources returned during previous tests conform to the US Core Procedure Profile	
✓ 12.41.06 All must support elements are provided in the Procedure resources returned	
✓ 12.41.07 MustSupport references within Procedure resources are valid	3
✓ 12.42 ServiceRequest Tests	
✓ 12.42.01 Server returns valid results for ServiceRequest search by patient	3
✓ 12.42.02 Server returns valid results for ServiceRequest search by _id	1
✓ 12.42.03 Server returns valid results for ServiceRequest search by patient + code	2
✓ 12.42.04 Server returns valid results for ServiceRequest search by patient + category + authored	6
✓ 12.42.05 Server returns valid results for ServiceRequest search by patient + category	2
✓ 12.42.06 Server returns correct ServiceRequest resource from ServiceRequest read interaction	1
✓ 12.42.07 Server returns Provenance resources from ServiceRequest search by patient + revInclude:Provenance:target	1
✓ 12.42.08 ServiceRequest resources returned during previous tests conform to the US Core ServiceRequest Profile	
✓ 12.42.09 All must support elements are provided in the ServiceRequest resources returned	
✓ 12.42.10 MustSupport references within ServiceRequest resources are valid	
✓ 12.43 Location Tests	
✓ 12.43.01 Server returns correct Location resource from Location read interaction	1
✓ 12.43.02 Server returns valid results for Location search by address	2

12.43.03 Server returns valid results for Location search by name 12.43.04 Location resources returned during previous tests conform to the US Core Location Profile 12.43.05 All must support elements are provided in the Location resources returned 12.43.06 MustSupport references within Location resources are valid	1
12.44 Organization Tests 12.44.01 Server returns correct Organization resource from Organization read interaction 12.44.02 Organization resources returned during previous tests conform to the US Core Organization Profile 12.44.03 All must support elements are provided in the Organization resources returned	8
12.45 Practitioner Tests 12.45.01 Server returns correct Practitioner resource from Practitioner read interaction 12.45.02 Practitioner resources returned during previous tests conform to the US Core Practitioner Profile 12.45.03 All must support elements are provided in the Practitioner resources returned 12.45.04 Server support either Practitioner.address or PractitionerRole	3
12.46 Provenance Tests 12.46.01 Server returns correct Provenance resource from Provenance read interaction 12.46.02 Provenance resources returned during previous tests conform to the US Core Provenance Profile 12.46.03 All must support elements are provided in the Provenance resources returned 12.46.04 MustSupport references within Provenance resources are valid	9+
12.47 RelatedPerson Tests 12.47.01 Server returns correct RelatedPerson resource from RelatedPerson read interaction 12.47.02 RelatedPerson resources returned during previous tests conform to the US Core RelatedPerson Profile 12.47.03 All must support elements are provided in the RelatedPerson resources returned 12.47.04 MustSupport references within RelatedPerson resources are valid	2
12.48 Specimen Tests 12.48.01 Server returns correct Specimen resource from Specimen read interaction 12.48.02 Specimen resources returned during previous tests conform to the US Core Specimen Profile 12.48.03 All must support elements are provided in the Specimen resources returned 12.48.04 MustSupport references within Specimen resources are valid	2
12.49 Clinical Notes Guidance 12.49.01 Server demonstrates support for the required DocumentReference types and DiagnosticReport categories. 12.49.02 DiagnosticReport and DocumentReference reference the same attachment	2
12.50 Screening Assessments Guidance 12.50.01 Server demonstrates support for the required Condition and Observation categories.	3
12.51 Missing Data Tests 12.51.01 Server represents missing data with the DataAbsentReason Extension 12.51.02 Server represents missing data with the DataAbsentReason CodeSystem	
8 Multi-Patient Authorization and API STU2	
INPUT	VALUE
bulk_server_url	https://care-commons.app/baseR4
group_id	inferno-test-group
bulk_patient_ids_in_group	
bulk_device_types_in_group	
lines_to_validate	
bulk_timeout	600
bulk_smart_auth_info	{ "auth_type": "backend_services", "token_url": "https://care-commons.app/oauth/token", "requested_scopes": "system/Patient.rs system/AllergyIntolerance.rs system/CarePlan.rs system/CareTeam.rs system/Condition.rs system/Coverage.rs system/Device.rs system/DiagnosticReport.rs system/DocumentReference.rs system/Encounter.rs system/Goal.rs system/Immunization.rs system/Location.rs system/Medication.rs system/MedicationDispense.rs system/MedicationRequest.rs system/Observation.rs system/Organization.rs system/Practitioner.rs system/PractitionerRole.rs system/Procedure.rs system/Provenance.rs system/RelatedPerson.rs system/ServiceRequest.rs system/Specimen.rs system/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "encryption_algorithm": "ES384", "access_token": "cXD7DhabpFPRgSSxi", "issue_time": "2026-07-21T18:24:57+00:00", "expires_in": 86400, "name": "bulk_smart_auth_info" }
since_timestamp	2026-07-14T18:21:02.691Z
8.1 Bulk Data Authorization 8.1.01 Authorization service token endpoint secured by transport layer security 8.1.02 Authorization request fails when client supplies invalid grant_type 8.1.03 Authorization request fails when supplied invalid client_assertion_type 8.1.04 Authorization request fails when client supplies invalid JWT token	1

✓ 8.1.05 Authorization request succeeds when supplied correct information	1
✓ 8.1.06 Authorization request response body contains required information encoded in JSON	
✓ 8.2 Group Compartment Export Tests STU2	
✓ 8.2.01 Bulk Data Server is secured by transport layer security	
✓ 8.2.02 Bulk Data Server declares support for Group export operation in CapabilityStatement	1
✓ 8.2.03 Bulk Data Server rejects \$export request without authorization	1
✓ 8.2.04 Bulk Data Server returns "202 Accepted" and "Content-location" for \$export operation	1
✓ 8.2.05 Bulk Data Server returns "202 Accepted" or "200 OK" for status check	2
✓ 8.2.06 Bulk Data Server returns output with type and url for status complete	
✓ 8.3 Group Compartment Export Validation Tests	
✓ 8.3.01 Bulk Data Server is secured by transport layer security	
✓ 8.3.02 NDJSON download requires access token if requireAccessToken is true	1
✓ 8.3.03 Patient resources returned conform to the US Core Patient Profile Successfully validated 5 Patient resource(s).	1
✓ 8.3.04 Group export has at least two patients	
8.3.05 Patient IDs match those expected in Group No patient ids were given.	
✓ 8.3.06 AllergyIntolerance resources returned conform to the US Core AllergyIntolerance Profile Successfully validated 5 AllergyIntolerance resource(s).	1
✓ 8.3.07 CarePlan resources returned conform to the US Core CarePlan Profile Successfully validated 5 CarePlan resource(s).	1
✓ 8.3.08 CareTeam resources returned conform to the US Core CareTeam Profile Successfully validated 3 CareTeam resource(s).	1
✓ 8.3.09 Condition resources returned conform to the relevant US Core Condition Profile Successfully validated 55 Condition resource(s).	1
✓ 8.3.10 Device resources returned conform to the US Core Implantable Device Profile Successfully validated 3 Device resource(s).	1
✓ 8.3.11 DiagnosticReport resources returned conform to the relevant US Core DiagnosticReport Profile Successfully validated 47 DiagnosticReport resource(s).	1
✓ 8.3.12 DocumentReference resources returned conform to the US Core DocumentReference Profile Successfully validated 40 DocumentReference resource(s).	1
✓ 8.3.13 Goal resources returned conform to the US Core Goal Profile Successfully validated 6 Goal resource(s).	1
✓ 8.3.14 Immunization resources returned conform to the US Core Immunization Profile Successfully validated 8 Immunization resource(s).	1
✓ 8.3.15 MedicationRequest resources returned conform to the US Core MedicationRequest Profile Successfully validated 65 MedicationRequest resource(s).	1
✓ 8.3.16 Observation resources returned conform to the relevant US Core Observation Profile Successfully validated 211 Observation resource(s).	1
✓ 8.3.17 Procedure resources returned conform to the US Core Procedure Profile Successfully validated 74 Procedure resource(s).	1
✓ 8.3.18 Encounter resources returned conform to the US Core Encounter Profile Successfully validated 28 Encounter resource(s).	1
✓ 8.3.19 Organization resources returned conform to the US Core Organization Profile Successfully validated 6 Organization resource(s).	1
✓ 8.3.20 Practitioner resources returned conform to the US Core Practitioner Profile Successfully validated 5 Practitioner resource(s).	1
✓ 8.3.21 Provenance resources returned conform to the US Core Provenance Profile Successfully validated 1 Provenance resource(s).	1
✓ 8.3.26 Medication resources returned conform to the US Core Medication Profile if bulk data export has Medication resources Successfully validated 1 Medication resource(s).	1
✓ 8.3.38 ServiceRequest resources returned conform to the US Core ServiceRequest Profile Successfully validated 18 ServiceRequest resource(s).	1
✓ 8.3.39 RelatedPerson resources returned conform to the US Core RelatedPerson Profile Successfully validated 2 RelatedPerson resource(s).	1
8.3.40 QuestionnaireResponse resources returned conform to the US Core QuestionnaireResponse Profile if bulk data has QuestionnaireResponse resources Successfully validated 95 QuestionnaireResponse resource(s).	1
✓ 8.3.41 PractitionerRole resources returned conform to the US Core PractitionerRole Profile if bulk data export has PractitionerRole resources Successfully validated 19 PractitionerRole resource(s).	1
✓ 8.3.42 Coverage resources returned conform to the US Core Coverage Profile Successfully validated 2 Coverage resource(s).	1
✓ 8.3.43 MedicationDispense resources returned conform to the US Core MedicationDispense Profile Successfully validated 2 MedicationDispense resource(s).	1

	8.3.44 Specimen resources returned conform to the US Core Specimen Profile	
	Successfully validated 4 Specimen resource(s).	
	8.3.45 Location resources returned conform to the US Core Location Profile	
	Successfully validated 3 Location resource(s).	
	8.4 Group Compartment Export Cancel Tests	
	8.4.01 Bulk Data Server returns "202 Accepted" for delete request	
	8.4.02 Bulk Data Server returns a 404 and OperationOutcome for polling requests to cancelled exports	
	8.5 Group Compartment Export Parameters Tests	
	8.5.01 Bulk Data Server supports "_outputFormat" query parameter	
	8.5.02 Bulk Data Server supports "_since" query parameter	
	9 Additional Authorization Tests	
	9.16 Public Client Standalone Launch with OpenID Connect	
INPUT	VALUE	
url	https://care-commons.app/baseR4	
public_smart_auth_info	{ "auth_type": "public", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authorize", patient/AllergyIntolerance.rs patient/CarePlan.rs patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/Location.rs patient/MedicationDispense.rs patient/MedicationRequest.rs patient/Observation.rs patient/Organization.rs patient/Patient.rs patient/ patient/RelatedPerson.rs patient/ServiceRequest.rs patient/Specimen.rs patient/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "pkce_support": "enabled", "pkce_code_challenge_method": "S256", "auth_request_method": "GET", "07-21T18:25:50+00:00", "expires_in": 86400, "name": "public_smart_auth_info" }	
	9.16.10 FHIR server makes SMART configuration available from well-known endpoint	
	9.16.01 OAuth 2.0 authorize endpoint secured by transport layer security	
	9.16.02 OAuth server redirects client browser to app redirect URI	
	9.16.03 OAuth server sends code parameter	
	9.16.04 OAuth 2.0 token endpoint secured by transport layer security	
	9.16.05 OAuth token exchange request succeeds when supplied correct information	
	9.16.06 Token exchange response body contains required information encoded in JSON	
	9.16.07 Response includes correct HTTP Cache-Control and Pragma headers	
	9.16.08 Patient from launch context can be retrieved	
	9.16.09 OAuth token exchange response contains OpenID Connect id_token	
	9.3 Token Revocation	
INPUT	VALUE	
token_revocation_attestation	true	
token_revocation_notes		
standalone_patient_id	958c63b0-4a7f-2ee7-ef6a-e04df5931b4c	
url	https://care-commons.app/baseR4	
smart_auth_info	{ "auth_type": "symmetric", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authorize", user/Condition.rs user/Coverage.rs user/Device.rs user/DiagnosticReport.rs user/DocumentReference.rs user/Encounter.rs user/Goal.rs user/Immunization.rs user/Procedure.rs patient/Provenance.rs patient/Patient.rs patient/PractitionerRole.rs patient/RelatedPerson.rs patient/ServiceRequest.rs patient/Specimen.rs user/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTP83pEYwvNdFpJorFAJMWXLNR", "pkce_support": "enabled", "pkce_code_challenge_method": "S256", "auth_request_method": "GET", "07-21T18:22:24+00:00", "expires_in": 86400, "name": "ehr_smart_auth_info" }	
	9.3.01 Health IT developer demonstrated the ability of the Health IT Module to revoke tokens within one hour of a patient's request.	
	9.3.02 Access to Patient resource returns unauthorized after token revocation.	
	9.3.03 Token refresh fails after token revocation.	
	9.4 Invalid AUD Parameter	
INPUT	VALUE	
url	https://care-commons.app/baseR4	
standalone_smart_auth_info	{ "auth_type": "symmetric", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authorize", patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/ patient/Organization.rs patient/Patient.rs patient/Practitioner.rs patient/Procedure.rs patient/Provenance.rs patient/PractitionerRole.rs patient/RelatedPerson.rs patient/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTP83pEYwvNdFpJorFAJMWXLNR", "pkce_support": "enabled", "pkce_code_challenge_method": "S256", "auth_request_method": "GET", "07-21T18:29:46+00:00", "expires_in": 86400, "name": "standalone_smart_auth_info" }	
	9.4.03 OAuth server redirects client browser to app redirect URI	
	9.4.04 Inferno client app does not receive code parameter redirect URI	
	Server redirected the user back to the app with an error.	
	9.17 Invalid Access Token Request	
INPUT	VALUE	
url	https://care-commons.app/baseR4	
standalone_smart_auth_info	{ "auth_type": "symmetric", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authorize", patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/ patient/Organization.rs patient/Patient.rs patient/Practitioner.rs patient/Procedure.rs patient/Provenance.rs patient/PractitionerRole.rs patient/RelatedPerson.rs patient/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTP83pEYwvNdFpJorFAJMWXLNR", "pkce_support": "enabled", "pkce_code_challenge_method": "S256", "auth_request_method": "GET", "07-21T18:29:46+00:00", "expires_in": 86400, "name": "standalone_smart_auth_info" }	
	9.17.06 FHIR server makes SMART configuration available from well-known endpoint	

✓ 9.17.01 OAuth server redirects client browser to app redirect URI	
✓ 9.17.02 OAuth server sends code parameter	 1
✓ 9.17.03 OAuth token exchange fails when supplied invalid code	 2
✓ 9.17.04 OAuth token exchange fails when supplied invalid client ID	 2
✓ 9.18 Invalid PKCE Code Verifier	
INPUT	VALUE
url	https://care-commons.app/baseR4
standalone_smart_auth_info	{ "auth_type": "symmetric", "use_discovery": true, "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authenticate", "patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/Encounter.rs patient/Immunization.rs patient/Location.rs patient/MedicationRequest.rs patient/MedicationStatement.rs patient/MessageHeader.rs patient/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTpP83pEYwvNdFpJorFAJMWXLNR", "pkce_support": "enabled", "pkce_challenge": "07-21T18:29:46+00:00", "expires_in": 86400, "name": "standalone_smart_auth_info" }
✓ 9.18.13 FHIR server makes SMART configuration available from well-known endpoint	 1
✓ 9.18.01 OAuth server redirects client browser to app redirect URI	
✓ 9.18.02 OAuth server sends code parameter	 1
✓ 9.18.03 OAuth token exchange fails when no code_verifier is given	 2
✓ 9.18.04 OAuth server redirects client browser to app redirect URI	
✓ 9.18.05 OAuth server sends code parameter	 1
✓ 9.18.06 OAuth token exchange fails when code_verifier is blank	 2
✓ 9.18.07 OAuth server redirects client browser to app redirect URI	
✓ 9.18.08 OAuth server sends code parameter	 1
✓ 9.18.09 OAuth token exchange fails when code_verifier is incorrect	 2
✓ 9.18.10 OAuth server redirects client browser to app redirect URI	
✓ 9.18.11 OAuth server sends code parameter	 1
✓ 9.18.12 OAuth token exchange fails when code_verifier matches code_challenge	 2
✓ 9.19 EHR Launch with Patient Scopes	
INPUT	VALUE
url	https://care-commons.app/baseR4
ehr_patient_smart_auth_info	{ "auth_type": "symmetric", "use_discovery": true, "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authenticate", "patient/Patient.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTpP83pEYwvNdFpJorFAJMWXLNR", "pkce_support": "enabled", "pkce_challenge": "07-21T18:29:18+00:00", "expires_in": 86400, "name": "ehr_patient_smart_auth_info" }
✓ 9.19.13 FHIR server makes SMART configuration available from well-known endpoint	 1
✓ 9.19.01 EHR server redirects client browser to Inferno app launch URI	
✓ 9.19.02 EHR server sends launch parameter	 1
✓ 9.19.03 OAuth 2.0 authorize endpoint secured by transport layer security	
✓ 9.19.04 OAuth server redirects client browser to app redirect URI	
✓ 9.19.05 OAuth server sends code parameter	 1
✓ 9.19.06 OAuth 2.0 token endpoint secured by transport layer security	
✓ 9.19.07 OAuth token exchange request succeeds when supplied correct information	 2
✓ 9.19.08 Token exchange response body contains required information encoded in JSON	 1
✓ 9.19.09 Response includes correct HTTP Cache-Control and Pragma headers	 1
✓ 9.19.10 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS) Client type is not public, Cross-Origin Resource Sharing (CORS) is not required to be supported for non-public client types	 1
✓ 9.19.11 Patient from launch context can be retrieved	 1
✓ 9.19.12 Patient-level scopes were granted	
✓ 9.20 Token Introspection	 1
INPUT	VALUE
url	https://care-commons.app/baseR4
well_known_introspection_url	https://care-commons.app/authorizations/introspect
custom_authorization_header	
optional_introspection_request_params	
standalone_smart_auth_info	{ "auth_type": "symmetric", "use_discovery": true, "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/authenticate", "patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/Encounter.rs patient/Immunization.rs patient/Location.rs patient/MedicationRequest.rs patient/MedicationStatement.rs patient/MessageHeader.rs patient/Media.rs", "client_id": "kMisGS9dKCH2d5cCp", "client_secret": "DfwjJoWBTpP83pEYwvNdFpJorFAJMWXLNR", "pkce_support": "enabled", "pkce_challenge": "07-21T18:29:46+00:00", "expires_in": 86400, "name": "standalone_smart_auth_info" }
✓ 9.20.1 Request New Access Token to Introspect	 1
✓ 9.20.1.1 SMART on FHIR Discovery	
✓ 9.20.1.1.01 FHIR server makes SMART configuration available from well-known endpoint	 1
✓ 9.20.1.1.02 Well-known configuration contains required fields	
✓ 9.20.1.1.03 Optional SMART .well-known/smart-configuration Endpoint Enables Cross-Origin Resource Sharing (CORS)	 1

9.20.1.1.04 <i>Optional</i> SMART metadata Endpoint Enables Cross-Origin Resource Sharing (CORS)	1						
9.20.1.2 SMART Standalone Launch	1						
9.20.1.2.01 OAuth 2.0 authorize endpoint secured by transport layer security							
9.20.1.2.02 OAuth server redirects client browser to app redirect URI							
9.20.1.2.03 OAuth server sends code parameter	1						
9.20.1.2.04 OAuth 2.0 token endpoint secured by transport layer security							
9.20.1.2.05 OAuth token exchange request succeeds when supplied correct information	2						
9.20.1.2.06 Token exchange response body contains required information encoded in JSON	1						
9.20.1.2.07 Response includes correct HTTP Cache-Control and Pragma headers	1						
9.20.1.2.08 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS) Client type is not public, Cross-Origin Resource Sharing (CORS) is not required to be supported for non-public client types	1						
9.20.2 Issue Token Introspection Request							
9.20.2.01 Token introspection endpoint returns a response when provided an active token	1						
9.20.2.02 Token introspection endpoint returns a response when provided an invalid token	1						
9.20.3 Validate Token Introspection Response							
9.20.3.01 Token introspection response for an active token contains required fields							
9.20.3.02 Token introspection response for an invalid token contains required fields							
9.21 Asymmetric Client Standalone Launch	1						
<table> <tr> <th>INPUT</th><th>VALUE</th></tr> <tr> <td>url</td><td>https://care-commons.app/baseR4</td></tr> <tr> <td>asymmetric_smart_auth_info</td><td>{ "auth_type":"asymmetric","use_discovery":"true","token_url":"https://care-commons.app/oauth/token","auth_url":"https://care-commons.app/oauth/patient/CarePlan.rs patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/MedicationRequest.rs patient/Observation.rs patient/Organization.rs patient/Patient.rs patient/Practitioner.rs patient/Procedure.rs patient/Provenance.rs patient/RelatedPerson.rs patient/Specimen.rs","client_id":"kMisGS9dKCH2d5cCp","pkce_support":"enabled","pkce_code_challenge_method":"S256","auth_request_method":"POST","expires_in":3600,"name":"asymmetric_smart_auth_info"} </td></tr> </table>	INPUT	VALUE	url	https://care-commons.app/baseR4	asymmetric_smart_auth_info	{ "auth_type":"asymmetric","use_discovery":"true","token_url":"https://care-commons.app/oauth/token","auth_url":"https://care-commons.app/oauth/patient/CarePlan.rs patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/MedicationRequest.rs patient/Observation.rs patient/Organization.rs patient/Patient.rs patient/Practitioner.rs patient/Procedure.rs patient/Provenance.rs patient/RelatedPerson.rs patient/Specimen.rs","client_id":"kMisGS9dKCH2d5cCp","pkce_support":"enabled","pkce_code_challenge_method":"S256","auth_request_method":"POST","expires_in":3600,"name":"asymmetric_smart_auth_info"}	
INPUT	VALUE						
url	https://care-commons.app/baseR4						
asymmetric_smart_auth_info	{ "auth_type":"asymmetric","use_discovery":"true","token_url":"https://care-commons.app/oauth/token","auth_url":"https://care-commons.app/oauth/patient/CarePlan.rs patient/CareTeam.rs patient/Condition.rs patient/Coverage.rs patient/Device.rs patient/DiagnosticReport.rs patient/DocumentReference.rs patient/MedicationRequest.rs patient/Observation.rs patient/Organization.rs patient/Patient.rs patient/Practitioner.rs patient/Procedure.rs patient/Provenance.rs patient/RelatedPerson.rs patient/Specimen.rs","client_id":"kMisGS9dKCH2d5cCp","pkce_support":"enabled","pkce_code_challenge_method":"S256","auth_request_method":"POST","expires_in":3600,"name":"asymmetric_smart_auth_info"}						
9.21.2 SMART on FHIR Discovery							
9.21.2.01 FHIR server makes SMART configuration available from well-known endpoint	1						
9.21.2.02 Well-known configuration contains required fields							
9.21.2.03 <i>Optional</i> SMART .well-known/smart-configuration Endpoint Enables Cross-Origin Resource Sharing (CORS)	1						
9.21.2.04 <i>Optional</i> SMART metadata Endpoint Enables Cross-Origin Resource Sharing (CORS)	1						
9.21.4 SMART Standalone Launch	1						
9.21.4.01 OAuth 2.0 authorize endpoint secured by transport layer security							
9.21.4.02 OAuth server redirects client browser to app redirect URI							
9.21.4.03 OAuth server sends code parameter	1						
9.21.4.04 OAuth 2.0 token endpoint secured by transport layer security							
9.21.4.05 OAuth token exchange request succeeds when supplied correct information	2						
9.21.4.06 Token exchange response body contains required information encoded in JSON	1						
9.21.4.07 Response includes correct HTTP Cache-Control and Pragma headers	1						
9.21.4.08 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS) Client type is not public, Cross-Origin Resource Sharing (CORS) is not required to be supported for non-public client types	1						
9.21.4.09 Patient from launch context can be retrieved	1						
9.21.4.10 OAuth token exchange response contains OpenID Connect id_token							
9.21.5 Token Refresh							
9.21.5.01 Server successfully refreshes the access token when optional scope parameter omitted	1						
9.21.5.02 Token refresh response contains all required fields	1						
9.21.5.03 Server successfully refreshes the access token when optional scope parameter provided	1						
9.21.5.04 Token refresh response contains all required fields	1						
9.21.5.05 Patient from launch context can be retrieved	2						
9.21.5.06 Refresh token exchange fails when supplied an invalid refresh token	1						
9.22 App Launch with SMART v1 scopes							
<table> <tr> <th>INPUT</th><th>VALUE</th></tr> <tr> <td>url</td><td>https://care-commons.app/baseR4</td></tr> <tr> <td>v1_smart_auth_info</td><td>{ "auth_type":"symmetric","use_discovery":"true","token_url":"https://care-commons.app/oauth/token","auth_url":"https://care-commons.app/oauth/authorize","patient/CareTeam.read patient/Condition.read patient/Device.read patient/DiagnosticReport.read patient/DocumentReference.read patient/Encounter.read patient/Patient.read patient/Practitioner.read patient/Procedure.read patient/Provenance.read patient/PractitionerRole.read patient/RelatedPerson.read patient/Specimen.read","client_id":"kMisGS9dKCH2d5cCp","client_secret":"DfwjJoWBTP83pEYwNdfJorAJMwXLNR","pkce_support":"enabled","pkce_code_challenge_method":"S256","auth_request_method":"POST","expires_in":3600,"name":"v1_smart_auth_info"} </td></tr> </table>	INPUT	VALUE	url	https://care-commons.app/baseR4	v1_smart_auth_info	{ "auth_type":"symmetric","use_discovery":"true","token_url":"https://care-commons.app/oauth/token","auth_url":"https://care-commons.app/oauth/authorize","patient/CareTeam.read patient/Condition.read patient/Device.read patient/DiagnosticReport.read patient/DocumentReference.read patient/Encounter.read patient/Patient.read patient/Practitioner.read patient/Procedure.read patient/Provenance.read patient/PractitionerRole.read patient/RelatedPerson.read patient/Specimen.read","client_id":"kMisGS9dKCH2d5cCp","client_secret":"DfwjJoWBTP83pEYwNdfJorAJMwXLNR","pkce_support":"enabled","pkce_code_challenge_method":"S256","auth_request_method":"POST","expires_in":3600,"name":"v1_smart_auth_info"}	
INPUT	VALUE						
url	https://care-commons.app/baseR4						
v1_smart_auth_info	{ "auth_type":"symmetric","use_discovery":"true","token_url":"https://care-commons.app/oauth/token","auth_url":"https://care-commons.app/oauth/authorize","patient/CareTeam.read patient/Condition.read patient/Device.read patient/DiagnosticReport.read patient/DocumentReference.read patient/Encounter.read patient/Patient.read patient/Practitioner.read patient/Procedure.read patient/Provenance.read patient/PractitionerRole.read patient/RelatedPerson.read patient/Specimen.read","client_id":"kMisGS9dKCH2d5cCp","client_secret":"DfwjJoWBTP83pEYwNdfJorAJMwXLNR","pkce_support":"enabled","pkce_code_challenge_method":"S256","auth_request_method":"POST","expires_in":3600,"name":"v1_smart_auth_info"}						

✓ 9.22.2 SMART on FHIR Discovery	
✓ 9.22.2.01 FHIR server makes SMART configuration available from well-known endpoint	1
✓ 9.22.2.02 Well-known configuration contains required fields	
✓ 9.22.2.03 <i>Optional</i> SMART .well-known/smart-configuration Endpoint Enables Cross-Origin Resource Sharing (CORS)	1
✓ 9.22.2.04 <i>Optional</i> SMART metadata Endpoint Enables Cross-Origin Resource Sharing (CORS)	1
✓ 9.22.2.05 Well-known configuration declares support for required capabilities	
✓ 9.22.4 Standalone Launch With Patient Scope	
✓ 9.22.4.01 OAuth 2.0 authorize endpoint secured by transport layer security	
✓ 9.22.4.02 OAuth server redirects client browser to app redirect URI	
✓ 9.22.4.03 OAuth server sends code parameter	1
✓ 9.22.4.04 OAuth 2.0 token endpoint secured by transport layer security	
✓ 9.22.4.05 OAuth token exchange request succeeds when supplied correct information	2
✓ 9.22.4.06 Token exchange response body contains required information encoded in JSON	1
✓ 9.22.4.07 Response includes correct HTTP Cache-Control and Pragma headers	1
9.22.4.08 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS) Client type is not public, Cross-Origin Resource Sharing (CORS) is not required to be supported for non-public client types	1
✓ 9.22.4.09 Patient-level access with OpenID Connect and Refresh Token scopes used.	1
✓ 9.22.4.10 Server rejects unauthorized access	2
✓ 9.22.4.11 Patient from launch context can be retrieved	1
✓ 9.22.5 Unrestricted Resource Type Access	
✓ 9.22.5.01 Scope granted enables access to all US Core resource types. Scopes received indicate access to all necessary resources.	
✓ 9.22.5.02 Access to Patient resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.03 Access to AllergyIntolerance resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.04 Access to CarePlan resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.05 Access to CareTeam resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.06 Access to Condition resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.07 Access to Device resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.08 Access to DiagnosticReport resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.09 Access to DocumentReference resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.10 Access to Goal resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.11 Access to Immunization resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.12 Access to MedicationRequest resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.13 Access to Observation resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.5.14 Access to Procedure resources granted Access expected to be granted and request properly returned 200	1
✓ 1.7.21 Access to Encounter resources granted Access expected to be granted and request properly returned 200	1
✓ 1.7.22 Access to ServiceRequest resources granted Access expected to be granted and request properly returned 200	1
✓ 1.7.23 Access to Coverage resources granted Access expected to be granted and request properly returned 200	1
✓ 1.7.24 Access to MedicationDispense resources granted Access expected to be granted and request properly returned 200	1
✓ 9.22.01 Handle TLS Warning Messages	
✓ 9.22.02 Handle TLS Warning Messages	
✓ 9.25 SMART App Launch with fine-grained scopes	
✓ 9.25.1 Granular Scopes 1	

INPUT	VALUE
url	https://care-commons.app/baseR4
granular_scopes_1_auth_info	{ "auth_type": "public", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/auth", "category": "http://terminology.hl7.org/CodeSystem/condition-category encounter-diagnosis patient/Condition.rs?category=http://hl7.org/fhir/us/core/CodeSystem/condition-category survey patient/Condition.rs?category=http://terminology.hl7.org/CodeSystem/observation-category laboratory patient/Observation.rs?category=http://terminology.hl7.org/CodeSystem/observation-category functional-status patient/Observation.rs?category=http://hl7.org/fhir/us/core/CodeSystem/us-core-category disability-status patient/Observation.rs?category=http://terminology.hl7.org/CodeSystem/observation-category activity", "client_id": "kMisGS9dKCH2d5cCp", "pkce_support": "enabled", "pkce_code_challenge_method": "S256", "auth_request_method": "GET", "expires_in": "86400", "name": "granular_scopes_1_auth_info" }
patient_ids	958c63b0-4a71-2ee7-ef6a-e04df5931b4c
✓ 9.25.1.1 Standalone Launch ✓ 9.25.1.1.1 SMART on FHIR Discovery ✓ 9.25.1.1.1.01 FHIR server makes SMART configuration available from well-known endpoint ✓ 9.25.1.1.1.02 Well-known configuration contains required fields ✓ 9.25.1.1.1.03 <i>Optional</i> SMART .well-known/smart-configuration Endpoint Enables Cross-Origin Resource Sharing (CORS) ✓ 9.25.1.1.1.04 <i>Optional</i> SMART metadata Endpoint Enables Cross-Origin Resource Sharing (CORS) ✓ 9.25.1.1.2 SMART Standalone Launch ✓ 9.25.1.1.2.01 OAuth 2.0 authorize endpoint secured by transport layer security ✓ 9.25.1.1.2.02 OAuth server redirects client browser to app redirect URI ✓ 9.25.1.1.2.03 OAuth server sends code parameter ✓ 9.25.1.1.2.04 OAuth 2.0 token endpoint secured by transport layer security ✓ 9.25.1.1.2.05 OAuth token exchange request succeeds when supplied correct information ✓ 9.25.1.1.2.06 Token exchange response body contains required information encoded in JSON ✓ 9.25.1.1.2.07 Response includes correct HTTP Cache-Control and Pragma headers ✓ 9.25.1.1.2.08 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS) ✓ 9.25.1.1.2.09 Required granular scopes were granted	
✓ 9.25.1.2 Condition Granular Scope Tests ✓ 9.25.1.2.01 Server filters results for Condition search by patient + category based on granular scopes ✓ 9.25.1.2.02 Server filters results for Condition search by patient based on granular scopes ✓ 9.25.1.2.03 Server filters results for Condition reads based on granular scopes	
✓ 9.25.1.3 Observation Granular Scope Tests ✓ 9.25.1.3.01 Server filters results for Observation search by patient + category based on granular scopes ✓ 9.25.1.3.02 Server filters results for Observation search by patient + code based on granular scopes ✓ 9.25.1.3.03 Server filters results for Observation search by patient + category + date based on granular scopes ✓ 9.25.1.3.04 Server filters results for Observation reads based on granular scopes	
✓ 9.25.2 Granular Scopes 2	
INPUT	VALUE
url	https://care-commons.app/baseR4
granular_scopes_2_auth_info	{ "auth_type": "public", "use_discovery": "true", "token_url": "https://care-commons.app/oauth/token", "auth_url": "https://care-commons.app/oauth/auth", "category": "http://terminology.hl7.org/CodeSystem/condition-category problem-list-item patient/Observation.rs?category=http://terminology.hl7.org/CodeSystem/condition-category survey patient/Observation.rs?category=http://hl7.org/fhir/us/core/CodeSystem/condition-category functional-status patient/Observation.rs?category=http://hl7.org/fhir/us/core/CodeSystem/us-core-category disability-status patient/Observation.rs?category=http://terminology.hl7.org/CodeSystem/observation-category activity", "client_id": "kMisGS9dKCH2d5cCp", "pkce_support": "enabled", "pkce_code_challenge_method": "S256", "auth_request_method": "GET", "expires_in": "86400", "name": "granular_scopes_2_auth_info" }
patient_ids	958c63b0-4a71-2ee7-ef6a-e04df5931b4c
✓ 9.25.2.1 Standalone Launch ✓ 9.25.2.1.1 SMART on FHIR Discovery ✓ 9.25.2.1.1.01 FHIR server makes SMART configuration available from well-known endpoint ✓ 9.25.2.1.1.02 Well-known configuration contains required fields ✓ 9.25.2.1.1.03 <i>Optional</i> SMART .well-known/smart-configuration Endpoint Enables Cross-Origin Resource Sharing (CORS) ✓ 9.25.2.1.1.04 <i>Optional</i> SMART metadata Endpoint Enables Cross-Origin Resource Sharing (CORS) ✓ 9.25.2.1.2 SMART Standalone Launch ✓ 9.25.2.1.2.01 OAuth 2.0 authorize endpoint secured by transport layer security ✓ 9.25.2.1.2.02 OAuth server redirects client browser to app redirect URI ✓ 9.25.2.1.2.03 OAuth server sends code parameter ✓ 9.25.2.1.2.04 OAuth 2.0 token endpoint secured by transport layer security ✓ 9.25.2.1.2.05 OAuth token exchange request succeeds when supplied correct information ✓ 9.25.2.1.2.06 Token exchange response body contains required information encoded in JSON	

✓ 9.25.2.1.2.07 Response includes correct HTTP Cache-Control and Pragma headers	1
✓ 9.25.2.1.2.08 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS)	1
✓ 9.25.2.1.2.09 Required granular scopes were granted	
✓ 9.25.2.2 Condition Granular Scope Tests	
✓ 9.25.2.2.01 Server filters results for Condition search by patient + category based on granular scopes	9+
✓ 9.25.2.2.02 Server filters results for Condition search by patient based on granular scopes	4
✓ 9.25.2.2.03 Server filters results for Condition reads based on granular scopes	9
✓ 9.25.2.3 Observation Granular Scope Tests	
✓ 9.25.2.3.01 Server filters results for Observation search by patient + category based on granular scopes	9+
✓ 9.25.2.3.02 Server filters results for Observation search by patient + code based on granular scopes	9+
✓ 9.25.2.3.03 Server filters results for Observation search by patient + category + date based on granular scopes	9+
✓ 9.25.2.3.04 Server filters results for Observation reads based on granular scopes	9+
✓ 9.28 SMART Granular Scope Selection	
INPUT	VALUE
url	https://care-commons.app/baseR4
granular_scopes_selection_smart_auth_info	{ "auth_type":"public", "use_discovery":true, "token_url":"https://care-commons.app/oauth/token", "auth_url":"https://care-commons.app/oauth/token", "offline_access":true, "patient/Condition.rs":true, "patient/Observation.rs":true, "patient/Patient.rs":true, "client_id":"kMisGS9dKCH2d5cCp", "pkce_support":"enabled", "pkce_code_challenge_method":"S256", "auth_re "
✓ 9.28.2 SMART on FHIR Discovery	
✓ 9.28.2.01 FHIR server makes SMART configuration available from well-known endpoint	1
✓ 9.28.2.02 Well-known configuration contains required fields	
✓ 9.28.2.03 Optional SMART .well-known/smart-configuration Endpoint Enables Cross-Origin Resource Sharing (CORS)	1
✓ 9.28.2.04 Optional SMART metadata Endpoint Enables Cross-Origin Resource Sharing (CORS)	1
✓ 9.28.4 Granular Scope Selection with v2 Scopes	
✓ 9.28.4.01 OAuth 2.0 authorize endpoint secured by transport layer security	
✓ 9.28.4.02 OAuth server redirects client browser to app redirect URI	
✓ 9.28.4.03 OAuth server sends code parameter	1
✓ 9.28.4.04 OAuth 2.0 token endpoint secured by transport layer security	
✓ 9.28.4.05 OAuth token exchange request succeeds when supplied correct information	2
✓ 9.28.4.06 Token exchange response body contains required information encoded in JSON	1
✓ 9.28.4.07 Response includes correct HTTP Cache-Control and Pragma headers	1
✓ 9.28.4.08 SMART Token Endpoint Enables Cross-Origin Resource Sharing (CORS)	1
✓ 9.28.4.09 Patient-level access with OpenID Connect and Refresh Token scopes used.	1
✓ 9.28.4.10 Granular Scope Selection	
✓ 11 Visual Inspection and Attestation	
INPUT	VALUE
single_patient_registration_supported	true
single_patient_registration_notes	
multiple_patient_registration_supported	true
multiple_patient_registration_notes	
resource_authorization_gui_supported	true
resource_authorization_gui_notes	
offline_access_notification_supported	true
offline_access_notification_notes	
refresh_token_period_attestation	true
refresh_token_period_notes	
token_validation_support	
token_validation_notes	
information_accuracy_attestation	true
information_accuracy_notes	
multi_patient_scopes_attestation	true
multi_patient_scopes_notes	
developer_documentation_attestation	true
developer_documentation_notes	
jwt_cache_attestation	true
jwt_cache_notes	
patient_suffix_attestation	
patient_suffix_notes	
native_refresh_attestation	true
native_refresh_notes	
public_url_attestation	true
public_url_attestation_notes	
unique_incorrectly_permitted_tls_versions_messages	
tls_documentation_required	

INPUT	VALUE
tls_version_attestation_notes	
refresh_token_refresh_attestation	true
refresh_token_refresh_notes	
bulk_v2_since_attestation	true
bulk_v2_since_attestation_notes	
clinical_test_scope_attestation	true
clinical_test_scope_attestation_notes	
✔ 11.01 Health IT Module demonstrated support for application registration for single patients. ✔ 11.02 Health IT Module demonstrated support for application registration for multiple patients. ✔ 11.03 Health IT Module demonstrated a graphical user interface for user to authorize FHIR resources. ✔ 11.04 Health IT Module informed patient when "offline_access" scope is being granted during authorization. ✔ 11.05 Health IT Module attested that it is capable of issuing refresh tokens that are valid for a period of no shorter than three months. ✔ 11.07 Tester verifies that all information is accurate and without omission. ✔ 11.08 Information returned no greater than scopes pre-authorized for multi-patient queries. ✔ 11.09 Health IT developer demonstrated the documentation is available at a publicly accessible URL. ✔ 11.10 Health IT developer confirms the Health IT Module does not cache the JWK Set received via a TLS-protected URL for longer than the cache-control header received by an application indicates. ✔ 11.13 Health IT developer demonstrates support for issuing refresh tokens to native applications. ✔ 11.14 Health IT developer demonstrates the public location of its base URLs. ✔ 11.15 TLS version 1.2 or above must be enforced ✔ 11.16 Health IT developer attested that the Health IT Module is capable of issuing refresh tokens valid for a new period of no shorter than three months without requiring re-authentication and re-authorization when a valid refresh token is supplied by the application. ✔ 11.17 Health IT developer attested that the Health IT Module meets the requirements for supporting the `_since` parameter for bulk data exports. ✔ 11.21 Health IT developer attested that the Health IT Module supports granting a sub resource scope for Clinical Test Observations.	