



# Message Handling Specification

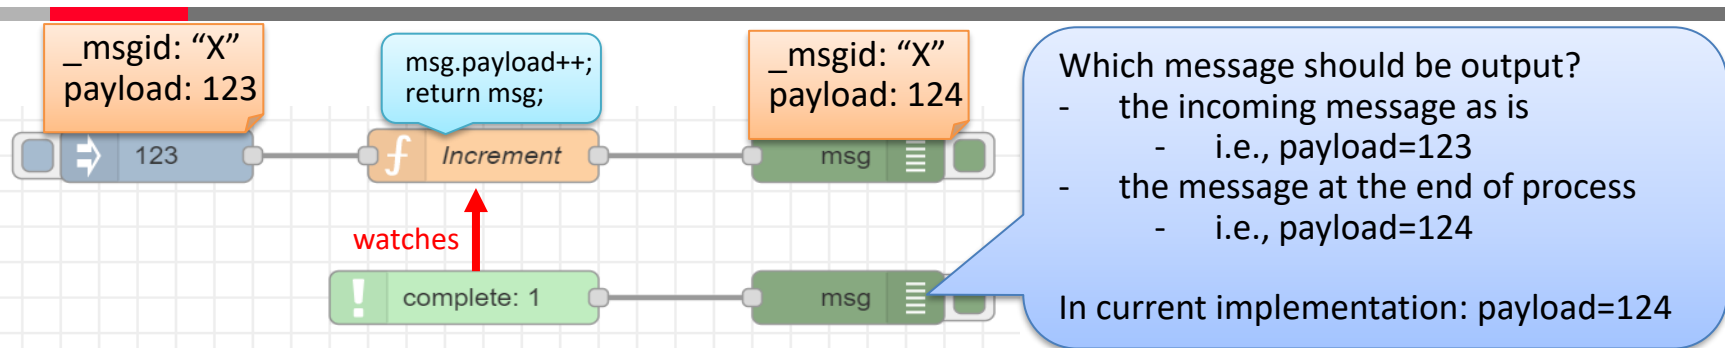

- Since Complete node detects that “processing of incoming message has finished”, I think it would be better if the incoming message comes out as it is.
- Moreover, Complete node behave weird when combine with Split node, which deletes `_msgid` of msg in message handler.

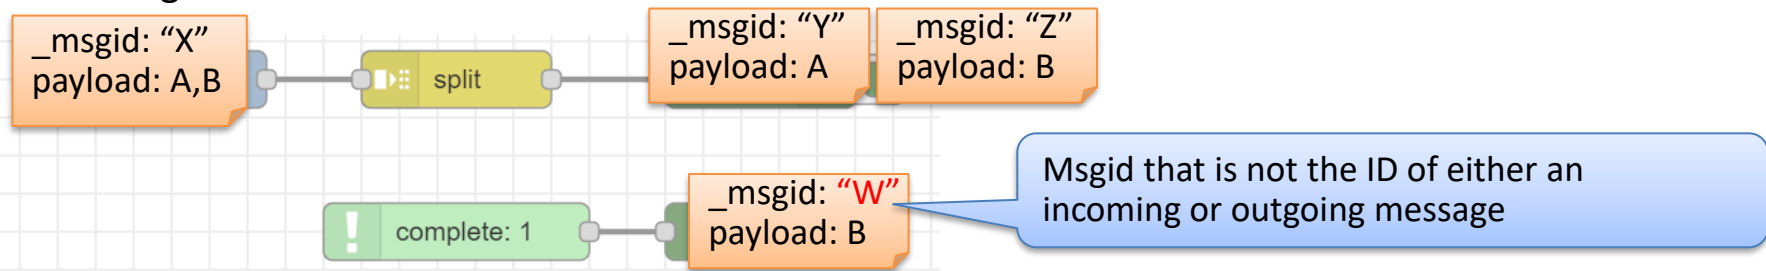

Should we make a copy of the incoming message before passing it to the message handler (`Node.prototype._emitInput()` in `runtime/lib/nodes/Node.js`) ?

But the cost of the copy might be an issue..