






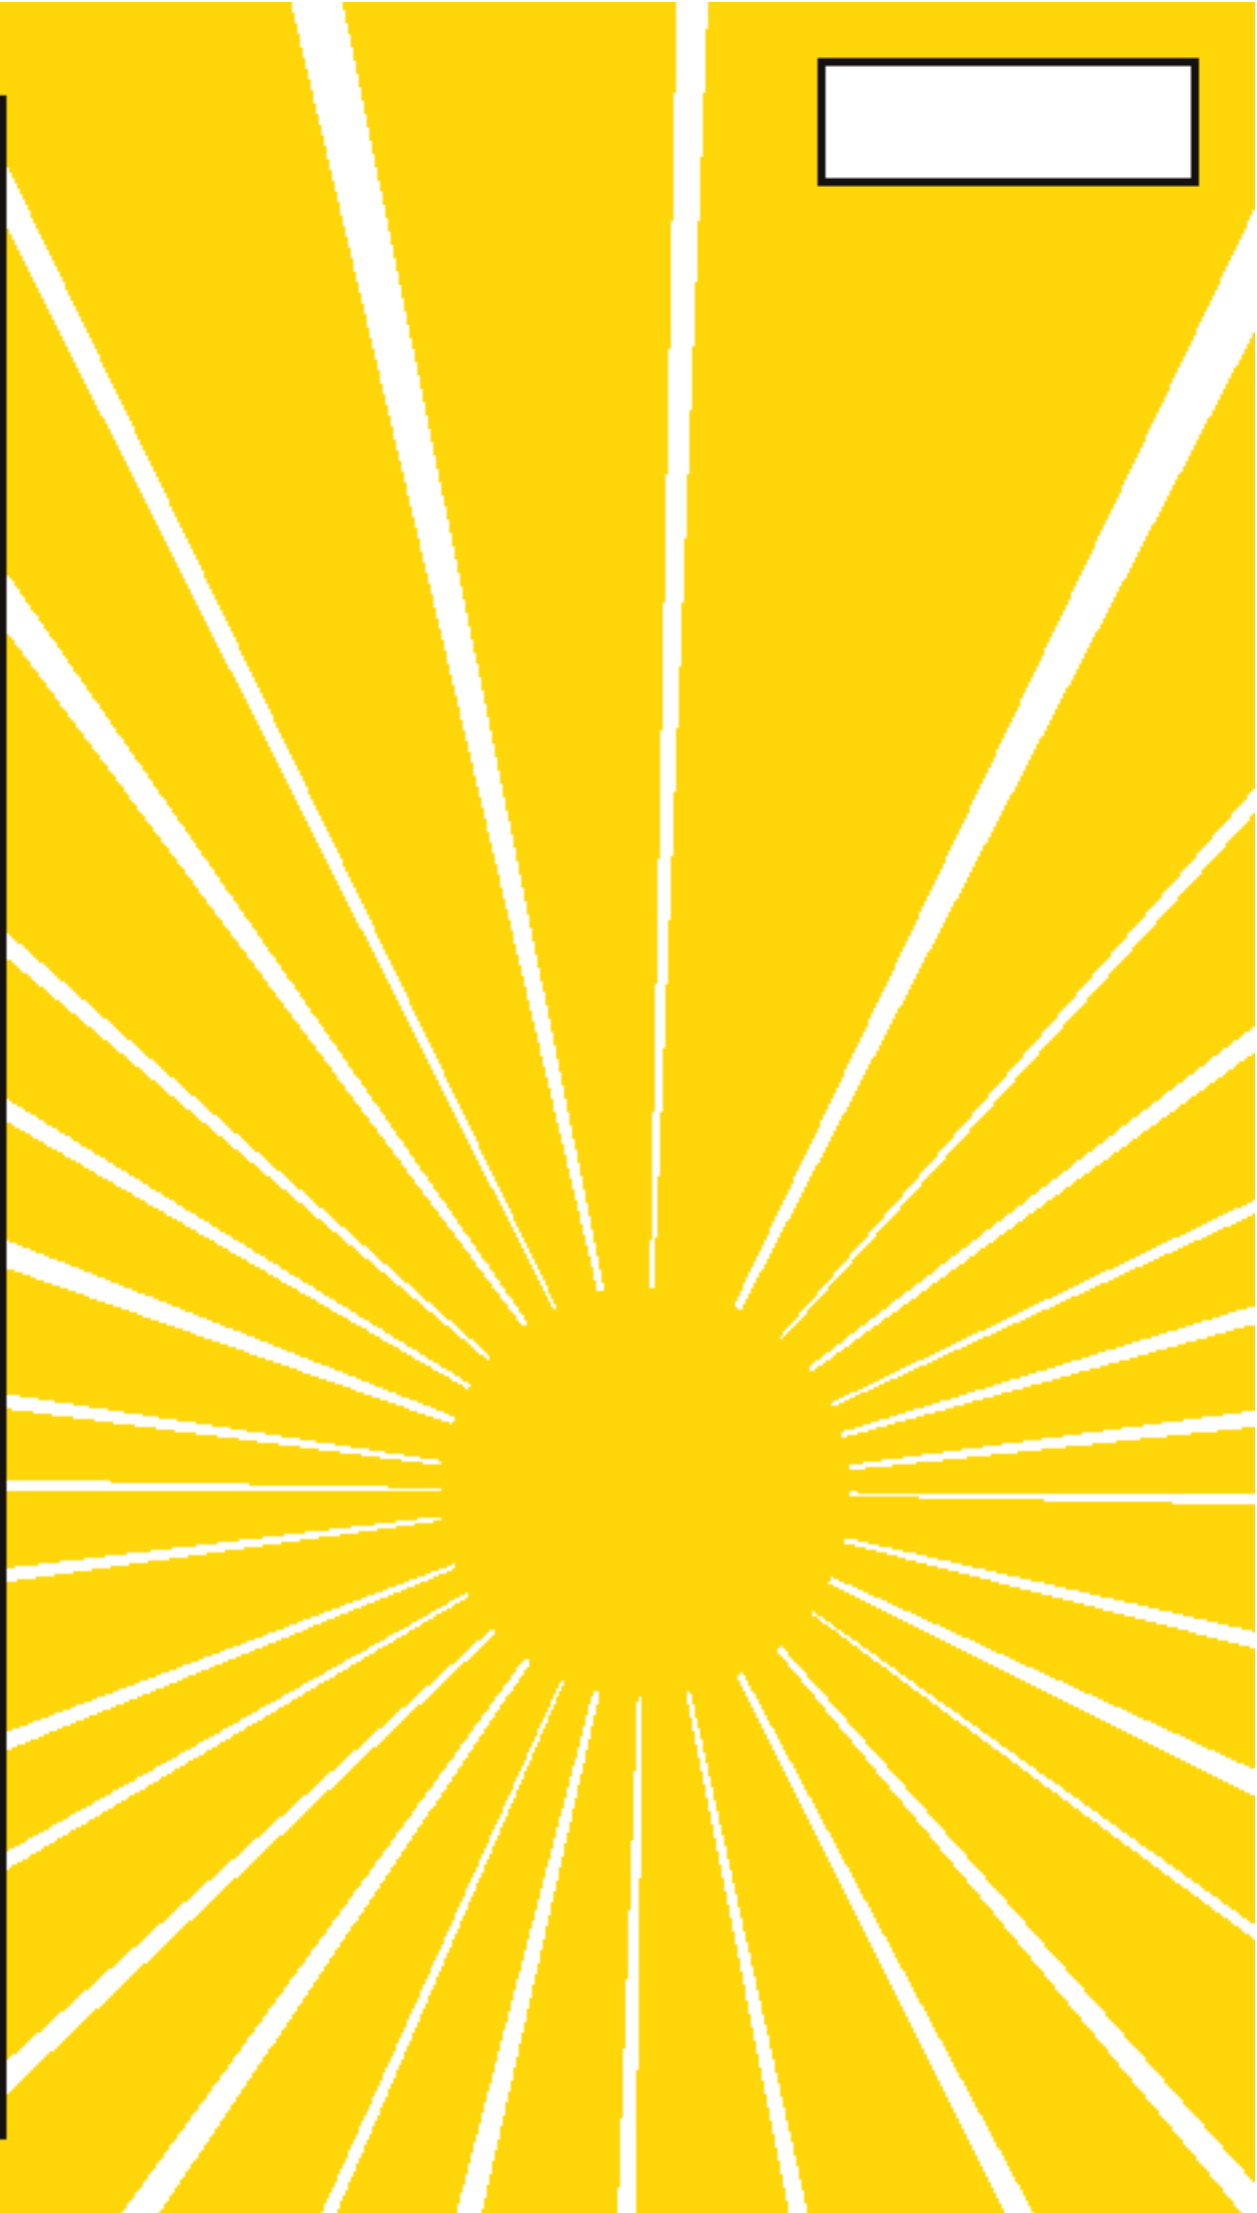

12/love.py

```
src = '''
@evolve
def attack():
    ...
'''

fn = ast.parse(src).body[0]
decorators = [ast.unparse(d) for d in fn.decorator_list]
print(type(fn).__name__, fn.name, decorators)
```

FunctionDefattac[k ['ev'ol've']

ВСПЕДНО СЕРИИ


SEES







17_evolve.py
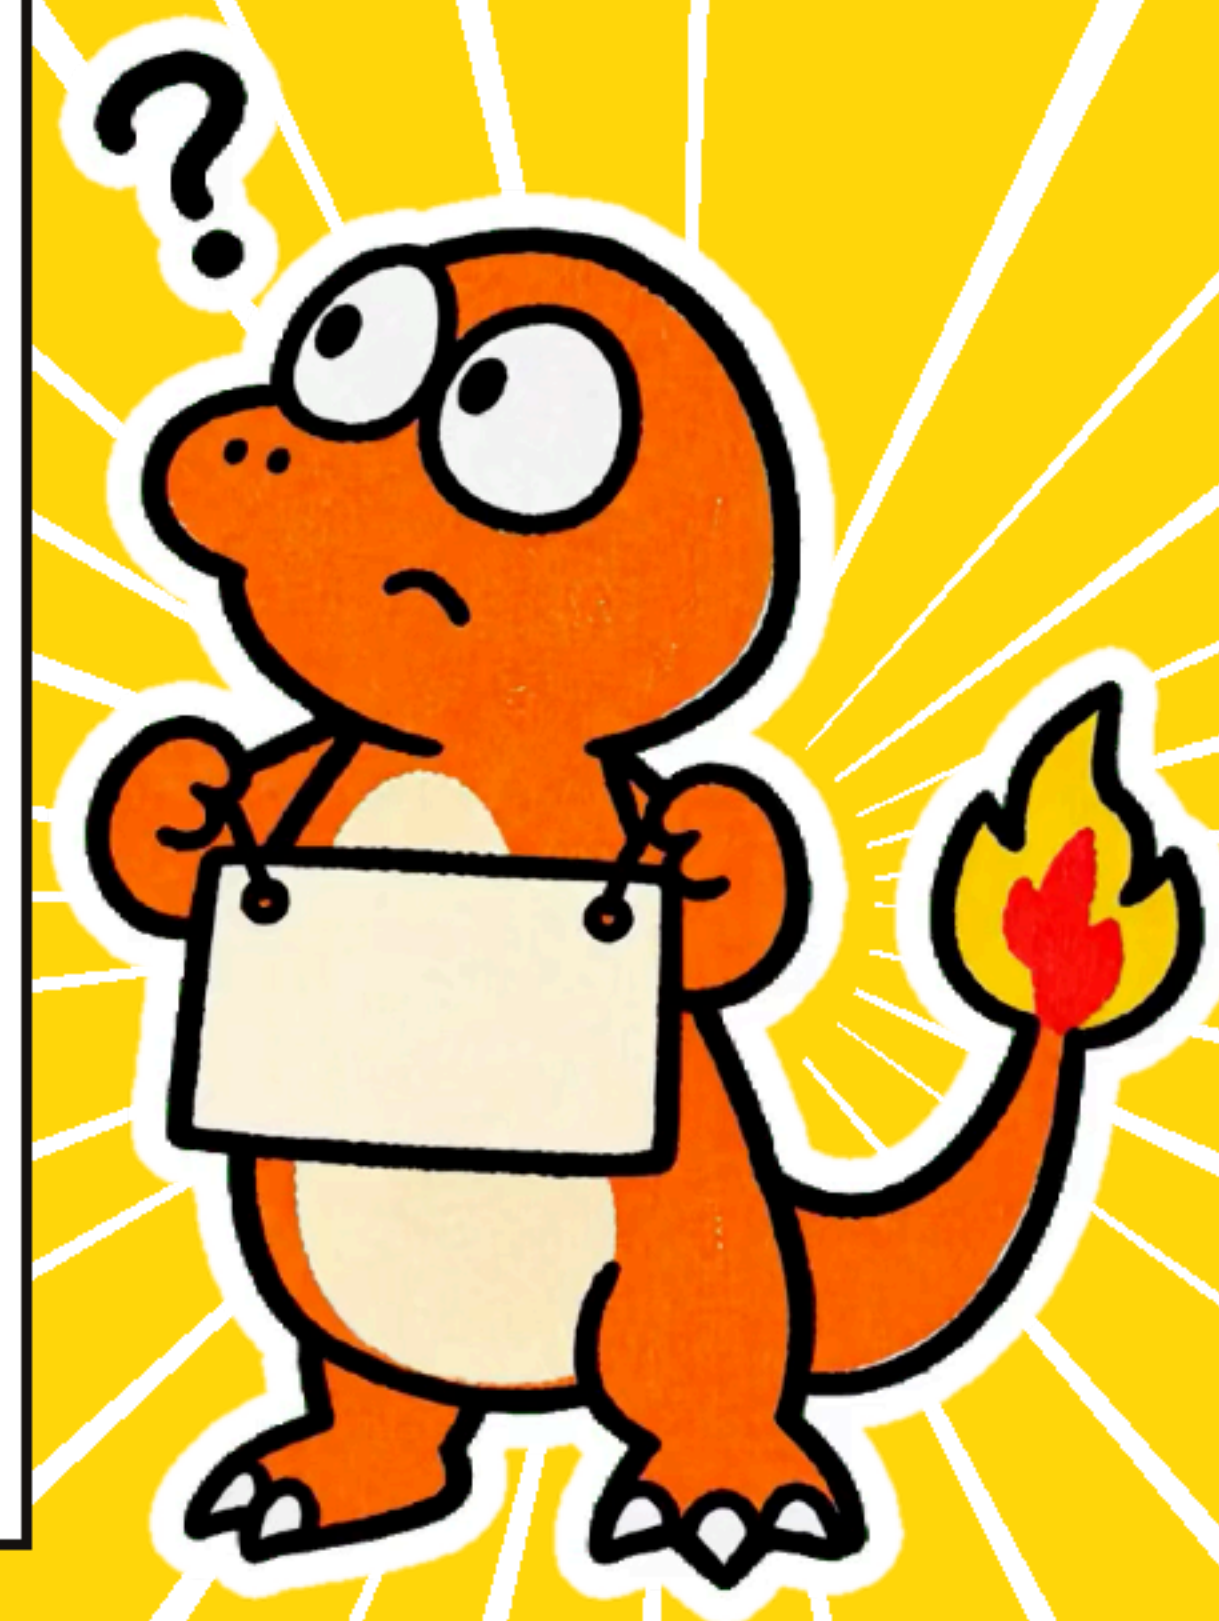
`src = '''``@evolve``def attack():` `...``'''``fn = ast.parse(src).body[0]``decorators = [ast.unparse(d) for d in fn.decorator_list]``print(type(fn).__name__, fn.name, decorators)``FunctionDef attack ['evolve']`

To be continued: карточка эволюционирует

Три вопроса на выход

- 1** Где лежит значение свободной переменной?
- 2** Когда вычисляется значение по умолчанию?
- 3** Что ловит `*targets`, а что — `**effects`?



Ответы — письменно, одной строкой