

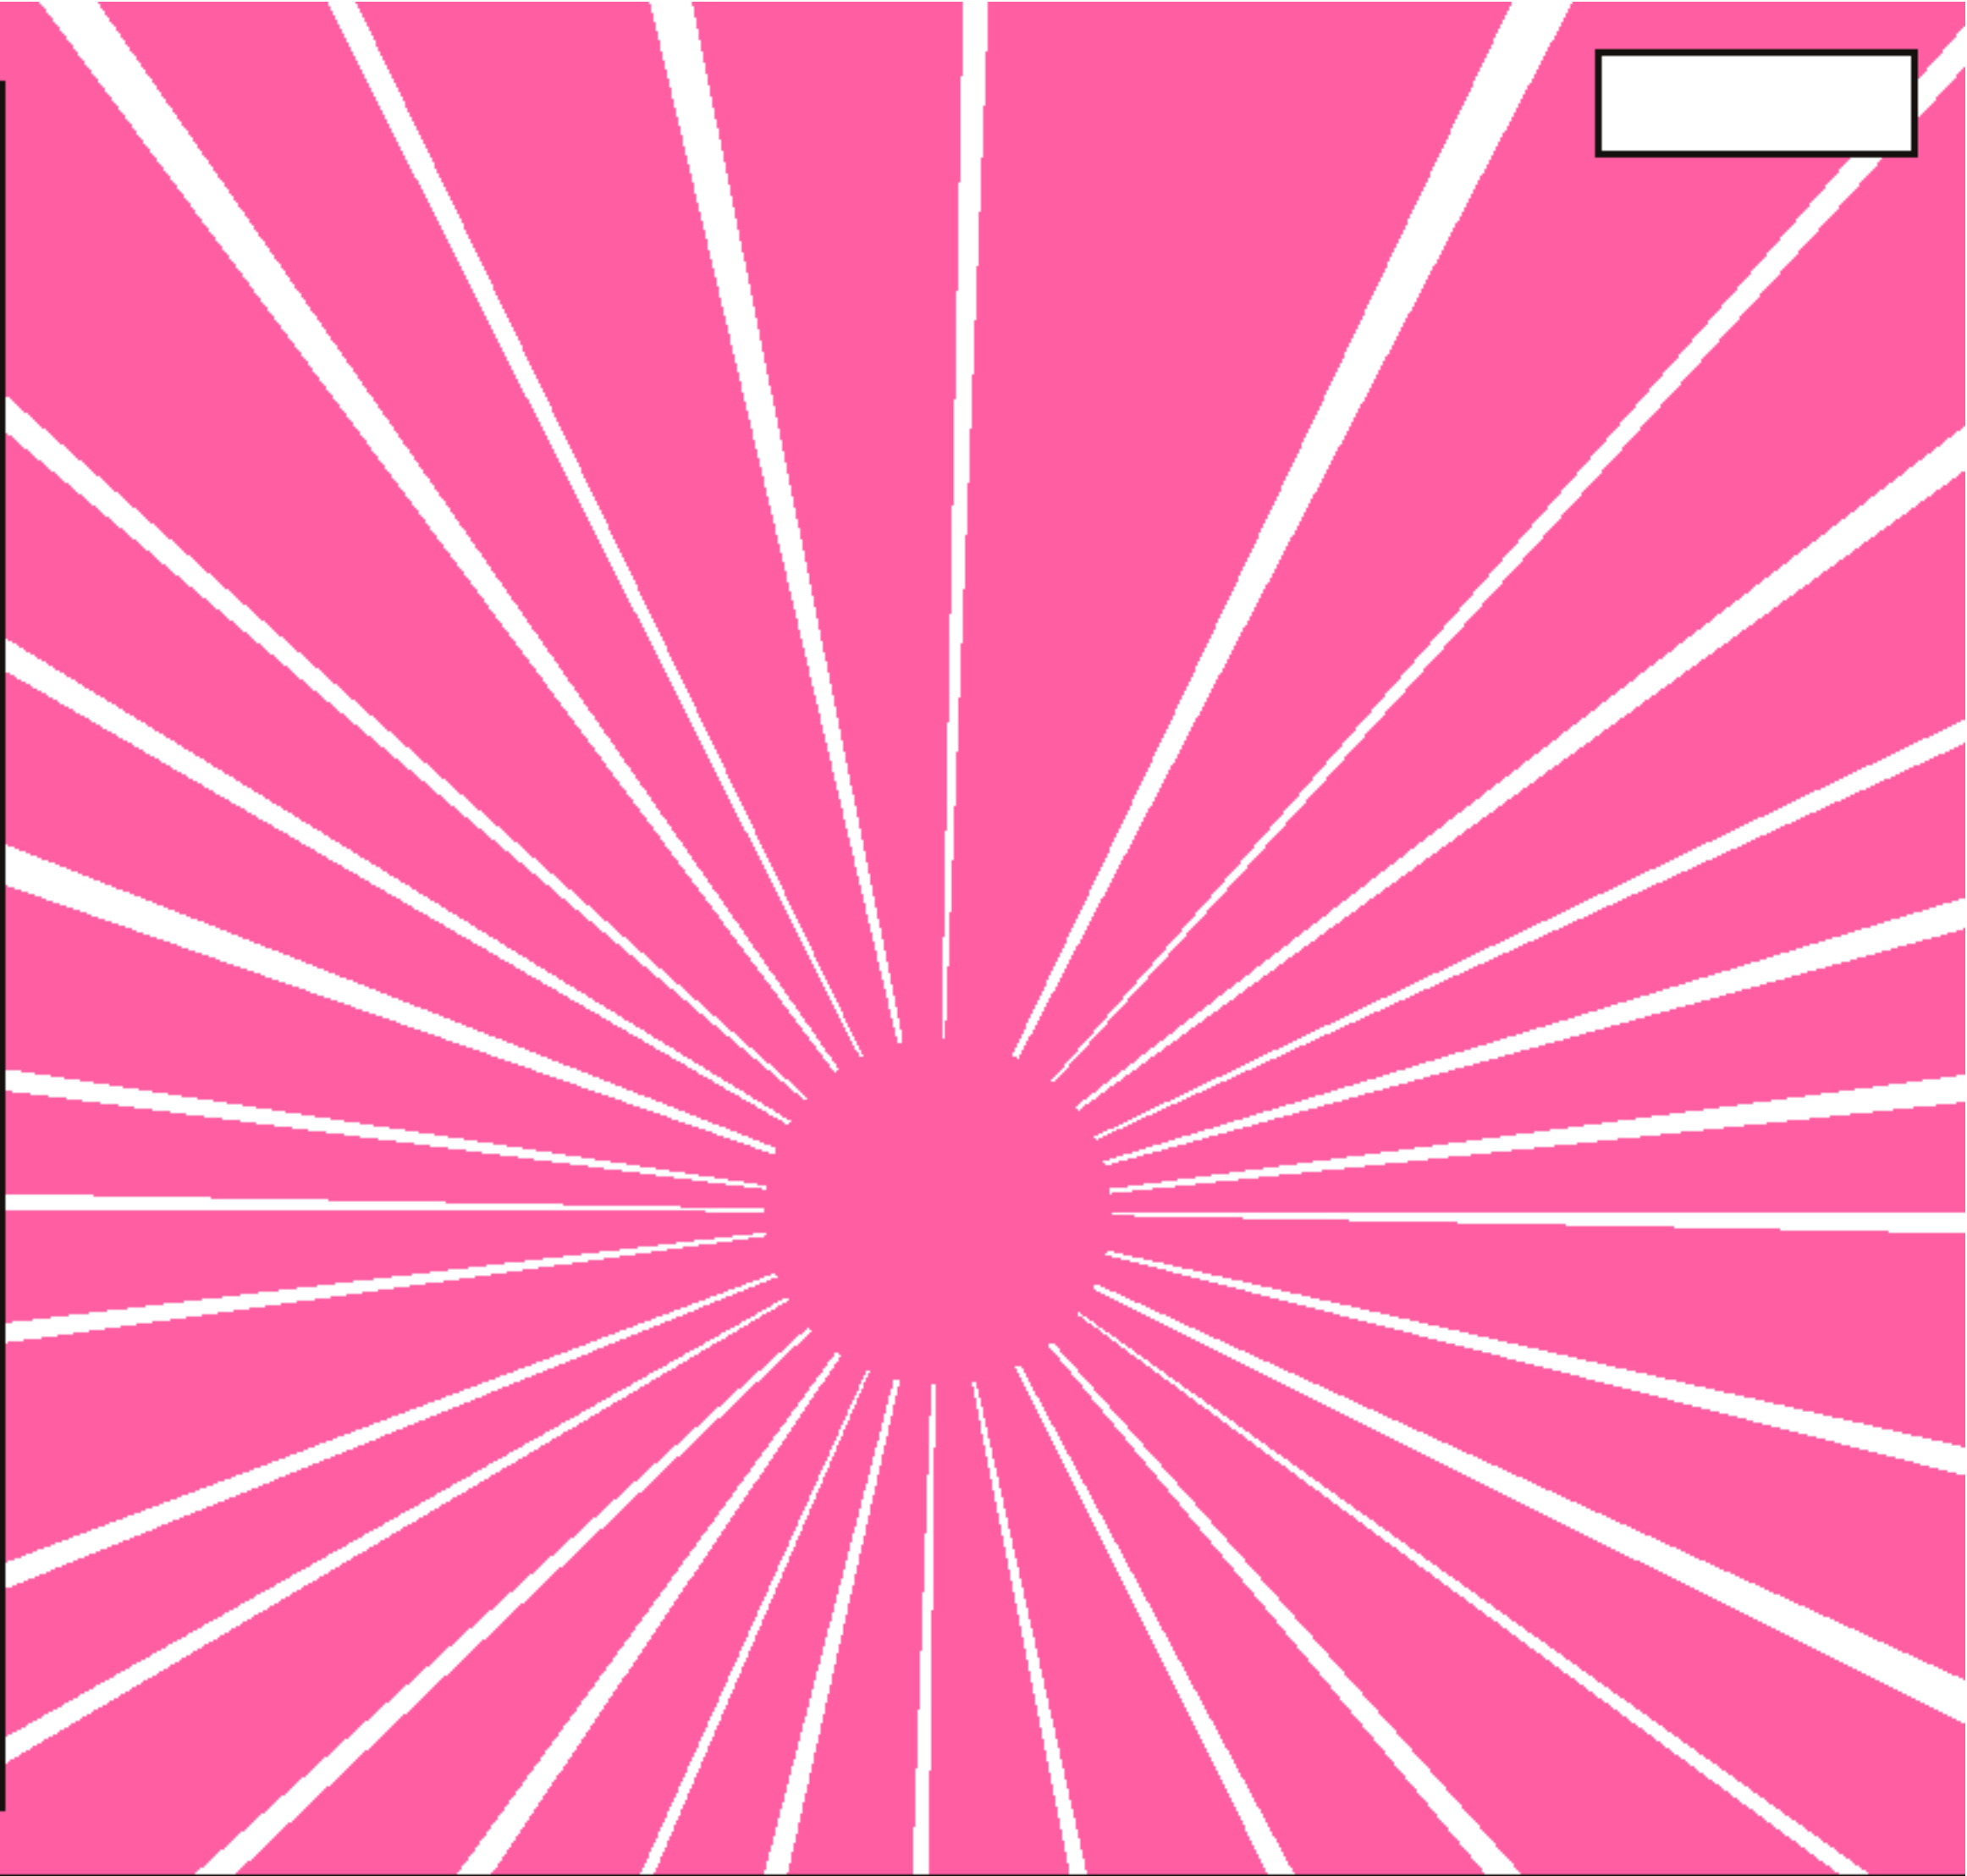




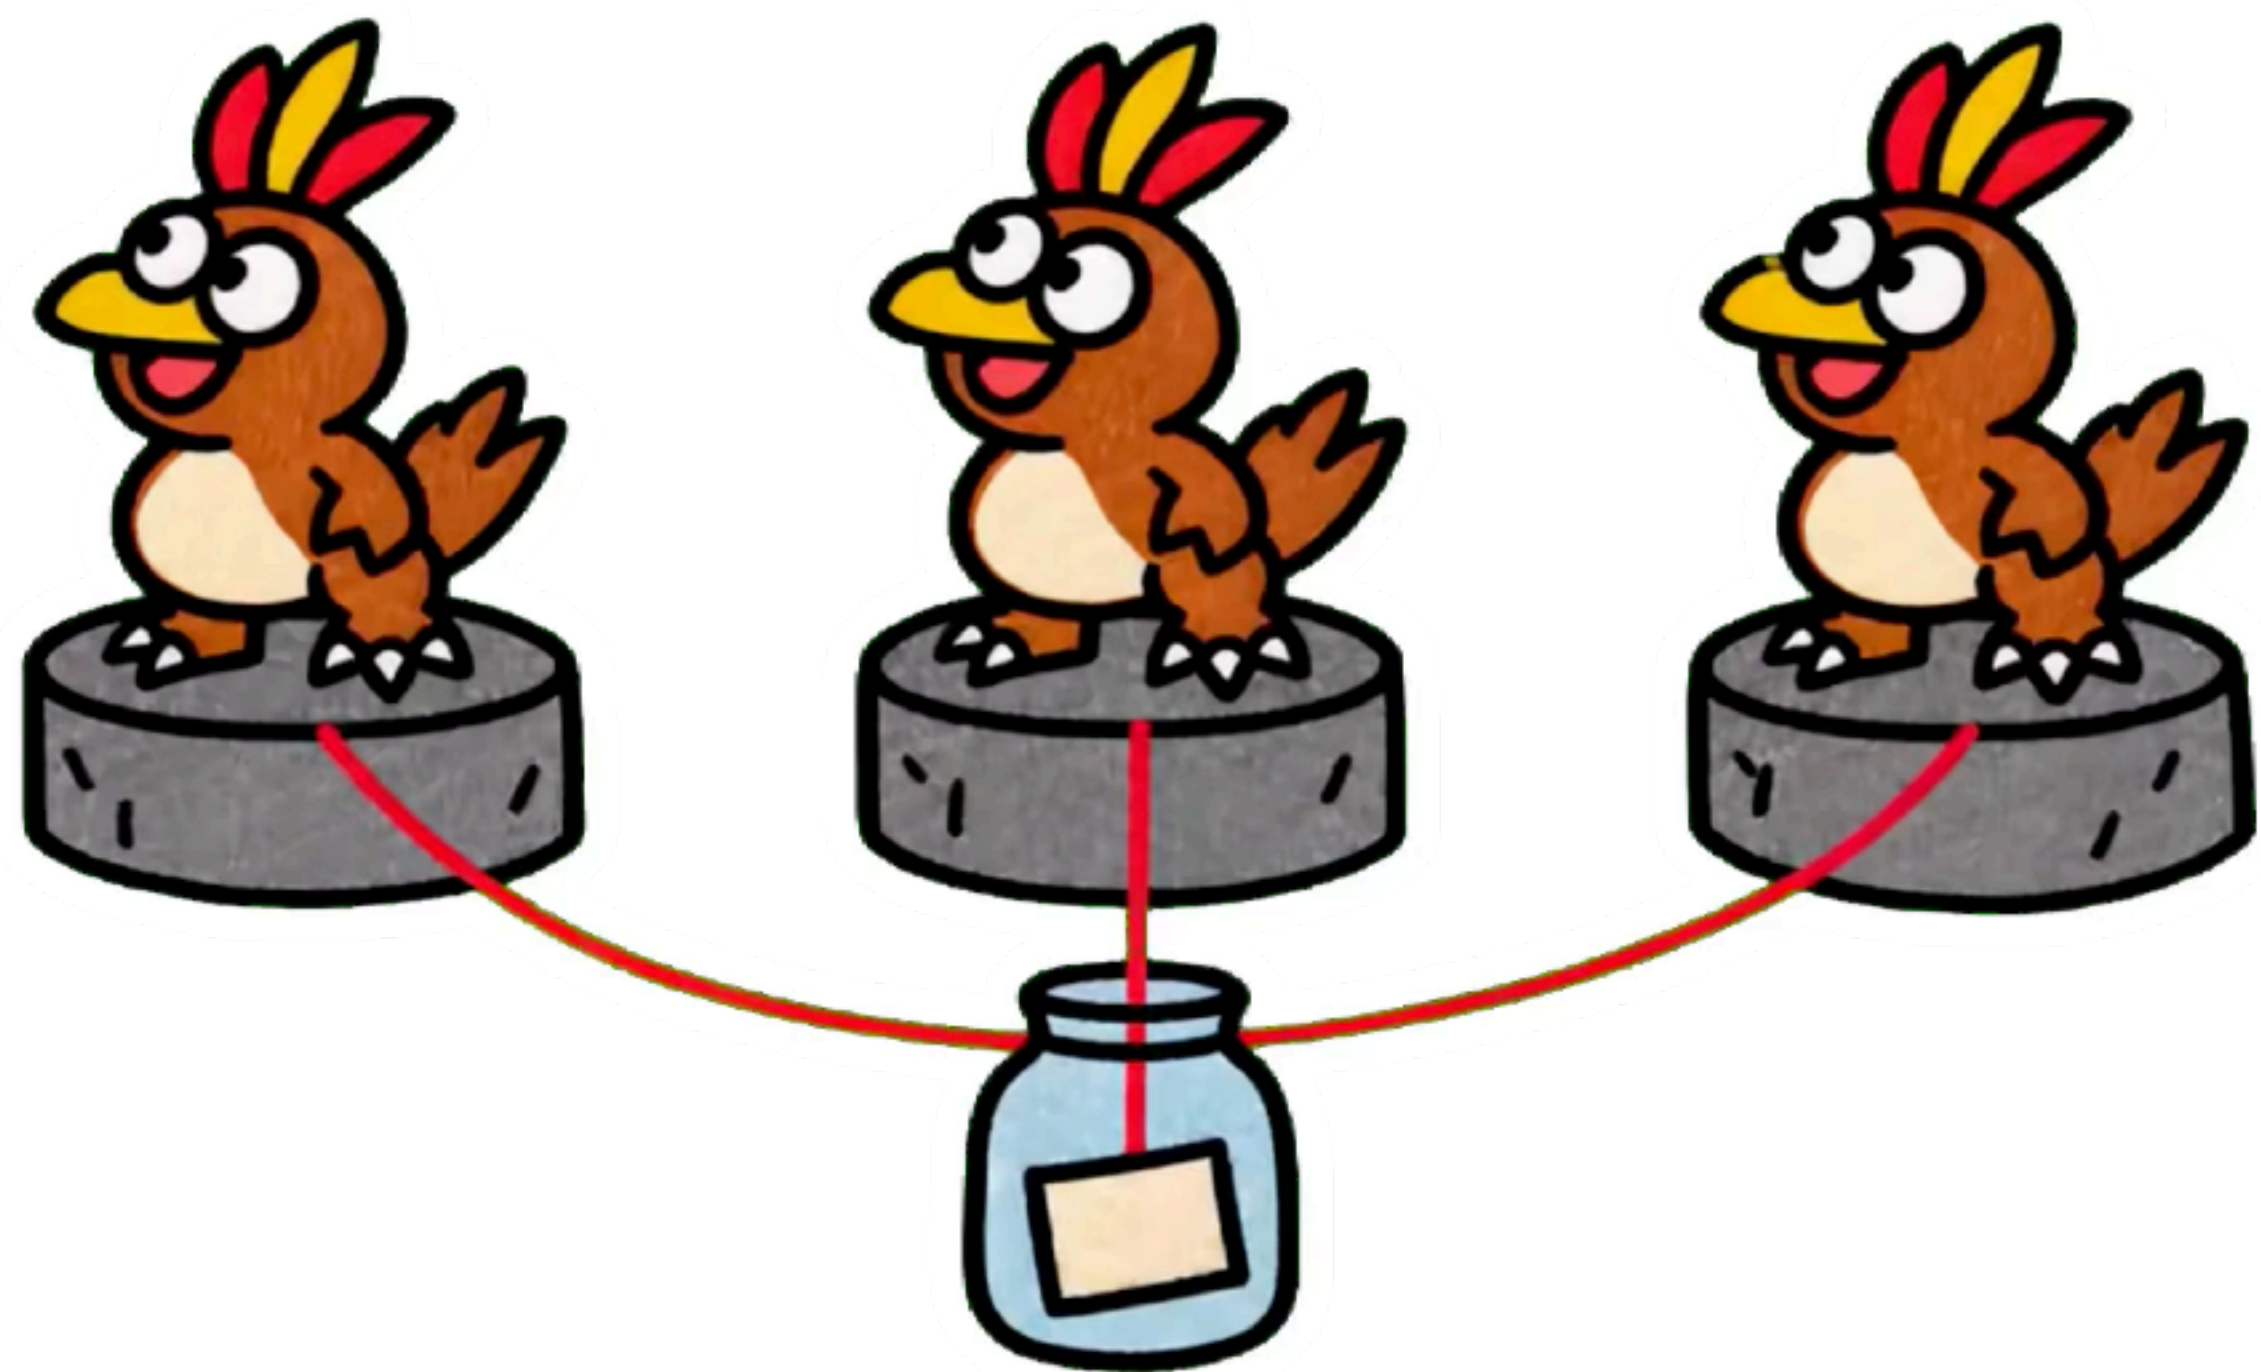

08 evolution.py

```
names = ("Pidghey", "Pidgeotto", "Pidgeot")
stages = [lambda: s for s in names]
print([stage() for stage in stages])
print(stages[0].__code__.co_freevars)
```

['Pidgeot', 'Pidgeot', 'Pidgeot']
('s',)


OTBET.


Prithon Tritor

SELO

BOBBERBAR

docs.pythag/3/faq/pythagraining.html

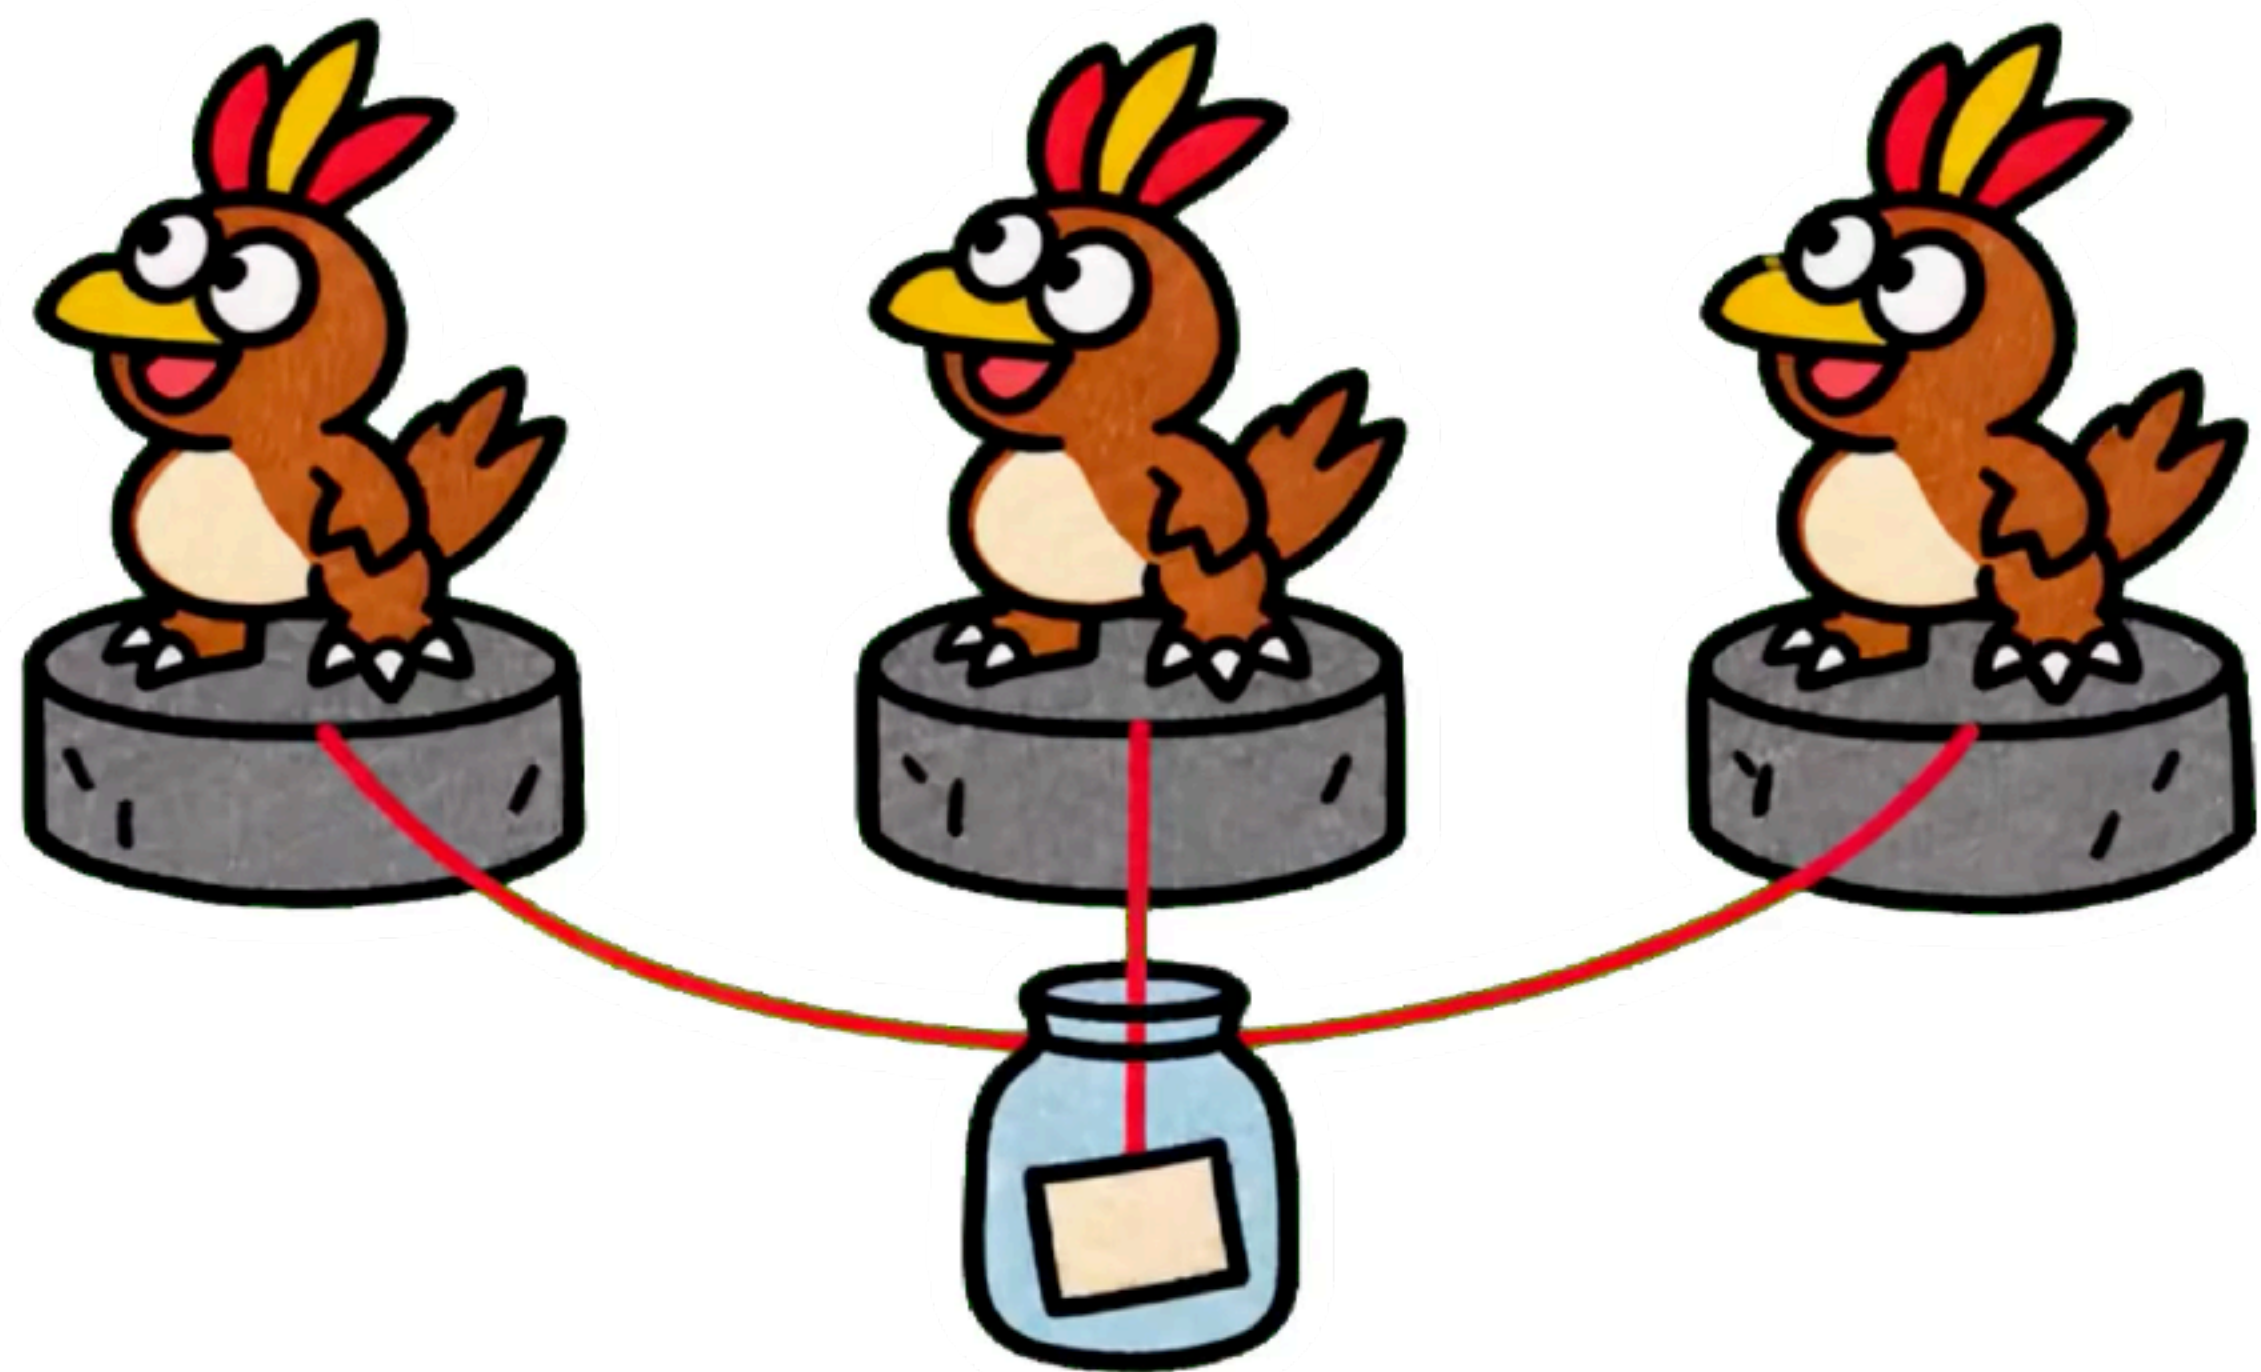


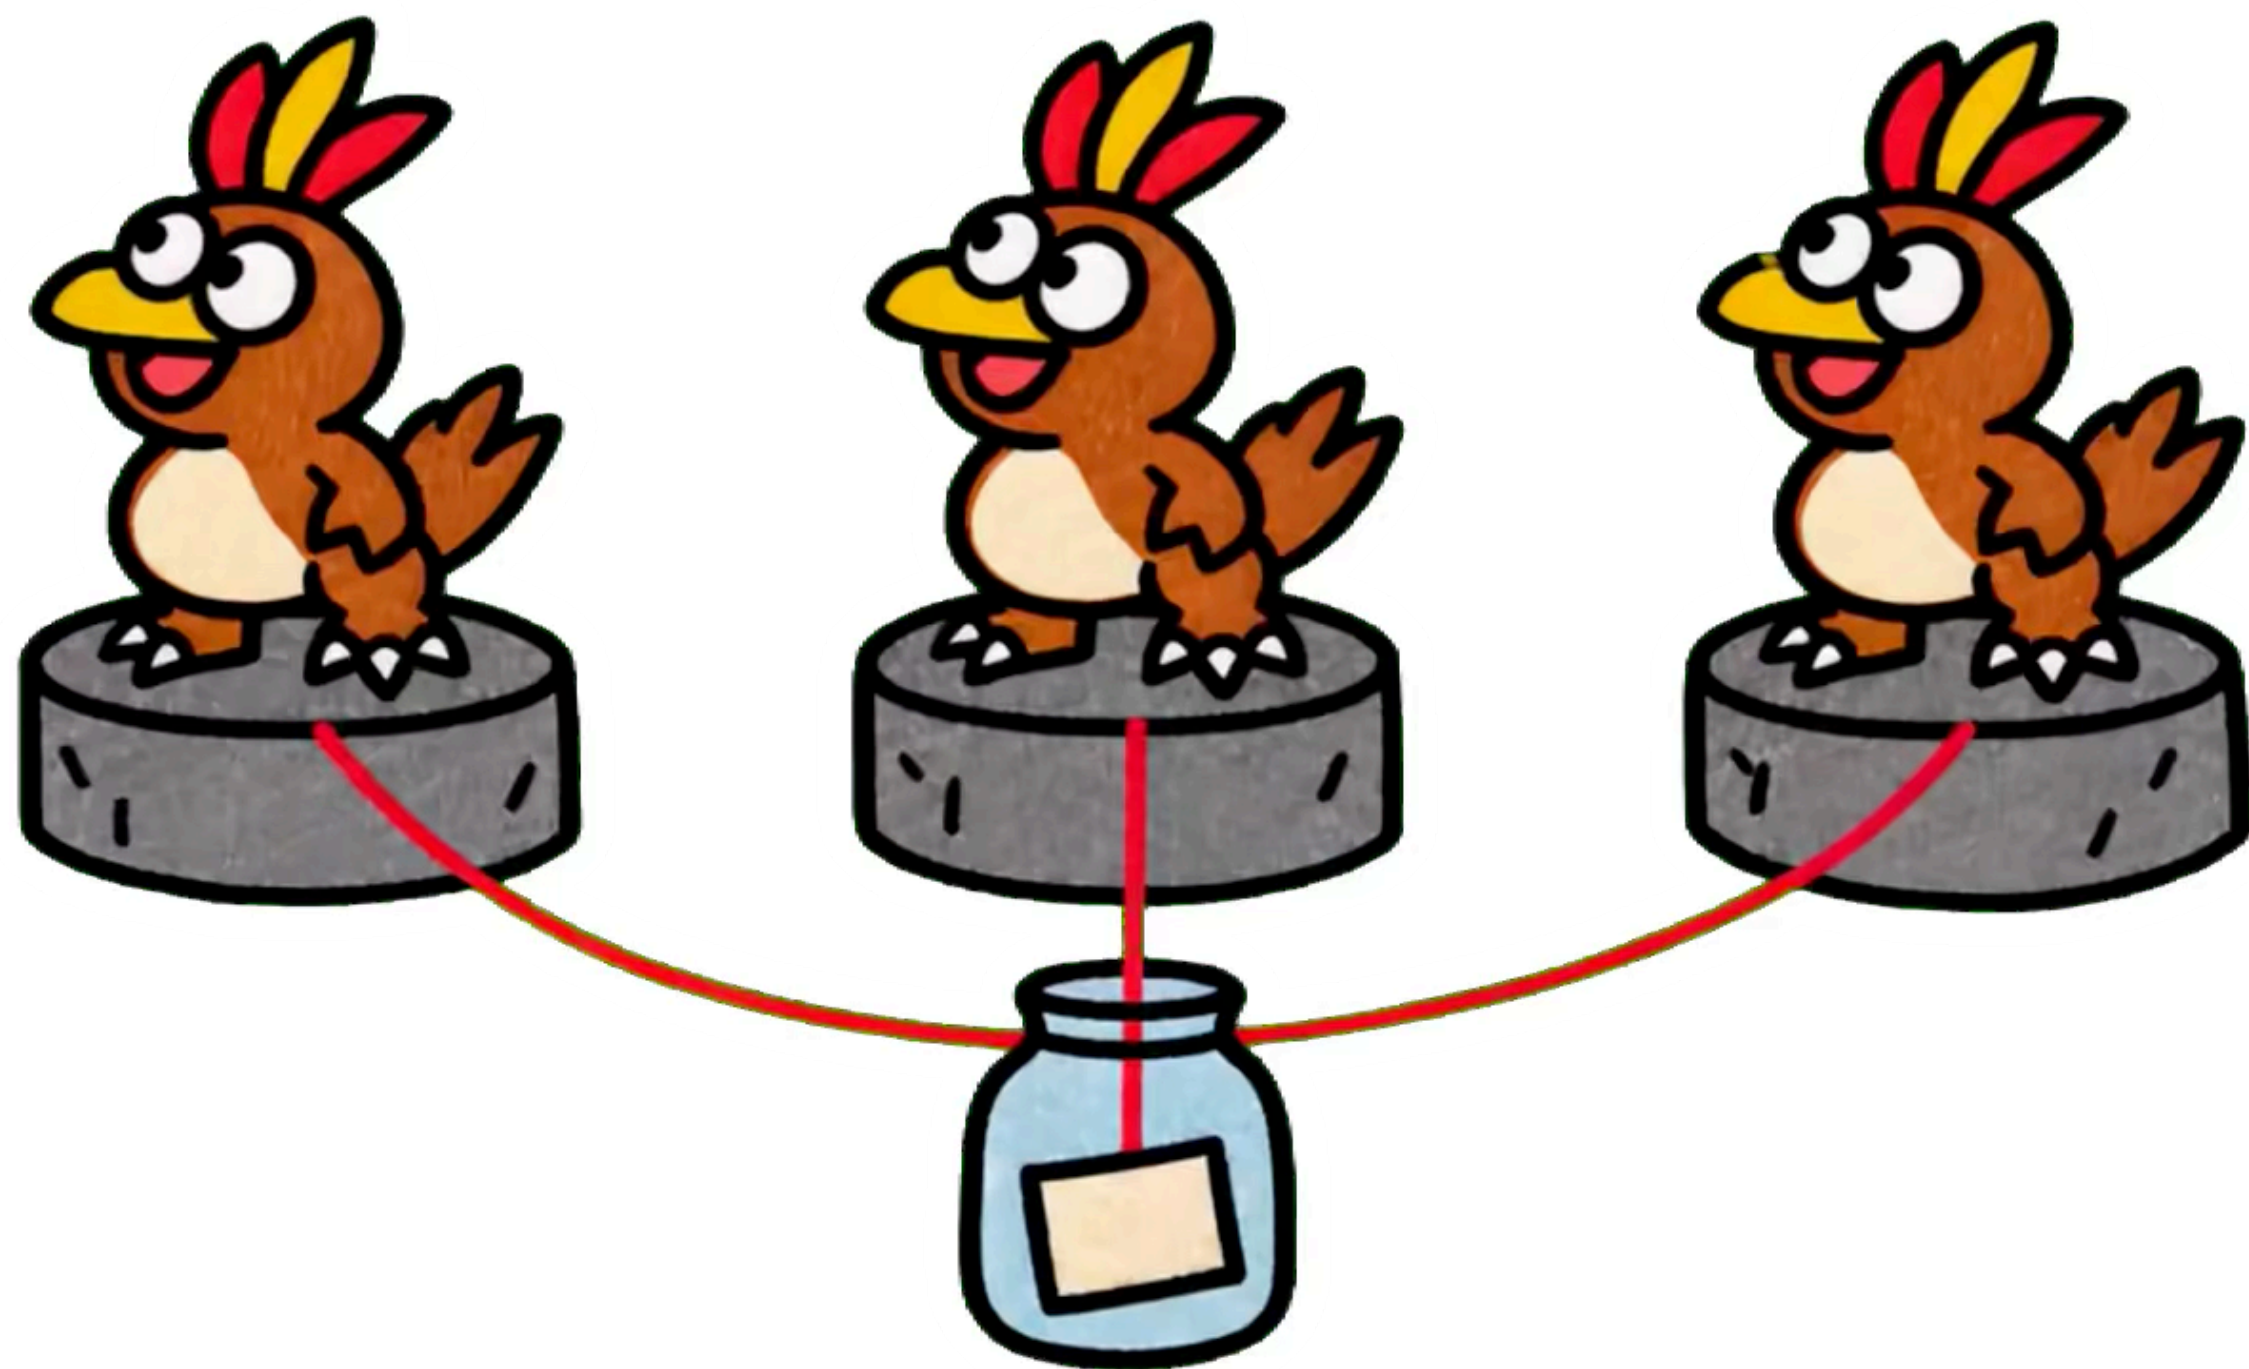

08_evolution.py

```
names = ("Pidgey", "Pidgeotto", "Pidgeot")  
stages = [lambda: s for s in names]  
print([stage() for stage in stages])  
print(stages[0].__code__.co_freevars)
```

```
['Pidgeot', 'Pidgeot', 'Pidgeot']  
( 's', )
```

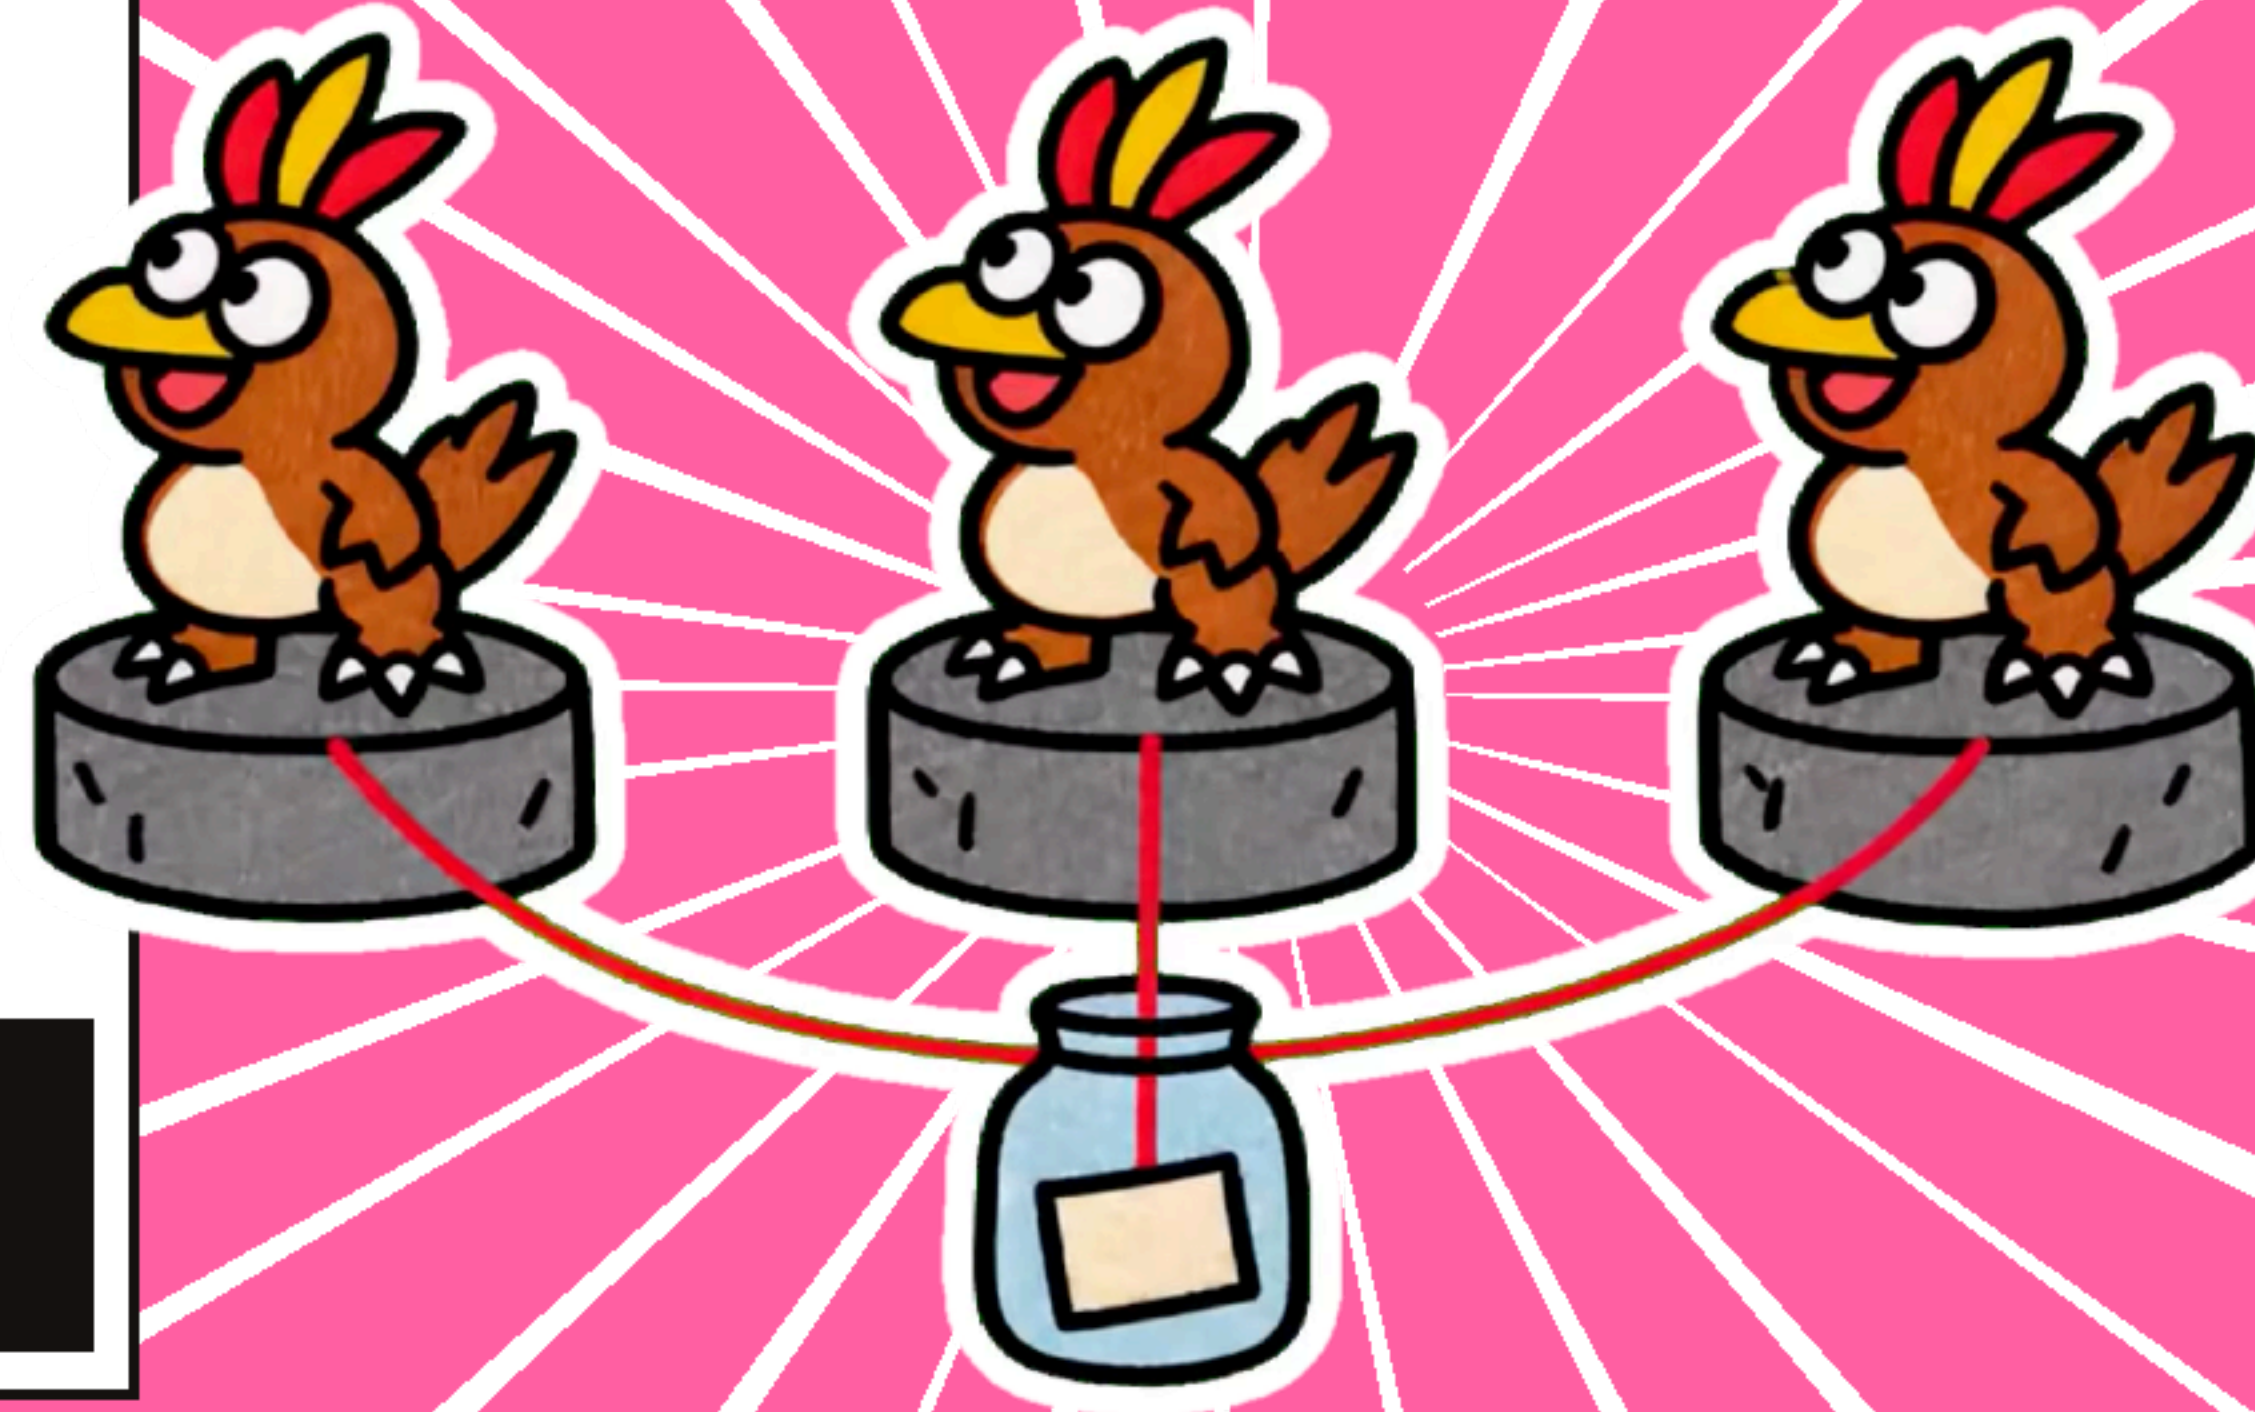

Три лямбды держат одну банку

ВО ВРЕМЯ ВЫЗОВАdocs.python.org/3/faq/programming.html

23_cell.py

```
cell = stages[0].__closure__[0]
print(type(cell).__name__, cell.cell_contents)
print(cell is stages[1].__closure__[0] is stages[2].__closure__[0])
```

```
cell Pidgeot
True
```

В банке лежит последнее значение s