




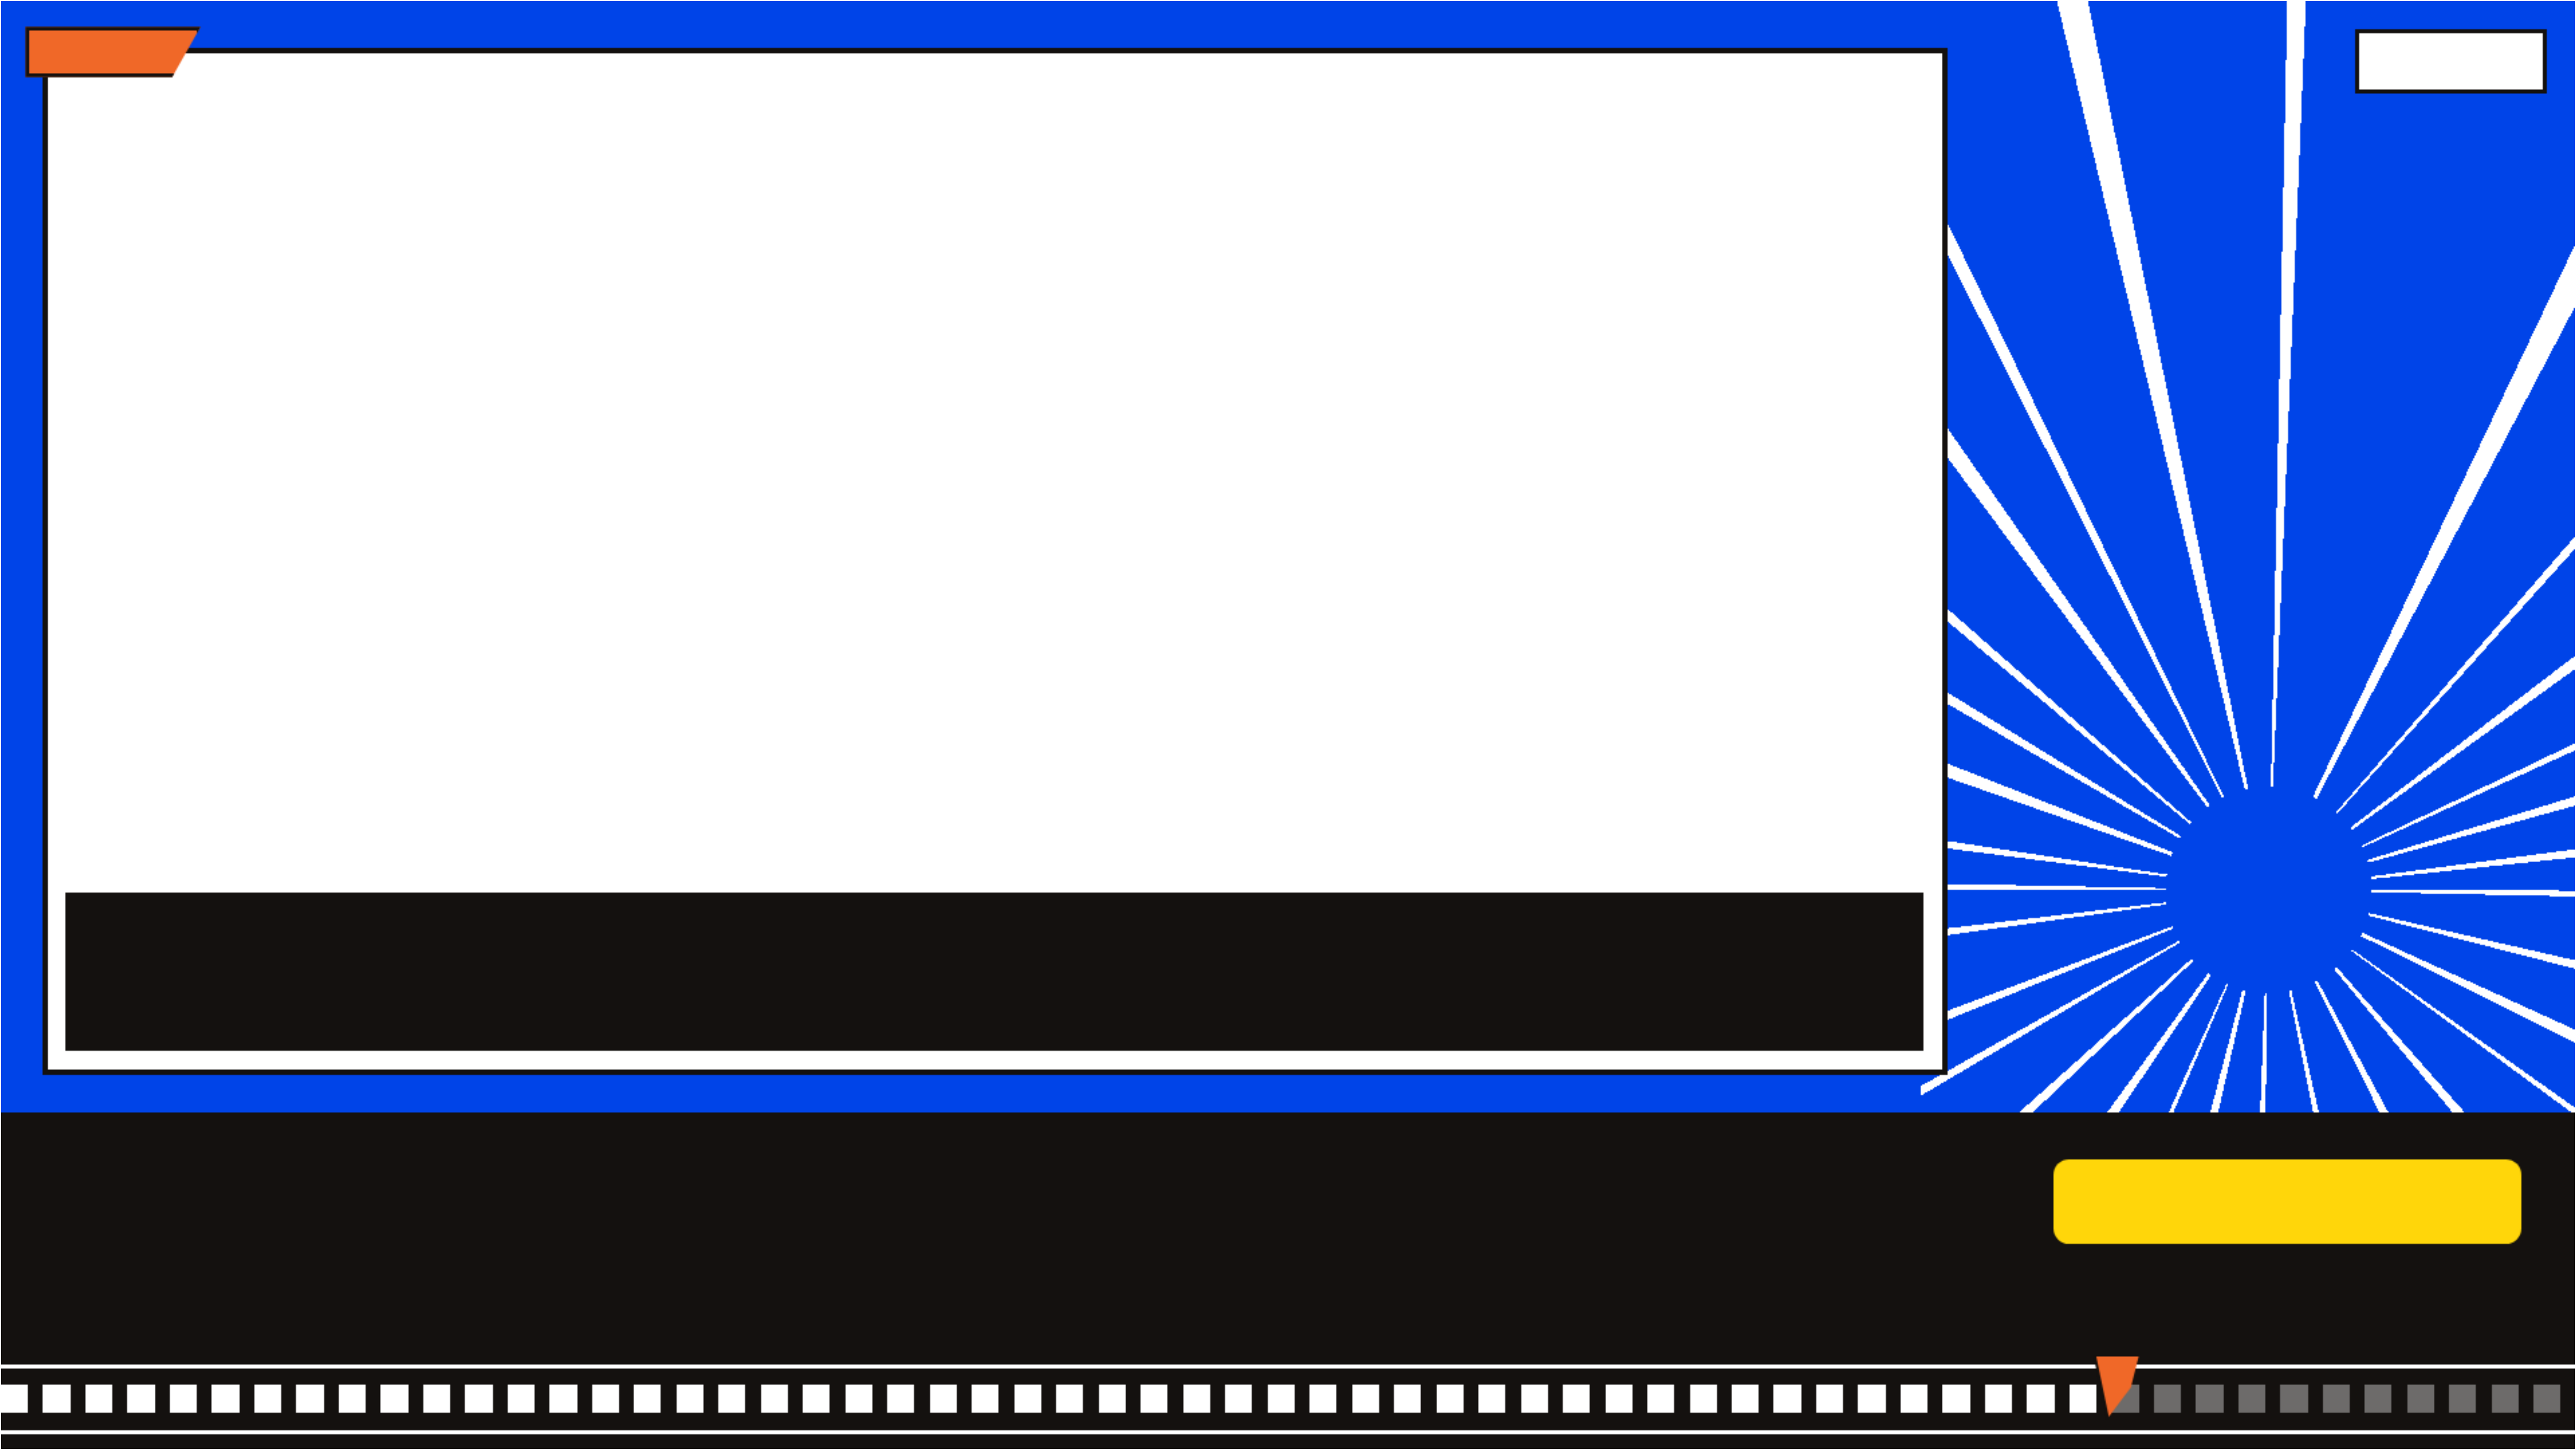

14_bare_star.py

```
print(attack("Pikachu", "Thunderbolt", crit=True))
```

```
print(attack("Pikachu", "Thunderbolt", True))
```

True

TypeError: attack() takes 2 positional arguments but 3 were given

OTRB

SELO

BOBBERBOBBA

PEP3102.pythor.org/pep-3102





14_bare_star.py

```
print(attack("Pikachu", "Thunderbolt", crit=True))  
print(attack("Pikachu", "Thunderbolt", True))
```

True

TypeError: attack() takes 2 positional arguments but 3 were given



Голая * — охранник: дальше только по имени

ВО ВРЕМЯ ВЫЗОВА

15_slash.py

```
def attack(pokemon, /, **effects):  
    return pokemon, effects
```

```
print(attack("Pikachu", pokemon="Meowth"))
```



pokemon="Meowth" — что будет?

A | TypeError**B** | ('Meowth', {})**C** | ('Pikachu', {'pokemon': 'Meowth'})