



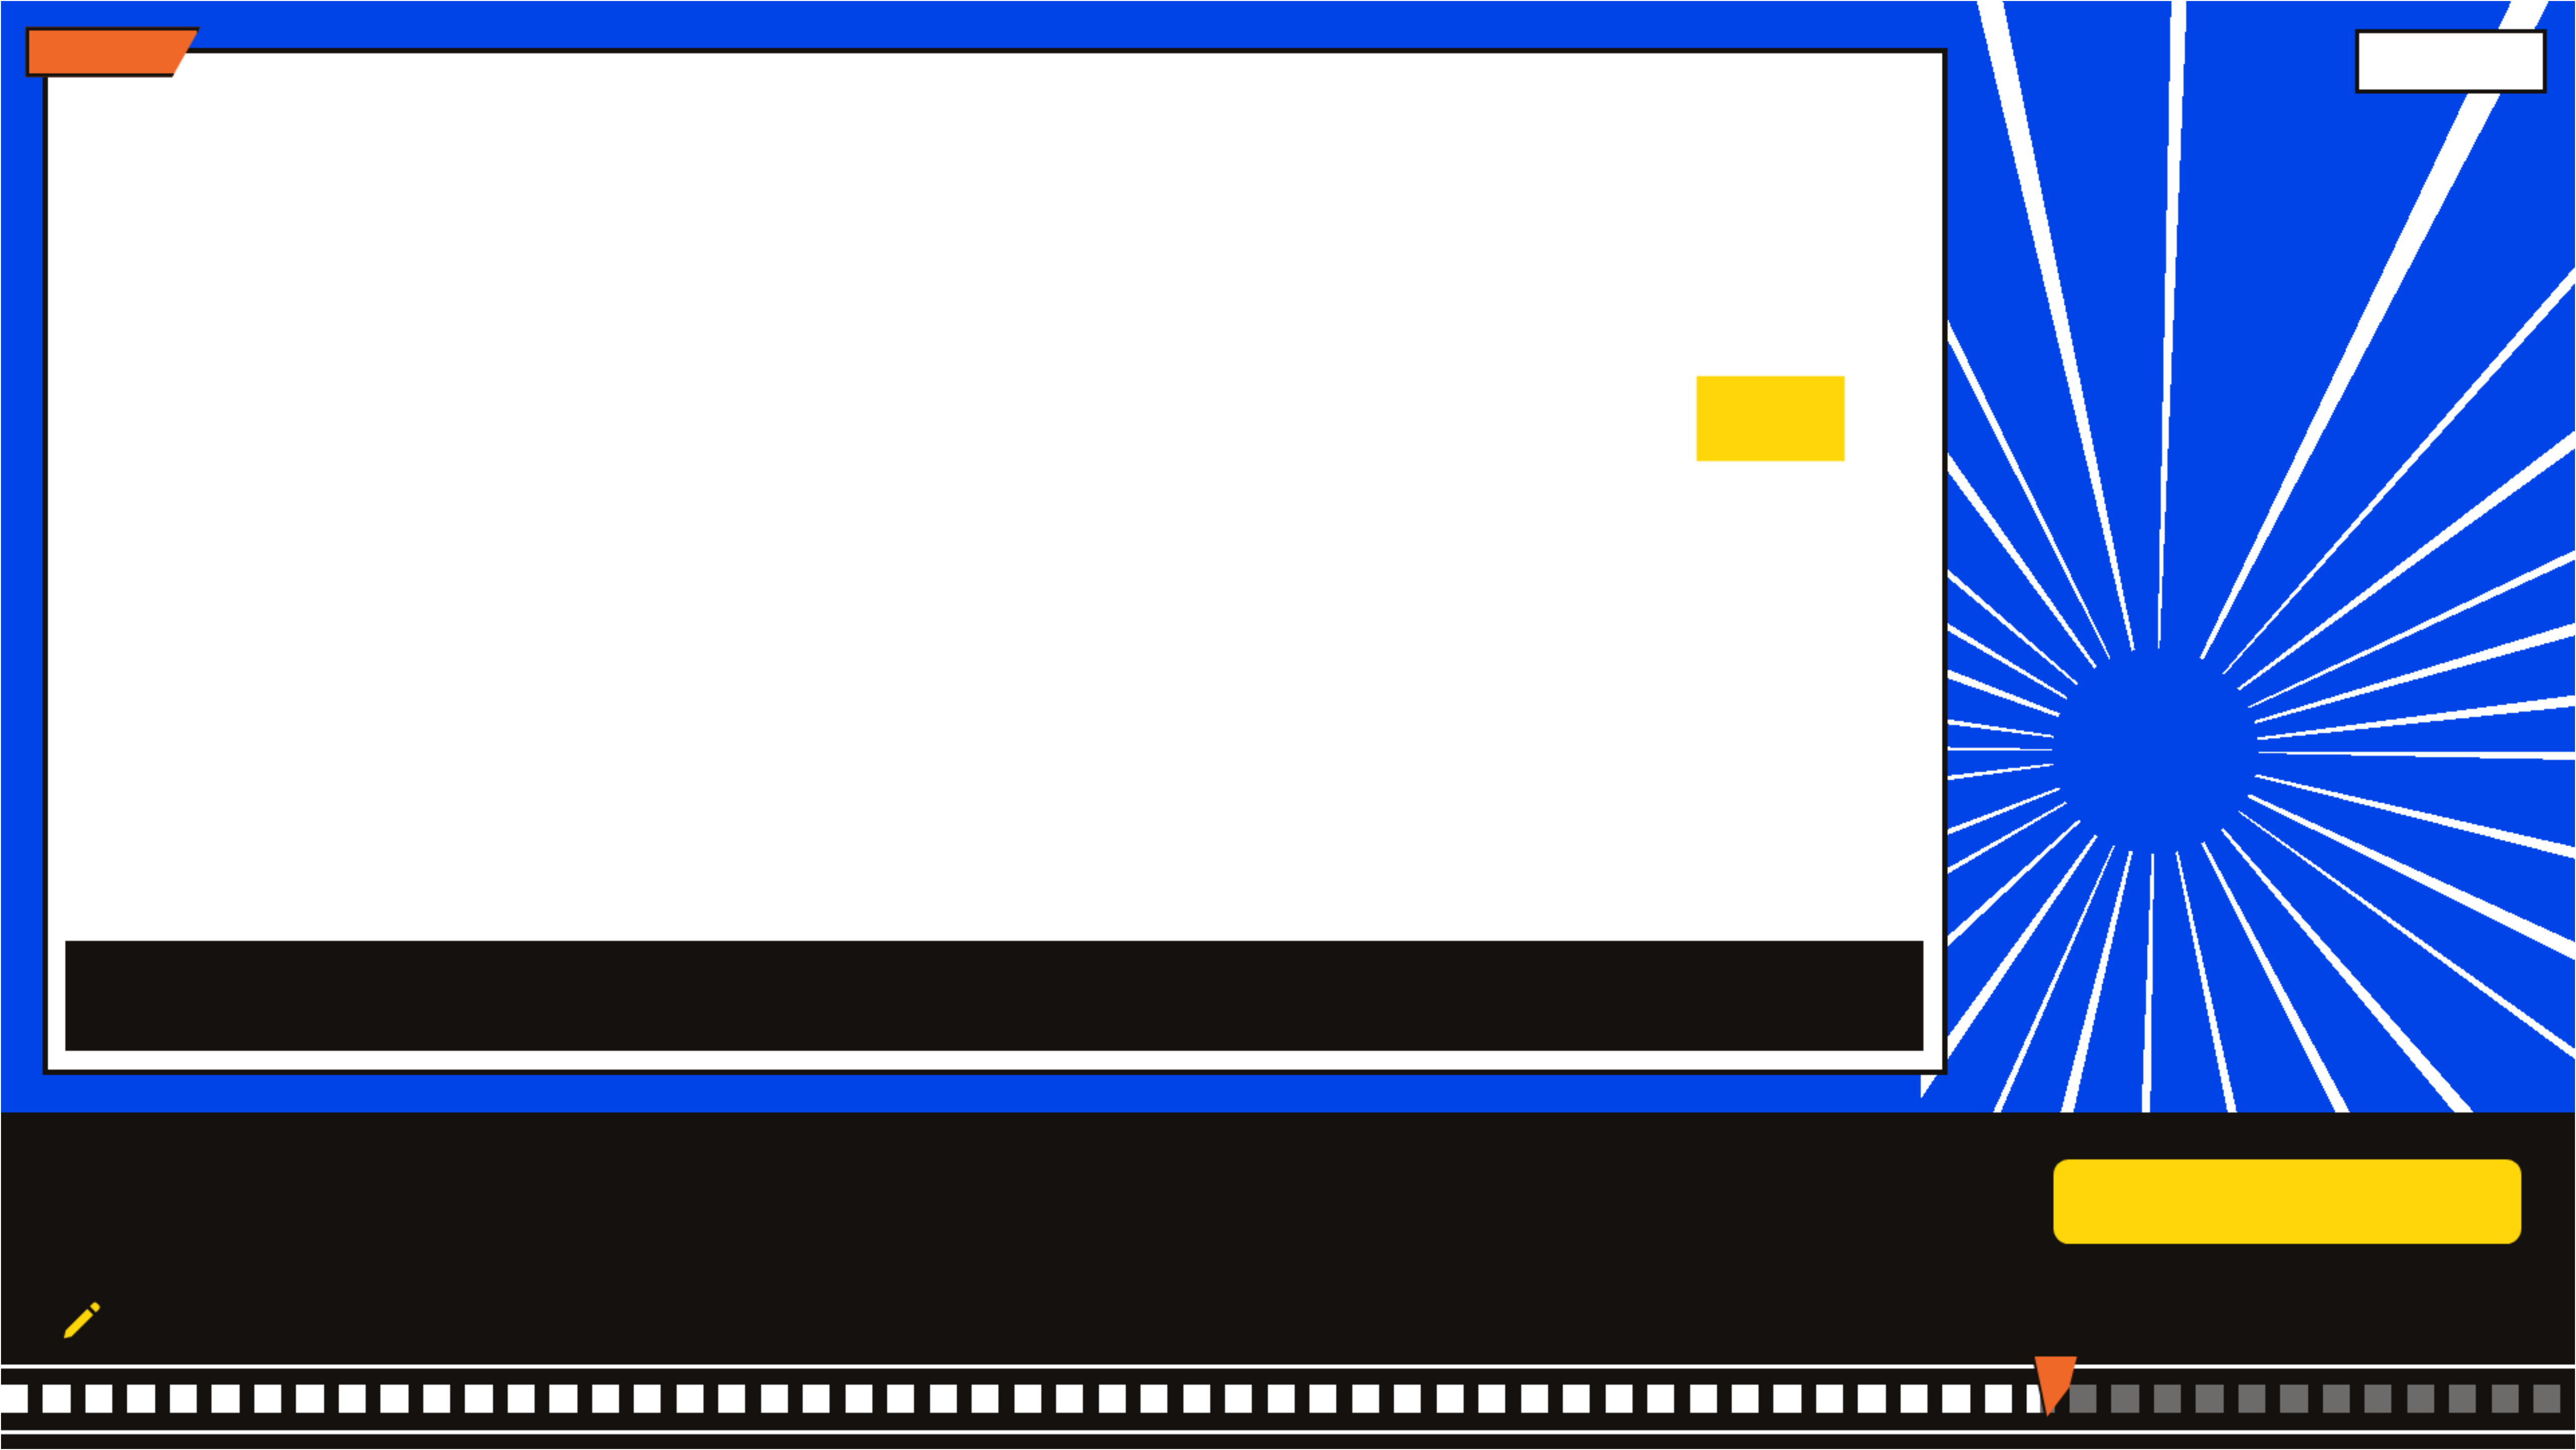

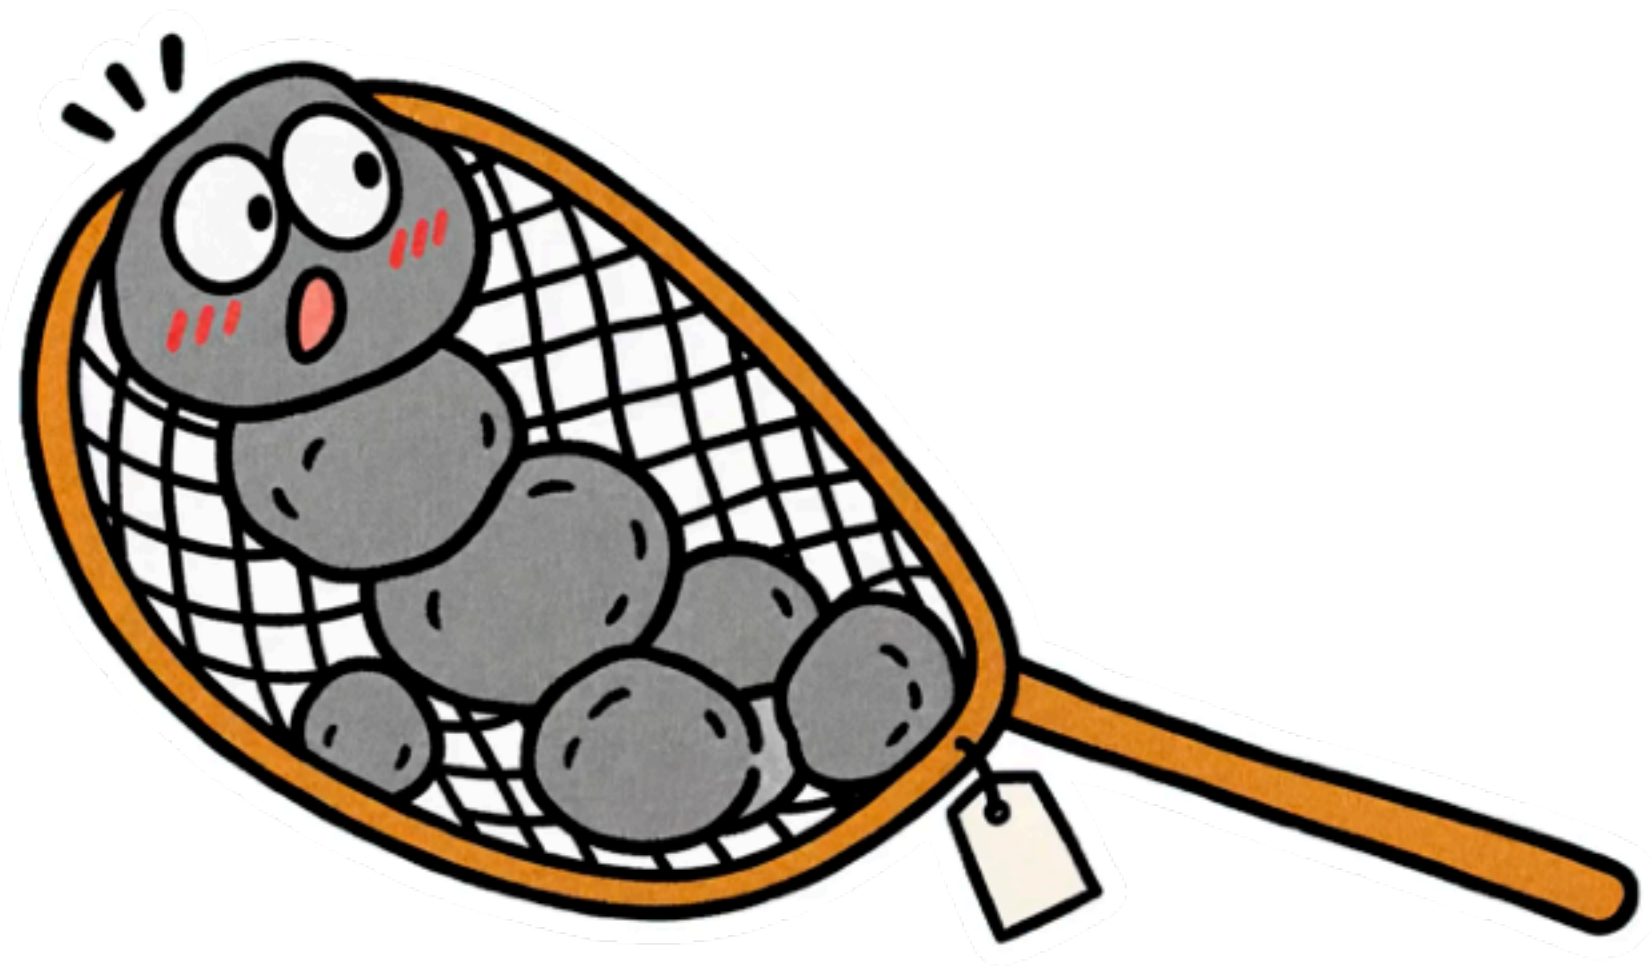

13-swallowed.py

```
def attack(pokemon, move, *targets, crit=False):  
    return targets, crit  
  
print(attack("Pikachu", "Thunderbolt", "Onix", True))
```

((('onix', True), False))

OTRIBEST

SELO


BOBBERBOBBA




куда уехало Тигриё?



docs.python.org/3/tutorial/controlflow.html#arbitrary-argument-lists

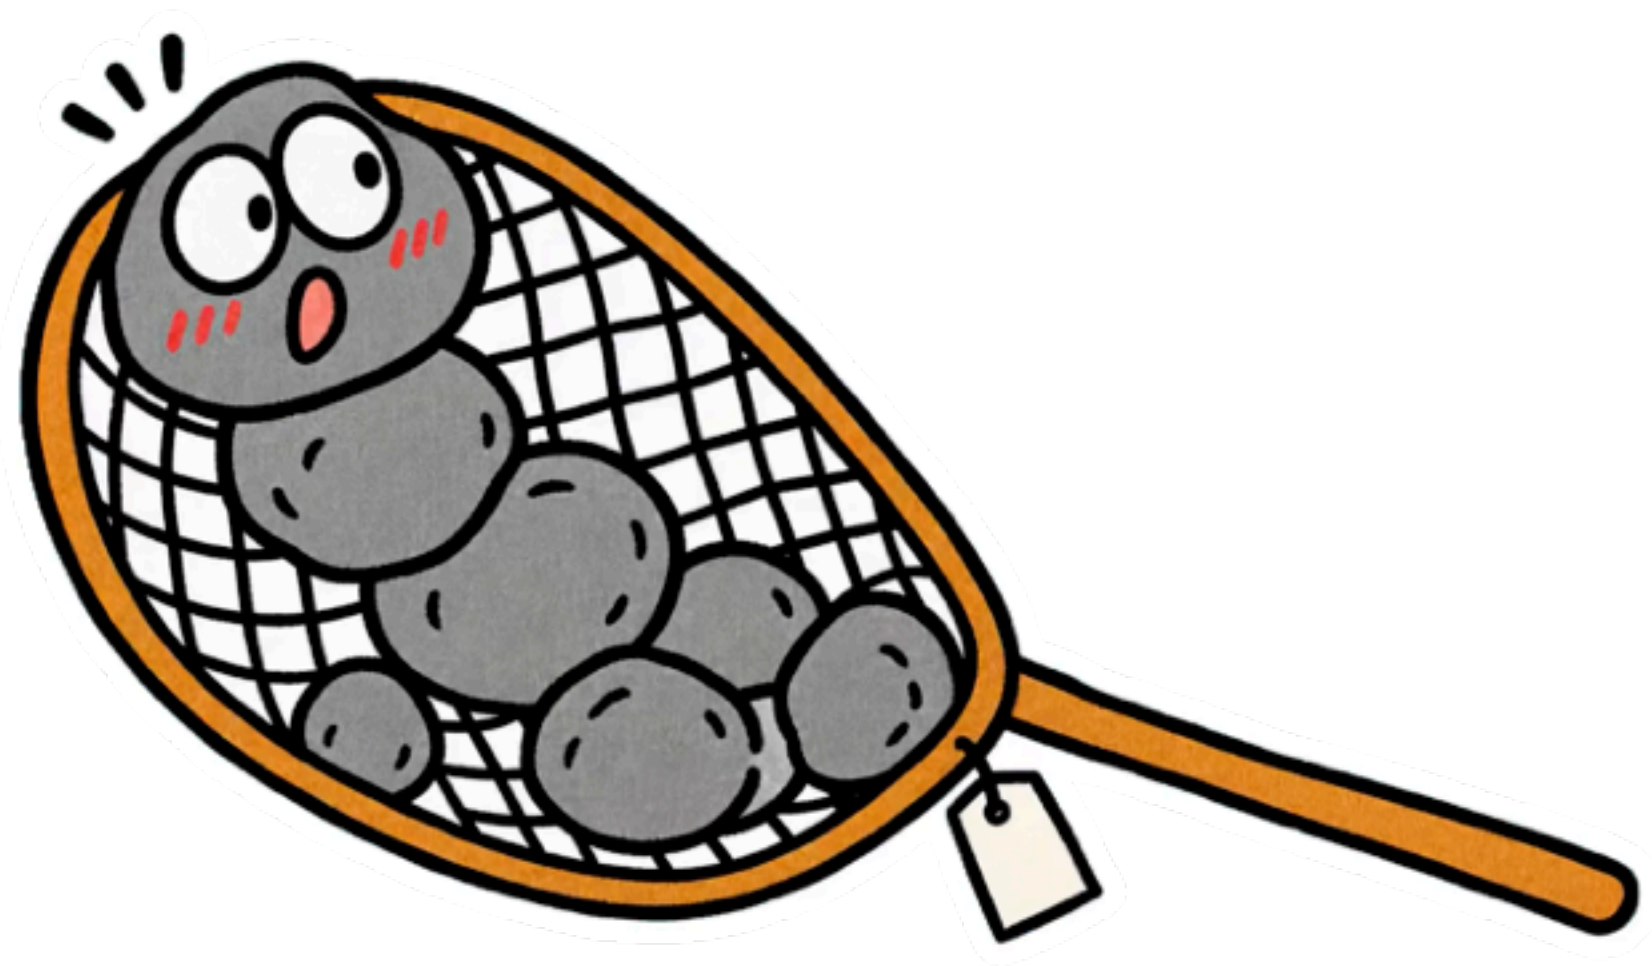

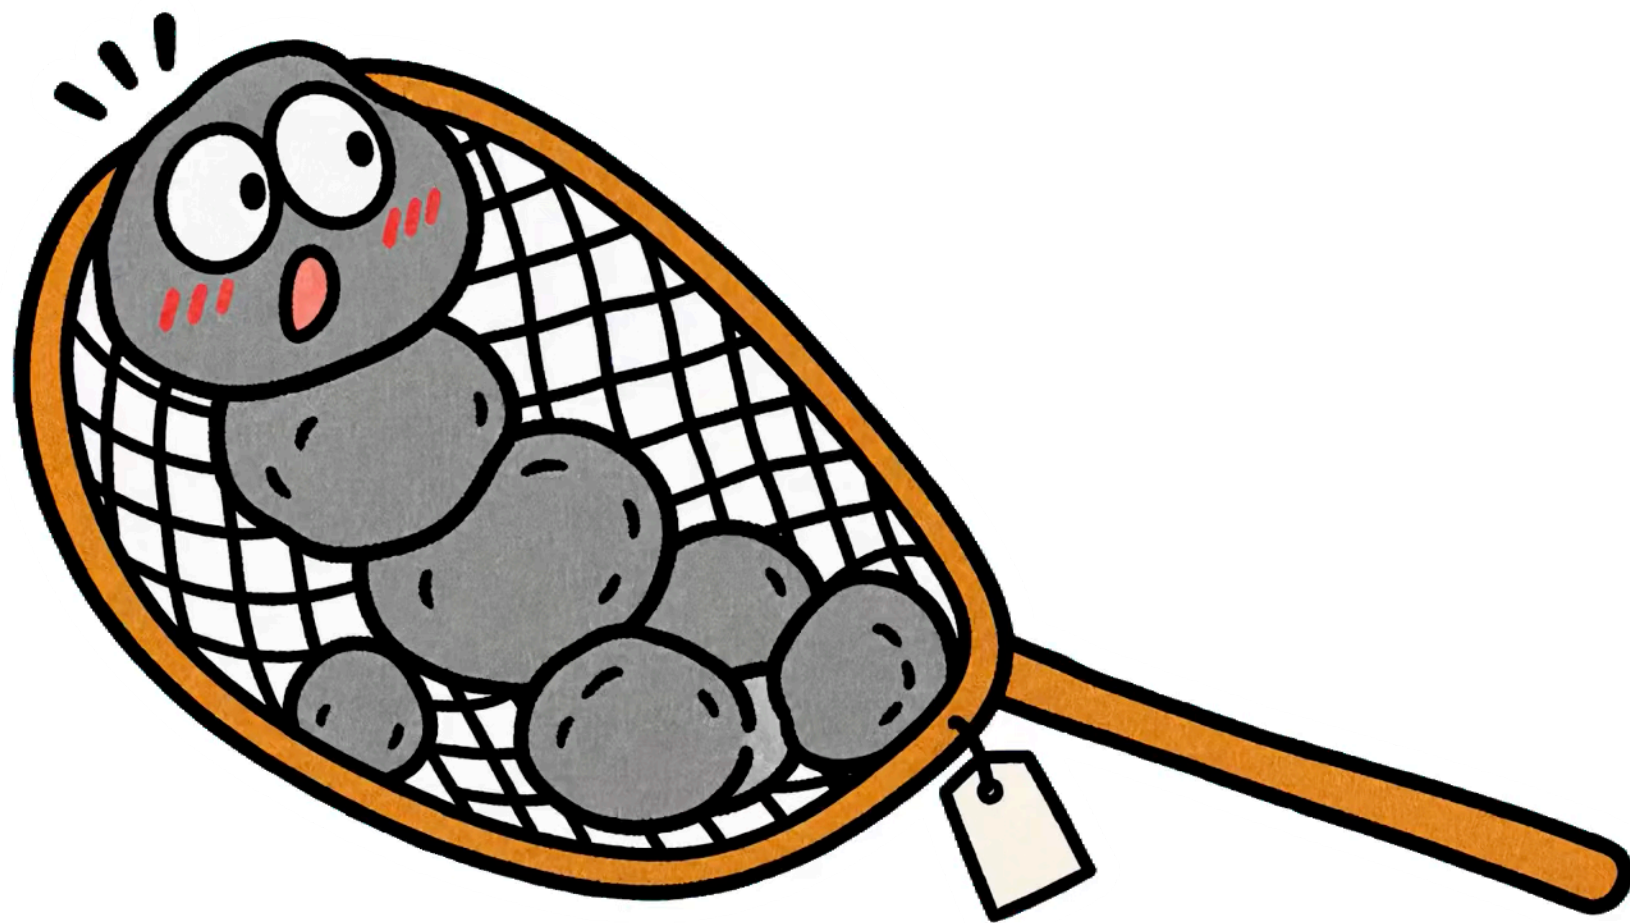


13_swallowed.py

```
def attack(pokemon, move, *targets, crit=False):  
    return targets, crit
```

```
print(attack("Pikachu", "Thunderbolt", "Onix", True))
```

```
(( 'Onix', True), False)
```

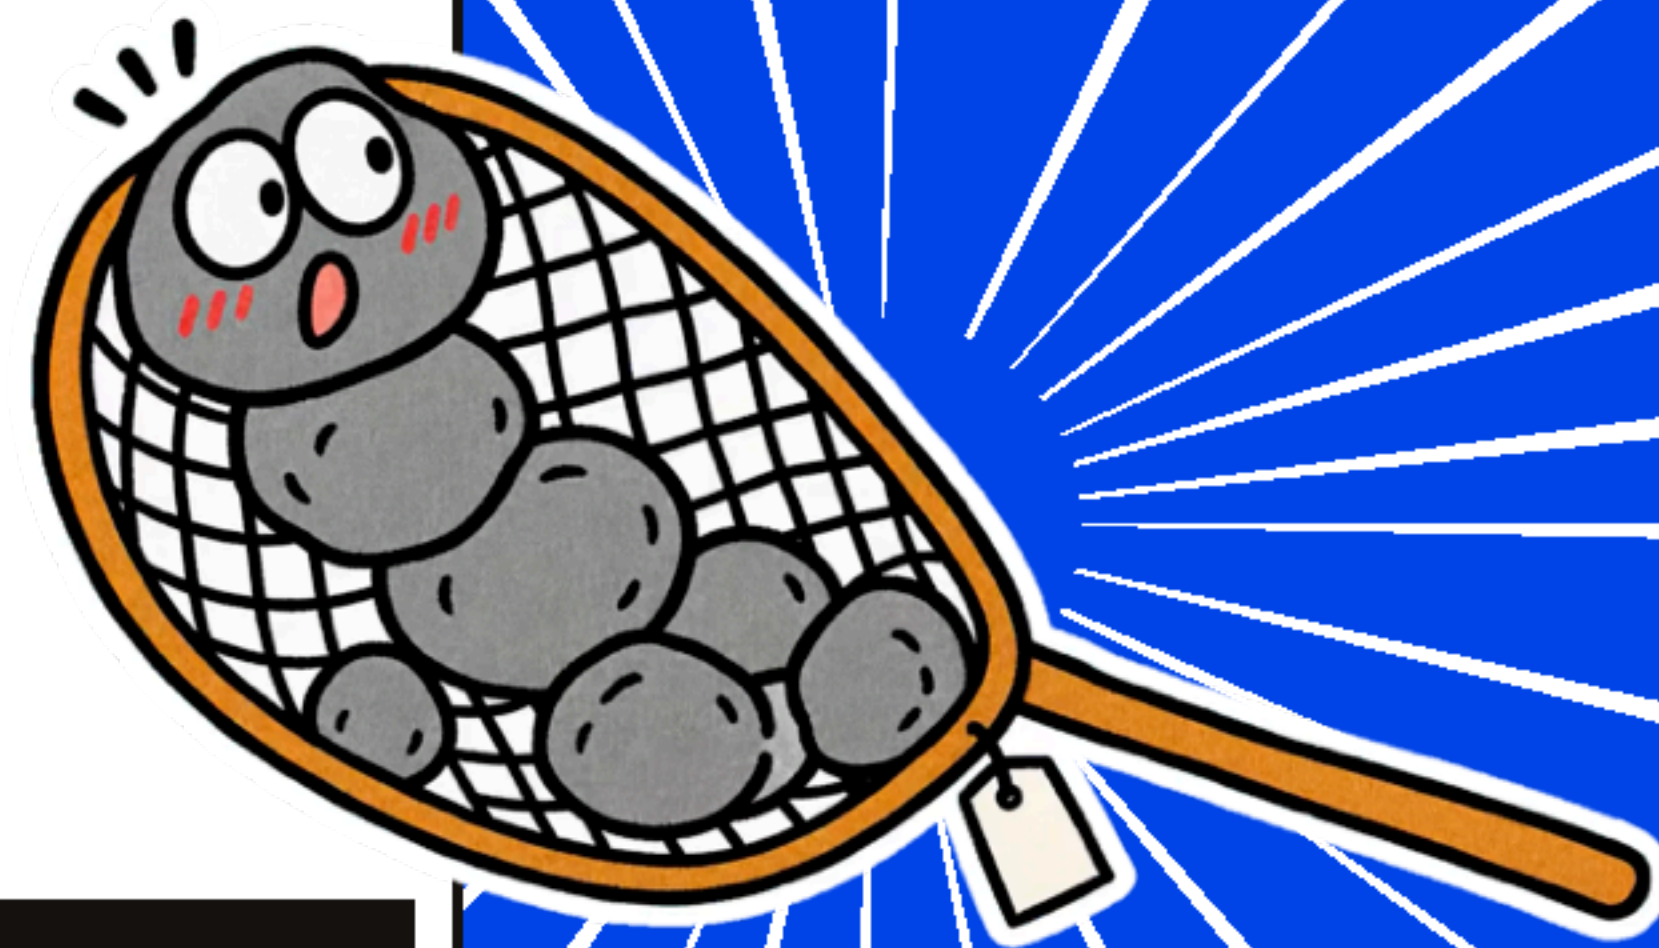

Сачок молчит: True уехал в targets

ВО ВРЕМЯ ВЫЗОВА

✎ куда уехал True?

docs.python.org/3/tutorial/controlflow.html#arbitrary-argument-lists

14_bare_star.py

```
def attack(pokemon, move, *, crit=False):  
    return crit
```

```
print(attack("Pikachu", "Thunderbolt", crit=True))  
print(attack("Pikachu", "Thunderbolt", True))
```

Второй вызов: True или ошибка?

A | True**B** | TypeError